

Report No.:

Test Time: 2019-09-24 16:31

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: magistral 700w 4 llens

Luminous Length (mm): 200

Luminous Width (mm): 500

Luminous Height (mm): 50

Voltage: 229.5 V

Current: 0.282 A

Power: 63.02 W

Power Factor: 0.972

Photometric Results

CIE Class: Direct

Total Rated Lamp Lumens: 10583.4 lm

Measurement Flux: 10583.4 lm

Efficiency: 100%

Downward Ratio: 99%

Upward Ratio: 1%

Horizontal Diffuse Angle(50%): H150.9

Vertical Diffuse Angle(50%): V51.7


Luminaire Efficacy Rating (LER): 168

Central Intensity: 3300.5 cd


Max. Intensity: 8030.38 cd

Pos of Max. Intensity: H5 V67

Picture Of Luminaire



Luminous Intensity Distribution Curve

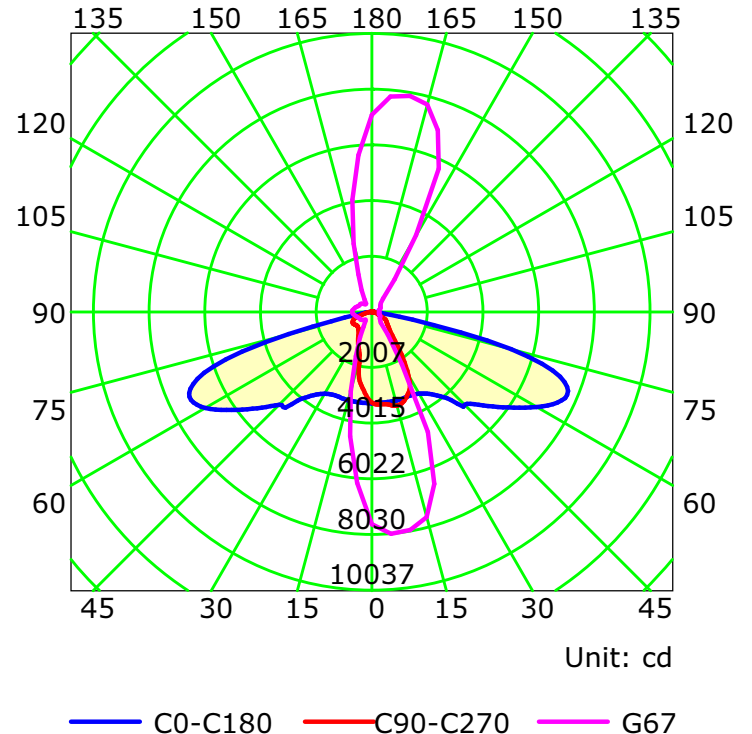

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:


Luminous Intensity Distribution Curve

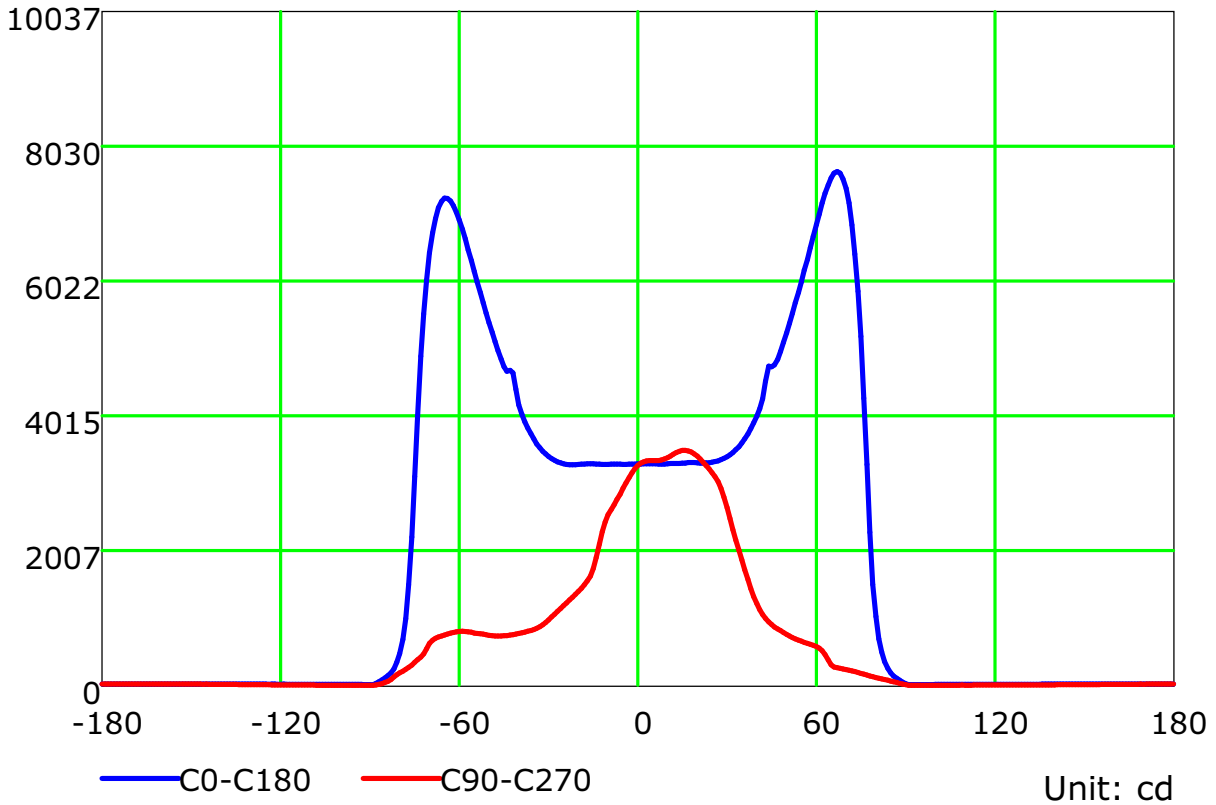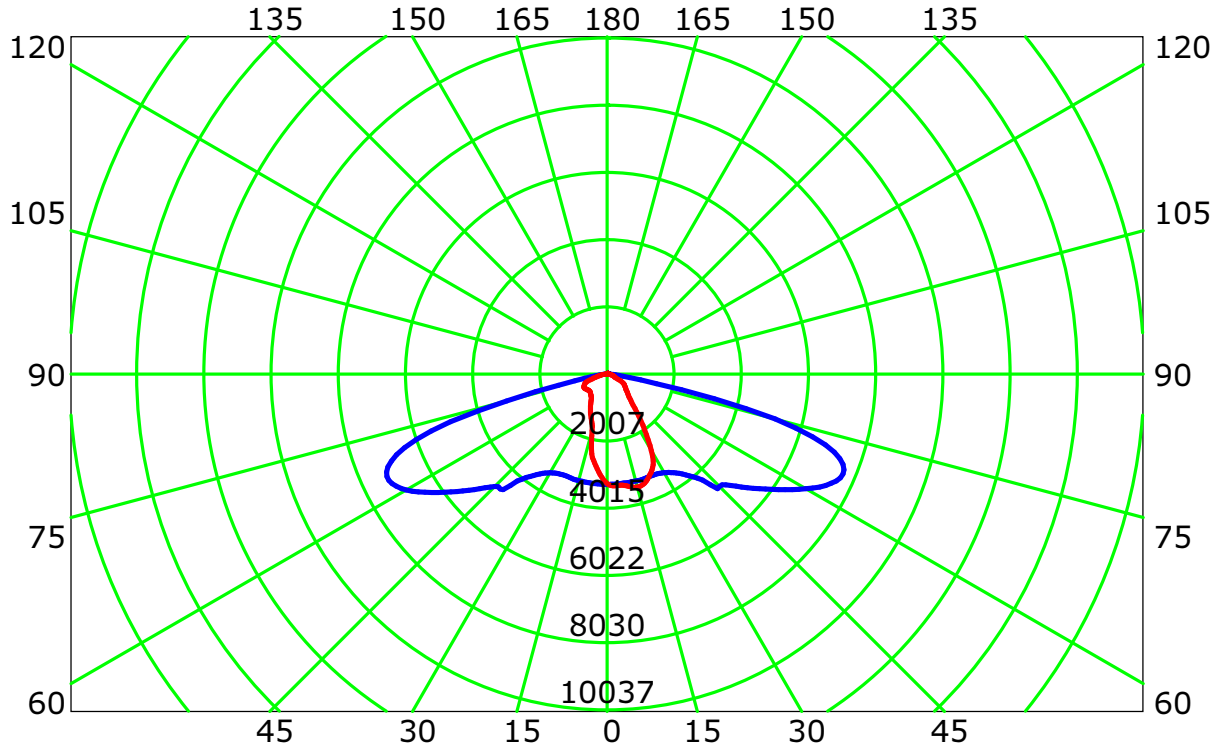

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Luminous Intensity Distribution Curve(cd/klm)

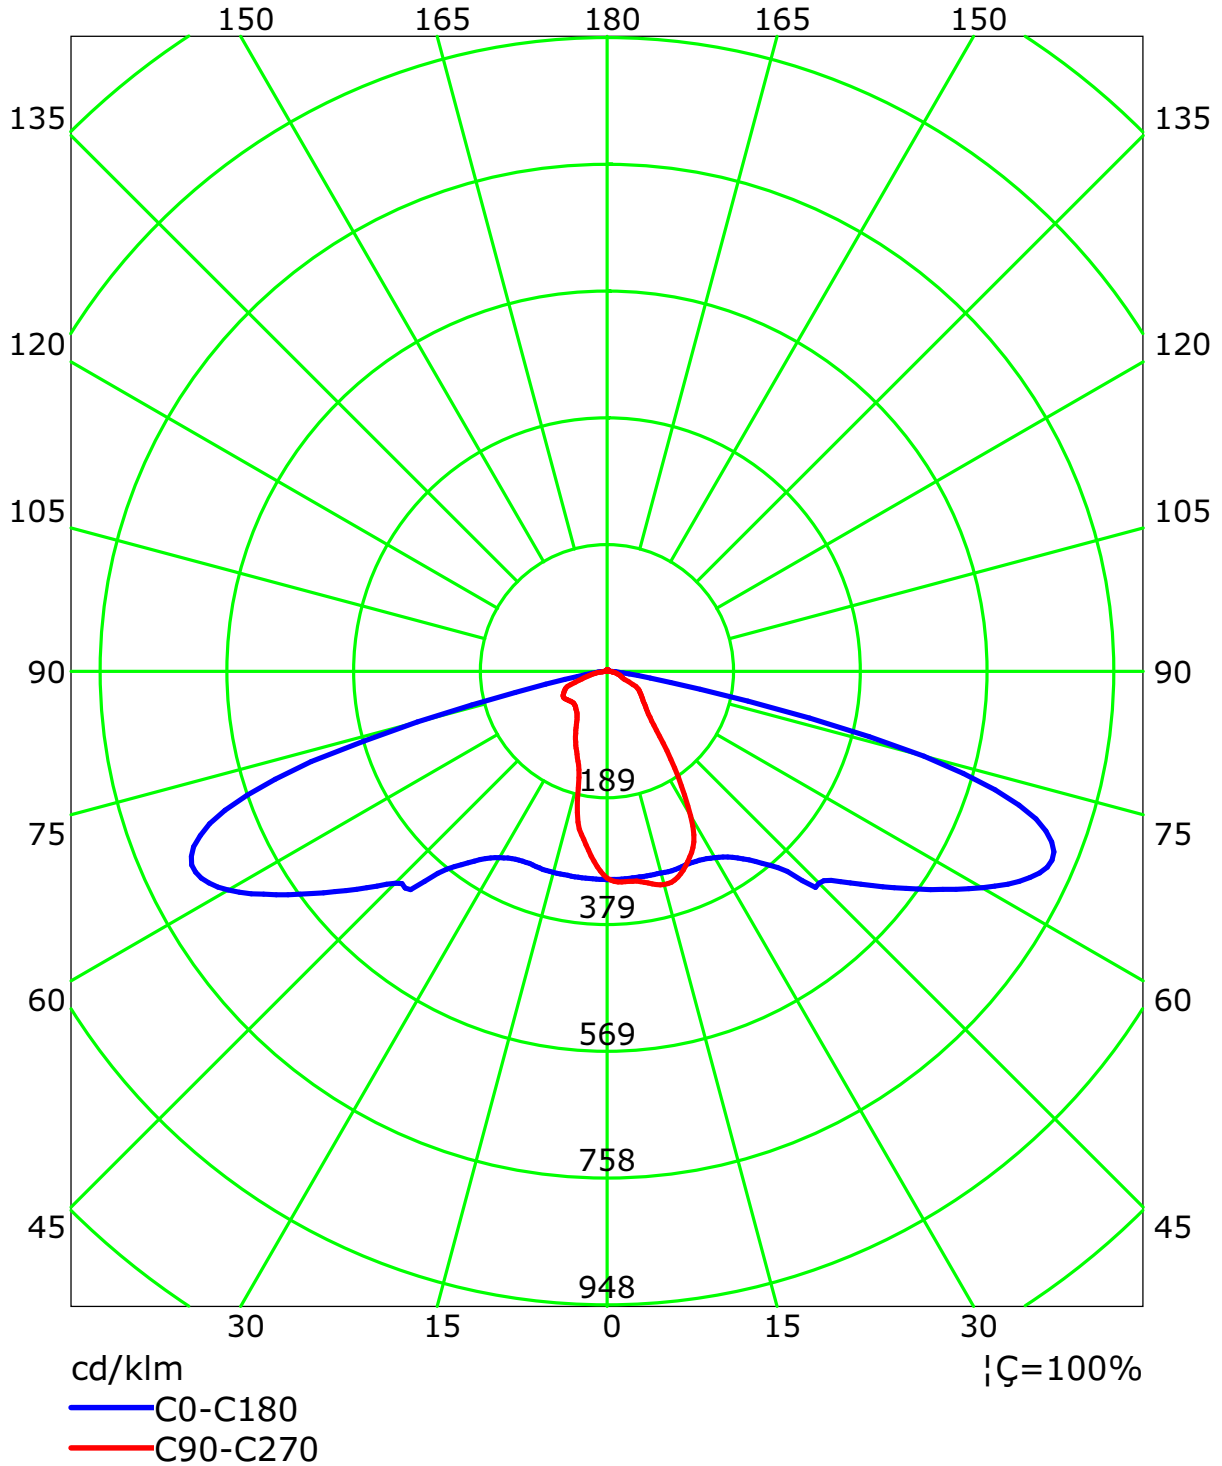

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40


Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	80
2	96	87	79	73	93	85	78	72	81	75	70	78	73	68	74	70	67	64
3	87	75	66	59	84	73	65	58	70	63	57	67	61	56	64	59	55	52
4	79	65	56	48	76	64	55	48	61	53	47	59	52	46	56	50	46	43
5	72	58	48	41	69	57	47	40	54	46	40	52	45	39	50	44	39	37
6	66	52	42	35	64	51	41	35	49	40	34	47	40	34	45	39	34	31
7	61	47	37	31	59	46	37	30	44	36	30	42	35	30	41	34	30	27
8	57	42	33	27	55	42	33	27	40	32	27	39	32	26	37	31	26	24
9	53	39	30	24	51	38	30	24	37	29	24	36	29	24	35	28	24	22
10	50	36	27	22	48	35	27	22	34	27	22	33	26	22	32	26	21	20

Spacing Criteria (0-180): 2.03
 Spacing Criteria (90-270): 0.92
 Spacing Criteria (Diagonal): 1.17


Curves of Luminaires vs Lighting Area

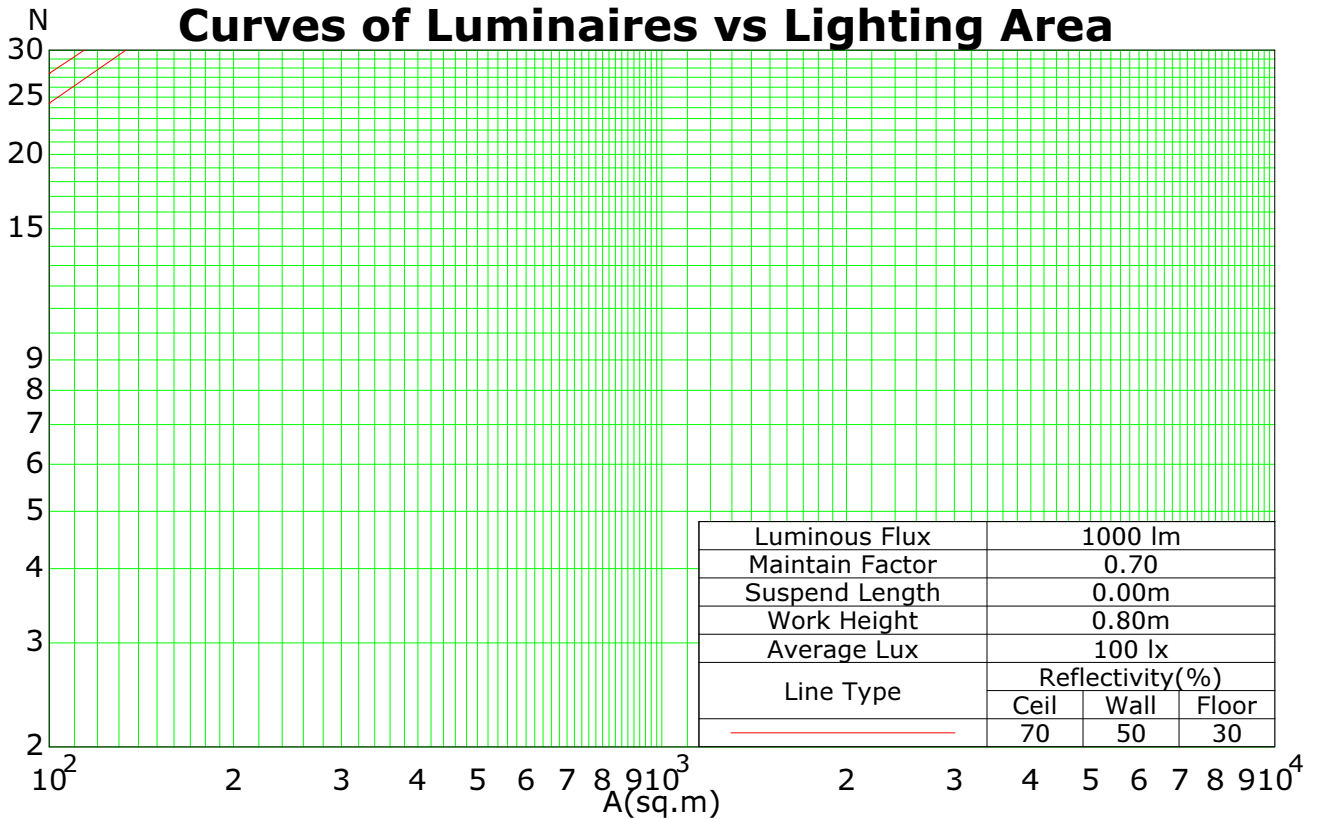

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

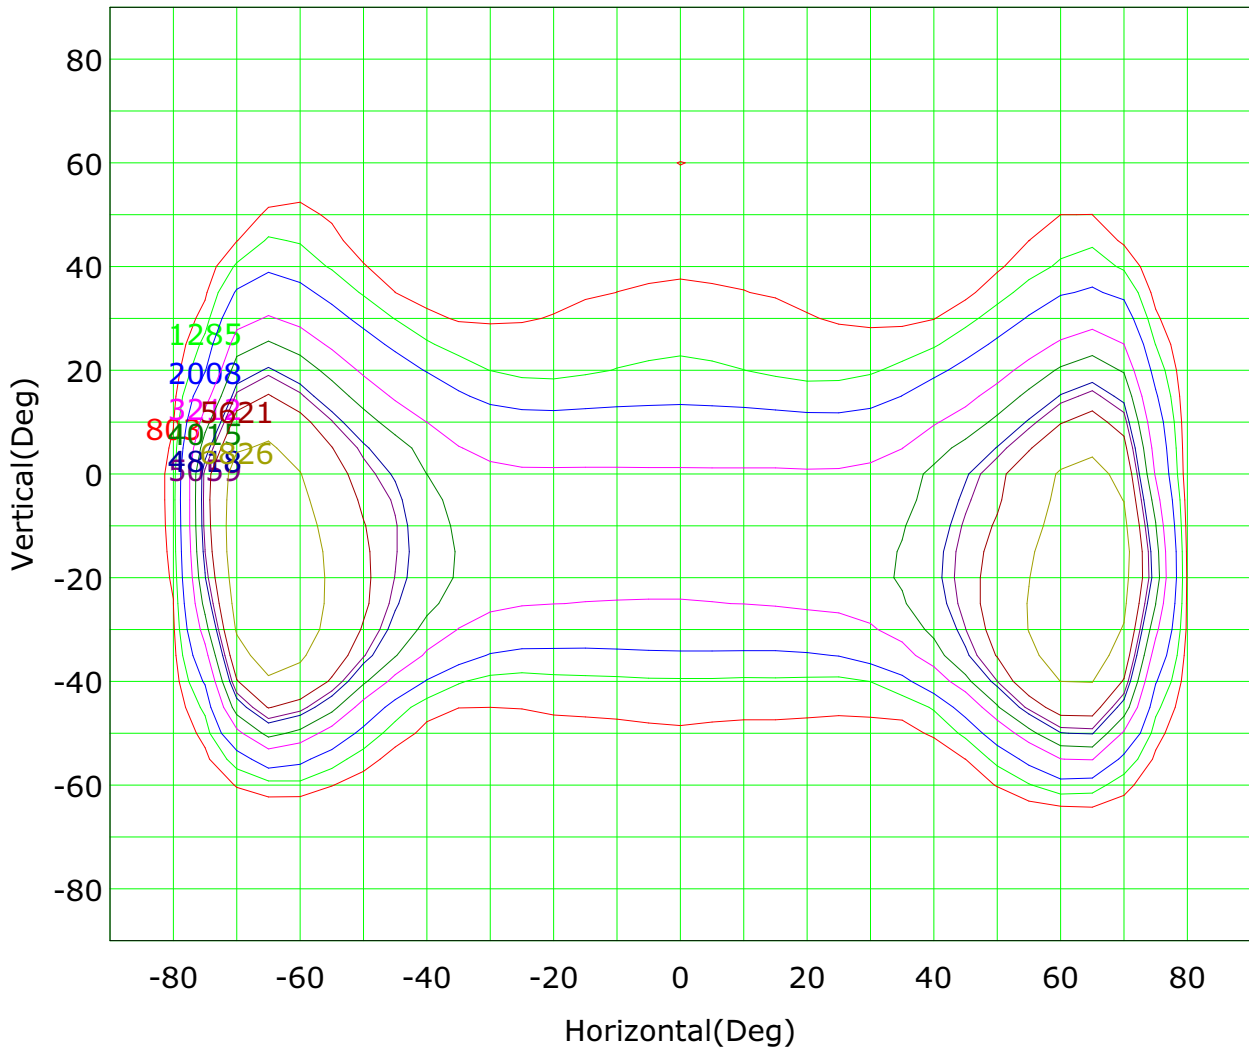

Imax (100%): 8030 cd

— (10%): 803 cd	— (16%): 1285 cd
— (25%): 2008 cd	— (40%): 3212 cd
— (63%): 5059 cd	— (100%): 8030 cd
— (50%): 4015 cd	— (60%): 4818 cd
— (70%): 5621 cd	— (85%): 6826 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Isocandela (sphere)

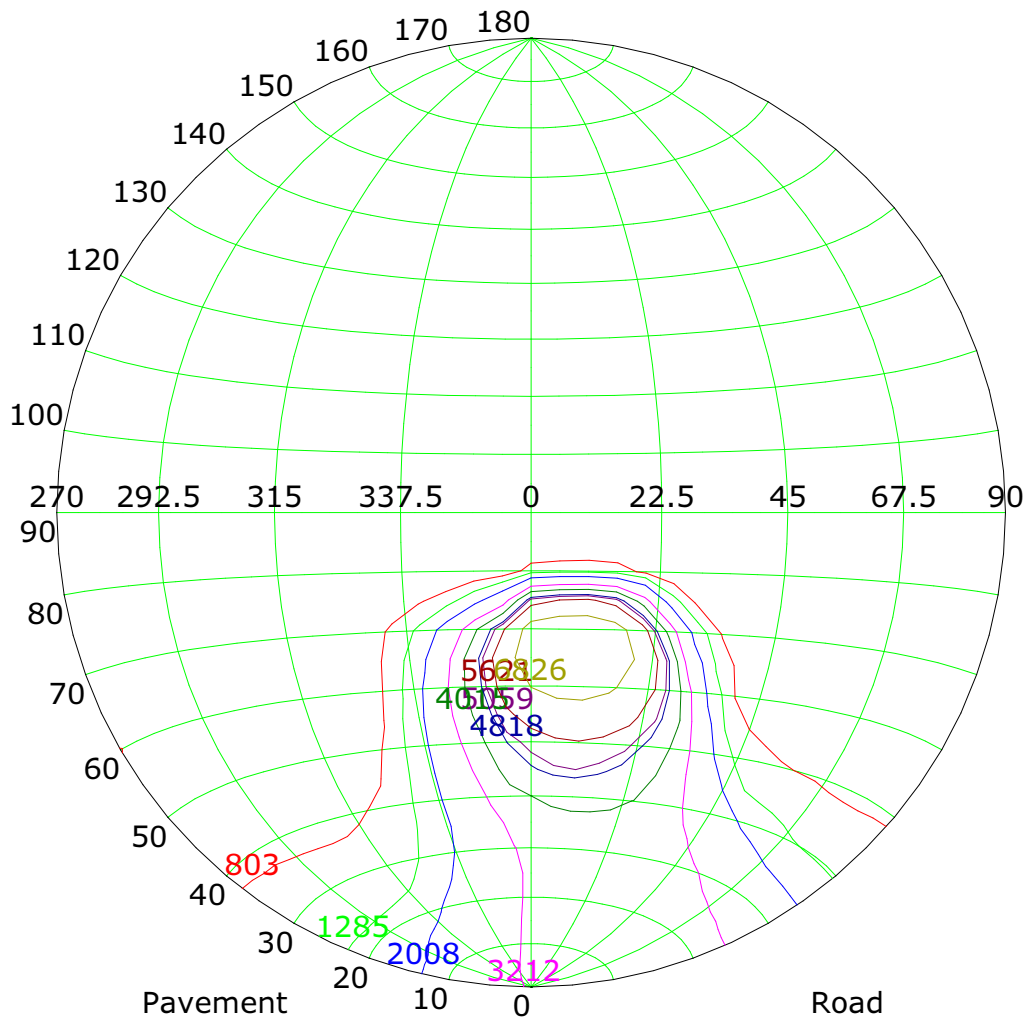


Imax (100%): 8030 cd

— (10%): 803 cd	— (16%): 1285 cd
— (25%): 2008 cd	— (40%): 3212 cd
— (63%): 5059 cd	— (100%): 8030 cd
— (50%): 4015 cd	— (60%): 4818 cd
— (70%): 5621 cd	— (85%): 6826 cd

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

IsoLux Plot

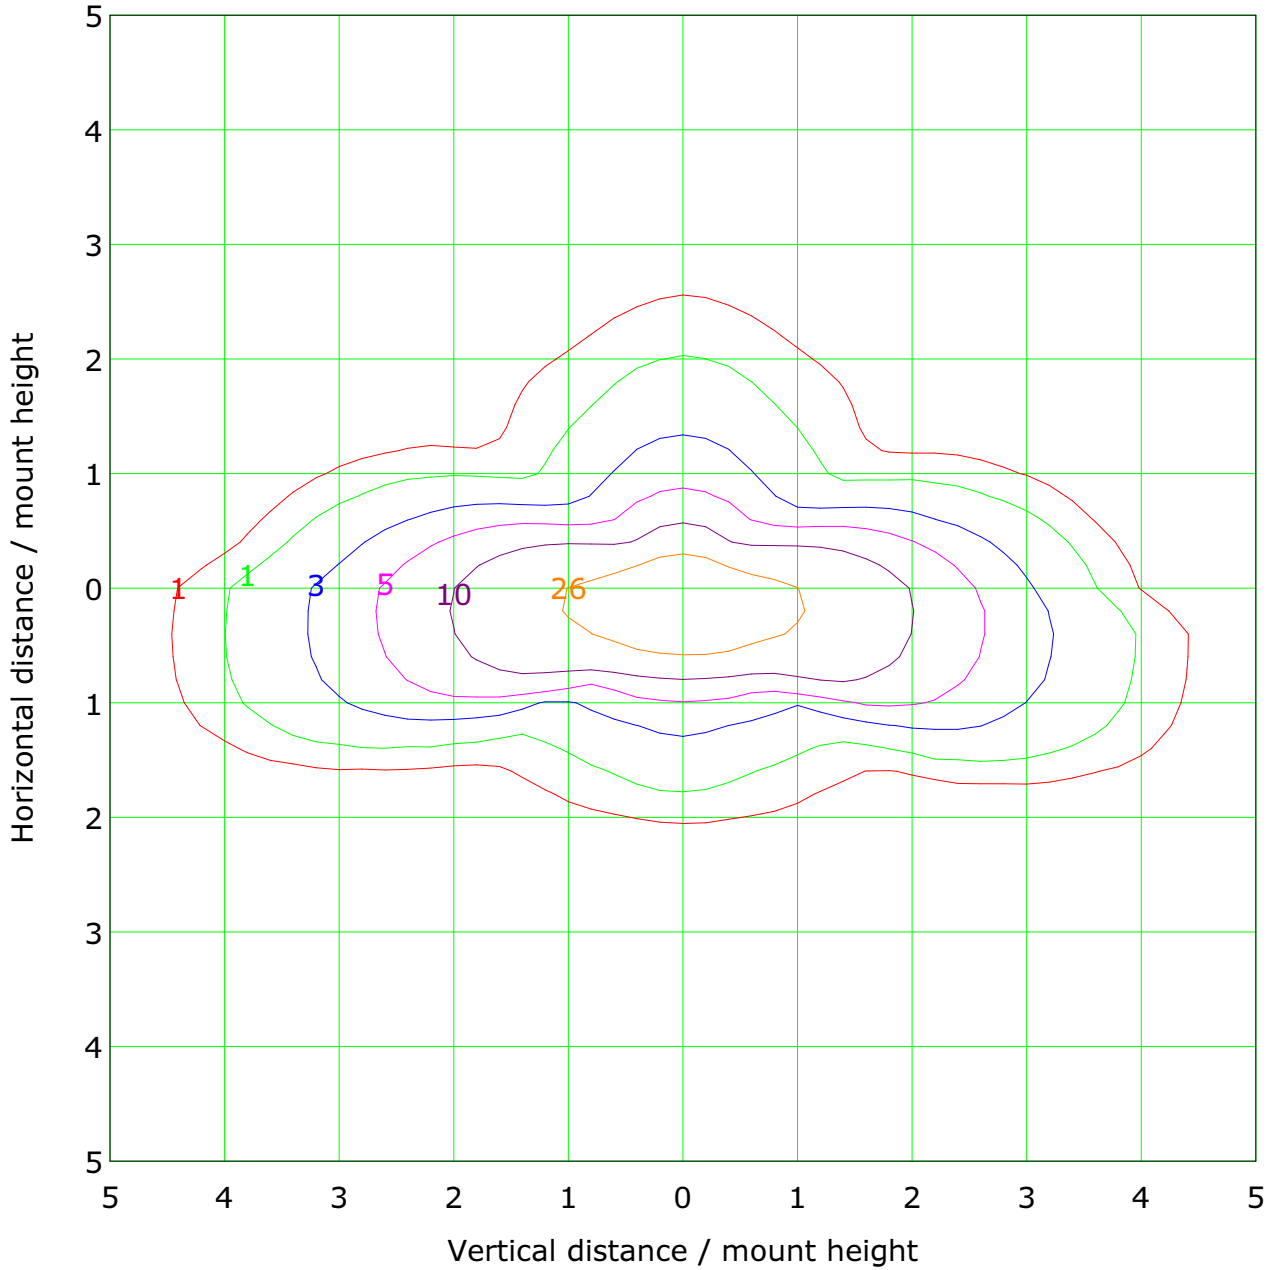


Mounting Height: 8.0m		Max Lux(100%): 52.1 lx
<ul style="list-style-type: none"> — (1%): 0.5 lx — (5%): 2.6 lx — (20%): 10.4 lx — (100%): 52.1 lx — (300%): 156.2 lx 	<ul style="list-style-type: none"> — (2%): 1.0 lx — (10%): 5.2 lx — (50%): 26.0 lx — (200%): 104.1 lx — (500%): 260.3 lx 	

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Roadway CU Curve

Efficiency(%)

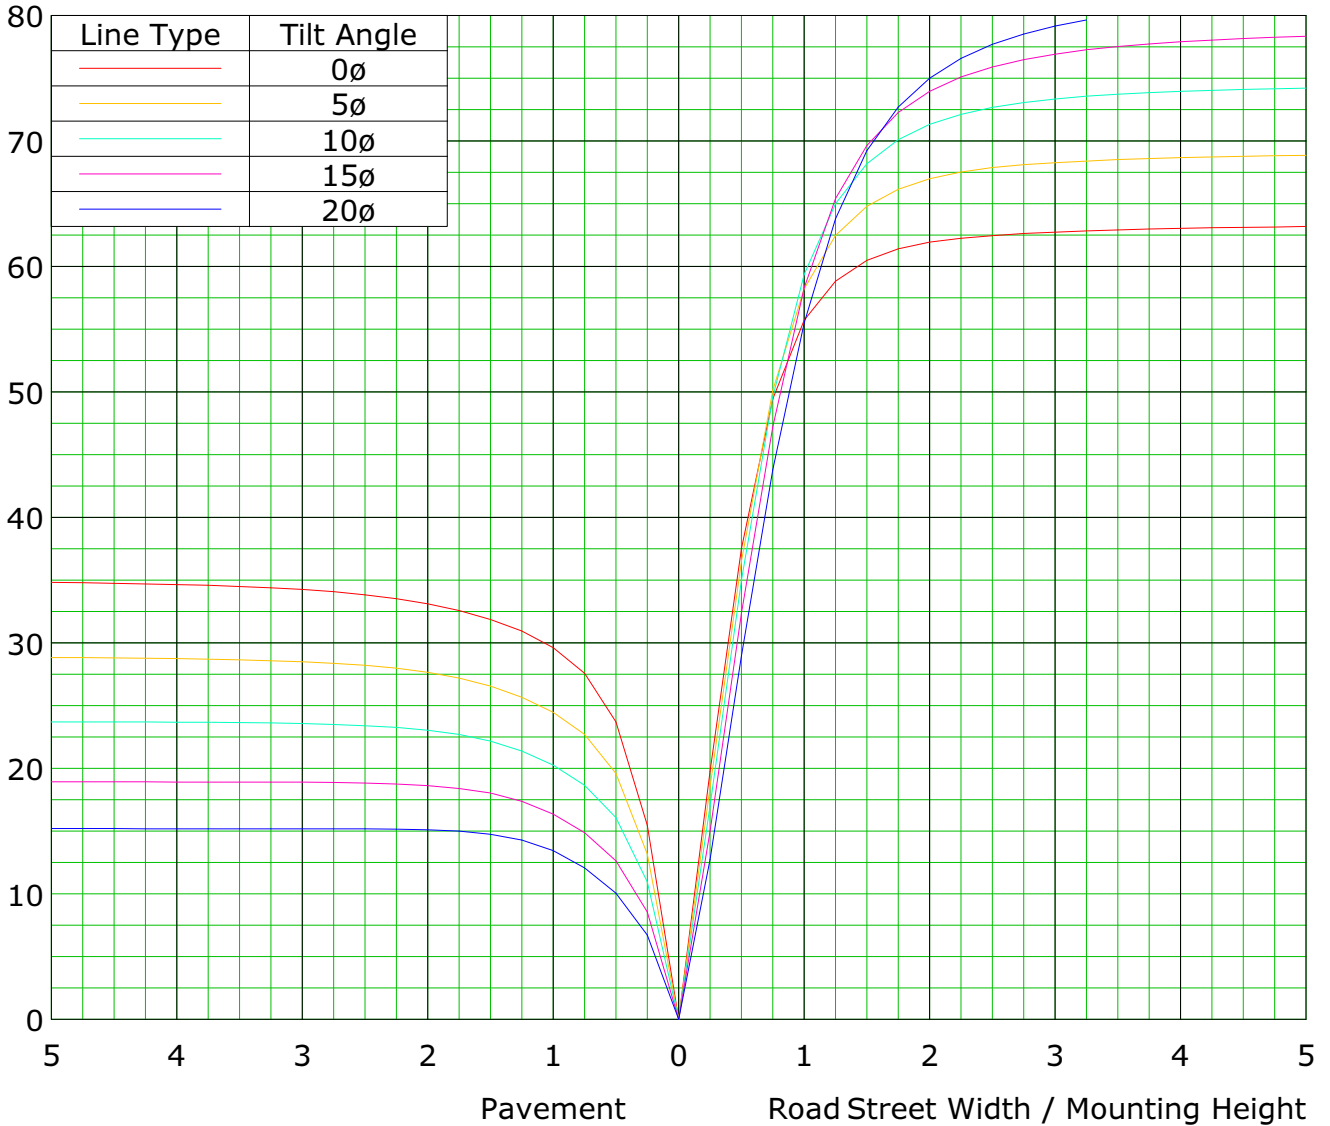

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

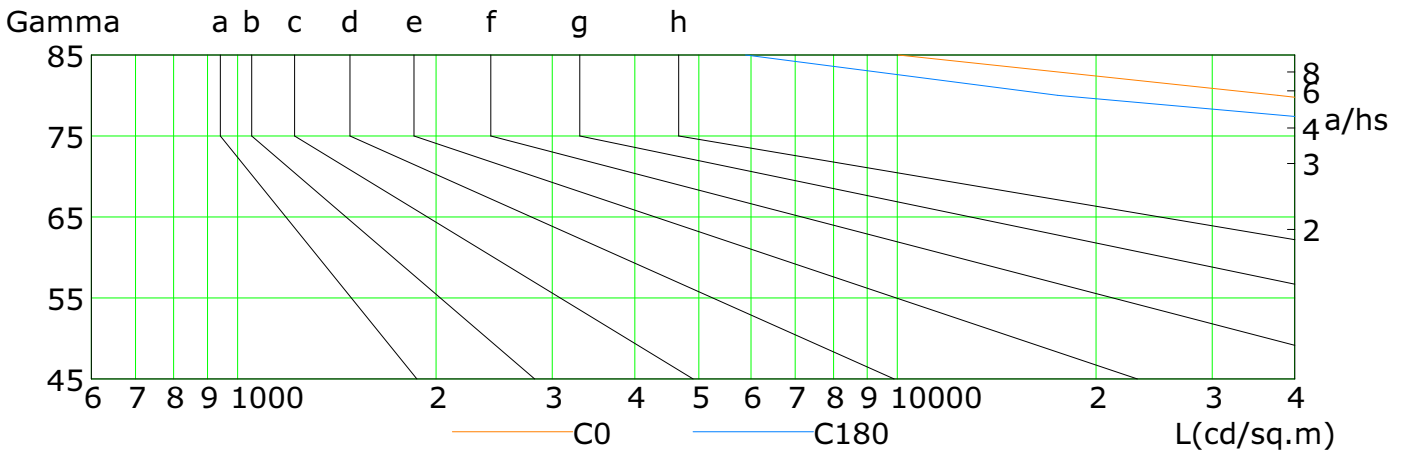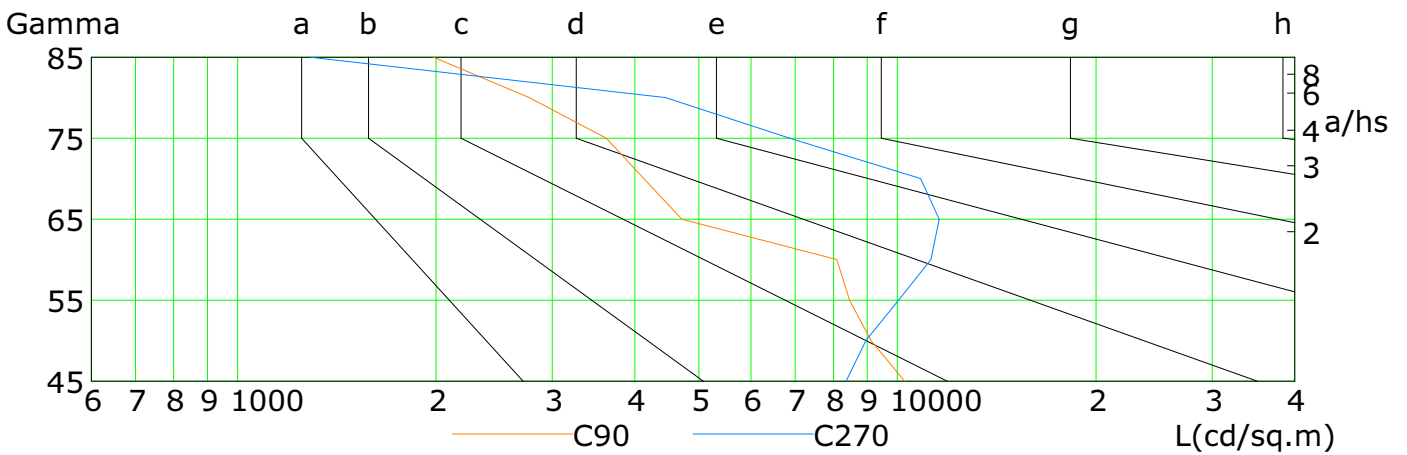

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	61039	73005	91734	116998	147294	169761	146268	37709	10024
C90	10253	9118	8468	8092	4714	4126	3622	2768	1981
C180	61033	75107	94134	118228	141468	147779	87576	17494	5888
C270	8363	8963	10042	11239	11572	10841	6868	4454	1290

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m


Humidity: 40

Inspector:

Illuminance at a Distance

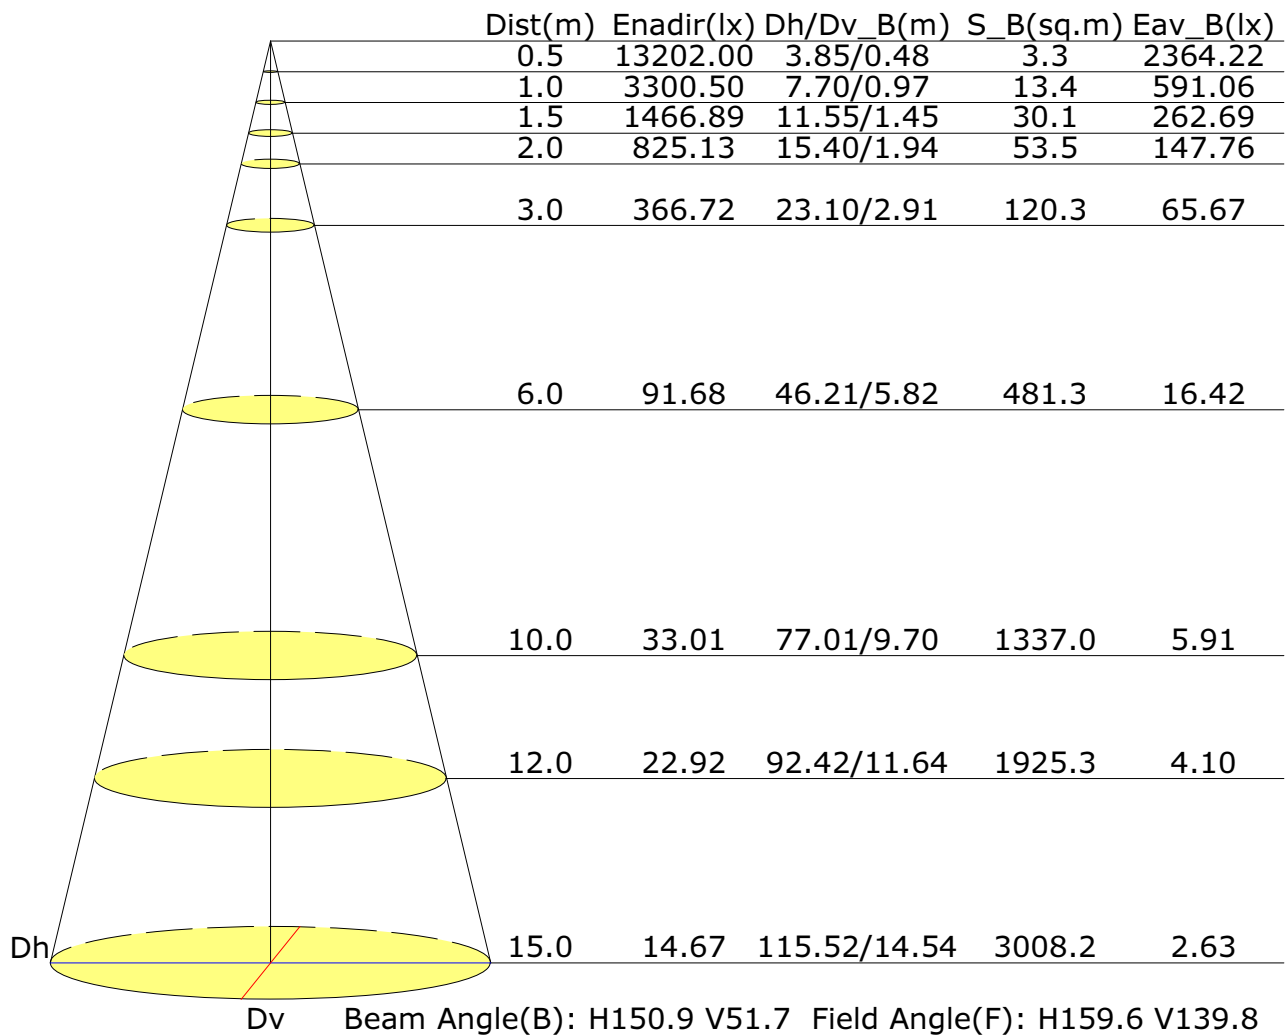

Vertical IsoLux Plot

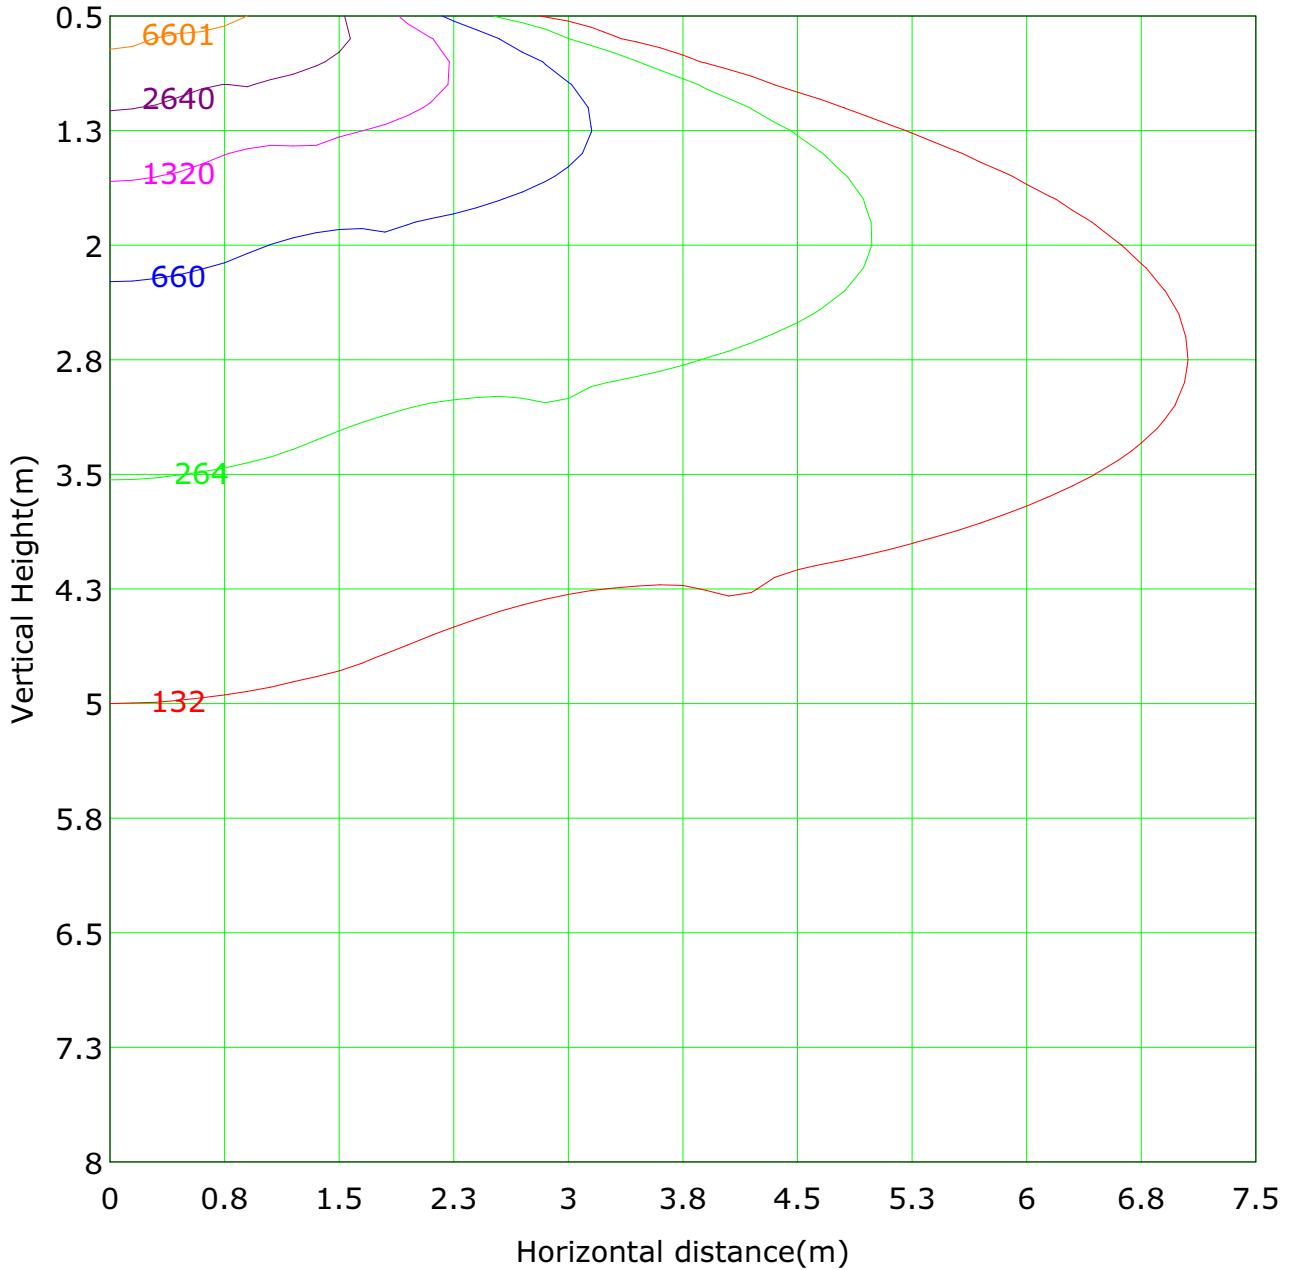

Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 13202.0 lx

— (1%): 132.0 lx	— (2%): 264.0 lx
— (5%): 660.1 lx	— (10%):1320.2 lx
— (20%):2640.4 lx	— (50%):6601.0 lx
— (100%):13202.0 lx	— (200%):26404.0 lx
— (300%):39606.0 lx	— (500%):66010.0 lx

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.000 m

Humidity: 40

Inspector:

The Average Illuminance Effective Figure

Flux Out: 10357.36lm

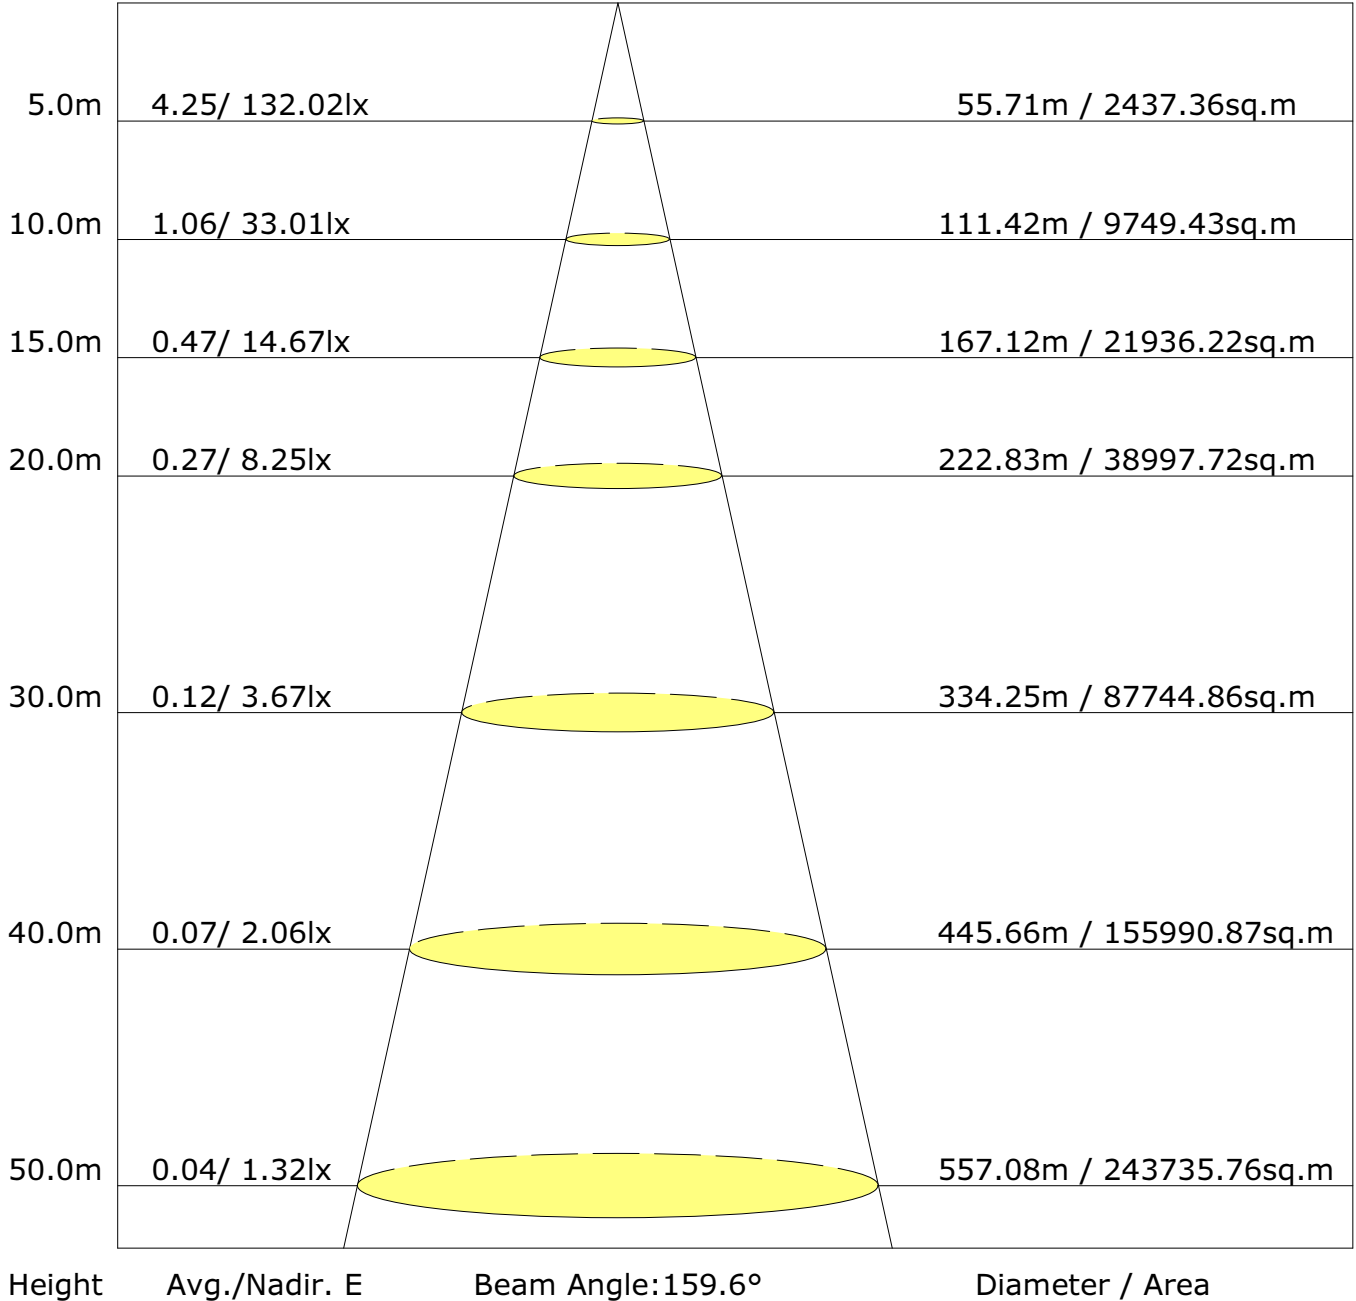

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	21.7	23.5	22.1	23.8	24.1	7.3	9.1	7.7	9.4	9.8
3H	26.1	27.7	26.5	28.1	28.4	8.3	9.9	8.7	10.2	10.6
4H	27.3	28.8	27.7	29.2	29.6	8.8	10.3	9.2	10.6	11.0
6H	27.5	28.9	27.9	29.3	29.7	9.1	10.5	9.6	10.9	11.3
8H	27.5	28.9	27.9	29.3	29.7	9.3	10.6	9.7	11.0	11.4
12H	27.5	28.8	27.9	29.2	29.6	9.4	10.7	9.8	11.1	11.5
X=4H Y=2H	21.5	23.1	21.9	23.4	23.8	8.1	9.7	8.5	10.0	10.4
3H	26.0	27.3	26.4	27.7	28.1	9.3	10.6	9.7	11.0	11.4
4H	27.3	28.4	27.7	28.9	29.3	9.9	11.0	10.3	11.5	11.9
6H	27.5	28.5	28.0	29.0	29.5	10.4	11.4	10.8	11.8	12.3
8H	27.5	28.5	28.0	28.9	29.4	10.5	11.5	11.0	12.0	12.4
12H	27.5	28.4	28.0	28.9	29.3	10.7	11.6	11.2	12.1	12.5
X=8H Y=4H	27.2	28.2	27.7	28.6	29.1	12.6	13.6	13.1	14.1	14.5
6H	27.4	28.2	28.0	28.7	29.2	13.0	13.8	13.5	14.3	14.8
8H	27.5	28.2	28.0	28.7	29.2	13.1	13.8	13.7	14.4	14.9
12H	27.5	28.1	28.0	28.6	29.1	13.3	13.9	13.8	14.4	15.0
X=12H Y=4H	27.2	28.1	27.7	28.5	29.0	13.0	13.9	13.5	14.4	14.8
6H	27.4	28.1	28.0	28.6	29.2	13.3	14.0	13.9	14.5	15.1
8H	27.4	28.1	28.0	28.6	29.1	13.5	14.1	14.0	14.6	15.2

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

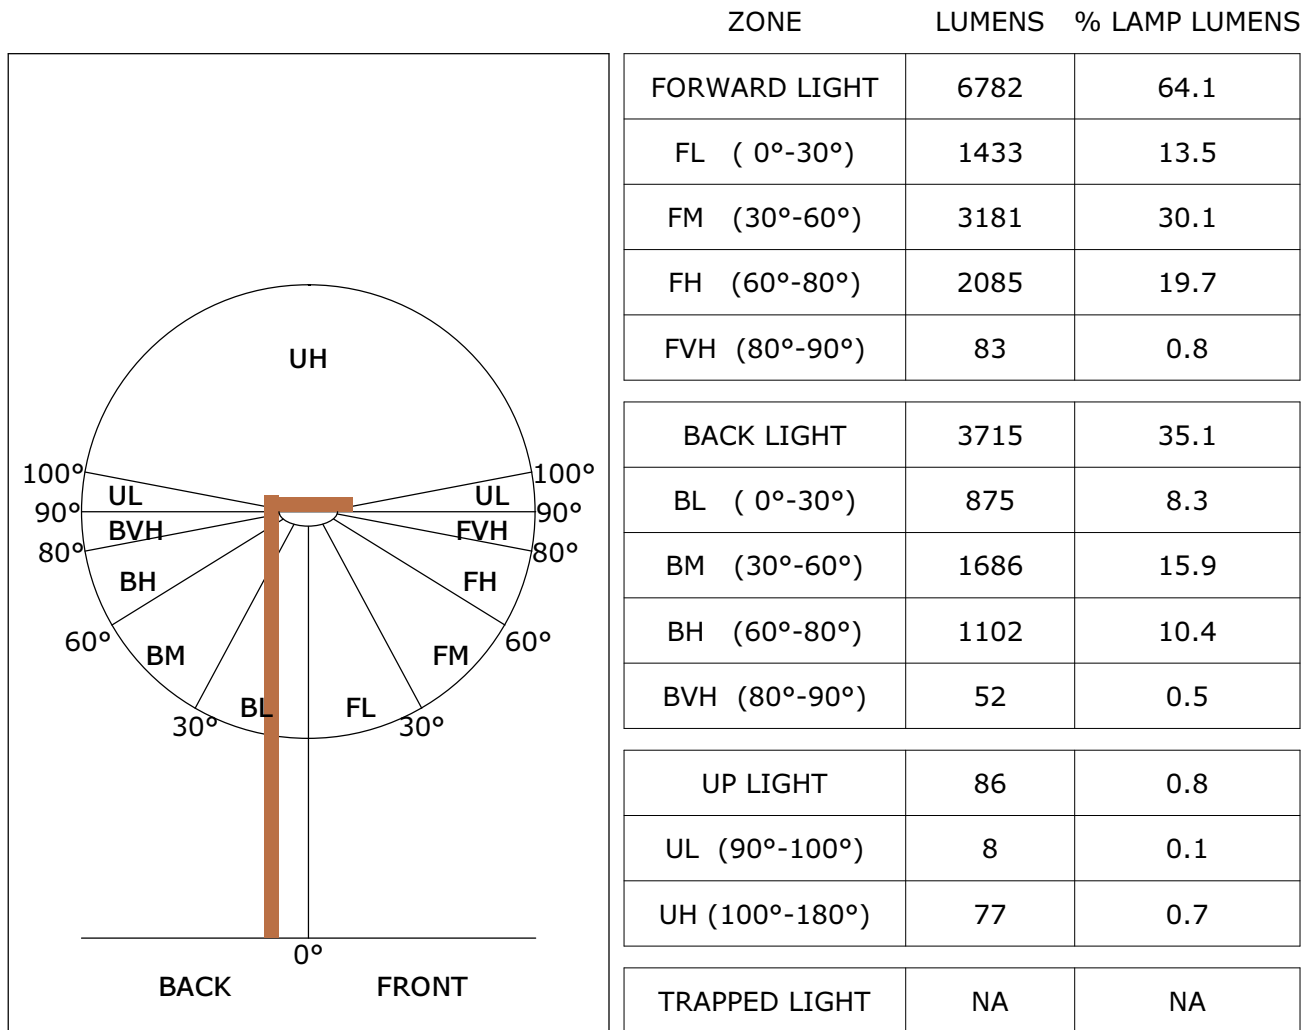


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U2 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U2 G2

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

LCS Graph

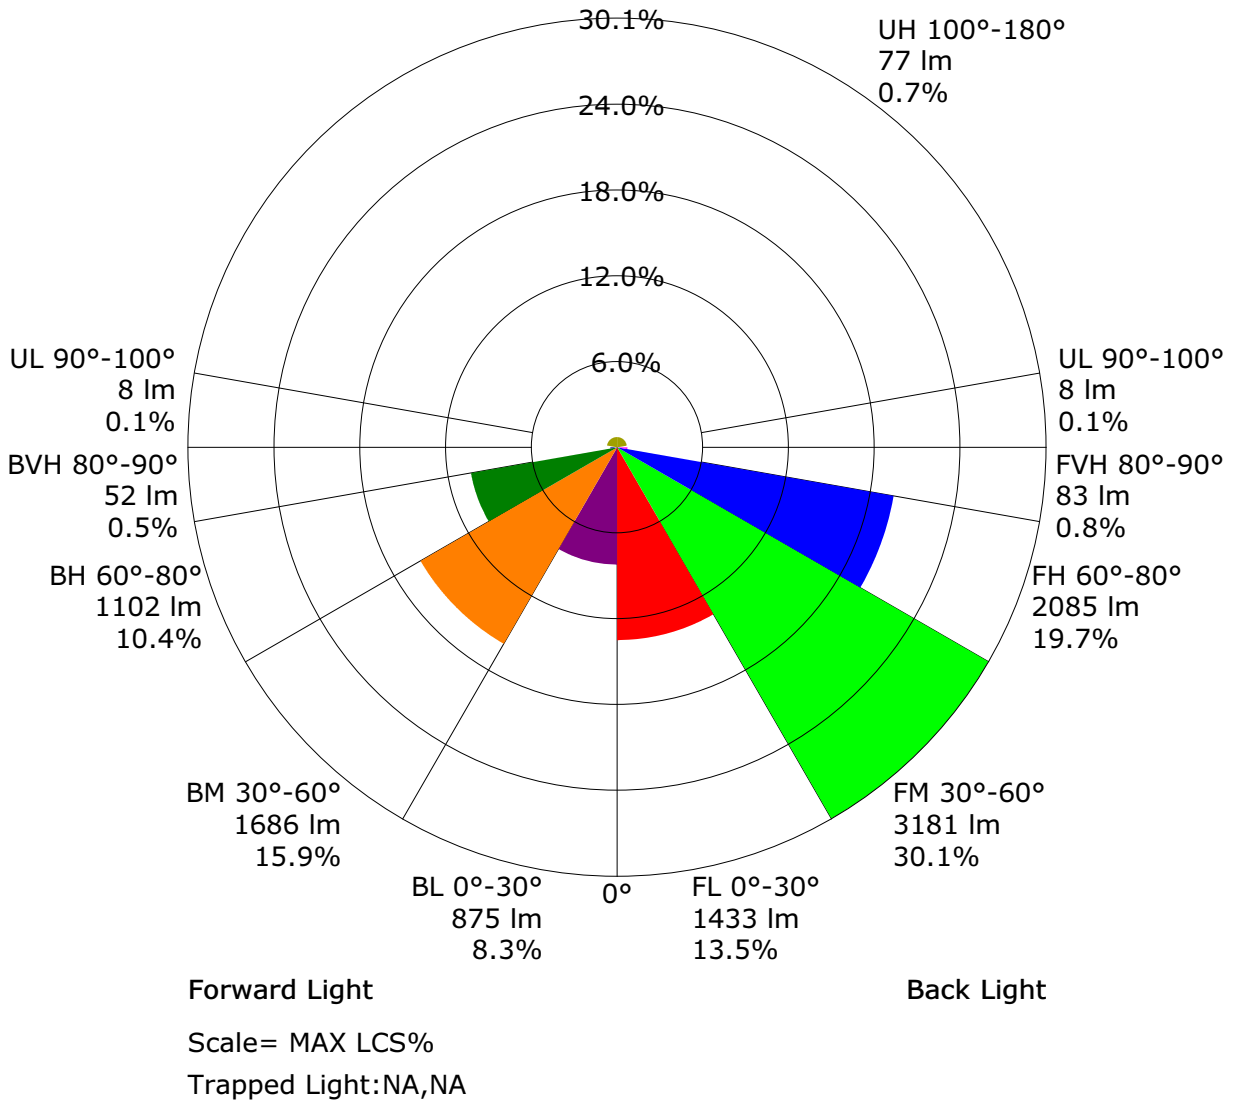

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3280.8	3.1	3.1	0.03	0.03
1.0-2.0	3274.6	9.4	12.5	0.09	0.12
2.0-3.0	3262.2	15.6	28.1	0.15	0.27
3.0-4.0	3244.1	21.7	49.9	0.21	0.47
4.0-5.0	3222.2	27.7	77.6	0.26	0.73
5.0-6.0	3198.1	33.6	111.2	0.32	1.05
6.0-7.0	3173.4	39.4	150.6	0.37	1.42
7.0-8.0	3149.0	45.1	195.7	0.43	1.85
8.0-9.0	3125.8	50.7	246.3	0.48	2.33
9.0-10.0	3104.1	56.2	302.5	0.53	2.86
10.0-11.0	3081.6	61.6	364.1	0.58	3.44
11.0-12.0	3055.4	66.8	430.9	0.63	4.07
12.0-13.0	3022.8	71.7	502.6	0.68	4.75
13.0-14.0	2983.0	76.4	579.0	0.72	5.47
14.0-15.0	2939.3	80.7	659.7	0.76	6.23
15.0-16.0	2895.7	84.9	744.6	0.80	7.04
16.0-17.0	2854.7	88.9	833.5	0.84	7.88
17.0-18.0	2817.1	92.9	926.4	0.88	8.75
18.0-19.0	2781.5	96.8	1023.2	0.91	9.67
19.0-20.0	2747.1	100.6	1123.7	0.95	10.62
20.0-21.0	2713.0	104.2	1227.9	0.98	11.60
21.0-22.0	2679.2	107.7	1335.6	1.02	12.62
22.0-23.0	2646.3	111.1	1446.6	1.05	13.67
23.0-24.0	2614.1	114.3	1560.9	1.08	14.75
24.0-25.0	2582.8	117.5	1678.4	1.11	15.86
25.0-26.0	2552.3	120.5	1798.9	1.14	17.00
26.0-27.0	2521.7	123.4	1922.3	1.17	18.16
27.0-28.0	2490.6	126.1	2048.4	1.19	19.35
28.0-29.0	2458.2	128.6	2177.0	1.22	20.57
29.0-30.0	2423.8	130.9	2307.9	1.24	21.81
30.0-31.0	2387.5	132.9	2440.8	1.26	23.06
31.0-32.0	2349.4	134.6	2575.4	1.27	24.33
32.0-33.0	2310.7	136.1	2711.5	1.29	25.62
33.0-34.0	2273.1	137.6	2849.1	1.30	26.92
34.0-35.0	2236.9	138.9	2988.1	1.31	28.23
35.0-36.0	2202.4	140.2	3128.3	1.33	29.56

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	2170.0	141.5	3269.9	1.34	30.90
37.0-38.0	2140.4	142.9	3412.7	1.35	32.25
38.0-39.0	2114.2	144.3	3557.1	1.36	33.61
39.0-40.0	2093.1	146.0	3703.1	1.38	34.99
40.0-41.0	2079.2	148.1	3851.1	1.40	36.39
41.0-42.0	2074.1	150.7	4001.9	1.42	37.81
42.0-43.0	2070.5	153.4	4155.2	1.45	39.26
43.0-44.0	2062.2	155.7	4310.9	1.47	40.73
44.0-45.0	2050.9	157.6	4468.6	1.49	42.22
45.0-46.0	2039.3	159.5	4628.1	1.51	43.73
46.0-47.0	2031.0	161.6	4789.6	1.53	45.26
47.0-48.0	2028.0	164.0	4953.6	1.55	46.81
48.0-49.0	2030.1	166.7	5120.3	1.58	48.38
49.0-50.0	2036.2	169.8	5290.1	1.60	49.98
50.0-51.0	2045.5	173.1	5463.2	1.64	51.62
51.0-52.0	2057.1	176.5	5639.7	1.67	53.29
52.0-53.0	2069.9	180.1	5819.8	1.70	54.99
53.0-54.0	2082.9	183.6	6003.4	1.73	56.72
54.0-55.0	2095.8	187.1	6190.5	1.77	58.49
55.0-56.0	2108.5	190.6	6381.1	1.80	60.29
56.0-57.0	2120.4	193.9	6575.0	1.83	62.13
57.0-58.0	2131.7	197.2	6772.2	1.86	63.99
58.0-59.0	2141.7	200.2	6972.4	1.89	65.88
59.0-60.0	2149.4	203.1	7175.5	1.92	67.80
60.0-61.0	2153.9	205.6	7381.1	1.94	69.74
61.0-62.0	2154.0	207.6	7588.7	1.96	71.70
62.0-63.0	2147.8	208.9	7797.6	1.97	73.68
63.0-64.0	2133.4	209.4	8006.9	1.98	75.66
64.0-65.0	2110.7	208.9	8215.9	1.97	77.63
65.0-66.0	2081.1	207.7	8423.5	1.96	79.59
66.0-67.0	2044.6	205.6	8629.1	1.94	81.53
67.0-68.0	1998.4	202.5	8831.6	1.91	83.45
68.0-69.0	1939.8	197.9	9029.5	1.87	85.32
69.0-70.0	1866.7	191.7	9221.3	1.81	87.13
70.0-71.0	1776.3	183.6	9404.9	1.73	88.86
71.0-72.0	1667.1	173.4	9578.3	1.64	90.50

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	1538.6	160.9	9739.2	1.52	92.02
73.0-74.0	1386.6	145.8	9885.0	1.38	93.40
74.0-75.0	1212.2	128.1	10013.1	1.21	94.61
75.0-76.0	1018.2	108.1	10121.2	1.02	95.63
76.0-77.0	813.7	86.8	10207.9	0.82	96.45
77.0-78.0	621.9	66.6	10274.5	0.63	97.08
78.0-79.0	466.0	50.1	10324.6	0.47	97.55
79.0-80.0	356.4	38.4	10363.0	0.36	97.92
80.0-81.0	283.3	30.6	10393.6	0.29	98.21
81.0-82.0	229.8	24.9	10418.6	0.24	98.44
82.0-83.0	186.4	20.3	10438.8	0.19	98.63
83.0-84.0	150.1	16.4	10455.2	0.15	98.79
84.0-85.0	119.9	13.1	10468.3	0.12	98.91
85.0-86.0	94.0	10.3	10478.6	0.10	99.01
86.0-87.0	71.2	7.8	10486.3	0.07	99.08
87.0-88.0	50.8	5.6	10491.9	0.05	99.14
88.0-89.0	33.0	3.6	10495.5	0.03	99.17
89.0-90.0	20.1	2.2	10497.7	0.02	99.19
90.0-91.0	10.9	1.2	10498.9	0.01	99.20
91.0-92.0	6.4	0.7	10499.6	0.01	99.21
92.0-93.0	6.5	0.7	10500.3	0.01	99.21
93.0-94.0	6.7	0.7	10501.1	0.01	99.22
94.0-95.0	7.0	0.8	10501.8	0.01	99.23
95.0-96.0	7.3	0.8	10502.6	0.01	99.24
96.0-97.0	7.6	0.8	10503.5	0.01	99.24
97.0-98.0	7.9	0.9	10504.3	0.01	99.25
98.0-99.0	8.1	0.9	10505.2	0.01	99.26
99.0-100.0	8.5	0.9	10506.1	0.01	99.27
100.0-101.0	8.7	0.9	10507.1	0.01	99.28
101.0-102.0	9.0	1.0	10508.0	0.01	99.29
102.0-103.0	9.3	1.0	10509.0	0.01	99.30
103.0-104.0	9.6	1.0	10510.0	0.01	99.31
104.0-105.0	9.8	1.0	10511.1	0.01	99.32
105.0-106.0	10.1	1.1	10512.1	0.01	99.33
106.0-107.0	10.3	1.1	10513.2	0.01	99.34
107.0-108.0	10.5	1.1	10514.3	0.01	99.35

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	10.8	1.1	10515.4	0.01	99.36
109.0-110.0	11.0	1.1	10516.6	0.01	99.37
110.0-111.0	11.3	1.2	10517.7	0.01	99.38
111.0-112.0	11.5	1.2	10518.9	0.01	99.39
112.0-113.0	11.7	1.2	10520.1	0.01	99.40
113.0-114.0	11.9	1.2	10521.3	0.01	99.41
114.0-115.0	12.1	1.2	10522.5	0.01	99.42
115.0-116.0	12.4	1.2	10523.7	0.01	99.44
116.0-117.0	12.6	1.2	10525.0	0.01	99.45
117.0-118.0	12.8	1.2	10526.2	0.01	99.46
118.0-119.0	13.0	1.3	10527.5	0.01	99.47
119.0-120.0	13.3	1.3	10528.7	0.01	99.48
120.0-121.0	13.5	1.3	10530.0	0.01	99.50
121.0-122.0	13.8	1.3	10531.3	0.01	99.51
122.0-123.0	14.0	1.3	10532.6	0.01	99.52
123.0-124.0	14.2	1.3	10533.9	0.01	99.53
124.0-125.0	14.5	1.3	10535.2	0.01	99.54
125.0-126.0	14.7	1.3	10536.5	0.01	99.56
126.0-127.0	14.9	1.3	10537.8	0.01	99.57
127.0-128.0	15.2	1.3	10539.2	0.01	99.58
128.0-129.0	15.4	1.3	10540.5	0.01	99.59
129.0-130.0	15.6	1.3	10541.8	0.01	99.61
130.0-131.0	15.9	1.3	10543.1	0.01	99.62
131.0-132.0	16.1	1.3	10544.5	0.01	99.63
132.0-133.0	16.3	1.3	10545.8	0.01	99.64
133.0-134.0	16.5	1.3	10547.1	0.01	99.66
134.0-135.0	16.8	1.3	10548.4	0.01	99.67
135.0-136.0	17.0	1.3	10549.7	0.01	99.68
136.0-137.0	17.2	1.3	10551.0	0.01	99.69
137.0-138.0	17.4	1.3	10552.3	0.01	99.71
138.0-139.0	17.7	1.3	10553.6	0.01	99.72
139.0-140.0	17.9	1.3	10554.8	0.01	99.73
140.0-141.0	18.1	1.3	10556.1	0.01	99.74
141.0-142.0	18.3	1.2	10557.4	0.01	99.75
142.0-143.0	18.4	1.2	10558.6	0.01	99.77
143.0-144.0	18.5	1.2	10559.8	0.01	99.78

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	18.7	1.2	10561.0	0.01	99.79
145.0-146.0	18.9	1.2	10562.2	0.01	99.80
146.0-147.0	18.9	1.1	10563.3	0.01	99.81
147.0-148.0	19.0	1.1	10564.4	0.01	99.82
148.0-149.0	19.1	1.1	10565.5	0.01	99.83
149.0-150.0	19.2	1.1	10566.6	0.01	99.84
150.0-151.0	19.3	1.0	10567.6	0.01	99.85
151.0-152.0	19.4	1.0	10568.6	0.01	99.86
152.0-153.0	19.5	1.0	10569.6	0.01	99.87
153.0-154.0	19.6	1.0	10570.6	0.01	99.88
154.0-155.0	19.6	0.9	10571.5	0.01	99.89
155.0-156.0	19.7	0.9	10572.4	0.01	99.90
156.0-157.0	19.8	0.9	10573.3	0.01	99.90
157.0-158.0	19.9	0.8	10574.1	0.01	99.91
158.0-159.0	19.9	0.8	10574.9	0.01	99.92
159.0-160.0	20.0	0.8	10575.7	0.01	99.93
160.0-161.0	20.1	0.7	10576.4	0.01	99.93
161.0-162.0	20.1	0.7	10577.1	0.01	99.94
162.0-163.0	20.2	0.7	10577.8	0.01	99.95
163.0-164.0	20.3	0.6	10578.4	0.01	99.95
164.0-165.0	20.3	0.6	10579.0	0.01	99.96
165.0-166.0	20.4	0.6	10579.6	0.01	99.96
166.0-167.0	20.4	0.5	10580.1	0.00	99.97
167.0-168.0	20.5	0.5	10580.6	0.00	99.97
168.0-169.0	20.6	0.5	10581.0	0.00	99.98
169.0-170.0	20.7	0.4	10581.4	0.00	99.98
170.0-171.0	20.7	0.4	10581.8	0.00	99.98
171.0-172.0	20.8	0.3	10582.2	0.00	99.99
172.0-173.0	20.8	0.3	10582.5	0.00	99.99
173.0-174.0	20.8	0.3	10582.7	0.00	99.99
174.0-175.0	20.8	0.2	10582.9	0.00	100.00
175.0-176.0	20.8	0.2	10583.1	0.00	100.00
176.0-177.0	20.9	0.1	10583.2	0.00	100.00
177.0-178.0	20.9	0.1	10583.3	0.00	100.00
178.0-179.0	21.0	0.1	10583.4	0.00	100.00
179.0-180.0	20.9	0.0	10583.4	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	3300.5	3298.6	3296.3	3294.5	3291.7	3291.2	3289.4	3288.2	3288.0	3285.6
G1.0	3299.3	3301.2	3302.4	3304.0	3304.4	3306.3	3306.1	3307.7	3309.5	3309.1
G2.0	3300.0	3305.1	3308.4	3311.6	3315.1	3318.6	3321.1	3323.5	3325.6	3327.9
G3.0	3301.0	3309.3	3314.6	3320.2	3323.9	3329.3	3332.1	3335.3	3337.4	3339.7
G4.0	3303.1	3314.4	3320.0	3328.1	3333.4	3336.7	3340.9	3343.4	3345.5	3345.5
G5.0	3300.3	3316.0	3324.9	3334.1	3339.9	3344.4	3346.9	3348.5	3349.7	3348.5
G6.0	3300.0	3317.7	3329.7	3338.3	3344.1	3347.8	3349.9	3349.7	3350.8	3349.9
G7.0	3298.9	3319.1	3332.3	3343.2	3348.1	3349.7	3351.5	3349.7	3350.6	3349.2
G8.0	3297.9	3321.1	3336.0	3346.2	3350.6	3351.8	3351.8	3349.4	3349.7	3350.4
G9.0	3299.1	3325.6	3342.9	3351.5	3354.6	3354.6	3351.5	3350.1	3350.4	3350.4
G10.0	3301.0	3331.4	3350.8	3358.7	3360.4	3356.9	3353.6	3351.1	3351.3	3352.7
G11.0	3304.9	3338.8	3359.4	3365.9	3365.0	3359.7	3355.9	3353.2	3354.3	3357.8
G12.0	3306.3	3343.6	3365.0	3371.5	3369.9	3363.8	3359.9	3358.3	3361.1	3367.1
G13.0	3306.1	3347.6	3370.1	3375.7	3372.4	3367.8	3364.5	3364.3	3372.2	3382.9
G14.0	3306.3	3352.0	3375.2	3379.6	3375.4	3370.3	3368.7	3374.7	3385.9	3401.6
G15.0	3310.0	3359.9	3384.3	3384.5	3380.1	3373.4	3375.2	3383.8	3402.8	3423.9
G16.0	3313.7	3366.9	3391.4	3392.8	3386.1	3381.0	3383.8	3397.0	3423.5	3447.1
G17.0	3319.1	3375.4	3400.3	3400.3	3394.0	3390.8	3396.3	3414.2	3443.4	3472.2
G18.0	3321.8	3383.6	3407.4	3407.9	3402.1	3402.1	3411.6	3436.7	3467.3	3493.8
G19.0	3320.7	3387.0	3412.1	3414.2	3409.1	3414.6	3429.9	3461.7	3493.1	3516.5
G20.0	3318.4	3389.1	3417.7	3420.2	3418.4	3426.2	3451.3	3487.7	3521.8	3536.9
G21.0	3313.9	3391.4	3422.3	3425.3	3426.9	3441.1	3471.9	3512.8	3546.0	3554.8
G22.0	3311.4	3395.9	3429.9	3433.2	3436.9	3455.2	3493.8	3539.7	3567.5	3567.5
G23.0	3314.9	3402.6	3438.3	3443.6	3449.0	3472.4	3517.6	3562.0	3584.5	3573.6
G24.0	3318.1	3413.9	3449.4	3455.9	3462.7	3491.4	3540.4	3582.1	3596.3	3570.8
G25.0	3323.9	3425.1	3462.7	3470.8	3479.6	3513.5	3563.6	3598.9	3602.3	3561.3
G26.0	3333.4	3438.8	3479.1	3489.1	3500.0	3536.4	3584.9	3613.0	3600.5	3544.6
G27.0	3346.4	3457.6	3497.7	3509.3	3520.0	3560.1	3605.4	3622.3	3591.2	3520.0
G28.0	3363.6	3478.7	3521.4	3532.7	3542.7	3583.1	3622.8	3627.4	3577.3	3489.8
G29.0	3385.2	3505.1	3549.2	3559.2	3569.9	3608.4	3639.0	3626.7	3556.6	3452.0
G30.0	3409.3	3532.5	3581.2	3590.5	3601.4	3634.1	3654.3	3620.0	3530.6	3412.8
G31.0	3437.6	3565.2	3615.1	3624.4	3633.6	3661.5	3668.2	3613.5	3501.6	3370.8
G32.0	3471.3	3603.3	3653.6	3664.1	3670.3	3690.0	3682.1	3601.6	3467.8	3321.4
G33.0	3511.6	3649.0	3700.5	3707.9	3710.7	3720.4	3692.4	3583.3	3428.3	3262.7
G34.0	3556.6	3694.0	3752.0	3759.2	3757.1	3750.6	3697.9	3562.7	3383.3	3204.7
G35.0	3611.4	3754.5	3812.8	3815.3	3805.8	3782.6	3701.4	3538.8	3336.5	3135.1
G36.0	3674.0	3822.0	3881.7	3880.7	3860.1	3816.9	3706.5	3512.6	3283.6	3063.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	3744.3	3897.4	3960.3	3952.4	3916.0	3857.1	3712.8	3486.1	3228.8	2986.1
G38.0	3825.5	3989.1	4046.6	4036.9	3987.9	3898.8	3717.6	3456.4	3168.7	2903.8
G39.0	3914.8	4077.0	4141.5	4130.1	4065.2	3946.9	3726.7	3426.5	3109.6	2814.7
G40.0	4015.1	4184.0	4261.2	4244.1	4156.4	4000.9	3738.3	3396.3	3048.1	2710.5
G41.0	4120.4	4306.7	4387.4	4362.6	4252.0	4058.7	3752.2	3367.1	2982.4	2587.3
G42.0	4270.3	4473.0	4555.9	4495.1	4352.6	4123.2	3768.4	3335.8	2912.6	2443.9
G43.0	4534.5	4693.5	4725.7	4630.8	4457.0	4194.9	3790.0	3307.2	2835.6	2277.4
G44.0	4758.0	4918.3	4894.1	4768.6	4574.9	4274.2	3817.9	3278.5	2748.6	2088.5
G45.0	4747.7	4988.1	5049.4	4905.3	4680.9	4349.4	3842.2	3250.1	2649.0	1883.6
G46.0	4774.9	5011.8	5117.1	5016.6	4779.1	4411.6	3863.8	3220.4	2533.0	1679.9
G47.0	4859.1	5092.5	5184.4	5100.9	4864.9	4469.6	3882.1	3184.3	2397.8	1504.8
G48.0	4978.1	5210.1	5291.1	5193.4	4955.6	4529.4	3897.0	3140.9	2240.7	1338.9
G49.0	5110.6	5349.3	5435.2	5312.0	5059.5	4596.0	3920.2	3088.9	2061.6	1199.7
G50.0	5251.9	5496.0	5576.0	5444.0	5171.8	4675.6	3949.4	3032.1	1883.6	1094.8
G51.0	5396.2	5653.5	5733.1	5586.0	5298.8	4763.3	3981.0	2952.5	1713.1	1012.5
G52.0	5545.4	5811.5	5889.2	5731.9	5426.4	4852.1	4009.5	2852.5	1560.0	944.3
G53.0	5699.0	5975.0	6048.8	5886.9	5561.4	4942.4	4030.1	2731.4	1407.6	890.9
G54.0	5853.0	6144.9	6212.9	6035.8	5689.5	5027.5	4042.9	2597.3	1273.7	839.4
G55.0	6013.1	6306.6	6380.8	6195.2	5822.9	5108.7	4036.6	2442.8	1156.3	795.5
G56.0	6186.6	6493.6	6547.2	6352.8	5948.4	5183.7	4007.6	2276.7	1054.7	753.1
G57.0	6345.1	6665.5	6728.4	6514.5	6072.0	5252.8	3958.7	2112.2	969.5	716.7
G58.0	6521.9	6848.8	6893.8	6674.3	6189.4	5315.0	3878.0	1955.6	897.6	682.6
G59.0	6687.8	7029.3	7065.9	6832.1	6303.3	5370.2	3770.1	1807.8	831.5	651.9
G60.0	6863.2	7213.5	7230.4	6985.9	6401.7	5408.3	3631.1	1669.5	777.9	626.2
G61.0	7022.1	7383.5	7390.3	7135.5	6491.3	5431.7	3461.7	1543.8	733.1	605.3
G62.0	7189.6	7556.4	7542.0	7264.8	6571.5	5425.2	3259.7	1431.2	697.9	585.6
G63.0	7331.3	7704.2	7681.0	7391.9	6632.1	5381.8	3047.4	1326.6	664.0	562.2
G64.0	7455.9	7836.4	7799.1	7505.1	6666.4	5300.1	2813.8	1242.2	631.3	531.3
G65.0	7559.9	7937.3	7895.8	7588.6	6675.9	5179.5	2586.6	1161.2	595.8	498.4
G66.0	7631.8	8006.2	7966.3	7647.3	6653.4	5013.1	2383.6	1085.1	558.4	461.7
G67.0	7656.9	8030.4	7987.5	7661.5	6597.0	4785.1	2186.2	1011.5	518.8	430.8
G68.0	7633.4	8003.7	7967.0	7623.9	6494.3	4511.1	1995.9	936.4	482.1	398.6
G69.0	7547.8	7919.7	7900.9	7529.0	6324.4	4162.2	1819.6	847.5	445.7	367.7
G70.0	7401.4	7768.2	7770.1	7378.9	6101.3	3778.9	1637.9	750.5	408.3	340.1
G71.0	7187.0	7550.6	7561.3	7157.3	5809.2	3347.6	1443.3	652.6	373.1	319.5
G72.0	6861.1	7223.7	7273.3	6864.3	5443.5	2920.9	1226.8	561.5	342.0	302.8
G73.0	6426.3	6795.9	6882.6	6433.0	4968.6	2475.7	1014.1	467.5	316.7	285.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	5874.1	6281.1	6390.1	5914.7	4345.2	2016.8	810.4	387.0	293.7	266.6
G75.0	5198.5	5624.3	5755.6	5258.6	3607.2	1559.5	632.9	329.2	269.6	248.0
G76.0	4282.1	4686.7	4855.4	4390.0	2796.8	1175.3	463.5	290.9	247.1	229.9
G77.0	3294.9	3650.1	3759.6	3431.6	1908.2	778.8	352.2	258.7	226.0	211.4
G78.0	2280.6	2525.1	2630.5	2407.3	1244.7	527.1	282.8	232.9	207.2	194.9
G79.0	1505.0	1674.1	1704.3	1552.1	866.8	391.4	235.3	209.3	190.2	180.3
G80.0	1026.2	1117.3	1149.8	1049.4	678.4	335.0	209.0	191.4	176.6	168.2
G81.0	694.6	780.9	793.2	749.1	540.1	295.8	191.2	172.1	157.8	155.2
G82.0	500.0	560.1	561.5	549.6	423.9	261.7	174.5	154.5	144.5	142.0
G83.0	357.5	398.8	391.4	391.9	332.2	223.2	152.9	140.1	131.3	127.8
G84.0	256.4	285.4	283.5	287.0	255.2	186.8	136.2	121.8	114.2	113.7
G85.0	187.2	191.6	209.5	214.6	194.6	156.1	120.9	108.6	101.6	100.7
G86.0	142.0	129.5	161.5	160.6	146.9	127.6	104.6	95.1	89.6	87.7
G87.0	106.9	101.4	118.3	119.9	106.0	101.2	86.3	82.8	76.1	74.7
G88.0	78.2	84.0	85.6	82.6	71.7	77.3	67.5	68.4	63.6	61.3
G89.0	49.2	55.9	53.6	47.6	43.4	48.7	45.9	49.2	49.7	45.7
G90.0	26.0	26.0	24.8	22.7	22.3	24.1	26.7	30.4	30.4	28.5
G91.0	10.7	9.5	9.1	8.1	6.7	5.8	4.6	3.9	3.3	3.3
G92.0	11.1	10.7	9.5	8.6	7.4	6.3	4.9	4.4	3.7	3.5
G93.0	11.4	10.4	10.0	8.6	7.4	6.3	5.6	4.6	4.2	3.3
G94.0	11.8	10.9	10.4	9.3	8.1	7.0	5.6	4.4	4.2	3.5
G95.0	12.1	12.1	10.7	9.7	8.1	7.0	5.8	4.9	4.2	3.3
G96.0	12.8	12.5	11.1	10.0	8.8	7.4	6.3	4.9	3.9	3.7
G97.0	13.5	12.3	11.6	10.4	9.3	7.7	6.3	5.6	4.2	3.3
G98.0	13.7	12.8	12.1	10.9	9.7	7.9	7.0	5.6	4.6	3.5
G99.0	14.1	13.9	12.5	11.1	9.7	8.6	7.0	5.8	4.4	3.9
G100.0	14.9	13.5	13.0	11.6	10.7	9.1	7.4	6.0	4.6	4.2
G101.0	15.1	14.6	13.2	12.1	10.4	8.8	7.7	6.5	5.1	4.4
G102.0	15.5	14.4	13.7	12.5	11.1	9.1	8.1	6.3	5.1	4.2
G103.0	15.8	15.3	14.4	13.0	11.1	9.5	8.6	7.0	5.8	4.2
G104.0	16.2	15.3	14.6	13.0	12.1	10.0	8.8	7.2	6.0	5.1
G105.0	16.5	15.5	14.9	13.7	12.1	10.2	9.1	7.7	5.8	5.3
G106.0	16.7	15.8	14.9	14.1	12.8	11.1	9.5	7.9	6.0	4.9
G107.0	16.7	16.0	15.1	14.4	13.0	11.4	9.3	8.1	6.3	5.8
G108.0	16.7	16.5	15.3	14.1	13.0	11.1	10.0	8.1	7.2	6.0
G109.0	16.7	16.2	15.5	14.9	13.2	12.1	10.2	8.4	7.4	6.3
G110.0	17.4	16.5	16.0	14.9	13.5	12.3	10.2	8.8	7.2	5.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	16.9	16.9	15.8	15.3	14.1	12.8	10.9	9.1	7.9	6.5
G112.0	17.2	16.9	16.0	15.5	14.4	12.3	10.9	9.3	8.1	6.3
G113.0	17.6	17.2	16.7	15.3	14.4	13.2	11.4	9.5	7.9	6.5
G114.0	17.9	17.2	16.5	16.0	14.6	12.8	11.6	9.7	8.6	7.4
G115.0	17.4	17.4	16.5	16.2	14.9	13.5	11.8	10.2	8.4	7.0
G116.0	18.1	17.4	16.7	16.2	14.9	13.7	11.8	10.2	9.1	7.7
G117.0	17.9	17.4	16.7	15.8	14.9	14.1	12.3	10.4	9.3	8.1
G118.0	17.4	17.4	17.2	16.5	15.1	13.5	12.5	10.9	9.5	7.7
G119.0	18.1	17.6	17.2	16.0	15.3	14.4	12.8	11.1	9.7	7.9
G120.0	17.4	17.6	16.9	16.7	15.5	14.6	12.8	11.1	9.7	8.8
G121.0	17.4	17.9	17.4	16.7	15.8	14.9	13.0	11.4	10.2	9.1
G122.0	18.3	17.6	17.6	17.2	15.8	14.4	13.5	11.8	10.2	9.3
G123.0	17.6	18.1	17.6	17.2	16.0	14.6	13.7	12.3	10.4	8.8
G124.0	17.6	18.1	17.9	16.7	16.7	15.5	14.1	12.3	10.7	9.3
G125.0	18.3	17.6	17.9	17.6	16.2	15.8	14.1	12.8	11.6	10.2
G126.0	17.9	17.9	17.6	17.6	16.9	16.0	14.4	13.0	11.8	10.2
G127.0	17.9	17.9	17.6	17.9	17.2	15.5	14.6	13.2	12.1	10.7
G128.0	18.6	17.9	18.1	17.9	16.7	16.5	14.9	13.7	12.3	10.2
G129.0	18.3	17.9	17.6	17.9	17.4	15.8	14.9	13.5	12.1	10.4
G130.0	18.1	18.6	17.6	17.4	16.9	16.5	15.1	13.9	12.8	11.4
G131.0	18.1	17.9	17.9	17.4	16.9	16.7	15.1	14.1	13.0	11.6
G132.0	18.3	18.6	17.9	17.4	16.7	16.2	15.5	14.1	12.5	11.1
G133.0	18.3	18.8	18.1	17.6	16.9	16.2	15.3	14.4	13.2	12.1
G134.0	18.6	18.3	18.3	17.6	17.6	16.9	15.8	14.6	13.5	12.3
G135.0	19.0	18.3	18.6	18.1	17.4	16.9	15.8	14.6	13.7	12.5
G136.0	19.3	19.3	18.8	18.6	17.6	17.2	16.0	14.9	13.5	12.5
G137.0	19.5	19.7	19.0	18.6	17.6	17.4	16.2	15.1	13.7	12.8
G138.0	20.0	20.0	19.3	19.0	18.6	17.2	16.5	15.3	14.1	13.0
G139.0	20.4	20.4	19.7	19.3	18.3	17.4	16.5	15.3	13.9	13.2
G140.0	20.6	20.2	20.0	19.5	19.0	18.1	16.7	15.5	14.1	13.0
G141.0	21.1	20.4	20.4	19.7	19.0	17.9	16.9	15.8	14.9	13.2
G142.0	21.6	21.1	20.4	20.0	19.3	18.3	17.2	15.8	15.1	13.9
G143.0	21.6	21.6	21.1	20.2	19.5	18.6	17.4	16.0	14.6	13.9
G144.0	21.8	21.3	20.9	20.4	19.5	18.3	17.4	16.5	14.9	14.1
G145.0	22.3	21.8	21.6	20.6	19.7	18.8	17.6	16.5	14.9	14.4
G146.0	22.5	22.0	21.6	20.9	20.0	19.0	17.9	16.7	15.8	14.6
G147.0	22.5	22.0	21.3	20.9	20.0	19.0	17.9	16.5	15.3	14.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	22.7	22.3	21.8	21.1	20.2	19.0	17.9	16.9	15.5	14.6
G149.0	22.7	22.3	21.3	21.1	20.2	19.0	17.9	16.9	15.5	14.9
G150.0	22.3	22.3	21.3	20.9	20.2	19.3	18.3	17.2	15.8	15.1
G151.0	22.7	22.3	22.0	21.1	20.4	19.3	18.3	17.2	16.0	15.3
G152.0	22.3	22.3	22.0	21.1	20.2	19.3	18.1	17.4	16.0	15.5
G153.0	22.0	22.3	22.0	20.9	20.4	19.5	18.6	17.4	16.7	15.5
G154.0	22.5	22.0	21.8	20.9	20.4	19.5	18.1	17.4	16.2	15.8
G155.0	22.3	21.8	21.1	20.9	20.4	19.5	18.8	17.6	16.5	16.0
G156.0	21.8	21.6	21.1	20.6	20.4	19.3	18.8	17.9	16.5	16.2
G157.0	21.6	21.6	21.8	20.6	20.6	19.7	18.3	17.9	16.7	16.2
G158.0	22.0	21.8	21.6	20.6	20.4	19.7	18.6	17.9	17.4	16.5
G159.0	22.0	21.8	20.9	20.9	20.4	19.5	18.3	18.1	16.9	16.5
G160.0	21.3	21.1	21.3	20.9	20.4	19.7	19.0	18.1	17.6	16.9
G161.0	21.1	21.6	20.6	20.9	19.7	19.3	19.0	18.3	17.9	16.9
G162.0	21.6	21.3	21.1	20.2	19.7	19.5	19.3	18.3	17.4	16.9
G163.0	21.3	20.6	20.9	20.2	20.4	19.7	19.3	18.3	18.1	17.2
G164.0	20.6	21.1	20.9	20.2	20.4	19.3	18.8	18.6	17.6	17.6
G165.0	21.1	20.4	20.4	20.0	20.2	19.7	19.3	18.8	17.9	17.6
G166.0	20.6	20.2	20.4	20.6	19.5	19.3	19.5	18.6	17.9	17.6
G167.0	20.6	20.9	20.4	20.4	19.7	19.7	19.5	18.8	18.6	18.3
G168.0	20.2	20.2	20.2	20.4	20.2	19.7	19.5	18.8	18.1	18.1
G169.0	20.6	20.6	20.2	20.4	19.5	19.3	19.5	19.0	18.3	18.6
G170.0	20.6	20.0	20.2	20.0	19.5	19.5	19.7	19.0	19.3	18.8
G171.0	20.2	20.0	20.0	20.2	19.5	20.0	19.7	19.0	19.3	19.0
G172.0	20.2	20.0	20.2	19.7	20.2	20.0	19.3	19.5	18.8	19.3
G173.0	20.4	20.4	20.4	20.2	20.2	20.0	19.3	19.5	19.0	19.0
G174.0	20.2	20.4	20.0	20.4	19.7	20.0	20.0	19.5	19.7	19.0
G175.0	20.4	20.0	20.0	20.4	19.7	19.7	20.0	19.7	20.0	19.3
G176.0	20.4	20.4	20.4	20.0	20.4	20.2	19.7	19.7	19.5	20.0
G177.0	20.4	20.2	20.4	20.2	20.0	20.0	19.7	20.0	20.2	20.2
G178.0	20.4	20.2	20.4	20.2	20.4	20.4	20.4	20.2	20.4	20.4
G179.0	20.4	20.2	19.7	20.0	20.4	20.0	20.4	20.2	20.0	20.0
G180.0	20.6	20.4	20.2	20.0	20.4	20.4	20.2	20.4	20.6	20.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	3285.9	3282.9	3285.6	3281.5	3281.2	3278.5	3278.0	3277.5	3276.1	3274.1
G1.0	3312.3	3312.6	3315.1	3314.4	3313.7	3312.3	3312.8	3313.5	3310.2	3310.9
G2.0	3330.7	3330.9	3334.1	3334.4	3334.6	3334.8	3334.6	3335.5	3332.7	3333.2
G3.0	3342.0	3343.2	3344.4	3344.8	3344.8	3345.5	3345.5	3346.2	3345.3	3343.6
G4.0	3346.9	3348.5	3348.3	3349.0	3349.0	3348.8	3348.8	3349.4	3348.3	3347.8
G5.0	3350.1	3350.4	3350.8	3350.1	3349.0	3349.0	3348.8	3349.7	3348.3	3347.4
G6.0	3350.4	3350.6	3351.1	3350.8	3349.4	3349.9	3348.8	3350.8	3348.5	3348.8
G7.0	3350.4	3350.8	3352.0	3351.8	3351.1	3350.4	3350.8	3352.2	3351.8	3351.5
G8.0	3350.8	3352.7	3353.6	3355.5	3355.0	3356.9	3358.3	3358.7	3357.8	3357.3
G9.0	3352.0	3356.2	3360.6	3364.5	3365.9	3368.7	3370.6	3373.1	3373.6	3371.9
G10.0	3357.8	3364.3	3371.9	3378.4	3384.0	3388.7	3391.9	3394.2	3394.5	3392.1
G11.0	3366.6	3378.2	3390.3	3399.6	3406.8	3410.7	3417.0	3418.8	3418.8	3418.1
G12.0	3380.5	3396.1	3411.4	3422.3	3430.6	3436.9	3441.6	3444.3	3445.5	3444.1
G13.0	3400.5	3416.7	3434.4	3446.9	3456.9	3461.7	3465.9	3468.9	3469.6	3469.4
G14.0	3422.3	3438.3	3458.0	3468.7	3477.8	3482.9	3484.7	3486.3	3488.0	3488.2
G15.0	3446.4	3461.7	3479.4	3488.2	3495.1	3497.5	3497.9	3498.6	3500.3	3501.2
G16.0	3470.1	3484.2	3495.8	3502.6	3504.7	3503.5	3502.1	3500.9	3501.2	3504.9
G17.0	3492.8	3503.5	3509.1	3509.3	3505.6	3502.6	3496.8	3493.3	3494.9	3500.3
G18.0	3513.7	3518.6	3514.9	3507.7	3499.3	3491.9	3480.8	3475.4	3476.6	3484.2
G19.0	3528.8	3526.7	3513.5	3499.8	3484.2	3471.0	3457.3	3449.9	3449.7	3461.3
G20.0	3539.2	3527.4	3506.3	3483.8	3462.0	3443.9	3426.0	3416.5	3414.9	3426.7
G21.0	3543.6	3521.8	3491.9	3461.0	3431.8	3408.8	3387.0	3375.4	3372.9	3386.6
G22.0	3543.2	3507.4	3467.5	3430.9	3394.2	3367.6	3343.4	3329.3	3327.6	3341.8
G23.0	3534.8	3485.6	3437.6	3394.7	3350.4	3321.4	3295.2	3281.5	3276.4	3291.2
G24.0	3519.0	3460.8	3398.9	3352.5	3303.3	3270.8	3242.5	3226.9	3223.9	3238.1
G25.0	3496.8	3426.0	3356.2	3303.1	3252.0	3216.3	3188.7	3173.1	3170.3	3186.4
G26.0	3468.5	3386.6	3307.9	3249.0	3194.2	3159.7	3130.4	3112.8	3109.8	3125.6
G27.0	3431.8	3340.2	3254.6	3193.3	3137.6	3094.9	3059.0	3039.0	3037.2	3056.4
G28.0	3388.9	3292.4	3199.1	3133.2	3071.5	3021.4	2973.6	2938.1	2935.3	2961.1
G29.0	3341.3	3239.3	3141.1	3069.2	2994.3	2919.1	2857.4	2812.8	2805.6	2837.4
G30.0	3291.9	3183.1	3079.4	2994.9	2887.5	2795.4	2711.7	2654.6	2649.3	2690.6
G31.0	3239.9	3122.8	3013.0	2898.0	2759.5	2643.5	2545.1	2492.2	2488.9	2521.4
G32.0	3178.7	3058.1	2919.1	2768.7	2587.8	2455.5	2367.4	2328.4	2318.9	2354.9
G33.0	3115.8	2981.0	2808.2	2602.9	2393.1	2276.9	2206.6	2173.2	2168.1	2190.6
G34.0	3044.8	2891.2	2657.6	2408.4	2211.5	2115.2	2053.5	2023.5	2016.8	2039.6
G35.0	2967.1	2775.5	2475.7	2208.4	2038.2	1955.8	1904.5	1877.2	1873.7	1891.8
G36.0	2875.7	2626.1	2266.4	2016.8	1872.0	1800.6	1753.3	1730.8	1723.3	1741.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	2764.6	2446.9	2064.4	1850.0	1723.3	1659.3	1610.6	1586.7	1579.5	1596.0
G38.0	2625.6	2242.6	1877.4	1690.4	1574.4	1514.1	1467.9	1448.6	1442.1	1457.2
G39.0	2458.3	2017.5	1712.2	1552.6	1438.0	1380.9	1347.0	1326.8	1324.5	1330.6
G40.0	2269.7	1805.9	1559.3	1422.2	1318.9	1265.6	1236.8	1222.0	1218.5	1227.1
G41.0	2048.4	1628.4	1433.1	1311.5	1216.6	1170.7	1143.6	1133.1	1130.1	1139.4
G42.0	1822.2	1466.3	1317.1	1219.7	1133.1	1090.2	1068.8	1060.3	1057.5	1062.8
G43.0	1618.7	1329.4	1221.0	1143.1	1064.4	1023.1	1005.5	1000.9	997.8	1003.2
G44.0	1440.5	1216.2	1135.7	1078.4	1004.8	967.2	949.8	946.3	948.0	947.3
G45.0	1289.5	1119.9	1063.7	1019.7	948.9	916.2	901.8	899.5	906.2	900.9
G46.0	1174.6	1039.6	999.7	963.0	900.9	869.3	859.8	861.7	869.8	858.4
G47.0	1082.8	970.7	942.4	909.5	857.0	828.3	821.5	831.7	840.8	822.0
G48.0	1004.6	912.9	887.9	860.5	816.7	793.2	791.6	807.8	816.0	794.8
G49.0	943.8	867.2	839.2	817.3	777.5	761.4	764.5	781.6	789.3	770.7
G50.0	897.4	827.6	795.5	772.6	742.0	735.0	739.9	754.5	760.7	744.5
G51.0	857.3	793.2	758.7	731.7	711.1	712.0	719.7	731.7	734.5	723.6
G52.0	821.8	761.7	723.2	697.2	685.1	690.9	706.9	715.0	714.6	709.9
G53.0	787.9	733.8	692.8	671.2	664.0	674.2	690.7	695.3	695.3	691.4
G54.0	752.6	706.7	667.5	649.2	646.1	657.7	671.0	674.2	677.0	672.1
G55.0	719.0	678.2	642.7	630.6	629.7	641.0	653.3	657.5	659.1	654.3
G56.0	683.5	647.1	619.5	611.3	613.0	623.6	635.0	641.7	642.4	636.4
G57.0	650.5	616.2	597.0	592.3	593.0	603.9	618.8	627.3	626.9	620.6
G58.0	622.2	588.1	574.0	570.7	571.7	585.1	604.8	616.0	612.5	606.9
G59.0	597.4	565.4	551.9	548.2	550.5	565.9	589.3	603.2	597.2	592.3
G60.0	578.4	547.1	532.2	527.1	529.9	545.9	569.6	584.4	579.8	572.6
G61.0	561.5	531.5	514.8	510.2	508.3	522.9	543.6	556.8	554.7	548.5
G62.0	541.7	512.0	496.7	490.7	485.8	495.3	511.1	520.4	518.1	516.0
G63.0	516.2	487.0	474.7	466.3	459.6	458.0	461.2	462.4	460.5	464.7
G64.0	485.1	458.7	446.6	436.9	422.9	400.2	390.9	383.0	381.0	388.8
G65.0	450.3	425.7	416.7	403.9	368.9	333.9	319.0	308.6	306.0	315.8
G66.0	414.8	391.2	385.6	370.5	317.9	283.3	279.3	275.9	273.5	278.2
G67.0	381.0	361.2	355.0	340.8	286.5	269.4	270.0	267.0	264.7	269.4
G68.0	351.3	333.9	327.1	315.1	274.5	262.2	261.5	258.5	256.8	261.5
G69.0	327.8	313.9	306.9	295.6	264.5	254.3	251.5	247.8	246.9	251.5
G70.0	310.4	300.5	291.4	281.9	254.3	245.2	243.6	238.7	238.0	241.5
G71.0	297.0	286.8	277.7	269.6	245.5	236.6	234.6	228.1	227.6	232.0
G72.0	283.3	273.5	264.0	256.1	235.3	228.5	225.0	217.6	217.4	220.6
G73.0	267.3	259.4	250.1	242.9	224.6	219.0	213.4	206.5	205.6	209.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	252.0	245.2	235.5	228.5	213.0	206.5	203.7	195.1	194.0	197.4
G75.0	235.7	230.6	221.3	215.5	201.4	194.6	192.1	181.9	181.2	185.1
G76.0	220.9	216.5	208.8	204.6	190.2	182.4	179.1	170.1	168.7	171.4
G77.0	204.9	203.2	197.7	195.8	179.6	170.3	165.9	157.8	155.7	159.4
G78.0	191.2	190.9	189.8	191.4	169.4	157.3	151.3	144.3	142.7	145.0
G79.0	179.1	180.0	185.4	188.6	161.2	144.8	137.1	130.4	129.0	132.0
G80.0	168.2	170.1	180.7	183.3	150.3	130.6	122.5	116.5	116.2	118.8
G81.0	157.1	158.7	170.5	172.1	139.2	119.0	111.6	107.4	106.0	109.0
G82.0	143.8	145.0	158.7	158.5	129.2	109.0	104.4	97.7	96.1	101.4
G83.0	129.9	132.0	142.7	148.5	118.8	100.5	92.6	87.5	86.5	90.9
G84.0	116.2	115.8	129.5	134.6	107.9	92.1	82.4	78.4	77.0	80.3
G85.0	101.8	98.6	111.6	113.0	96.8	81.7	71.9	68.0	66.6	69.1
G86.0	87.9	83.1	87.0	94.4	83.1	70.3	60.3	57.3	55.9	58.5
G87.0	72.2	69.6	70.8	71.0	64.7	57.5	49.7	45.9	43.8	46.9
G88.0	57.5	55.7	56.8	54.5	48.0	43.6	38.0	34.8	32.7	35.7
G89.0	41.1	40.4	37.8	39.0	33.9	29.5	26.9	23.4	22.0	24.8
G90.0	24.1	23.4	20.6	20.6	18.6	16.7	15.5	13.5	12.8	14.1
G91.0	3.0	3.3	3.3	3.7	3.9	4.2	3.7	3.9	3.3	3.7
G92.0	3.7	3.5	3.7	3.7	3.7	3.9	3.9	3.5	3.5	3.7
G93.0	3.3	3.3	3.0	3.5	3.5	3.3	3.3	3.3	3.5	3.5
G94.0	3.0	3.3	3.5	3.3	3.3	3.5	3.0	3.3	3.0	2.8
G95.0	3.5	2.8	3.0	3.0	3.0	3.0	3.0	3.3	3.3	3.3
G96.0	3.0	2.8	3.3	3.0	3.3	3.0	3.0	3.5	3.5	3.0
G97.0	3.3	3.0	3.3	3.0	3.3	3.5	3.7	3.5	3.3	3.5
G98.0	3.0	3.0	3.3	3.3	3.5	3.3	3.9	3.7	3.7	3.5
G99.0	3.5	3.0	2.8	3.3	3.5	3.5	3.3	3.7	3.7	3.3
G100.0	3.5	3.5	3.0	3.5	3.7	3.9	3.5	3.7	3.9	3.5
G101.0	3.7	3.7	3.7	3.5	3.7	3.9	3.5	3.7	3.7	3.5
G102.0	3.7	3.7	3.9	3.7	3.7	4.2	4.4	4.2	3.7	3.7
G103.0	3.9	3.7	3.3	3.7	3.9	4.2	4.4	3.9	3.9	3.7
G104.0	4.2	3.9	4.2	3.7	3.9	4.4	4.4	4.4	3.9	3.9
G105.0	4.4	3.9	3.7	3.9	4.2	3.9	3.9	4.4	3.9	3.9
G106.0	4.4	4.2	4.4	4.2	4.2	4.6	4.2	4.2	4.6	4.2
G107.0	4.9	4.2	4.4	3.9	4.2	4.2	4.2	4.2	4.6	4.6
G108.0	4.9	4.4	3.9	4.2	4.4	4.6	4.9	4.9	4.4	4.6
G109.0	5.1	4.6	4.2	4.2	4.4	4.9	4.9	4.9	4.9	4.6
G110.0	5.1	4.9	4.6	4.6	4.6	4.9	4.4	4.6	4.4	4.4

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	5.6	4.9	4.9	4.9	4.6	5.1	5.1	5.1	4.6	4.4
G112.0	5.8	5.1	4.6	4.6	4.9	4.6	4.6	4.6	4.6	4.6
G113.0	6.0	5.3	4.6	5.1	5.1	5.1	4.6	5.3	5.1	4.6
G114.0	6.0	5.3	4.9	5.1	4.9	5.3	5.6	5.6	4.9	5.3
G115.0	6.5	5.8	5.1	5.3	5.3	5.3	5.6	5.6	5.6	4.9
G116.0	6.3	5.8	5.1	5.6	5.3	5.6	5.6	5.6	5.1	5.1
G117.0	6.7	5.8	5.8	5.3	5.6	5.3	5.8	5.1	5.1	5.6
G118.0	7.2	6.3	5.8	5.3	5.6	5.8	5.8	5.8	5.8	5.1
G119.0	7.2	6.5	5.8	5.6	5.6	5.8	6.0	5.3	5.3	5.8
G120.0	7.2	6.7	5.8	6.0	6.0	5.8	6.0	5.3	5.6	5.8
G121.0	7.4	7.0	6.0	5.8	5.8	6.0	6.3	5.6	6.0	5.6
G122.0	8.1	7.0	6.3	5.8	6.3	6.0	6.3	5.8	6.3	5.6
G123.0	7.9	7.4	6.5	6.5	6.5	6.0	5.8	5.8	6.3	5.8
G124.0	8.1	7.2	6.5	6.3	6.5	6.3	6.0	6.5	6.5	5.8
G125.0	8.4	7.7	7.2	7.0	6.7	6.5	6.0	6.5	6.7	6.0
G126.0	8.6	8.1	7.7	7.0	7.0	6.5	6.3	6.3	6.3	6.0
G127.0	8.8	7.9	7.7	7.0	6.7	6.7	6.5	6.5	7.0	6.3
G128.0	9.5	8.6	7.4	7.0	7.4	7.2	6.5	7.2	6.5	6.5
G129.0	9.7	8.8	7.7	7.2	7.4	7.0	7.4	7.2	6.7	6.7
G130.0	9.5	9.1	7.9	7.4	7.7	7.4	7.0	7.0	7.4	7.4
G131.0	9.7	9.3	8.4	8.4	7.4	7.4	7.2	7.7	7.0	7.0
G132.0	10.0	9.5	8.8	7.9	7.7	7.9	7.2	7.7	7.7	7.2
G133.0	10.2	9.3	9.1	8.1	7.9	8.1	7.4	7.9	7.9	7.7
G134.0	10.7	9.5	9.3	8.4	8.6	8.1	8.4	7.9	8.1	7.7
G135.0	10.9	10.4	9.5	8.6	8.8	8.4	8.6	8.4	7.9	8.4
G136.0	11.1	10.7	9.7	8.8	8.6	8.6	8.1	8.4	8.4	8.4
G137.0	11.8	10.2	9.7	9.7	9.3	9.1	9.1	8.6	8.1	8.6
G138.0	12.1	11.1	10.2	9.3	9.7	9.1	9.3	8.8	9.1	8.4
G139.0	11.8	10.9	10.4	9.5	10.0	9.5	9.5	9.1	9.3	9.1
G140.0	12.5	11.6	10.7	10.7	10.2	9.5	9.7	9.3	9.5	9.1
G141.0	12.1	11.4	10.9	10.2	10.4	9.7	10.0	9.5	9.7	9.3
G142.0	12.3	11.6	11.4	11.1	10.7	10.4	10.2	9.7	10.0	9.5
G143.0	12.8	11.8	11.4	11.4	10.9	10.7	10.4	10.2	9.7	10.2
G144.0	13.0	12.5	11.8	11.6	10.7	10.9	10.9	10.4	10.7	10.4
G145.0	13.0	13.0	12.1	11.1	11.4	11.1	10.7	10.7	10.9	10.4
G146.0	13.2	12.5	12.5	12.1	11.8	10.9	11.4	10.9	10.7	11.1
G147.0	13.9	12.8	12.8	12.3	12.1	11.8	11.1	11.4	10.9	11.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	13.7	13.5	13.0	12.8	11.8	11.6	11.8	11.6	11.8	11.4
G149.0	13.9	13.2	12.8	12.3	12.8	12.3	12.3	12.1	12.1	11.6
G150.0	14.1	13.9	13.2	12.5	13.0	12.8	12.1	12.1	12.5	12.5
G151.0	14.9	14.1	13.5	12.8	13.2	13.0	13.0	12.8	12.8	12.3
G152.0	15.1	13.9	13.9	13.7	13.5	13.0	13.2	12.8	13.0	13.2
G153.0	15.1	14.1	13.9	13.5	13.7	13.7	13.0	13.0	13.0	13.5
G154.0	15.3	14.9	14.4	14.4	14.1	13.9	13.5	13.5	13.5	13.5
G155.0	15.5	15.1	14.9	14.1	13.9	14.4	14.1	14.1	13.7	13.9
G156.0	15.3	15.5	14.6	14.9	14.4	14.1	14.6	14.6	14.6	14.1
G157.0	16.0	15.5	14.9	15.1	14.6	14.6	14.4	14.4	14.4	15.1
G158.0	16.2	15.8	15.5	15.1	15.5	14.9	14.9	14.9	14.9	14.9
G159.0	16.0	15.8	15.5	15.3	15.3	15.3	15.1	15.5	15.5	15.1
G160.0	16.5	16.2	15.8	15.5	15.5	16.0	16.0	16.0	16.0	15.5
G161.0	16.7	16.0	16.2	15.8	15.8	16.2	16.2	15.8	16.0	16.0
G162.0	16.5	16.2	16.7	16.7	16.7	16.2	16.2	16.2	16.2	16.5
G163.0	17.2	16.7	16.7	16.5	16.7	16.9	16.7	16.7	16.7	16.7
G164.0	17.2	17.2	16.9	17.2	17.4	17.2	17.4	17.4	16.9	17.2
G165.0	17.2	17.4	17.2	17.4	17.2	17.6	17.4	17.9	17.9	17.9
G166.0	17.6	17.6	17.6	17.9	17.9	17.9	18.1	17.6	18.1	17.9
G167.0	17.6	17.9	17.6	17.6	17.9	18.1	18.3	18.6	18.6	18.1
G168.0	17.9	18.1	18.1	18.1	18.6	18.6	18.3	18.3	18.3	18.8
G169.0	18.3	18.3	18.6	18.3	19.0	19.0	18.6	18.8	19.3	19.3
G170.0	18.6	18.6	18.6	18.8	19.3	19.3	19.5	19.0	19.0	19.3
G171.0	18.8	18.8	18.8	19.0	19.3	19.5	20.0	19.5	19.5	19.5
G172.0	19.0	18.8	19.0	19.3	20.0	20.0	20.2	19.7	19.7	20.0
G173.0	19.0	19.3	19.5	19.7	19.7	20.2	20.0	20.2	20.0	20.4
G174.0	19.3	19.5	19.7	20.0	20.0	20.4	20.9	20.4	20.9	20.4
G175.0	19.7	19.7	19.7	20.0	20.2	20.6	20.9	20.6	20.6	20.6
G176.0	19.7	19.7	20.0	20.2	20.9	20.9	21.1	20.9	21.3	20.9
G177.0	20.0	20.2	20.2	20.4	20.9	20.9	21.3	21.6	21.3	21.1
G178.0	20.2	20.4	20.6	20.6	21.1	21.1	21.6	21.6	21.3	21.3
G179.0	20.6	20.6	20.6	21.1	21.3	21.6	21.8	21.8	21.8	21.8
G180.0	20.4	20.6	20.9	21.1	21.6	21.3	22.0	22.0	22.0	22.3

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	3273.6	3272.9	3272.0	3272.2	3273.1	3274.1	3273.1	3274.5	3275.9	3278.2
G1.0	3309.3	3306.8	3305.6	3306.3	3304.7	3303.5	3301.4	3301.2	3299.6	3299.6
G2.0	3331.4	3330.7	3327.9	3326.5	3326.9	3325.6	3323.0	3320.4	3318.6	3317.2
G3.0	3343.2	3342.3	3341.6	3340.2	3339.9	3339.2	3336.7	3333.4	3331.4	3330.2
G4.0	3347.4	3346.9	3345.5	3345.7	3345.7	3345.5	3344.4	3342.9	3340.2	3339.7
G5.0	3346.9	3347.1	3346.4	3346.7	3347.6	3348.5	3347.8	3346.4	3346.4	3345.5
G6.0	3348.5	3349.0	3347.6	3347.6	3348.8	3349.2	3349.9	3348.3	3349.0	3350.6
G7.0	3349.7	3351.1	3350.6	3350.1	3350.6	3350.8	3351.5	3352.0	3353.4	3354.3
G8.0	3356.9	3355.7	3353.9	3352.2	3352.5	3353.6	3354.1	3354.1	3355.9	3358.5
G9.0	3370.6	3366.9	3363.1	3360.6	3357.6	3356.4	3357.6	3358.5	3359.7	3362.0
G10.0	3389.1	3385.9	3378.9	3372.6	3369.2	3364.8	3362.0	3359.9	3362.0	3363.4
G11.0	3414.2	3410.0	3400.7	3392.6	3383.6	3376.8	3370.8	3366.1	3364.1	3367.1
G12.0	3440.9	3435.1	3426.9	3416.7	3405.8	3394.7	3382.6	3374.5	3369.2	3371.0
G13.0	3466.4	3460.4	3452.5	3441.6	3430.2	3415.8	3399.3	3386.1	3377.3	3376.1
G14.0	3486.8	3482.6	3476.4	3467.1	3456.2	3439.5	3420.2	3400.7	3388.2	3384.7
G15.0	3501.6	3499.8	3497.7	3490.3	3481.0	3464.3	3443.6	3422.3	3402.1	3394.9
G16.0	3507.2	3509.3	3511.4	3509.1	3503.5	3490.5	3468.9	3446.0	3421.8	3405.8
G17.0	3503.7	3510.7	3517.0	3522.5	3520.9	3511.9	3494.2	3471.3	3445.0	3422.5
G18.0	3492.4	3504.0	3515.6	3525.8	3531.8	3531.1	3519.3	3499.6	3468.7	3442.5
G19.0	3471.7	3488.6	3505.1	3520.9	3536.2	3546.0	3542.7	3526.2	3497.0	3465.9
G20.0	3442.0	3466.6	3488.2	3510.2	3533.2	3554.1	3560.6	3551.3	3526.0	3491.7
G21.0	3404.7	3433.4	3460.6	3490.7	3522.8	3554.1	3573.6	3573.8	3553.6	3519.0
G22.0	3361.3	3394.5	3427.9	3463.6	3503.5	3545.3	3580.1	3593.1	3580.8	3546.0
G23.0	3313.5	3349.7	3386.6	3429.7	3479.4	3529.0	3576.1	3605.6	3604.0	3573.3
G24.0	3261.5	3300.7	3339.9	3388.9	3448.5	3507.9	3565.7	3611.1	3621.1	3598.4
G25.0	3209.8	3247.8	3293.1	3345.5	3411.4	3480.1	3547.4	3607.7	3634.8	3618.3
G26.0	3151.3	3192.6	3235.8	3295.4	3366.9	3443.4	3524.6	3599.8	3640.6	3635.1
G27.0	3086.8	3129.5	3178.2	3242.7	3317.7	3404.0	3495.1	3581.7	3639.9	3646.6
G28.0	3002.1	3062.7	3117.2	3184.7	3264.1	3356.9	3459.9	3557.3	3630.2	3658.7
G29.0	2890.1	2968.7	3050.6	3123.0	3208.9	3307.7	3420.0	3526.0	3617.6	3666.1
G30.0	2750.9	2852.5	2959.9	3054.1	3150.4	3256.2	3375.9	3490.3	3600.9	3670.8
G31.0	2590.1	2708.9	2841.1	2974.3	3085.7	3200.7	3328.8	3455.5	3581.9	3674.9
G32.0	2403.6	2521.9	2687.3	2862.5	3013.5	3137.2	3272.0	3412.1	3559.6	3674.3
G33.0	2232.6	2330.7	2500.8	2726.1	2922.3	3068.7	3209.3	3364.3	3529.0	3670.1
G34.0	2074.4	2158.8	2296.1	2547.6	2806.1	2991.7	3144.6	3311.2	3497.5	3663.4
G35.0	1922.2	1992.0	2111.5	2339.8	2656.2	2903.1	3072.0	3252.9	3459.6	3654.3
G36.0	1776.5	1836.3	1934.9	2129.6	2466.2	2785.7	2990.8	3189.6	3419.5	3644.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	1628.2	1685.7	1776.0	1946.3	2256.2	2640.4	2905.4	3123.2	3379.1	3635.7
G38.0	1484.6	1541.4	1624.0	1774.6	2037.5	2457.6	2802.9	3052.0	3336.0	3627.6
G39.0	1354.9	1406.6	1492.0	1627.7	1839.1	2252.5	2681.3	2981.7	3292.4	3618.8
G40.0	1246.6	1286.0	1361.6	1490.9	1666.0	2013.3	2530.7	2903.5	3248.5	3613.5
G41.0	1153.5	1191.1	1259.1	1371.8	1512.4	1795.7	2355.5	2822.1	3204.2	3609.1
G42.0	1075.6	1108.1	1174.6	1273.9	1381.3	1589.9	2152.8	2721.9	3155.3	3604.0
G43.0	1012.7	1044.5	1106.7	1186.5	1272.3	1422.0	1927.5	2608.9	3105.4	3601.4
G44.0	956.3	985.6	1048.7	1115.7	1171.4	1285.3	1699.7	2467.6	3052.3	3604.0
G45.0	905.8	931.0	993.9	1057.5	1090.0	1178.3	1508.5	2308.2	2998.9	3604.9
G46.0	860.5	883.5	938.2	998.8	1022.7	1093.9	1346.3	2121.0	2933.2	3601.9
G47.0	819.9	840.1	890.0	944.0	962.8	1027.1	1216.4	1918.2	2850.4	3594.2
G48.0	785.3	801.3	845.4	889.7	911.1	968.2	1115.9	1703.2	2746.7	3585.9
G49.0	759.3	765.6	799.3	839.6	863.8	919.9	1042.4	1517.8	2634.4	3581.9
G50.0	733.8	734.3	756.8	793.9	822.7	879.8	983.9	1354.4	2497.3	3574.5
G51.0	711.8	708.3	720.8	751.2	785.6	845.7	936.4	1215.0	2346.0	3555.9
G52.0	694.6	683.7	690.9	714.6	753.1	813.9	894.4	1111.5	2172.5	3523.2
G53.0	676.5	665.4	666.8	685.6	723.6	781.4	854.2	1023.8	1999.4	3468.5
G54.0	659.1	648.0	646.1	660.5	694.2	747.3	811.3	953.5	1824.7	3397.0
G55.0	641.7	630.6	626.4	637.1	661.4	709.2	771.9	894.8	1663.5	3295.4
G56.0	623.2	612.5	606.2	614.3	629.2	674.2	732.0	842.6	1516.6	3168.5
G57.0	604.1	591.6	585.1	591.2	599.5	638.9	693.5	795.8	1386.5	3020.7
G58.0	587.0	570.5	562.6	566.1	574.0	608.8	658.2	753.8	1266.1	2858.3
G59.0	569.8	549.8	540.8	543.3	553.1	583.0	628.3	714.3	1156.5	2671.3
G60.0	551.7	531.8	521.5	526.0	537.5	563.3	603.9	678.6	1059.6	2486.6
G61.0	529.7	513.0	505.3	512.0	520.8	545.0	583.7	648.9	974.0	2294.5
G62.0	503.9	490.2	488.6	497.2	503.0	525.5	563.1	623.6	896.0	2124.9
G63.0	460.5	462.4	465.6	477.2	480.5	501.6	538.0	598.1	833.6	1958.8
G64.0	394.4	414.8	436.9	450.5	455.7	471.7	508.5	569.6	780.7	1812.4
G65.0	325.5	350.8	393.3	418.5	424.8	438.3	475.1	536.4	732.9	1677.9
G66.0	282.4	296.0	351.7	387.0	393.9	404.4	440.6	504.4	690.0	1559.1
G67.0	271.5	274.5	318.5	353.1	360.8	371.4	408.3	469.6	644.5	1444.0
G68.0	263.6	266.3	298.1	324.3	333.2	343.1	376.5	437.1	594.4	1333.8
G69.0	253.8	258.0	282.4	303.7	313.0	322.0	348.0	402.8	547.3	1220.3
G70.0	244.5	248.9	271.5	289.8	299.0	308.6	326.4	369.1	499.0	1103.7
G71.0	235.3	239.7	260.8	276.8	285.6	295.8	310.6	340.1	450.3	963.8
G72.0	226.2	229.0	247.6	263.1	272.1	282.6	294.6	319.2	401.4	820.6
G73.0	215.8	218.3	235.0	247.6	256.8	268.4	278.9	300.9	357.0	677.2

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	204.4	206.5	220.2	232.0	240.8	253.1	260.8	281.0	320.2	545.2
G75.0	191.2	194.4	204.9	216.2	225.5	236.2	243.1	259.6	292.1	422.7
G76.0	177.9	182.1	192.1	201.4	210.2	220.6	225.3	239.2	266.1	339.0
G77.0	163.6	170.1	183.1	188.2	195.6	205.6	208.1	218.3	241.3	283.5
G78.0	150.1	157.3	175.6	179.1	184.0	190.0	190.9	199.8	218.8	245.2
G79.0	136.6	145.9	168.9	173.1	173.1	176.3	176.8	183.3	198.4	216.2
G80.0	123.4	133.9	161.5	172.6	163.1	164.5	164.3	168.9	180.7	194.6
G81.0	113.2	126.0	152.0	174.7	154.8	153.4	152.2	153.8	164.7	179.8
G82.0	104.9	116.5	141.8	169.4	148.5	140.1	140.8	142.0	151.3	164.0
G83.0	94.4	107.7	131.3	155.2	138.7	127.1	128.1	129.9	138.3	148.7
G84.0	84.7	98.1	120.2	139.2	123.2	112.5	114.4	114.8	119.3	130.1
G85.0	74.9	88.6	106.0	119.0	105.6	97.4	99.1	100.9	104.4	114.6
G86.0	63.8	77.3	89.6	92.1	84.7	83.5	85.4	88.2	92.1	100.5
G87.0	53.1	62.4	69.1	71.5	69.1	70.5	72.2	74.5	78.7	84.9
G88.0	41.1	46.6	52.0	56.4	55.0	57.8	57.8	61.3	65.7	68.4
G89.0	27.8	33.4	36.9	40.6	39.0	40.8	42.2	46.9	51.0	49.9
G90.0	16.2	19.3	20.9	21.8	23.2	23.9	26.2	29.2	32.3	31.1
G91.0	3.7	4.4	3.7	4.2	3.5	3.9	3.3	3.5	3.7	4.4
G92.0	3.9	3.9	3.5	3.5	3.7	2.8	3.0	3.5	3.9	4.6
G93.0	3.3	3.0	3.0	3.3	3.0	2.8	3.0	3.5	4.2	4.9
G94.0	3.0	2.3	3.0	3.5	3.5	2.5	3.0	3.5	4.2	5.8
G95.0	3.3	3.3	3.0	3.3	3.3	3.3	3.5	3.7	4.6	6.0
G96.0	2.8	3.3	2.5	3.0	3.3	2.8	3.3	3.9	4.6	6.0
G97.0	3.5	2.5	3.0	3.3	3.3	3.5	3.5	4.2	5.1	6.7
G98.0	3.0	3.5	3.3	2.5	3.5	2.8	3.5	4.4	5.3	6.7
G99.0	3.0	2.8	2.8	3.3	3.5	3.7	3.7	4.4	5.6	7.4
G100.0	3.7	3.7	3.0	3.5	3.5	3.0	4.2	4.9	6.0	7.9
G101.0	3.7	3.7	3.0	3.5	3.5	3.7	4.2	4.9	6.3	8.1
G102.0	3.5	3.9	3.7	3.0	3.7	3.9	4.2	5.6	7.0	8.6
G103.0	4.2	3.9	3.7	3.0	3.9	3.5	4.4	5.3	6.7	9.1
G104.0	3.5	3.9	3.9	3.3	3.3	4.2	4.6	5.8	7.2	9.3
G105.0	4.2	4.2	3.9	3.3	3.9	4.4	5.1	5.8	7.9	9.7
G106.0	4.4	3.5	3.9	3.9	3.5	4.6	5.1	6.5	7.9	10.2
G107.0	3.9	3.7	3.7	4.2	3.7	4.9	5.3	6.7	8.1	10.4
G108.0	4.6	3.7	4.2	3.7	4.4	5.1	5.6	7.2	8.6	10.9
G109.0	4.6	4.4	3.9	3.7	3.9	4.6	5.8	7.0	9.1	11.4
G110.0	4.9	4.6	3.9	3.9	4.2	5.3	6.0	7.9	9.7	11.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	4.2	4.6	4.4	4.4	4.4	5.6	6.0	7.7	9.7	12.3
G112.0	4.9	4.6	4.2	4.2	4.6	5.6	6.5	7.9	10.0	12.5
G113.0	5.1	4.9	4.6	4.4	5.1	5.3	7.0	8.1	10.2	12.5
G114.0	5.1	4.4	4.6	4.4	5.3	6.0	7.0	8.6	11.1	13.0
G115.0	5.3	5.1	4.6	5.1	5.3	6.3	7.7	8.8	11.4	13.5
G116.0	5.3	4.6	4.9	5.1	5.6	6.5	7.9	9.5	11.6	13.5
G117.0	5.3	4.9	5.1	4.9	5.8	6.7	8.1	9.7	11.6	13.9
G118.0	5.6	4.9	5.1	5.3	6.0	6.7	8.1	9.7	12.5	14.6
G119.0	5.1	5.3	5.3	5.6	6.0	6.7	8.4	10.2	12.3	14.9
G120.0	5.8	5.1	5.3	5.8	6.3	7.4	8.6	10.9	12.5	14.9
G121.0	5.8	5.3	5.6	5.6	6.5	7.7	9.3	11.1	13.5	15.1
G122.0	6.0	5.8	5.6	6.0	6.7	7.7	9.7	11.1	13.2	15.3
G123.0	5.6	5.6	5.8	6.3	7.0	7.9	10.0	11.4	13.9	15.5
G124.0	5.8	6.0	6.0	6.3	7.2	8.1	9.7	12.1	13.9	15.8
G125.0	5.8	6.0	6.3	6.7	7.4	8.6	10.4	12.3	14.1	16.9
G126.0	6.0	6.3	6.5	7.0	7.7	8.8	10.2	12.5	14.4	16.5
G127.0	6.3	6.3	6.5	7.0	7.9	9.3	10.4	13.0	14.9	17.4
G128.0	6.7	6.5	6.7	7.2	8.1	9.5	11.4	12.8	15.1	17.6
G129.0	6.5	6.7	7.2	7.4	8.4	9.7	11.6	13.5	15.3	17.2
G130.0	6.7	7.0	7.2	7.9	8.8	10.0	11.4	13.7	15.5	17.4
G131.0	7.2	7.2	7.2	8.1	9.1	10.2	11.6	13.9	16.0	18.3
G132.0	7.4	7.2	7.7	8.1	9.3	10.7	11.8	13.9	16.0	18.6
G133.0	7.7	7.7	7.7	8.6	9.7	10.7	12.3	14.1	16.2	18.6
G134.0	7.4	7.7	8.1	8.8	10.0	11.1	12.3	14.4	16.7	18.8
G135.0	7.9	8.1	8.6	9.1	10.0	11.4	12.8	15.1	16.9	18.3
G136.0	8.1	8.4	8.8	9.3	10.4	11.6	13.0	14.9	16.9	18.3
G137.0	8.4	8.6	9.1	9.5	10.4	12.1	13.2	15.3	17.2	18.6
G138.0	8.6	8.8	9.1	9.7	11.1	12.1	14.1	15.3	17.2	19.3
G139.0	8.8	9.1	9.5	10.2	11.1	12.3	14.4	15.5	17.4	18.8
G140.0	9.3	9.3	10.0	10.4	11.8	12.8	13.9	16.0	17.6	18.8
G141.0	9.5	9.5	10.0	10.9	12.1	13.2	14.9	15.8	17.6	19.5
G142.0	9.7	10.0	10.7	11.1	12.5	13.2	14.4	16.5	17.6	19.5
G143.0	10.2	10.4	10.9	11.6	12.8	13.7	14.6	16.5	17.9	19.3
G144.0	10.4	10.4	10.9	11.8	12.5	14.1	14.9	16.2	18.1	19.0
G145.0	10.7	11.1	11.6	12.1	13.5	13.9	15.1	16.9	18.1	19.0
G146.0	11.1	11.1	11.6	12.5	13.7	14.6	15.8	16.9	18.1	19.7
G147.0	11.4	11.4	12.3	12.8	13.9	14.4	15.5	16.7	18.3	19.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	11.8	11.8	12.5	13.2	13.7	14.6	16.2	17.2	18.3	19.3
G149.0	12.1	12.5	12.5	13.2	14.6	15.3	16.5	17.2	18.3	19.7
G150.0	12.5	12.8	12.8	13.7	14.4	15.1	16.0	17.4	18.6	19.3
G151.0	12.8	12.8	13.5	13.9	15.1	15.5	16.9	17.9	18.8	19.3
G152.0	12.8	13.0	13.5	14.1	15.3	15.8	17.2	17.6	18.6	19.7
G153.0	13.2	13.9	14.1	14.6	15.1	16.5	17.4	17.9	18.6	19.7
G154.0	13.7	13.7	14.6	15.1	15.8	16.0	16.7	18.1	18.6	19.5
G155.0	14.1	14.4	14.6	15.3	15.8	16.7	17.6	18.3	19.0	19.5
G156.0	14.6	14.4	15.3	15.5	16.5	16.9	17.9	18.3	18.8	19.7
G157.0	14.6	14.9	15.5	16.0	16.2	16.7	18.1	18.6	19.5	19.7
G158.0	15.1	15.5	15.8	16.0	16.5	16.9	17.4	18.6	19.5	19.7
G159.0	15.8	16.0	16.2	16.5	17.2	17.9	18.3	18.3	19.0	19.7
G160.0	15.8	15.8	16.5	16.7	16.9	17.4	18.6	18.8	19.5	19.7
G161.0	16.0	16.7	16.9	17.2	17.6	18.1	18.6	18.6	19.7	20.0
G162.0	16.9	16.5	17.2	17.2	17.9	18.3	18.8	18.8	19.3	19.7
G163.0	16.7	17.2	17.6	17.6	18.1	18.1	19.0	19.3	19.5	20.0
G164.0	17.6	17.2	17.2	17.6	17.9	18.1	19.0	19.3	20.0	20.0
G165.0	18.1	17.9	17.6	18.3	18.1	19.0	19.5	19.3	20.0	20.0
G166.0	17.9	17.9	18.3	18.6	19.0	18.6	18.8	19.5	20.2	20.0
G167.0	18.1	18.6	18.3	18.6	18.6	19.3	19.0	19.5	19.5	20.0
G168.0	18.6	18.3	18.6	18.8	19.3	19.5	19.7	19.7	20.2	20.0
G169.0	18.8	19.3	18.8	19.0	19.0	19.3	19.5	20.0	19.5	20.0
G170.0	19.5	19.0	19.0	19.3	19.7	19.5	20.0	20.0	19.7	20.0
G171.0	19.5	19.7	19.7	19.7	19.5	20.0	20.2	20.2	20.4	20.4
G172.0	19.7	19.7	20.2	20.0	19.7	19.7	19.7	20.2	20.6	20.6
G173.0	20.0	20.0	20.0	20.2	20.4	20.4	20.4	20.2	20.0	20.2
G174.0	20.2	20.2	20.2	20.2	20.4	20.0	20.4	20.2	20.0	20.6
G175.0	20.9	20.4	20.4	20.2	20.6	20.6	20.2	20.4	20.2	20.2
G176.0	20.6	20.9	20.9	20.4	20.4	20.2	20.2	20.4	20.2	20.9
G177.0	21.3	20.9	21.1	20.6	20.6	20.9	20.6	20.4	20.4	20.9
G178.0	20.9	21.1	20.9	20.6	20.6	20.9	20.4	20.6	20.4	20.9
G179.0	21.8	21.3	20.9	21.3	21.1	20.9	20.9	20.6	20.6	20.9
G180.0	21.8	21.8	21.1	21.3	21.1	21.1	20.9	20.6	20.6	20.6

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	3279.6	3280.3	3281.0	3284.7	3285.2	3286.6	3300.5	3298.6	3296.3	3294.5
G1.0	3298.6	3295.6	3294.2	3293.8	3291.9	3290.1	3299.6	3294.7	3288.7	3284.3
G2.0	3313.0	3308.9	3305.4	3303.3	3297.9	3293.1	3299.1	3290.5	3279.9	3272.0
G3.0	3325.3	3320.4	3314.6	3310.0	3302.6	3293.8	3297.0	3285.6	3271.3	3257.3
G4.0	3334.4	3329.3	3322.8	3316.7	3307.0	3296.3	3294.9	3279.4	3260.1	3242.0
G5.0	3341.3	3336.5	3330.0	3323.2	3312.3	3297.9	3294.5	3274.5	3251.3	3226.7
G6.0	3348.1	3342.9	3338.1	3331.4	3318.6	3301.9	3296.3	3272.0	3242.3	3208.9
G7.0	3354.3	3351.8	3346.4	3339.2	3324.4	3306.5	3297.0	3266.9	3230.7	3192.9
G8.0	3359.9	3358.5	3355.3	3347.1	3332.5	3311.4	3296.6	3261.3	3217.4	3172.2
G9.0	3364.1	3363.6	3360.6	3353.9	3337.6	3313.9	3295.6	3253.4	3203.1	3149.9
G10.0	3365.7	3367.1	3365.2	3359.9	3344.4	3317.7	3294.9	3247.6	3188.7	3126.3
G11.0	3369.2	3371.5	3371.5	3366.4	3350.1	3322.1	3294.2	3240.6	3173.1	3103.3
G12.0	3372.2	3376.4	3377.8	3373.8	3357.8	3325.8	3294.7	3231.6	3156.0	3078.5
G13.0	3377.3	3381.0	3385.2	3381.5	3364.5	3330.9	3296.1	3225.8	3140.4	3054.8
G14.0	3384.5	3388.0	3390.5	3388.9	3373.1	3336.5	3297.7	3220.0	3126.5	3029.3
G15.0	3391.4	3393.8	3395.6	3397.2	3381.5	3344.4	3300.3	3214.4	3112.3	3005.6
G16.0	3400.5	3401.2	3403.7	3405.6	3390.3	3350.1	3301.0	3207.0	3095.4	2977.1
G17.0	3412.6	3409.5	3410.7	3413.0	3398.4	3356.4	3301.0	3199.3	3076.4	2943.7
G18.0	3427.4	3417.7	3419.3	3422.3	3407.7	3362.0	3299.8	3188.4	3052.9	2908.2
G19.0	3441.3	3428.6	3427.6	3428.8	3414.4	3366.9	3295.9	3174.1	3026.0	2865.3
G20.0	3458.5	3441.3	3436.4	3436.0	3421.6	3369.9	3291.2	3158.5	2995.6	2822.8
G21.0	3479.4	3455.5	3444.1	3442.9	3426.9	3372.2	3286.8	3143.0	2966.6	2779.4
G22.0	3501.9	3468.9	3454.6	3449.9	3432.7	3374.5	3285.6	3131.1	2940.2	2736.5
G23.0	3525.5	3484.7	3465.4	3458.0	3440.6	3380.8	3288.9	3121.4	2918.1	2700.1
G24.0	3548.1	3500.9	3477.3	3469.9	3451.8	3389.1	3294.5	3117.7	2897.7	2667.1
G25.0	3568.7	3518.4	3494.9	3486.6	3466.1	3402.1	3303.7	3114.2	2882.9	2635.6
G26.0	3590.3	3542.0	3516.0	3504.7	3483.1	3415.8	3316.0	3114.4	2870.4	2608.0
G27.0	3613.0	3568.0	3538.1	3526.0	3503.0	3433.4	3332.7	3120.0	2861.1	2581.8
G28.0	3639.0	3594.2	3563.8	3550.1	3526.7	3455.2	3353.2	3129.5	2856.7	2556.2
G29.0	3660.6	3623.4	3592.6	3578.0	3553.4	3481.5	3379.8	3144.4	2855.3	2531.9
G30.0	3679.6	3653.6	3624.1	3612.5	3586.3	3512.1	3410.5	3162.9	2858.3	2507.3
G31.0	3700.2	3683.1	3659.6	3648.5	3623.9	3545.7	3448.1	3188.9	2862.5	2486.9
G32.0	3722.3	3718.8	3701.2	3696.3	3668.0	3587.5	3490.0	3217.7	2873.4	2470.1
G33.0	3742.7	3758.0	3752.4	3744.6	3717.6	3634.8	3540.2	3257.8	2886.8	2460.4
G34.0	3764.5	3799.1	3806.7	3803.7	3771.9	3686.6	3599.6	3302.6	2908.6	2458.8
G35.0	3786.3	3843.1	3863.3	3868.7	3838.3	3749.4	3672.6	3358.7	2936.0	2467.6
G36.0	3813.7	3893.0	3931.8	3944.1	3917.6	3824.8	3750.1	3419.5	2972.2	2487.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	3837.8	3948.5	4005.6	4026.9	3998.6	3904.9	3834.3	3490.5	3015.8	2519.8
G38.0	3868.7	4013.7	4092.6	4123.4	4093.9	3995.4	3929.0	3571.7	3073.1	2563.6
G39.0	3899.1	4084.9	4189.8	4229.7	4195.8	4089.1	4036.6	3667.1	3139.9	2611.0
G40.0	3941.5	4165.2	4296.3	4354.7	4318.5	4199.8	4179.6	3785.6	3225.3	2670.8
G41.0	3979.6	4247.8	4408.3	4492.5	4459.1	4332.2	4411.8	3957.8	3331.4	2746.5
G42.0	4026.7	4330.8	4523.9	4638.9	4643.6	4526.9	4656.3	4148.5	3456.6	2815.6
G43.0	4080.0	4422.9	4645.2	4792.8	4832.4	4777.0	4695.1	4184.0	3474.3	2826.5
G44.0	4133.4	4526.6	4777.4	4951.2	5023.6	4950.5	4679.5	4172.1	3459.2	2815.6
G45.0	4182.8	4616.9	4894.4	5090.9	5115.2	4957.9	4747.3	4222.0	3494.7	2833.5
G46.0	4219.2	4693.5	4999.5	5174.9	5146.6	4978.8	4859.3	4309.5	3549.7	2866.9
G47.0	4254.5	4768.6	5088.8	5248.2	5231.5	5074.9	4990.2	4404.8	3612.1	2901.2
G48.0	4291.9	4852.4	5184.8	5358.8	5361.4	5207.3	5125.4	4508.3	3678.0	2931.8
G49.0	4342.4	4944.0	5302.5	5492.9	5509.4	5343.5	5262.8	4608.3	3742.9	2962.9
G50.0	4401.1	5046.6	5431.7	5634.9	5655.8	5494.3	5403.1	4714.8	3813.9	2992.6
G51.0	4464.0	5151.0	5570.2	5785.7	5809.6	5642.1	5550.0	4822.9	3888.4	3024.9
G52.0	4527.3	5255.4	5711.3	5934.7	5967.9	5801.0	5700.6	4929.2	3959.9	3056.7
G53.0	4588.8	5360.5	5851.1	6086.9	6133.5	5959.0	5851.9	5039.8	4032.5	3086.1
G54.0	4646.4	5453.7	5992.0	6241.4	6297.1	6121.9	6010.8	5146.8	4107.4	3111.4
G55.0	4694.8	5547.7	6138.4	6400.5	6463.6	6289.6	6170.4	5256.8	4176.1	3131.8
G56.0	4729.4	5633.1	6273.9	6566.0	6627.0	6460.2	6328.4	5363.0	4241.0	3145.5
G57.0	4750.1	5719.6	6410.5	6715.1	6802.1	6627.7	6486.4	5465.3	4302.3	3152.7
G58.0	4743.1	5798.5	6542.1	6868.7	6962.5	6797.0	6652.7	5570.2	4357.3	3153.6
G59.0	4715.5	5868.3	6662.9	7022.3	7135.5	6975.7	6799.6	5659.3	4406.7	3144.1
G60.0	4656.6	5929.1	6770.4	7168.5	7300.0	7146.9	6935.3	5734.5	4435.7	3121.4
G61.0	4555.4	5977.1	6876.4	7310.7	7460.6	7310.7	7048.5	5792.7	4452.6	3081.0
G62.0	4418.5	6009.6	6964.1	7434.6	7596.3	7452.9	7145.7	5834.2	4452.9	3030.7
G63.0	4233.6	6014.3	7031.8	7543.4	7715.1	7581.9	7216.5	5859.7	4433.8	2964.6
G64.0	4015.5	5989.7	7072.2	7629.0	7807.9	7682.4	7257.3	5865.1	4395.6	2885.0
G65.0	3768.2	5934.4	7076.8	7694.9	7878.2	7758.2	7260.8	5843.0	4336.4	2797.3
G66.0	3490.3	5845.6	7049.5	7737.1	7915.5	7801.4	7213.7	5782.9	4242.4	2686.6
G67.0	3206.8	5708.7	6978.5	7744.1	7912.0	7802.3	7116.0	5678.8	4108.8	2549.7
G68.0	2926.3	5520.8	6868.0	7701.4	7860.1	7753.6	6953.6	5521.0	3940.6	2399.6
G69.0	2648.1	5268.8	6705.2	7605.8	7760.3	7658.7	6746.2	5299.5	3724.1	2223.5
G70.0	2382.4	4940.1	6500.5	7451.3	7607.0	7499.8	6443.0	5018.3	3472.2	2058.1
G71.0	2106.8	4518.5	6224.9	7234.6	7387.3	7263.1	6036.8	4651.2	3185.9	1885.7
G72.0	1830.8	4055.2	5883.2	6935.5	7078.7	6938.1	5532.4	4211.6	2853.2	1696.9
G73.0	1536.1	3512.6	5465.1	6532.5	6658.1	6520.5	4904.3	3690.3	2464.1	1469.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	1244.2	2942.5	4952.6	6001.3	6153.0	5978.8	4013.4	3023.7	1977.1	1217.3
G75.0	965.4	2343.7	4326.9	5371.6	5522.9	5300.6	3112.6	2341.9	1469.3	907.4
G76.0	713.2	1760.2	3570.1	4503.7	4642.2	4416.4	2212.2	1654.9	1033.3	677.7
G77.0	482.1	1184.8	2685.2	3491.7	3581.2	3383.8	1497.8	1142.4	702.7	511.8
G78.0	348.2	785.6	1850.7	2475.3	2562.9	2387.1	995.5	777.5	500.0	404.4
G79.0	277.7	554.3	1202.5	1652.1	1708.3	1621.7	682.6	530.4	384.9	334.1
G80.0	239.7	444.5	860.5	1135.0	1156.5	1084.8	476.1	378.6	311.6	281.2
G81.0	215.5	384.0	640.1	799.3	816.7	769.1	344.5	288.4	250.8	236.9
G82.0	194.4	327.4	482.3	572.4	573.5	552.4	247.8	227.8	203.5	194.9
G83.0	170.8	273.3	361.9	411.6	406.2	394.2	187.7	174.0	160.8	152.7
G84.0	151.7	219.7	273.3	300.5	292.3	287.2	145.2	130.6	126.7	120.9
G85.0	134.1	177.7	205.3	225.7	216.0	202.8	110.0	96.8	92.1	89.8
G86.0	115.1	141.5	157.1	173.5	154.5	142.9	82.6	74.5	69.6	68.9
G87.0	94.4	107.9	116.9	131.8	117.6	109.7	55.5	52.0	49.0	50.6
G88.0	74.7	79.1	86.3	97.4	93.0	87.9	30.9	28.8	27.6	28.8
G89.0	50.6	51.7	50.8	58.2	62.6	61.7	12.5	12.3	11.6	11.1
G90.0	29.5	27.1	27.6	30.6	31.1	32.3	13.0	12.8	12.8	11.8
G91.0	5.8	7.4	8.6	9.3	10.4	10.7	13.5	13.7	12.8	12.3
G92.0	5.8	7.2	9.1	9.7	11.1	11.1	13.9	13.7	13.7	13.2
G93.0	6.3	7.7	9.1	10.9	11.6	11.6	14.4	13.9	13.9	13.2
G94.0	6.7	8.6	9.5	10.7	12.1	12.8	14.9	15.1	14.4	13.9
G95.0	7.0	8.6	10.2	11.4	12.3	12.8	15.3	15.8	15.3	14.9
G96.0	7.7	9.3	11.1	12.5	13.2	13.2	15.8	16.0	15.5	14.9
G97.0	8.4	9.7	11.4	13.0	13.7	14.4	16.2	16.0	16.2	16.0
G98.0	8.4	10.2	11.6	13.5	14.4	14.9	16.7	16.9	16.5	16.0
G99.0	9.3	11.1	12.3	14.1	14.6	15.1	16.9	17.4	16.9	16.5
G100.0	9.3	11.6	13.2	14.1	15.1	16.0	17.2	17.6	17.4	17.4
G101.0	9.7	12.1	13.5	14.6	16.0	16.0	17.6	17.6	17.6	17.2
G102.0	10.7	12.8	13.9	15.8	16.7	16.5	18.1	17.9	17.9	17.9
G103.0	11.1	12.8	14.4	16.2	16.7	16.9	18.1	18.1	18.1	18.3
G104.0	11.6	13.2	15.5	16.2	17.2	17.4	18.3	18.1	18.3	18.1
G105.0	12.1	13.9	15.5	16.7	17.9	17.6	18.3	18.3	18.6	18.3
G106.0	12.5	14.6	16.2	17.6	18.3	18.1	18.3	18.6	18.8	18.8
G107.0	13.0	14.6	16.7	18.1	18.8	18.6	18.3	18.3	18.6	18.6
G108.0	13.0	15.3	16.7	18.3	19.0	18.8	18.3	18.6	18.8	19.0
G109.0	13.7	15.5	17.2	18.3	18.8	18.8	18.6	18.8	18.6	19.0
G110.0	14.1	16.0	17.6	19.0	19.5	19.3	18.6	18.8	19.0	19.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	14.1	16.5	18.3	19.3	19.5	19.5	19.0	19.0	19.3	19.3
G112.0	14.6	16.7	18.3	19.5	20.0	19.7	19.0	19.0	18.8	19.3
G113.0	14.9	16.9	18.3	19.7	20.2	19.7	19.0	19.0	19.3	19.5
G114.0	15.3	17.2	18.6	19.7	20.4	20.0	18.8	19.0	19.0	19.5
G115.0	15.5	17.4	18.8	20.0	20.0	20.0	19.0	19.0	19.5	19.5
G116.0	16.0	17.6	19.3	20.2	20.0	20.2	19.0	18.8	19.5	19.7
G117.0	16.0	18.1	19.5	20.2	20.2	20.2	18.8	19.3	19.0	19.7
G118.0	16.5	18.3	19.5	20.4	20.4	20.2	18.8	19.3	19.7	20.0
G119.0	16.7	18.6	20.2	20.6	21.1	20.2	19.3	19.0	19.3	20.2
G120.0	17.2	18.8	20.4	20.6	21.1	20.4	19.0	19.0	19.5	20.4
G121.0	17.4	19.0	20.2	20.9	21.3	20.4	19.0	19.7	19.7	20.6
G122.0	17.6	19.5	20.9	21.3	20.9	20.6	19.5	19.3	20.2	20.6
G123.0	17.9	19.5	20.6	21.6	21.6	20.6	19.3	19.3	20.0	20.9
G124.0	18.3	20.0	21.3	21.8	21.8	20.9	19.0	20.0	20.4	21.1
G125.0	18.6	20.0	21.6	22.0	22.0	20.9	19.5	19.5	20.6	21.3
G126.0	18.8	20.6	21.8	22.0	22.3	21.3	19.5	19.5	20.2	21.6
G127.0	19.0	20.9	21.6	22.3	22.5	21.3	19.3	19.7	20.4	21.3
G128.0	19.3	21.1	21.6	22.3	22.5	21.6	19.5	20.4	20.9	22.0
G129.0	19.5	20.6	22.3	22.5	22.0	21.6	20.0	20.6	20.9	21.8
G130.0	19.7	21.6	22.5	22.7	22.7	22.0	20.2	20.2	21.1	22.5
G131.0	20.0	21.6	22.7	22.7	22.5	22.3	20.4	20.4	21.1	22.5
G132.0	20.0	21.1	22.0	23.0	23.2	22.0	20.6	20.6	21.6	22.7
G133.0	20.2	21.8	22.3	23.0	23.2	22.5	20.4	20.9	21.8	22.7
G134.0	20.2	21.3	22.3	23.0	23.4	22.7	21.1	21.3	22.0	23.0
G135.0	20.2	22.0	22.3	23.2	22.7	23.0	21.3	22.0	22.5	23.0
G136.0	20.2	21.3	22.5	23.2	23.7	23.0	21.1	22.3	22.7	23.7
G137.0	20.6	21.3	23.0	23.2	23.7	23.2	21.8	22.5	23.0	23.4
G138.0	20.6	21.3	23.0	23.4	23.7	23.4	22.0	22.7	23.2	23.7
G139.0	20.6	22.0	22.5	23.4	23.9	23.7	22.3	22.5	23.4	24.1
G140.0	20.6	21.6	22.5	23.4	23.4	23.4	21.8	22.5	23.4	23.9
G141.0	20.4	22.0	22.3	23.4	23.9	23.4	21.8	22.7	23.2	24.1
G142.0	20.4	22.0	22.3	23.2	23.4	23.9	22.0	22.7	23.4	23.9
G143.0	20.9	21.6	22.3	23.2	23.4	23.7	22.0	23.0	23.2	23.9
G144.0	20.6	21.8	22.3	23.2	23.4	23.7	22.3	22.5	23.2	23.9
G145.0	20.4	21.8	22.7	23.2	23.9	24.1	22.0	22.5	23.2	23.9
G146.0	20.4	21.8	22.7	23.0	23.2	23.9	22.0	22.7	23.2	23.7
G147.0	20.4	21.3	22.0	22.7	23.4	23.9	22.0	22.5	23.2	23.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	20.2	21.6	22.5	22.7	23.0	23.4	22.0	22.5	23.0	23.4
G149.0	20.6	21.3	22.5	22.7	23.0	23.7	21.8	22.3	23.0	23.2
G150.0	20.6	21.3	22.3	22.5	23.2	23.2	21.3	22.0	22.5	23.0
G151.0	20.2	21.3	21.6	22.3	23.2	23.0	21.8	22.0	22.3	23.0
G152.0	20.6	21.1	22.0	22.3	23.0	23.4	21.6	21.8	22.3	22.5
G153.0	20.0	21.1	22.0	22.3	22.5	23.2	21.1	21.8	22.0	22.5
G154.0	20.0	21.1	21.1	22.0	22.3	23.2	20.9	21.8	22.3	22.3
G155.0	20.0	20.9	21.8	21.8	22.3	22.5	20.9	21.6	22.0	22.5
G156.0	20.0	20.9	21.1	21.8	22.5	22.3	21.1	21.6	22.0	22.5
G157.0	20.0	20.9	21.6	21.8	22.5	22.7	21.1	21.3	22.0	21.8
G158.0	20.6	20.9	21.1	21.6	22.3	22.0	20.6	21.1	21.8	22.0
G159.0	20.4	20.6	21.3	21.6	22.0	22.5	20.4	21.1	21.6	21.3
G160.0	20.6	20.4	20.9	21.6	22.0	21.8	20.6	21.1	21.1	22.0
G161.0	20.0	20.9	20.9	21.3	21.6	21.8	20.4	21.1	20.9	21.8
G162.0	20.0	20.9	20.6	21.1	21.8	21.6	20.4	20.6	20.9	21.6
G163.0	20.6	20.9	21.1	21.1	21.3	22.0	20.2	20.9	21.3	20.9
G164.0	20.4	20.9	21.1	21.1	21.1	21.8	20.4	20.6	20.9	21.6
G165.0	20.0	20.2	20.6	21.1	21.1	21.8	20.2	20.6	21.1	21.3
G166.0	20.0	20.2	20.6	20.9	21.1	21.3	20.4	20.6	20.6	20.6
G167.0	20.4	20.2	21.1	20.9	21.1	21.8	20.4	20.9	20.6	20.6
G168.0	20.6	20.2	21.1	21.1	21.3	21.3	20.4	20.2	20.9	21.1
G169.0	20.6	20.9	21.1	21.1	21.3	21.1	20.4	20.9	20.9	20.6
G170.0	20.0	20.2	21.1	20.9	21.3	21.6	20.4	20.4	20.4	20.6
G171.0	20.2	20.2	20.6	21.1	21.3	21.3	20.4	20.4	20.6	20.6
G172.0	20.2	21.1	20.6	21.1	21.3	21.3	20.2	20.6	20.6	20.4
G173.0	20.2	20.2	20.6	20.9	21.1	21.1	20.4	20.2	20.2	20.4
G174.0	20.2	20.9	20.9	20.9	20.9	21.1	20.4	20.6	20.2	20.4
G175.0	20.9	20.9	20.9	20.9	20.9	21.1	20.4	20.6	20.2	20.2
G176.0	20.9	20.4	20.9	20.6	20.9	21.1	20.4	20.0	20.2	20.2
G177.0	20.4	20.4	20.9	20.9	20.9	21.1	20.4	20.0	20.2	20.2
G178.0	20.9	20.6	20.6	20.9	21.1	20.9	20.4	20.4	20.2	20.4
G179.0	20.4	20.6	20.9	20.9	20.9	21.1	20.4	20.0	20.4	20.6
G180.0	20.6	20.9	20.6	20.6	20.9	21.1	20.2	20.0	20.2	20.0

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	3291.7	3291.2	3289.4	3288.2	3288.0	3285.6	3285.9	3282.9	3285.6	3281.5
G1.0	3278.7	3273.4	3268.7	3263.6	3258.3	3255.0	3251.1	3246.7	3246.9	3241.3
G2.0	3261.8	3253.4	3242.7	3234.1	3225.3	3215.4	3210.0	3199.6	3197.0	3188.9
G3.0	3242.7	3227.6	3212.3	3199.1	3185.0	3168.9	3157.8	3145.8	3139.0	3125.1
G4.0	3220.4	3200.7	3178.5	3158.5	3138.3	3117.4	3100.7	3081.7	3072.9	3050.9
G5.0	3198.6	3172.0	3143.0	3115.1	3088.7	3061.5	3039.5	3015.4	3000.8	2977.1
G6.0	3175.7	3140.2	3103.8	3069.6	3034.9	3001.2	2972.4	2943.0	2923.7	2900.3
G7.0	3150.9	3108.4	3063.9	3022.1	2980.8	2942.1	2908.4	2873.1	2852.5	2824.2
G8.0	3121.9	3074.3	3023.3	2975.0	2928.1	2882.4	2841.6	2805.4	2779.2	2749.5
G9.0	3094.2	3036.9	2980.6	2926.3	2874.3	2822.1	2782.0	2738.4	2708.9	2673.6
G10.0	3062.9	2999.8	2933.7	2873.8	2817.0	2762.3	2717.0	2670.6	2638.1	2604.3
G11.0	3031.8	2960.6	2886.8	2821.2	2761.1	2698.4	2651.1	2601.7	2566.7	2521.4
G12.0	2998.9	2919.1	2837.4	2765.3	2696.8	2632.8	2580.6	2524.4	2476.6	2418.2
G13.0	2964.6	2874.1	2783.8	2703.6	2629.5	2561.3	2497.5	2421.4	2364.6	2283.6
G14.0	2927.9	2825.6	2723.0	2637.9	2558.3	2475.3	2396.8	2301.5	2216.8	2108.5
G15.0	2890.1	2775.7	2664.8	2570.1	2476.9	2377.8	2284.1	2152.5	2043.7	1922.8
G16.0	2847.2	2722.8	2601.9	2494.5	2383.6	2260.4	2126.3	1976.4	1857.9	1742.3
G17.0	2803.1	2667.1	2535.8	2411.9	2278.3	2118.4	1961.6	1794.6	1693.4	1608.5
G18.0	2753.7	2606.3	2464.1	2322.4	2157.2	1963.9	1791.8	1645.1	1563.0	1513.8
G19.0	2699.1	2543.5	2388.0	2223.8	2023.8	1806.4	1639.3	1519.4	1476.0	1447.0
G20.0	2643.2	2474.6	2302.4	2109.6	1882.9	1663.9	1518.5	1434.7	1409.2	1395.3
G21.0	2586.6	2405.0	2205.2	1982.7	1742.6	1541.0	1425.0	1364.7	1355.8	1345.2
G22.0	2532.1	2329.6	2104.1	1854.4	1612.9	1438.4	1350.5	1312.0	1305.3	1297.1
G23.0	2478.3	2255.1	1996.9	1729.1	1500.1	1351.7	1290.2	1264.4	1259.6	1253.5
G24.0	2428.6	2178.3	1890.1	1615.2	1405.3	1282.5	1237.5	1219.2	1214.5	1212.7
G25.0	2379.4	2102.0	1791.1	1516.4	1328.7	1223.6	1194.4	1177.9	1174.6	1169.8
G26.0	2329.3	2020.8	1699.4	1435.2	1263.5	1174.2	1150.7	1137.5	1132.4	1130.8
G27.0	2276.2	1943.0	1618.9	1366.7	1205.0	1129.4	1110.1	1095.8	1092.3	1090.7
G28.0	2223.3	1873.2	1549.6	1306.9	1152.6	1091.3	1071.6	1057.2	1054.5	1052.4
G29.0	2173.9	1812.9	1487.6	1253.3	1106.7	1054.7	1035.2	1019.7	1018.0	1016.0
G30.0	2126.1	1760.4	1438.2	1203.6	1066.5	1019.7	999.0	985.6	982.8	980.9
G31.0	2091.5	1717.5	1388.1	1159.1	1030.1	984.6	965.1	951.2	945.9	944.0
G32.0	2063.4	1678.1	1347.3	1117.1	998.5	954.0	933.3	920.6	914.6	910.6
G33.0	2044.7	1647.0	1309.0	1080.9	971.4	924.3	903.0	889.5	885.1	879.5
G34.0	2032.4	1618.9	1277.2	1047.7	944.3	896.2	872.3	861.9	856.6	852.8
G35.0	2027.5	1595.7	1247.3	1016.9	919.2	867.9	843.3	833.8	832.4	828.7
G36.0	2029.8	1576.9	1220.3	988.1	893.7	842.4	816.4	808.3	810.6	809.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	2037.9	1559.8	1192.0	960.0	869.8	816.2	789.3	782.8	790.0	792.3
G38.0	2047.7	1541.9	1164.7	933.1	846.8	790.9	766.1	761.0	771.4	778.1
G39.0	2058.6	1527.3	1138.4	908.8	822.5	766.8	742.0	740.3	754.0	764.9
G40.0	2082.2	1518.7	1108.5	879.5	794.4	740.8	719.7	720.6	738.9	754.3
G41.0	2107.8	1502.5	1072.1	848.0	766.3	715.5	698.3	704.1	724.5	744.3
G42.0	2119.4	1480.9	1031.3	812.7	737.3	695.3	679.8	688.4	711.3	735.0
G43.0	2102.9	1442.1	985.1	779.3	714.3	675.8	662.4	671.9	699.3	726.2
G44.0	2076.4	1409.9	947.3	752.4	693.0	656.8	646.1	657.0	686.7	717.6
G45.0	2072.0	1391.1	914.8	724.1	672.1	638.0	630.4	644.0	675.1	709.0
G46.0	2078.5	1377.6	884.9	699.5	651.0	620.6	616.0	631.8	664.0	700.4
G47.0	2082.9	1366.3	854.5	674.2	631.0	605.1	602.8	619.7	653.1	691.8
G48.0	2083.9	1351.9	826.2	650.5	612.3	591.2	590.5	609.0	642.4	683.0
G49.0	2082.0	1335.7	799.0	628.5	594.4	577.2	579.1	599.3	632.7	674.4
G50.0	2078.5	1315.5	772.1	606.9	577.7	567.3	569.3	589.8	622.7	665.8
G51.0	2073.4	1294.6	745.2	584.9	562.6	556.3	560.3	580.2	612.5	658.0
G52.0	2067.9	1272.5	721.8	563.8	547.8	547.1	553.1	571.9	603.4	650.5
G53.0	2063.0	1250.0	699.5	542.4	533.2	536.9	547.1	563.1	594.9	642.4
G54.0	2055.6	1228.2	680.2	522.7	517.6	529.4	541.5	555.9	587.4	635.5
G55.0	2043.3	1207.1	661.0	505.1	501.6	519.7	534.3	548.7	580.7	626.4
G56.0	2027.0	1183.9	642.2	489.3	486.0	507.4	525.5	543.6	574.0	615.7
G57.0	2006.6	1158.4	624.1	473.3	470.7	493.7	516.9	538.5	566.8	608.8
G58.0	1984.1	1131.7	605.1	460.5	456.6	480.7	511.3	533.4	561.7	604.4
G59.0	1953.5	1103.2	588.1	447.8	442.4	468.9	506.5	529.4	558.9	600.4
G60.0	1916.4	1072.8	572.1	436.6	429.9	461.0	500.2	526.9	557.0	596.0
G61.0	1863.9	1039.8	560.3	426.0	419.5	454.3	495.6	526.2	554.0	589.8
G62.0	1804.8	1004.3	553.3	417.1	411.6	445.9	494.4	526.0	550.1	583.0
G63.0	1740.7	967.7	551.7	408.6	404.1	439.2	494.4	525.3	545.2	574.0
G64.0	1674.8	939.4	549.4	401.8	394.4	434.3	493.7	524.1	540.6	564.2
G65.0	1599.0	918.0	545.0	396.3	385.1	429.9	490.5	521.8	533.8	554.0
G66.0	1521.5	898.1	539.0	388.6	378.2	423.2	484.2	516.0	526.0	543.6
G67.0	1447.7	875.1	532.5	380.3	371.4	414.8	474.7	507.2	515.5	532.5
G68.0	1377.4	844.0	524.8	372.6	364.9	403.9	461.2	494.4	503.2	519.0
G69.0	1299.9	807.1	513.9	367.3	357.8	391.4	445.2	478.9	487.7	503.2
G70.0	1220.6	768.9	500.2	362.2	350.1	376.5	426.7	458.9	469.1	482.1
G71.0	1123.1	727.3	483.3	356.8	340.8	360.8	406.7	436.9	445.0	451.5
G72.0	1019.9	676.5	462.1	349.4	330.6	342.7	384.2	409.5	416.7	419.9
G73.0	916.2	624.8	438.0	340.4	318.8	322.5	356.8	378.6	385.1	384.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	811.8	566.8	409.5	329.2	304.4	300.9	329.2	347.8	348.5	347.3
G75.0	674.7	500.9	379.8	315.5	288.4	280.5	302.8	317.9	317.6	313.2
G76.0	543.8	423.2	344.8	297.4	272.4	261.2	277.3	288.6	287.9	286.1
G77.0	419.0	348.2	301.4	275.4	253.8	240.6	254.5	264.5	264.0	267.0
G78.0	342.9	297.0	262.6	249.6	236.9	221.3	232.9	242.9	247.1	257.3
G79.0	293.3	261.7	239.2	231.5	214.4	205.6	213.9	222.0	235.7	251.0
G80.0	252.4	229.4	216.5	205.1	196.0	188.9	193.3	200.0	224.4	242.4
G81.0	217.2	198.8	191.2	181.2	179.3	171.7	173.3	177.3	206.9	227.4
G82.0	180.0	172.8	162.4	159.9	159.2	150.6	151.0	153.6	179.6	204.9
G83.0	145.7	145.5	139.9	141.3	138.5	129.9	130.4	132.9	147.6	172.8
G84.0	111.1	122.5	116.7	123.0	119.7	113.2	112.1	111.1	117.2	128.1
G85.0	86.8	93.7	94.7	102.1	98.8	94.2	91.9	86.5	91.6	97.2
G86.0	68.7	70.3	68.9	74.7	68.2	67.3	65.4	61.0	65.9	69.4
G87.0	48.3	46.6	46.6	48.5	42.7	42.9	42.7	39.4	41.3	41.3
G88.0	26.2	25.5	23.4	22.0	18.6	18.8	18.3	17.4	19.3	16.5
G89.0	10.9	9.3	7.9	6.7	5.6	4.2	3.5	2.8	2.5	2.1
G90.0	10.7	10.2	8.4	7.2	6.3	4.9	3.7	2.5	2.3	2.5
G91.0	12.1	10.9	9.7	8.1	6.5	4.9	3.9	3.3	2.3	2.1
G92.0	12.1	11.4	10.2	8.4	7.0	5.8	4.2	3.5	2.5	2.3
G93.0	13.0	11.4	10.9	9.3	7.7	6.3	4.4	3.7	2.8	2.8
G94.0	13.2	12.1	10.9	9.5	8.1	6.5	4.9	3.5	3.0	2.5
G95.0	13.7	13.2	12.1	10.4	8.6	7.0	5.1	3.7	3.0	3.0
G96.0	14.6	13.2	12.8	10.9	9.1	7.4	5.8	4.2	3.5	3.3
G97.0	14.9	14.4	12.5	11.4	9.5	8.1	6.0	4.4	3.5	2.8
G98.0	15.5	15.1	13.2	12.1	10.4	8.4	6.5	4.9	3.7	3.0
G99.0	16.2	15.5	13.7	12.5	10.7	8.8	7.2	5.6	4.2	3.7
G100.0	16.5	15.3	14.9	13.0	11.1	9.3	7.7	6.0	4.4	3.3
G101.0	16.9	16.0	15.5	13.7	12.1	10.0	7.9	6.0	4.6	4.2
G102.0	17.2	16.2	15.3	14.1	12.5	10.4	8.6	7.0	5.1	3.7
G103.0	17.9	17.2	15.5	14.6	12.8	10.9	9.1	7.0	5.3	4.2
G104.0	17.9	17.2	16.7	15.1	13.5	11.4	9.3	7.7	5.8	4.9
G105.0	18.3	18.1	17.2	15.5	13.7	11.8	10.0	7.9	6.0	4.6
G106.0	18.3	18.3	17.6	15.8	14.4	12.3	10.7	8.4	6.5	5.1
G107.0	18.3	18.1	17.2	16.2	14.6	12.8	11.1	9.1	7.0	5.8
G108.0	18.6	19.0	17.6	16.7	15.1	13.2	11.6	9.5	7.2	5.8
G109.0	19.5	19.3	18.6	17.2	15.5	13.7	11.8	9.7	7.7	6.5
G110.0	19.0	19.5	18.8	17.4	16.0	14.1	12.5	10.4	8.6	6.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	19.3	19.0	19.3	17.6	16.5	14.9	12.8	10.9	8.6	7.0
G112.0	20.0	19.7	18.8	18.1	16.7	15.3	13.2	11.4	9.5	7.9
G113.0	20.0	19.5	19.7	18.6	17.2	15.8	14.1	12.1	9.5	8.4
G114.0	19.7	19.7	20.0	18.8	17.9	16.2	14.6	12.5	10.4	8.1
G115.0	19.7	20.0	19.7	19.5	18.3	16.7	15.1	12.8	10.9	9.3
G116.0	20.0	20.9	20.2	20.0	18.6	17.2	15.3	13.2	11.4	9.7
G117.0	20.4	21.1	21.1	20.4	19.0	17.6	16.0	13.7	11.4	10.2
G118.0	20.6	20.9	21.6	20.4	19.7	18.3	16.5	14.4	12.5	10.0
G119.0	20.9	21.1	21.8	20.9	20.2	18.8	16.9	14.9	13.0	11.1
G120.0	21.1	22.0	21.8	21.6	20.6	19.3	17.2	15.3	13.5	11.1
G121.0	21.3	22.3	22.5	22.0	20.9	19.5	17.9	15.8	13.2	11.6
G122.0	21.3	22.0	23.0	22.0	21.6	20.0	18.3	16.2	13.7	12.1
G123.0	21.6	22.7	22.7	23.0	22.0	20.4	18.8	16.7	14.1	13.0
G124.0	22.3	22.7	23.2	22.7	22.0	20.6	19.0	17.2	15.3	13.0
G125.0	22.0	23.4	23.9	23.7	22.7	21.3	19.5	17.6	15.8	13.5
G126.0	22.5	23.2	24.1	24.1	23.0	21.6	20.0	17.9	16.2	14.4
G127.0	22.5	23.9	23.9	24.4	23.0	22.0	20.4	18.3	16.0	14.4
G128.0	23.2	23.7	24.6	24.1	23.9	22.3	20.6	18.8	16.5	14.9
G129.0	23.4	24.4	24.8	24.8	24.1	22.7	21.1	19.3	16.9	15.3
G130.0	23.2	24.6	24.6	25.1	23.9	23.0	21.3	19.5	17.9	16.2
G131.0	23.4	24.4	25.3	25.3	24.1	23.2	21.6	19.7	17.6	16.2
G132.0	23.7	24.4	25.5	25.5	24.8	23.2	21.8	20.2	18.6	17.2
G133.0	23.9	24.6	25.5	25.5	24.4	23.4	22.0	20.4	18.6	17.2
G134.0	24.1	24.8	25.3	25.5	24.6	23.7	22.3	20.9	19.5	18.1
G135.0	24.4	24.8	25.5	25.1	24.6	23.9	22.5	21.1	19.7	17.9
G136.0	24.4	24.8	25.5	25.5	24.6	23.9	22.7	21.3	20.0	18.3
G137.0	24.6	25.1	25.5	25.3	24.6	24.1	23.0	21.6	20.0	18.8
G138.0	24.6	25.5	25.5	25.1	25.3	24.4	23.2	21.8	20.4	19.3
G139.0	24.6	25.3	25.3	25.5	25.3	24.4	23.4	22.0	20.9	20.0
G140.0	24.6	24.8	25.3	25.1	25.3	24.4	23.4	22.5	20.9	20.2
G141.0	24.8	25.3	25.3	25.5	24.6	24.4	23.4	22.7	21.6	20.2
G142.0	24.6	25.1	25.1	25.3	24.6	24.4	23.7	22.5	21.8	20.9
G143.0	24.4	24.6	24.8	24.8	25.1	24.4	23.4	23.0	21.8	21.1
G144.0	24.4	24.4	24.8	25.1	25.1	24.1	23.4	22.7	22.3	21.1
G145.0	24.4	24.4	24.6	24.6	24.4	24.4	23.7	23.2	22.3	21.8
G146.0	24.4	24.1	24.4	24.8	24.1	24.1	23.7	23.4	22.5	22.0
G147.0	24.1	23.9	24.6	24.6	24.1	24.1	23.7	23.4	22.7	22.3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	23.4	24.1	24.4	24.6	23.9	23.9	23.9	23.2	22.7	22.5
G149.0	23.7	23.7	23.9	24.4	23.7	23.9	23.9	23.7	23.0	22.7
G150.0	23.7	23.9	24.1	24.4	23.7	23.9	23.7	23.7	23.2	23.0
G151.0	23.0	23.2	23.9	24.1	24.1	23.9	23.7	23.7	23.4	22.7
G152.0	23.2	23.7	23.9	23.4	24.1	23.9	23.4	23.2	23.2	22.7
G153.0	23.2	23.4	23.7	23.2	23.9	23.7	23.7	23.7	23.4	23.2
G154.0	23.0	22.7	23.0	23.2	23.9	23.7	23.7	23.7	23.4	23.4
G155.0	22.7	22.5	22.7	23.0	23.7	23.4	23.4	23.7	23.4	23.4
G156.0	22.3	23.0	22.5	22.7	23.0	23.2	23.4	23.2	23.7	23.2
G157.0	22.5	22.3	22.5	23.2	23.4	23.2	23.2	23.7	23.2	23.2
G158.0	22.3	22.0	23.0	23.0	22.7	23.0	23.2	23.0	23.2	23.7
G159.0	21.8	22.0	22.0	22.5	23.2	23.0	23.0	23.7	23.2	23.4
G160.0	22.0	21.8	22.5	22.3	23.0	22.7	23.0	23.7	23.7	23.7
G161.0	22.0	22.0	22.5	22.5	22.3	22.7	23.2	23.0	23.7	23.2
G162.0	21.3	21.6	21.8	22.0	22.7	22.7	22.7	22.7	23.2	23.7
G163.0	21.3	21.3	21.6	22.3	22.0	22.7	22.7	23.4	23.0	23.4
G164.0	21.3	21.8	22.0	22.3	21.8	22.5	22.5	22.7	23.7	23.2
G165.0	21.3	21.1	22.0	22.0	22.5	22.3	22.5	23.2	23.0	23.7
G166.0	20.9	21.6	21.3	21.6	22.3	22.3	22.7	22.5	23.0	23.2
G167.0	21.1	20.9	21.3	21.8	22.3	22.3	22.3	22.5	22.7	23.2
G168.0	21.1	21.3	21.1	21.8	21.6	22.3	22.7	23.0	22.7	23.2
G169.0	21.1	21.1	21.1	21.6	22.0	21.8	22.5	23.0	23.2	23.4
G170.0	20.9	20.6	20.9	21.1	21.3	22.0	22.5	22.3	23.2	23.4
G171.0	20.6	21.1	21.3	21.3	21.1	21.8	21.8	22.7	23.2	23.2
G172.0	20.4	20.6	21.1	20.9	21.8	21.3	22.0	22.5	22.7	23.0
G173.0	20.6	20.4	21.1	20.9	20.9	21.3	21.6	22.5	22.7	22.5
G174.0	20.4	20.6	20.6	20.6	20.9	21.1	21.3	22.3	22.5	22.3
G175.0	20.4	20.6	20.6	21.1	21.3	21.3	21.6	22.0	21.8	22.5
G176.0	20.4	20.6	20.9	20.9	21.3	20.9	21.1	21.8	22.0	22.3
G177.0	20.4	20.6	20.6	20.6	21.1	21.1	20.9	21.6	21.8	21.8
G178.0	20.4	20.4	20.6	20.6	21.1	20.9	21.3	21.6	21.3	21.6
G179.0	20.2	20.4	20.4	20.4	20.2	20.4	21.1	20.9	21.6	21.8
G180.0	20.4	20.4	20.4	20.2	20.6	20.4	20.9	20.9	20.9	21.1

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	3281.2	3278.5	3278.0	3277.5	3276.1	3274.1	3273.6	3272.9	3272.0	3272.2
G1.0	3236.9	3234.4	3232.3	3231.4	3229.3	3226.9	3228.8	3227.6	3228.3	3230.9
G2.0	3182.9	3176.4	3174.1	3172.2	3169.4	3167.8	3171.3	3171.7	3173.4	3178.5
G3.0	3117.7	3107.9	3106.3	3100.7	3098.4	3098.0	3101.4	3103.1	3108.6	3119.8
G4.0	3042.3	3032.3	3024.6	3022.3	3016.5	3017.9	3023.3	3026.0	3035.3	3047.4
G5.0	2963.6	2952.5	2944.1	2937.9	2937.9	2936.3	2941.6	2948.6	2961.8	2977.8
G6.0	2883.8	2869.0	2860.1	2853.7	2851.3	2851.1	2859.0	2868.3	2882.2	2898.7
G7.0	2805.2	2789.4	2781.0	2775.9	2772.4	2771.5	2780.3	2789.4	2804.5	2826.3
G8.0	2729.1	2711.7	2700.3	2694.3	2691.5	2693.6	2700.8	2712.1	2729.3	2749.9
G9.0	2653.9	2633.9	2627.7	2623.0	2620.0	2621.4	2629.1	2640.9	2655.3	2678.7
G10.0	2582.4	2561.1	2548.3	2543.0	2542.3	2541.6	2551.4	2566.0	2583.8	2608.2
G11.0	2493.8	2460.6	2448.8	2439.1	2433.7	2431.9	2451.1	2467.8	2498.5	2528.1
G12.0	2373.4	2337.9	2306.8	2295.9	2290.6	2290.6	2316.3	2343.7	2383.4	2425.1
G13.0	2224.9	2158.3	2135.1	2112.6	2105.0	2106.6	2142.6	2169.9	2233.7	2293.8
G14.0	2039.1	1966.2	1936.1	1909.4	1906.6	1911.9	1939.3	1975.5	2044.4	2125.6
G15.0	1846.8	1782.5	1760.9	1746.3	1742.6	1745.4	1767.2	1783.7	1853.9	1943.0
G16.0	1681.8	1647.7	1631.0	1629.1	1628.0	1629.1	1636.8	1653.3	1690.6	1760.4
G17.0	1567.7	1551.9	1551.2	1555.4	1556.3	1554.2	1555.6	1555.4	1576.9	1622.2
G18.0	1495.3	1486.2	1490.2	1496.9	1498.3	1496.7	1495.5	1492.5	1498.8	1521.5
G19.0	1438.4	1430.8	1437.5	1444.5	1448.6	1445.8	1444.5	1436.6	1442.8	1456.8
G20.0	1387.2	1383.7	1389.0	1396.2	1401.3	1399.0	1394.8	1389.0	1391.8	1402.7
G21.0	1340.5	1334.9	1342.2	1352.6	1357.7	1353.5	1348.9	1341.0	1346.1	1356.8
G22.0	1294.3	1291.1	1299.9	1311.3	1313.8	1312.2	1304.1	1297.8	1300.2	1309.2
G23.0	1253.1	1250.0	1258.4	1269.3	1274.2	1270.7	1262.8	1254.2	1258.2	1264.7
G24.0	1212.9	1207.3	1213.4	1225.7	1229.9	1227.1	1217.8	1212.5	1216.9	1222.9
G25.0	1172.6	1166.3	1172.3	1182.1	1188.3	1182.3	1175.3	1169.1	1176.3	1181.1
G26.0	1131.5	1127.8	1131.3	1141.2	1146.6	1140.8	1132.4	1127.3	1133.1	1139.1
G27.0	1093.2	1087.2	1090.7	1100.9	1105.0	1099.5	1089.7	1084.8	1091.8	1095.8
G28.0	1054.0	1048.9	1049.6	1058.9	1061.7	1056.8	1047.7	1045.4	1050.8	1055.8
G29.0	1017.1	1011.1	1011.1	1016.9	1021.5	1014.3	1007.8	1006.7	1013.4	1016.2
G30.0	980.2	975.1	969.5	974.9	977.4	974.4	967.2	970.5	975.6	979.5
G31.0	945.4	937.5	930.1	935.9	938.2	933.8	928.0	932.7	939.6	941.0
G32.0	911.3	903.2	898.1	900.6	903.7	900.6	894.4	899.7	904.8	905.3
G33.0	880.2	874.2	868.9	872.6	876.3	870.9	866.8	870.9	873.7	873.5
G34.0	853.5	849.1	845.7	849.6	852.6	847.7	841.5	845.7	846.8	845.2
G35.0	831.0	828.7	825.9	830.3	833.6	828.7	823.4	825.7	823.6	822.2
G36.0	810.4	812.0	810.4	815.0	818.3	814.1	808.8	808.8	804.1	802.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	794.4	798.1	797.9	803.0	806.0	801.6	797.2	795.8	789.3	787.2
G38.0	780.9	786.5	787.2	790.9	793.7	790.2	787.4	785.6	776.8	774.2
G39.0	769.6	775.6	776.3	780.5	783.5	780.5	778.6	776.8	766.5	762.1
G40.0	760.5	766.1	767.2	771.0	773.5	772.1	770.3	768.4	758.9	752.6
G41.0	751.5	756.6	758.7	761.2	764.2	763.8	763.3	759.3	751.7	743.6
G42.0	744.0	748.9	750.3	753.1	756.1	756.6	756.3	752.6	745.7	734.5
G43.0	737.1	741.3	743.8	747.0	748.9	749.8	750.1	746.1	740.6	725.3
G44.0	731.7	735.7	738.7	742.0	743.1	744.7	745.0	740.8	735.9	716.7
G45.0	726.6	731.3	735.2	737.5	739.2	741.3	741.5	736.6	730.8	707.6
G46.0	722.9	727.6	732.4	735.0	736.6	738.5	738.7	733.4	726.2	699.7
G47.0	717.6	725.5	731.7	734.5	735.7	738.0	738.0	730.6	721.3	692.1
G48.0	713.4	724.5	732.4	736.2	738.0	739.6	737.5	728.7	716.4	683.0
G49.0	709.9	724.8	734.3	739.6	742.0	743.6	739.2	728.0	711.8	674.9
G50.0	705.8	725.5	737.8	745.0	747.8	747.5	742.0	728.0	706.9	666.1
G51.0	702.0	726.4	741.7	752.4	755.4	753.8	744.3	728.3	702.0	657.0
G52.0	698.3	727.8	747.8	760.5	764.9	760.5	748.2	727.3	696.5	648.7
G53.0	694.8	728.7	751.0	765.8	770.5	765.2	749.6	725.5	689.5	638.9
G54.0	689.3	725.7	750.1	768.9	774.0	766.5	747.0	721.3	681.6	628.5
G55.0	679.8	722.0	752.4	775.1	781.6	771.4	746.4	714.8	671.0	618.5
G56.0	673.3	722.0	757.3	784.4	792.1	779.5	748.9	711.3	661.7	607.8
G57.0	670.0	724.3	762.4	792.5	800.4	785.6	752.4	709.7	655.2	598.8
G58.0	666.8	725.0	766.5	796.9	805.3	790.0	753.5	708.1	649.8	592.1
G59.0	663.8	723.6	766.5	799.0	807.6	791.1	754.0	704.6	643.6	586.3
G60.0	658.2	719.9	764.2	796.5	805.3	788.1	750.3	701.1	637.1	579.8
G61.0	651.0	712.0	756.3	789.7	800.2	782.5	743.8	693.9	629.2	573.0
G62.0	642.7	700.7	746.1	780.0	790.2	772.3	734.1	683.3	620.6	566.1
G63.0	631.3	688.4	733.6	767.0	777.5	759.6	721.5	671.0	609.2	557.7
G64.0	618.8	674.9	719.2	752.6	764.9	745.9	707.2	657.3	597.4	549.2
G65.0	604.6	660.8	703.9	738.9	751.2	730.6	691.1	644.0	583.5	539.9
G66.0	589.5	644.0	687.0	723.4	737.1	714.6	674.9	627.1	570.0	530.4
G67.0	575.1	626.4	667.7	707.8	721.8	698.8	655.4	608.5	555.9	519.5
G68.0	558.4	605.1	645.9	687.2	702.0	678.4	633.4	588.1	540.8	506.5
G69.0	540.1	581.2	620.4	660.8	675.6	649.4	607.8	564.7	524.1	490.7
G70.0	512.3	548.0	575.8	608.5	625.5	597.0	564.2	534.1	498.8	471.7
G71.0	481.9	498.8	510.0	535.0	545.9	526.0	503.5	488.4	468.4	442.7
G72.0	443.1	442.4	453.8	465.4	471.4	458.0	449.4	434.5	432.5	412.7
G73.0	394.6	400.0	415.1	419.0	421.5	416.5	407.4	392.3	388.4	379.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	351.7	362.9	373.5	381.0	382.3	377.2	365.9	355.0	343.8	343.8
G75.0	313.7	326.4	334.8	340.1	343.6	340.1	327.8	318.8	308.1	311.4
G76.0	282.8	290.9	297.7	302.1	304.9	301.4	294.9	286.8	279.8	286.3
G77.0	257.3	256.1	261.2	265.0	269.1	265.6	259.1	254.5	259.4	269.4
G78.0	235.7	225.7	231.3	235.3	239.4	233.9	228.8	224.8	244.5	260.3
G79.0	219.9	197.0	199.3	206.5	211.6	204.9	198.6	200.0	232.9	258.7
G80.0	201.6	170.5	174.2	180.5	187.0	176.8	172.8	175.9	216.7	252.0
G81.0	182.4	150.8	144.5	152.7	159.9	151.0	142.9	156.4	195.8	232.0
G82.0	162.4	128.8	109.5	113.4	125.3	111.6	110.7	135.9	173.3	207.2
G83.0	139.4	99.1	75.9	77.7	86.3	77.3	79.6	109.3	151.0	174.2
G84.0	111.6	76.1	55.5	53.4	62.0	50.3	60.1	82.6	122.0	129.9
G85.0	76.3	56.4	40.8	35.5	43.4	32.7	45.7	60.3	84.7	96.8
G86.0	52.0	38.7	28.8	20.2	28.1	21.6	31.8	41.8	57.8	69.4
G87.0	31.8	23.9	16.7	12.8	16.2	13.7	19.7	26.2	32.7	37.1
G88.0	14.1	11.4	8.6	7.4	8.4	8.4	8.8	11.6	13.5	15.5
G89.0	2.5	2.5	2.3	2.1	1.9	2.1	2.3	2.1	2.5	2.3
G90.0	2.5	2.1	1.9	2.3	2.1	2.8	2.3	2.3	2.1	2.5
G91.0	2.3	2.1	2.5	3.3	2.5	2.8	2.3	2.1	2.1	2.8
G92.0	2.5	2.1	2.5	2.8	2.5	1.9	2.3	2.1	2.3	3.0
G93.0	2.5	2.3	1.9	1.9	2.1	1.9	2.1	2.3	2.3	3.0
G94.0	2.5	2.3	2.8	1.9	2.1	2.5	2.1	2.3	3.3	3.7
G95.0	2.5	2.3	2.8	2.8	2.1	2.5	2.3	2.5	3.3	3.9
G96.0	3.0	2.8	2.8	2.1	2.3	2.3	2.3	2.5	2.8	3.7
G97.0	2.8	3.0	3.0	3.0	2.3	2.8	2.3	2.8	3.0	4.4
G98.0	3.0	3.0	2.5	2.3	2.5	3.0	2.5	3.0	3.3	4.2
G99.0	3.0	3.3	2.5	2.5	2.5	2.5	2.8	3.3	3.5	4.9
G100.0	3.3	3.3	3.3	2.5	3.3	2.8	2.8	3.3	3.7	4.9
G101.0	3.3	3.0	3.5	3.5	2.8	3.3	3.0	3.5	3.9	5.3
G102.0	3.7	3.0	3.5	3.7	3.5	3.3	3.7	3.7	4.9	5.3
G103.0	3.9	3.7	3.3	3.7	3.7	3.7	3.7	3.9	4.4	5.8
G104.0	3.9	3.9	3.9	3.3	3.7	3.9	3.5	4.2	4.6	6.3
G105.0	4.4	3.7	4.2	3.5	3.5	3.7	3.9	4.4	4.9	6.5
G106.0	4.6	4.4	3.7	4.4	4.2	4.2	4.2	4.9	6.0	7.0
G107.0	4.6	4.2	3.9	3.9	3.9	4.2	4.4	4.9	6.0	7.2
G108.0	4.9	4.4	4.6	4.6	4.6	4.6	4.6	5.3	6.0	7.4
G109.0	5.3	5.1	4.4	4.9	5.1	4.6	4.9	5.6	6.7	7.9
G110.0	5.8	4.9	5.3	4.6	5.1	5.1	5.6	6.0	6.7	8.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	6.0	5.8	5.6	5.6	4.9	5.6	6.0	6.5	7.4	8.6
G112.0	6.5	5.6	5.3	5.1	5.8	5.8	5.8	7.0	7.7	9.1
G113.0	6.7	5.8	5.6	5.3	6.0	6.0	6.0	6.7	7.7	9.1
G114.0	7.2	6.3	6.5	6.3	6.5	6.3	6.7	7.2	8.1	9.7
G115.0	7.7	6.7	6.7	6.7	6.3	6.7	6.7	7.4	8.6	10.2
G116.0	8.1	7.0	6.7	7.2	6.5	7.0	7.7	8.4	9.3	10.2
G117.0	8.6	7.9	7.0	6.7	7.4	7.4	7.7	8.4	9.7	10.9
G118.0	9.1	8.4	7.9	7.2	7.7	7.7	8.4	9.1	9.7	10.9
G119.0	9.3	8.4	8.4	7.7	8.1	8.1	8.4	9.1	10.0	11.1
G120.0	10.0	8.8	8.4	8.6	8.6	8.6	8.6	9.3	10.4	11.4
G121.0	10.4	9.1	8.8	9.1	9.1	9.1	9.5	9.7	10.7	12.3
G122.0	10.9	10.2	9.5	8.8	8.8	9.3	9.5	10.0	11.1	12.3
G123.0	11.4	10.2	9.5	9.3	9.3	9.5	10.0	10.9	11.6	13.0
G124.0	11.8	10.7	10.4	10.2	10.2	10.0	10.2	10.9	11.8	12.8
G125.0	12.3	10.9	10.4	10.2	10.7	10.4	11.1	11.1	12.3	13.0
G126.0	12.8	11.6	10.9	10.7	11.1	10.9	11.6	11.6	12.8	13.5
G127.0	13.2	12.1	11.4	11.1	10.9	11.1	12.1	11.8	13.0	13.7
G128.0	13.7	13.0	11.8	11.6	11.4	11.6	11.8	13.0	13.2	13.9
G129.0	14.1	13.0	12.3	12.1	11.8	12.1	12.1	12.5	13.7	14.4
G130.0	14.6	13.5	12.8	13.0	12.8	12.5	12.5	13.0	13.9	14.6
G131.0	15.3	14.4	13.5	13.5	13.2	13.0	13.0	13.5	14.4	14.9
G132.0	15.5	14.4	14.1	13.9	13.7	13.7	13.9	14.4	14.6	15.8
G133.0	16.0	15.3	14.1	13.9	13.7	14.1	13.7	14.9	15.1	16.0
G134.0	16.5	15.3	14.9	14.4	13.9	14.6	14.1	14.4	15.3	15.8
G135.0	16.9	15.8	15.3	15.1	14.4	14.9	15.1	15.5	15.8	16.0
G136.0	17.4	16.2	16.0	15.5	15.1	15.3	14.9	15.3	16.0	16.9
G137.0	17.9	17.2	16.2	15.8	15.5	15.5	15.3	16.2	16.2	16.5
G138.0	18.3	17.2	16.7	16.2	16.0	16.2	15.8	15.8	16.5	17.4
G139.0	18.6	17.6	17.2	16.9	16.9	16.2	16.2	16.9	16.9	16.9
G140.0	19.0	18.6	17.4	17.2	16.7	16.7	16.5	17.4	16.9	17.2
G141.0	19.5	18.6	18.3	17.9	17.6	17.4	17.4	16.9	17.4	17.9
G142.0	19.7	19.0	18.3	18.3	18.1	17.9	17.9	17.9	17.9	18.1
G143.0	20.4	19.3	18.8	18.6	18.6	18.3	17.6	18.1	18.1	18.3
G144.0	20.4	19.5	19.5	19.0	18.8	18.6	17.9	17.9	18.1	18.6
G145.0	20.9	20.4	19.5	19.5	19.3	19.0	18.8	18.8	18.6	18.6
G146.0	21.3	20.9	20.0	19.7	19.0	18.8	18.6	19.0	18.8	18.8
G147.0	21.6	21.1	20.2	20.0	19.3	19.5	19.3	19.0	18.8	18.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	21.6	21.3	20.6	20.2	19.7	20.0	19.0	19.3	19.0	18.6
G149.0	22.0	21.8	20.9	20.6	20.0	19.7	19.3	19.5	19.0	18.8
G150.0	22.0	21.6	21.6	20.9	20.6	20.0	19.5	19.7	19.5	19.5
G151.0	22.5	22.3	21.3	21.1	20.6	20.6	19.7	20.0	19.3	19.3
G152.0	22.7	22.0	21.6	21.3	21.1	20.2	20.4	19.7	19.5	19.3
G153.0	22.7	22.0	21.8	21.6	21.3	21.1	20.2	20.2	20.0	19.7
G154.0	23.0	23.0	22.0	21.8	21.1	21.1	20.2	20.4	19.7	19.5
G155.0	23.2	23.0	22.5	22.0	21.3	21.3	20.9	20.2	20.2	19.7
G156.0	23.2	23.2	22.3	22.3	21.6	21.6	20.6	20.2	20.4	20.0
G157.0	23.2	22.7	22.5	22.3	22.0	21.1	20.9	20.9	20.4	20.0
G158.0	23.2	23.4	23.0	22.5	22.0	21.3	21.6	21.1	20.6	20.2
G159.0	23.4	23.4	23.2	22.7	22.0	22.0	21.1	21.3	20.9	20.4
G160.0	23.4	23.7	23.2	22.5	22.5	22.3	21.3	21.3	20.6	20.6
G161.0	23.4	23.0	23.0	22.7	22.3	21.8	21.3	21.3	21.1	20.6
G162.0	23.7	23.7	23.0	23.0	22.5	22.0	21.6	21.6	20.9	20.9
G163.0	23.7	23.2	23.4	23.0	22.5	22.0	21.8	21.8	21.3	20.9
G164.0	23.4	23.9	23.7	23.2	23.0	22.3	22.5	21.8	21.1	21.1
G165.0	23.4	23.2	23.2	23.2	23.0	22.3	22.0	22.0	21.6	21.1
G166.0	23.4	23.9	23.2	23.4	23.2	22.5	22.0	22.0	21.3	21.3
G167.0	23.4	23.9	23.7	23.2	23.2	23.2	22.7	22.3	21.3	21.3
G168.0	23.4	23.2	23.7	23.4	23.2	22.7	23.0	22.3	21.8	21.3
G169.0	23.4	23.9	23.4	23.4	23.2	22.7	23.0	22.3	21.6	21.6
G170.0	23.2	23.9	23.4	23.7	23.2	23.4	22.5	22.3	21.6	21.6
G171.0	23.2	23.7	23.2	23.2	23.2	22.7	23.0	22.3	22.3	21.6
G172.0	23.0	23.7	23.4	23.0	23.2	23.4	23.0	22.3	22.0	21.6
G173.0	23.0	23.4	23.0	23.0	23.2	23.2	22.0	22.3	22.0	21.6
G174.0	22.7	22.5	23.2	22.7	23.0	22.5	22.0	22.0	21.6	21.6
G175.0	22.5	23.0	22.5	23.0	22.7	23.0	22.5	21.8	22.0	21.3
G176.0	22.3	22.3	22.5	22.7	22.5	22.7	21.8	21.8	21.6	21.3
G177.0	22.0	22.0	22.7	22.7	22.5	22.7	21.8	21.8	21.3	21.6
G178.0	21.8	22.5	22.0	22.3	22.3	22.0	22.3	22.0	21.8	21.6
G179.0	21.6	21.6	22.0	22.5	22.0	22.5	22.3	21.6	21.8	21.6
G180.0	21.8	22.0	21.6	21.8	21.8	21.6	21.3	21.6	21.3	21.3

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	3273.1	3274.1	3273.1	3274.5	3275.9	3278.2	3279.6	3280.3	3281.0	3284.7
G1.0	3233.2	3237.2	3238.1	3243.0	3247.4	3254.8	3258.5	3262.7	3268.7	3274.3
G2.0	3183.3	3191.2	3197.0	3206.5	3213.7	3225.3	3234.8	3244.1	3251.5	3263.6
G3.0	3127.6	3138.3	3150.6	3162.2	3175.7	3193.1	3207.7	3221.9	3237.2	3252.0
G4.0	3062.7	3077.5	3095.4	3114.2	3133.7	3156.9	3176.4	3195.9	3218.8	3237.6
G5.0	2994.5	3015.6	3034.6	3060.1	3086.4	3113.3	3142.0	3168.3	3196.8	3221.6
G6.0	2920.0	2946.2	2970.4	3002.1	3032.3	3068.7	3103.5	3136.9	3172.0	3204.2
G7.0	2850.2	2875.9	2907.0	2943.9	2978.2	3020.9	3063.2	3104.2	3145.1	3185.2
G8.0	2778.5	2807.7	2840.9	2882.0	2923.5	2973.8	3018.8	3069.0	3117.9	3166.6
G9.0	2707.7	2739.1	2778.7	2820.9	2871.1	2925.8	2979.2	3036.0	3091.9	3148.5
G10.0	2637.2	2669.9	2711.7	2761.6	2814.9	2876.2	2939.0	3002.4	3066.2	3130.0
G11.0	2563.4	2602.9	2644.6	2700.3	2758.5	2827.2	2897.5	2967.1	3038.3	3109.6
G12.0	2475.3	2526.1	2578.7	2635.8	2699.8	2772.7	2849.5	2927.0	3006.6	3084.7
G13.0	2366.4	2436.5	2502.2	2570.8	2636.0	2715.4	2798.4	2883.8	2972.9	3061.1
G14.0	2223.8	2323.1	2409.4	2490.3	2569.9	2651.8	2740.2	2836.5	2936.9	3036.7
G15.0	2057.4	2181.1	2295.0	2403.3	2494.1	2585.9	2681.7	2789.2	2903.3	3013.0
G16.0	1871.6	2008.7	2152.1	2294.3	2407.1	2513.8	2623.7	2739.1	2864.6	2988.0
G17.0	1703.4	1832.6	1991.3	2165.1	2307.8	2439.5	2562.3	2688.2	2824.2	2960.1
G18.0	1575.8	1672.3	1821.0	2013.8	2197.8	2356.9	2495.4	2634.9	2780.1	2927.0
G19.0	1486.4	1548.9	1663.2	1861.8	2067.9	2266.0	2427.7	2577.6	2733.5	2890.8
G20.0	1418.7	1456.3	1541.9	1712.4	1935.8	2163.7	2350.0	2516.1	2680.4	2848.8
G21.0	1366.5	1383.9	1440.1	1582.3	1794.8	2049.3	2263.4	2449.3	2627.4	2809.1
G22.0	1317.3	1329.4	1367.0	1472.8	1665.1	1920.8	2168.8	2379.2	2573.4	2768.7
G23.0	1271.2	1282.3	1308.0	1388.3	1544.4	1795.3	2071.8	2310.5	2526.5	2736.7
G24.0	1226.8	1236.8	1256.8	1315.9	1444.5	1678.6	1967.6	2242.1	2481.1	2707.5
G25.0	1184.4	1194.1	1210.4	1254.9	1362.8	1576.2	1871.6	2174.8	2439.8	2681.7
G26.0	1142.4	1152.6	1167.0	1199.7	1295.5	1488.8	1778.6	2105.9	2398.9	2659.5
G27.0	1100.6	1110.8	1124.3	1154.2	1235.4	1415.7	1696.2	2036.3	2359.7	2640.4
G28.0	1058.9	1068.4	1084.4	1112.5	1181.4	1351.2	1621.3	1968.8	2319.4	2624.0
G29.0	1019.9	1028.2	1045.6	1074.6	1134.5	1297.8	1558.6	1908.2	2279.9	2609.8
G30.0	980.9	988.8	1007.6	1036.8	1093.0	1248.9	1504.6	1850.5	2240.0	2596.4
G31.0	944.3	954.2	969.3	1000.6	1054.7	1204.3	1459.1	1804.1	2203.8	2585.5
G32.0	908.3	919.7	935.4	965.4	1020.8	1162.6	1418.5	1765.3	2172.5	2577.1
G33.0	877.4	888.8	900.9	933.1	990.4	1127.1	1382.8	1734.5	2148.8	2572.5
G34.0	849.8	858.4	868.9	903.2	962.8	1092.5	1349.8	1709.4	2132.4	2571.3
G35.0	826.6	829.4	839.2	877.2	937.1	1061.4	1323.1	1690.6	2127.0	2577.3
G36.0	804.1	803.0	813.2	849.4	911.3	1030.8	1298.1	1676.9	2130.7	2593.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	785.1	777.7	787.2	825.5	887.4	1002.0	1273.0	1665.6	2143.0	2616.6
G38.0	765.4	755.4	765.2	800.9	864.9	973.7	1247.7	1653.5	2158.8	2653.9
G39.0	747.8	734.8	742.4	777.0	841.3	948.4	1224.5	1644.2	2176.2	2697.1
G40.0	731.0	716.2	720.1	751.9	816.0	920.6	1200.6	1637.3	2200.6	2748.1
G41.0	717.8	700.4	699.7	727.6	785.8	889.7	1171.8	1631.7	2236.3	2820.3
G42.0	706.9	685.6	681.6	704.6	758.9	856.6	1138.7	1618.2	2270.4	2916.3
G43.0	695.3	669.8	663.1	684.0	733.6	824.1	1100.4	1592.3	2274.1	2953.2
G44.0	683.7	655.9	647.1	664.5	712.0	794.8	1066.1	1565.1	2255.1	2946.7
G45.0	673.7	643.1	630.6	644.7	688.6	766.8	1036.1	1548.4	2251.4	2965.0
G46.0	662.8	630.8	616.0	626.4	665.8	739.2	1008.3	1540.1	2257.9	2999.4
G47.0	651.7	619.7	602.5	608.8	644.3	711.8	982.3	1531.5	2267.1	3041.8
G48.0	642.2	608.3	589.1	593.2	623.6	684.9	955.6	1521.5	2274.6	3083.8
G49.0	631.8	598.8	577.7	579.1	603.7	659.8	929.9	1507.6	2280.8	3124.2
G50.0	622.2	589.3	568.2	566.6	583.7	634.5	901.8	1492.9	2284.3	3166.2
G51.0	613.2	579.8	558.2	554.7	564.7	607.8	875.3	1474.4	2286.2	3208.2
G52.0	603.2	572.4	550.8	543.8	548.7	581.4	849.8	1454.7	2286.6	3249.0
G53.0	592.8	564.5	544.8	533.6	530.8	556.1	823.8	1431.7	2285.9	3289.6
G54.0	584.4	555.9	538.0	522.2	513.0	531.5	799.0	1410.1	2282.0	3326.9
G55.0	575.4	547.8	531.5	510.9	496.5	510.4	773.0	1384.8	2275.3	3361.8
G56.0	568.2	540.6	524.8	499.7	479.3	491.4	745.4	1360.2	2266.2	3389.6
G57.0	560.8	535.0	515.3	487.2	463.5	475.1	720.4	1334.7	2250.9	3412.8
G58.0	553.8	529.7	505.5	474.0	449.2	460.8	696.0	1305.3	2231.4	3429.3
G59.0	549.4	524.3	500.4	462.9	434.8	447.5	672.3	1272.5	2202.6	3437.6
G60.0	545.4	519.0	493.9	453.6	423.2	436.6	651.9	1239.4	2166.5	3434.6
G61.0	541.5	517.4	488.4	447.3	413.2	426.7	635.2	1200.4	2120.8	3416.3
G62.0	537.1	516.4	486.0	440.1	406.0	418.8	626.6	1163.3	2065.5	3385.2
G63.0	532.9	515.8	485.1	432.7	400.4	413.0	623.6	1123.8	2005.7	3337.9
G64.0	528.7	515.5	484.0	427.4	392.3	409.3	622.9	1086.5	1943.7	3275.4
G65.0	523.2	513.7	481.2	422.5	384.4	407.2	622.2	1060.5	1871.1	3202.4
G66.0	515.5	510.2	474.9	416.7	376.5	405.8	621.3	1040.8	1789.0	3103.1
G67.0	506.2	501.6	466.1	409.3	371.0	403.0	619.0	1016.9	1696.4	2968.0
G68.0	494.6	490.7	454.0	400.0	365.4	398.8	614.8	981.6	1606.2	2802.9
G69.0	480.5	475.6	439.9	388.8	359.6	394.9	602.5	938.7	1515.0	2615.6
G70.0	461.7	457.5	423.9	376.3	352.6	391.2	582.8	891.4	1418.5	2406.8
G71.0	439.6	435.5	404.4	361.5	344.5	385.8	559.1	837.1	1304.6	2195.9
G72.0	413.2	410.4	383.7	345.2	335.0	376.8	529.2	777.9	1180.9	1971.1
G73.0	381.4	379.6	359.1	327.4	323.9	362.6	492.5	708.8	1047.3	1712.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	347.1	350.1	329.9	308.6	309.0	345.5	453.3	633.4	902.7	1391.1
G75.0	316.7	319.9	303.5	287.5	294.0	324.6	408.6	551.7	742.0	1032.9
G76.0	286.8	292.6	278.4	268.0	277.3	303.0	363.1	460.1	583.5	728.7
G77.0	261.9	266.8	255.9	246.9	259.6	276.5	311.6	369.1	444.8	525.5
G78.0	243.8	246.4	236.4	230.4	242.9	251.3	271.0	309.0	359.6	410.2
G79.0	227.6	224.6	217.9	214.4	223.6	233.4	244.1	266.6	303.0	339.0
G80.0	213.0	203.0	198.1	197.7	204.6	208.6	214.6	230.4	257.8	286.1
G81.0	192.8	180.3	176.6	178.4	184.0	181.7	187.2	195.8	214.6	235.3
G82.0	167.3	157.8	154.3	154.5	161.0	159.9	161.9	168.0	178.6	191.9
G83.0	139.4	135.3	133.9	134.6	142.0	141.5	138.3	138.3	141.8	149.6
G84.0	113.7	114.8	116.2	117.6	121.8	122.3	114.8	112.5	107.2	116.0
G85.0	89.3	88.6	94.2	96.1	100.2	100.2	91.9	87.9	84.9	88.2
G86.0	65.4	62.6	68.2	64.7	66.3	70.8	65.4	65.9	66.1	67.3
G87.0	40.6	39.7	43.6	40.4	42.7	45.9	45.5	42.0	46.2	46.9
G88.0	17.6	17.6	16.9	18.6	19.0	20.9	22.3	23.2	23.9	25.1
G89.0	3.3	4.4	5.6	7.0	8.4	9.5	10.7	11.4	11.8	12.5
G90.0	3.9	4.6	6.0	7.4	8.8	10.0	11.1	12.1	12.8	12.3
G91.0	4.2	4.9	6.3	7.9	9.3	10.4	11.6	12.8	13.2	13.5
G92.0	4.4	5.3	6.7	8.1	9.5	10.9	12.1	12.8	13.2	14.1
G93.0	4.6	5.6	7.0	8.6	10.0	11.4	12.5	13.7	14.1	13.9
G94.0	4.4	6.0	7.4	9.1	10.4	11.8	13.0	13.9	14.1	14.4
G95.0	4.6	6.3	7.7	9.3	11.1	12.3	13.5	14.4	14.9	15.5
G96.0	5.3	6.7	8.1	9.7	11.4	12.8	13.9	14.6	15.3	15.8
G97.0	5.1	7.0	8.4	10.2	11.8	13.2	14.4	15.5	16.0	15.8
G98.0	6.0	7.2	8.8	10.7	12.3	13.7	14.9	15.5	16.2	16.7
G99.0	5.8	7.7	9.1	10.9	12.5	13.9	15.1	16.2	16.7	17.2
G100.0	6.3	8.1	9.7	11.4	13.0	14.4	15.5	16.5	16.9	17.4
G101.0	6.7	8.4	9.7	11.6	13.2	14.6	15.8	16.7	16.9	17.6
G102.0	7.2	8.6	10.2	12.1	13.5	14.9	16.0	16.7	17.2	17.2
G103.0	7.4	9.1	10.2	12.3	13.9	15.1	16.2	16.9	17.4	17.4
G104.0	7.4	9.5	10.7	12.5	14.1	15.5	16.5	16.9	17.6	17.9
G105.0	7.9	9.7	11.1	12.8	14.4	15.5	16.7	17.2	17.6	17.4
G106.0	8.6	9.7	11.8	13.2	14.9	16.0	16.7	17.4	17.6	18.1
G107.0	8.6	10.0	12.1	13.5	14.9	16.0	16.9	17.6	17.9	17.6
G108.0	8.8	10.4	11.8	13.7	15.1	16.2	16.9	17.6	17.9	17.6
G109.0	9.5	10.7	12.3	13.9	15.5	16.5	17.2	17.9	18.1	17.6
G110.0	9.7	11.4	12.5	14.1	15.5	16.5	17.6	17.9	18.1	18.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	10.0	11.4	12.8	14.6	16.0	16.7	17.4	17.9	18.1	18.3
G112.0	10.4	12.1	13.5	14.9	16.0	17.2	17.4	17.9	18.1	17.9
G113.0	10.7	12.5	13.9	15.1	16.2	16.9	17.6	17.9	18.1	17.9
G114.0	11.1	12.3	13.7	15.3	16.5	17.4	17.6	17.9	18.1	18.3
G115.0	11.4	12.8	14.4	15.5	16.7	17.2	17.6	17.9	17.9	18.3
G116.0	11.8	13.5	14.9	16.0	16.9	17.6	18.1	18.1	18.1	17.9
G117.0	12.1	13.7	15.1	16.2	17.2	17.6	18.3	18.1	18.3	17.9
G118.0	12.5	13.7	15.5	16.5	17.2	17.9	17.9	18.1	18.1	17.9
G119.0	12.8	13.9	15.8	16.7	17.6	17.9	18.1	18.3	18.1	18.1
G120.0	13.2	14.9	16.0	17.2	17.9	18.6	18.6	18.3	18.1	18.1
G121.0	13.5	15.1	16.0	17.2	17.9	18.8	18.3	18.3	18.6	18.1
G122.0	13.7	15.3	16.7	17.4	18.3	18.3	18.6	18.6	18.6	18.3
G123.0	13.9	15.8	16.9	17.9	18.3	19.0	18.8	18.6	18.3	18.8
G124.0	14.4	15.3	16.7	17.9	18.3	19.0	18.6	18.6	18.8	18.3
G125.0	14.6	15.5	16.7	18.1	18.6	18.6	19.0	18.8	18.6	18.6
G126.0	14.9	16.2	17.6	18.1	18.8	18.6	19.0	18.6	18.3	18.6
G127.0	15.1	16.2	17.2	18.1	18.8	18.6	19.0	18.8	18.3	19.0
G128.0	15.5	16.9	17.4	18.1	19.0	18.8	18.8	18.8	19.0	18.8
G129.0	15.8	16.9	17.9	18.6	19.0	19.5	18.8	19.0	18.6	19.0
G130.0	15.8	16.7	17.6	18.6	19.3	19.0	19.0	19.0	18.8	19.5
G131.0	16.2	17.4	17.6	18.8	19.3	19.0	19.0	19.3	19.0	19.7
G132.0	16.5	16.9	18.3	18.6	19.0	19.7	19.7	19.5	19.7	19.7
G133.0	16.7	17.2	18.1	18.8	19.3	19.3	19.3	19.5	20.0	20.4
G134.0	16.7	17.9	18.6	19.0	19.5	20.0	19.5	20.0	20.2	20.2
G135.0	16.9	17.4	18.1	19.0	19.3	19.3	20.2	20.0	20.4	20.9
G136.0	17.2	18.3	18.3	18.8	19.3	19.5	20.2	20.2	20.9	21.3
G137.0	17.6	17.9	18.8	19.3	19.5	19.5	20.0	20.6	21.1	21.1
G138.0	17.6	18.6	18.6	19.5	19.5	19.7	20.4	20.4	20.9	21.6
G139.0	17.9	17.9	19.0	19.0	19.5	20.4	20.2	20.9	21.6	21.8
G140.0	18.1	18.8	18.8	19.5	20.0	19.7	20.4	20.6	21.3	21.8
G141.0	18.1	18.8	18.8	19.3	20.2	20.4	20.9	21.3	21.8	22.3
G142.0	18.3	18.3	19.3	19.3	20.2	20.6	20.9	21.3	21.8	22.3
G143.0	18.6	18.3	19.0	19.3	20.0	20.6	20.4	21.3	21.6	22.3
G144.0	18.6	19.3	19.5	19.7	20.2	20.6	20.6	21.6	22.0	22.3
G145.0	18.6	19.3	19.5	19.5	19.7	20.0	20.6	21.1	22.0	22.5
G146.0	18.8	19.5	19.0	19.5	20.0	20.2	20.6	21.1	21.8	22.5
G147.0	19.0	18.8	19.5	20.0	20.0	20.2	20.6	21.1	22.0	22.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	19.0	19.5	19.3	19.5	20.2	20.9	20.9	21.1	21.8	22.0
G149.0	19.3	19.0	19.3	19.7	20.0	20.9	21.1	21.8	21.8	22.5
G150.0	19.0	19.0	19.3	20.0	20.0	20.2	21.1	21.1	21.8	22.5
G151.0	19.5	19.0	20.0	20.2	20.0	20.2	20.9	21.6	21.8	22.0
G152.0	19.5	20.0	19.5	20.0	20.4	20.2	20.9	21.1	21.8	22.3
G153.0	19.7	19.3	20.0	20.2	20.2	20.2	20.6	21.1	21.6	21.8
G154.0	19.7	20.0	19.7	20.2	20.4	20.2	20.9	21.1	21.3	21.8
G155.0	19.7	20.2	19.7	20.4	20.4	20.9	21.1	20.9	21.3	22.0
G156.0	19.7	19.7	19.7	20.2	20.2	20.9	21.1	21.6	21.3	22.0
G157.0	20.2	19.7	20.4	20.4	20.6	21.1	21.1	21.3	21.6	21.8
G158.0	20.0	19.7	20.0	20.6	20.4	20.9	21.1	21.6	21.6	21.8
G159.0	20.4	20.4	20.4	20.2	20.2	20.4	21.1	20.9	21.6	21.8
G160.0	20.4	20.6	20.4	20.2	20.4	21.1	21.1	20.9	21.6	21.6
G161.0	20.4	20.2	20.4	20.6	20.4	20.4	20.9	20.9	21.6	21.3
G162.0	20.6	20.9	20.2	20.2	20.4	21.1	20.9	20.9	21.3	21.1
G163.0	20.9	20.9	20.9	20.9	20.4	20.9	20.9	20.9	20.9	21.1
G164.0	20.9	21.1	20.9	20.9	20.9	21.1	20.9	21.1	21.3	21.1
G165.0	20.9	20.6	20.9	20.4	20.6	20.6	20.9	20.6	21.3	20.9
G166.0	21.1	21.1	20.6	21.1	21.1	20.6	20.9	21.1	20.6	20.9
G167.0	21.1	20.9	21.1	21.1	20.6	20.9	20.9	20.6	21.3	21.3
G168.0	21.1	20.9	20.9	20.6	21.1	20.6	20.9	21.1	20.6	21.3
G169.0	21.3	20.9	21.1	21.1	20.6	20.9	20.9	21.1	20.6	21.1
G170.0	21.6	21.3	21.1	20.6	20.6	21.1	20.9	21.1	20.6	20.9
G171.0	21.6	21.6	21.1	20.6	21.1	20.6	20.9	21.1	21.3	21.1
G172.0	21.6	21.6	21.1	21.1	20.6	20.6	20.9	21.1	20.6	20.6
G173.0	21.6	21.6	20.9	20.6	20.6	20.9	20.9	20.6	21.1	20.9
G174.0	21.6	21.6	21.1	20.6	21.1	20.9	20.6	21.1	20.4	20.6
G175.0	21.1	21.1	21.1	20.6	20.6	20.9	20.6	21.1	21.1	20.6
G176.0	21.1	21.1	21.1	20.6	20.6	20.6	20.6	20.6	20.6	20.6
G177.0	21.1	21.3	21.1	21.1	21.1	20.9	20.9	20.6	20.6	21.1
G178.0	21.3	21.1	21.1	21.1	21.1	20.6	20.4	20.4	20.6	20.6
G179.0	21.1	20.9	20.9	20.6	20.4	20.9	20.9	20.6	20.9	20.9
G180.0	21.3	21.1	20.9	20.6	20.4	20.4	20.4	20.6	20.6	20.9

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G0.0	3285.2	3286.6	3300.5							
G1.0	3278.2	3283.1	3299.3							
G2.0	3271.5	3280.3	3300.0							
G3.0	3265.5	3277.8	3301.0							
G4.0	3257.1	3273.6	3303.1							
G5.0	3246.4	3267.3	3300.3							
G6.0	3234.8	3261.3	3300.0							
G7.0	3223.2	3255.5	3298.9							
G8.0	3210.7	3251.1	3297.9							
G9.0	3201.2	3247.1	3299.1							
G10.0	3189.8	3243.7	3301.0							
G11.0	3177.8	3238.6	3304.9							
G12.0	3161.1	3232.3	3306.3							
G13.0	3145.5	3225.3	3306.1							
G14.0	3130.7	3219.3	3306.3							
G15.0	3117.2	3215.4	3310.0							
G16.0	3103.1	3210.9	3313.7							
G17.0	3086.4	3205.4	3319.1							
G18.0	3067.6	3194.9	3321.8							
G19.0	3042.0	3181.5	3320.7							
G20.0	3014.9	3167.6	3318.4							
G21.0	2986.1	3154.1	3313.9							
G22.0	2962.7	3144.4	3311.4							
G23.0	2943.0	3137.9	3314.9							
G24.0	2926.3	3134.1	3318.1							
G25.0	2913.1	3133.0	3323.9							
G26.0	2904.5	3136.9	3333.4							
G27.0	2900.5	3144.6	3346.4							
G28.0	2900.3	3156.9	3363.6							
G29.0	2903.5	3172.7	3385.2							
G30.0	2910.7	3191.7	3409.3							
G31.0	2921.9	3218.4	3437.6							
G32.0	2937.4	3248.8	3471.3							
G33.0	2957.1	3286.3	3511.6							
G34.0	2983.1	3332.5	3556.6							
G35.0	3015.6	3387.0	3611.4							
G36.0	3057.1	3446.9	3674.0							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	3102.1	3519.3	3744.3						
G38.0	3159.7	3597.7	3825.5						
G39.0	3224.4	3691.0	3914.8						
G40.0	3301.2	3789.1	4015.1						
G41.0	3402.1	3943.8	4120.4						
G42.0	3560.3	4187.0	4270.3						
G43.0	3619.7	4277.0	4534.5						
G44.0	3604.9	4262.2	4758.0						
G45.0	3628.8	4309.0	4747.7						
G46.0	3681.2	4390.9	4774.9						
G47.0	3743.2	4495.1	4859.1						
G48.0	3814.1	4606.9	4978.1						
G49.0	3887.0	4717.4	5110.6						
G50.0	3961.3	4836.1	5251.9						
G51.0	4042.2	4956.5	5396.2						
G52.0	4118.5	5075.6	5545.4						
G53.0	4198.6	5199.5	5699.0						
G54.0	4275.8	5325.4	5853.0						
G55.0	4357.3	5456.8	6013.1						
G56.0	4429.7	5578.5	6186.6						
G57.0	4502.0	5703.8	6345.1						
G58.0	4572.1	5826.3	6521.9						
G59.0	4634.8	5934.2	6687.8						
G60.0	4685.8	6037.7	6863.2						
G61.0	4726.2	6131.6	7022.1						
G62.0	4753.3	6209.8	7189.6						
G63.0	4766.3	6271.8	7331.3						
G64.0	4761.0	6309.1	7455.9						
G65.0	4729.4	6314.9	7559.9						
G66.0	4666.5	6282.5	7631.8						
G67.0	4553.3	6195.9	7656.9						
G68.0	4397.9	6042.8	7633.4						
G69.0	4182.6	5834.9	7547.8						
G70.0	3929.7	5540.7	7401.4						
G71.0	3620.9	5177.0	7187.0						
G72.0	3255.9	4712.5	6861.1						
G73.0	2824.9	4182.1	6426.3						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G74.0	2296.8	3481.2	5874.1							
G75.0	1714.1	2729.3	5198.5							
G76.0	1229.9	1919.4	4282.1							
G77.0	812.9	1284.6	3294.9							
G78.0	563.5	848.4	2280.6							
G79.0	420.2	572.1	1505.0							
G80.0	331.8	401.6	1026.2							
G81.0	265.9	297.7	694.6							
G82.0	215.3	227.6	500.0							
G83.0	167.3	161.2	357.5							
G84.0	121.6	115.1	256.4							
G85.0	85.6	97.2	187.2							
G86.0	64.5	74.9	142.0							
G87.0	44.1	48.5	106.9							
G88.0	23.9	24.1	78.2							
G89.0	12.1	11.6	49.2							
G90.0	12.8	12.1	26.0							
G91.0	13.0	13.2	10.7							
G92.0	13.7	13.0	11.1							
G93.0	14.1	13.5	11.4							
G94.0	14.6	14.6	11.8							
G95.0	15.1	15.3	12.1							
G96.0	15.5	14.9	12.8							
G97.0	15.8	15.5	13.5							
G98.0	16.5	16.5	13.7							
G99.0	16.7	16.5	14.1							
G100.0	17.2	17.4	14.9							
G101.0	17.4	17.2	15.1							
G102.0	17.6	17.4	15.5							
G103.0	18.1	17.4	15.8							
G104.0	17.6	18.3	16.2							
G105.0	17.6	18.6	16.5							
G106.0	18.3	18.6	16.7							
G107.0	17.9	18.8	16.7							
G108.0	17.9	18.8	16.7							
G109.0	17.9	18.3	16.7							
G110.0	17.9	19.0	17.4							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	18.1	18.6	16.9							
G112.0	18.1	18.8	17.2							
G113.0	18.1	19.5	17.6							
G114.0	18.1	18.8	17.9							
G115.0	18.8	19.5	17.4							
G116.0	18.1	18.8	18.1							
G117.0	18.8	19.5	17.9							
G118.0	19.0	19.0	17.4							
G119.0	18.3	19.0	18.1							
G120.0	19.3	20.0	17.4							
G121.0	18.6	19.5	17.4							
G122.0	18.6	19.5	18.3							
G123.0	19.5	20.2	17.6							
G124.0	19.0	20.4	17.6							
G125.0	19.0	20.4	18.3							
G126.0	19.7	20.0	17.9							
G127.0	19.7	20.2	17.9							
G128.0	19.7	20.9	18.6							
G129.0	20.0	20.6	18.3							
G130.0	20.2	20.9	18.1							
G131.0	20.0	21.6	18.1							
G132.0	20.9	21.6	18.3							
G133.0	21.1	22.3	18.3							
G134.0	21.6	22.0	18.6							
G135.0	21.3	22.7	19.0							
G136.0	22.0	22.7	19.3							
G137.0	22.0	23.2	19.5							
G138.0	22.3	23.2	20.0							
G139.0	22.7	23.7	20.4							
G140.0	22.7	23.7	20.6							
G141.0	23.0	23.7	21.1							
G142.0	22.7	23.7	21.6							
G143.0	23.0	23.7	21.6							
G144.0	23.0	23.7	21.8							
G145.0	23.0	23.7	22.3							
G146.0	23.0	23.7	22.5							
G147.0	23.0	23.4	22.5							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	23.0	23.4	22.7							
G149.0	22.7	23.4	22.7							
G150.0	22.7	23.2	22.3							
G151.0	22.5	23.0	22.7							
G152.0	22.5	22.7	22.3							
G153.0	22.5	22.7	22.0							
G154.0	22.3	22.7	22.5							
G155.0	22.3	22.5	22.3							
G156.0	22.3	22.5	21.8							
G157.0	22.0	22.5	21.6							
G158.0	22.0	21.8	22.0							
G159.0	21.6	21.8	22.0							
G160.0	21.8	21.8	21.3							
G161.0	21.8	21.8	21.1							
G162.0	21.3	21.6	21.6							
G163.0	21.6	21.3	21.3							
G164.0	21.1	21.3	20.6							
G165.0	21.1	21.6	21.1							
G166.0	21.1	21.1	20.6							
G167.0	20.9	21.1	20.6							
G168.0	21.3	21.3	20.2							
G169.0	20.9	20.9	20.6							
G170.0	21.1	21.3	20.6							
G171.0	21.3	20.9	20.2							
G172.0	20.6	20.9	20.2							
G173.0	21.1	20.9	20.4							
G174.0	20.6	21.3	20.2							
G175.0	20.6	21.1	20.4							
G176.0	21.1	20.9	20.4							
G177.0	20.6	20.9	20.4							
G178.0	20.9	21.1	20.4							
G179.0	21.1	21.3	20.4							
G180.0	21.1	21.3	20.6							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector: