

Report No.:

Test Time: 2019-06-06 15:47

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: EG-2 140w glas

Luminous Width (mm): 170

Voltage: 229.2 V

Power: 132.89 W

Luminous Length (mm): 400

Luminous Height (mm): 130

Current: 0.587 A

Power Factor: 0.986

Photometric Results

CIE Class: Direct

Measurement Flux: 20215.3 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(50%): H116.1

Vertical Diffuse Angle(50%): V113.8

Luminaire Efficacy Rating (LER): 152

Max. Intensity: 6930.67 cd

Total Rated Lamp Lumens: 20215.3 lm


Efficiency: 100%

Upward Ratio: 1%


Central Intensity: 6923.48 cd

Pos of Max. Intensity: H195 V3

Picture Of Luminaire



Luminous Intensity Distribution Curve

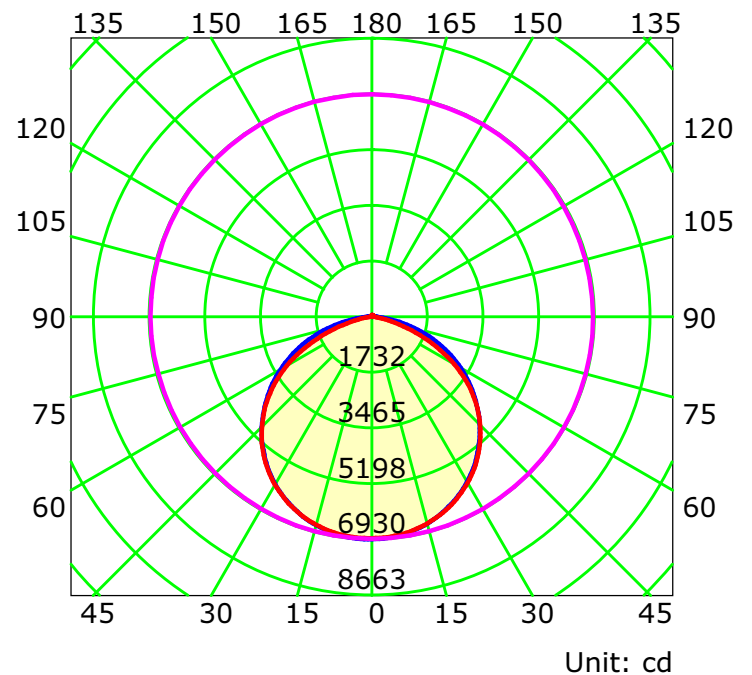

— C0-C180 — C90-C270 — G3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Luminous Intensity Distribution Curve

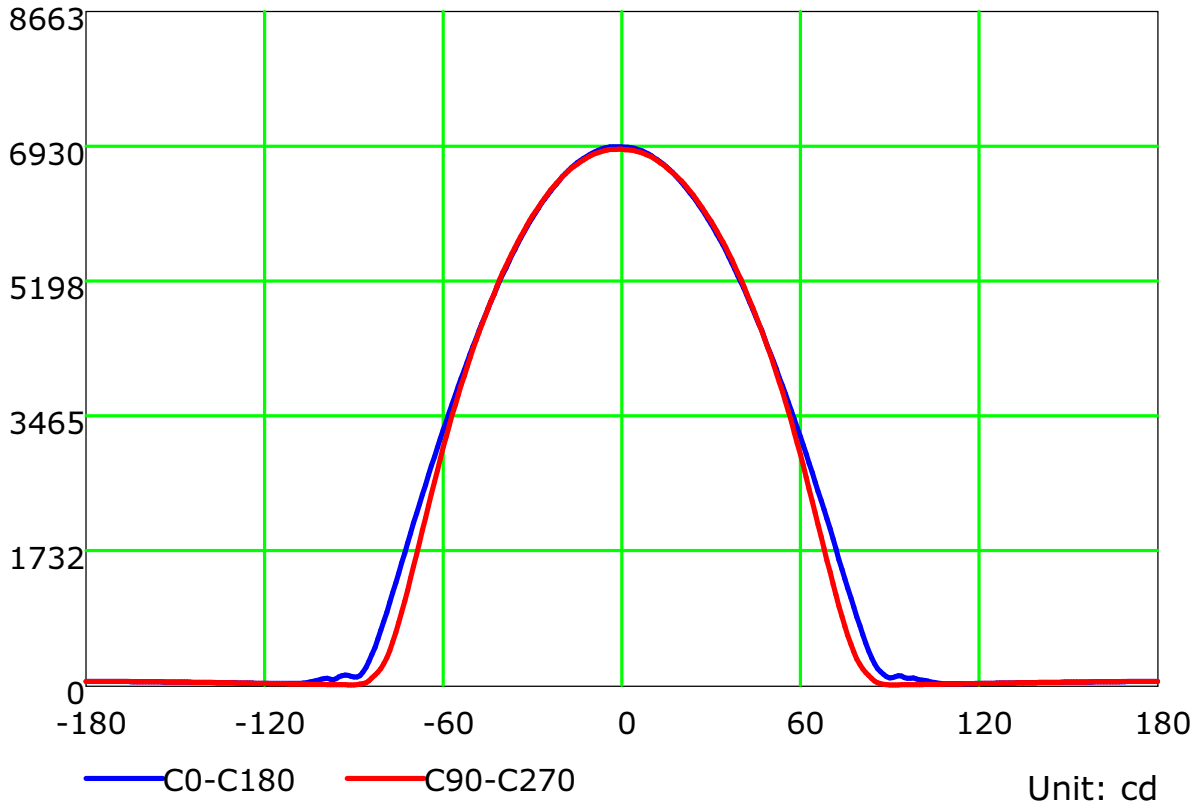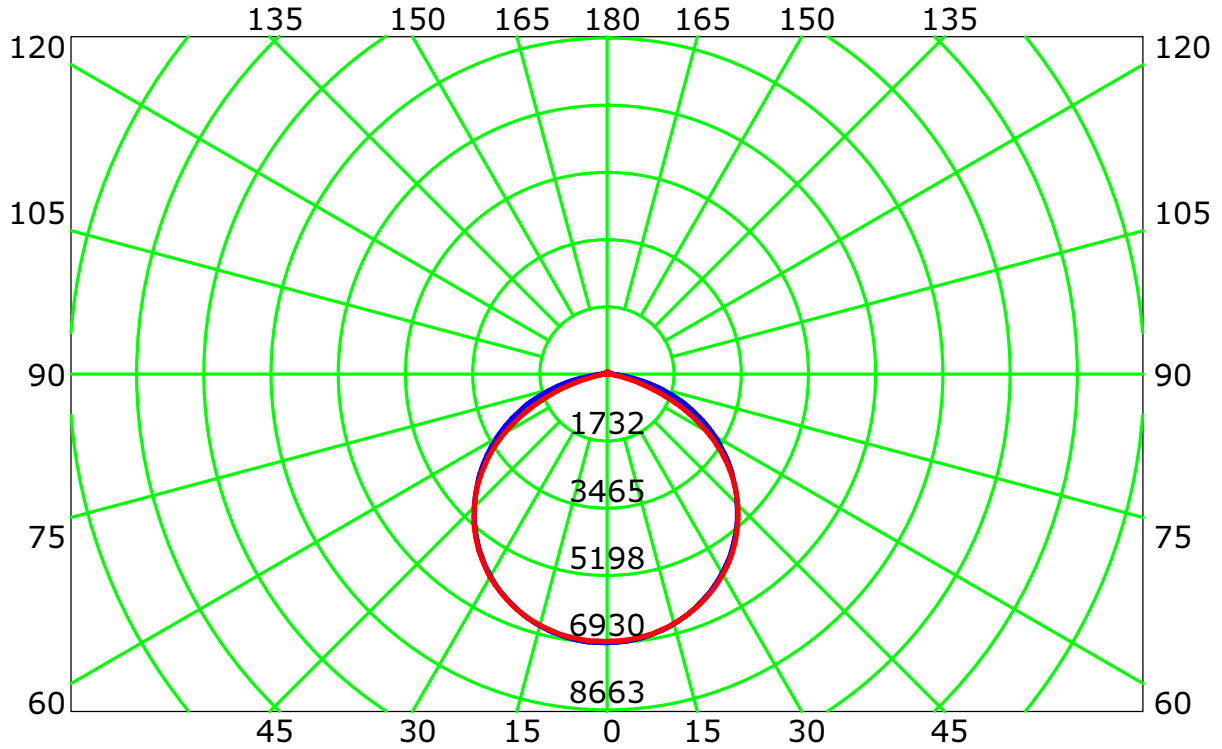

Unit: cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Luminous Intensity Distribution Curve(cd/klm)

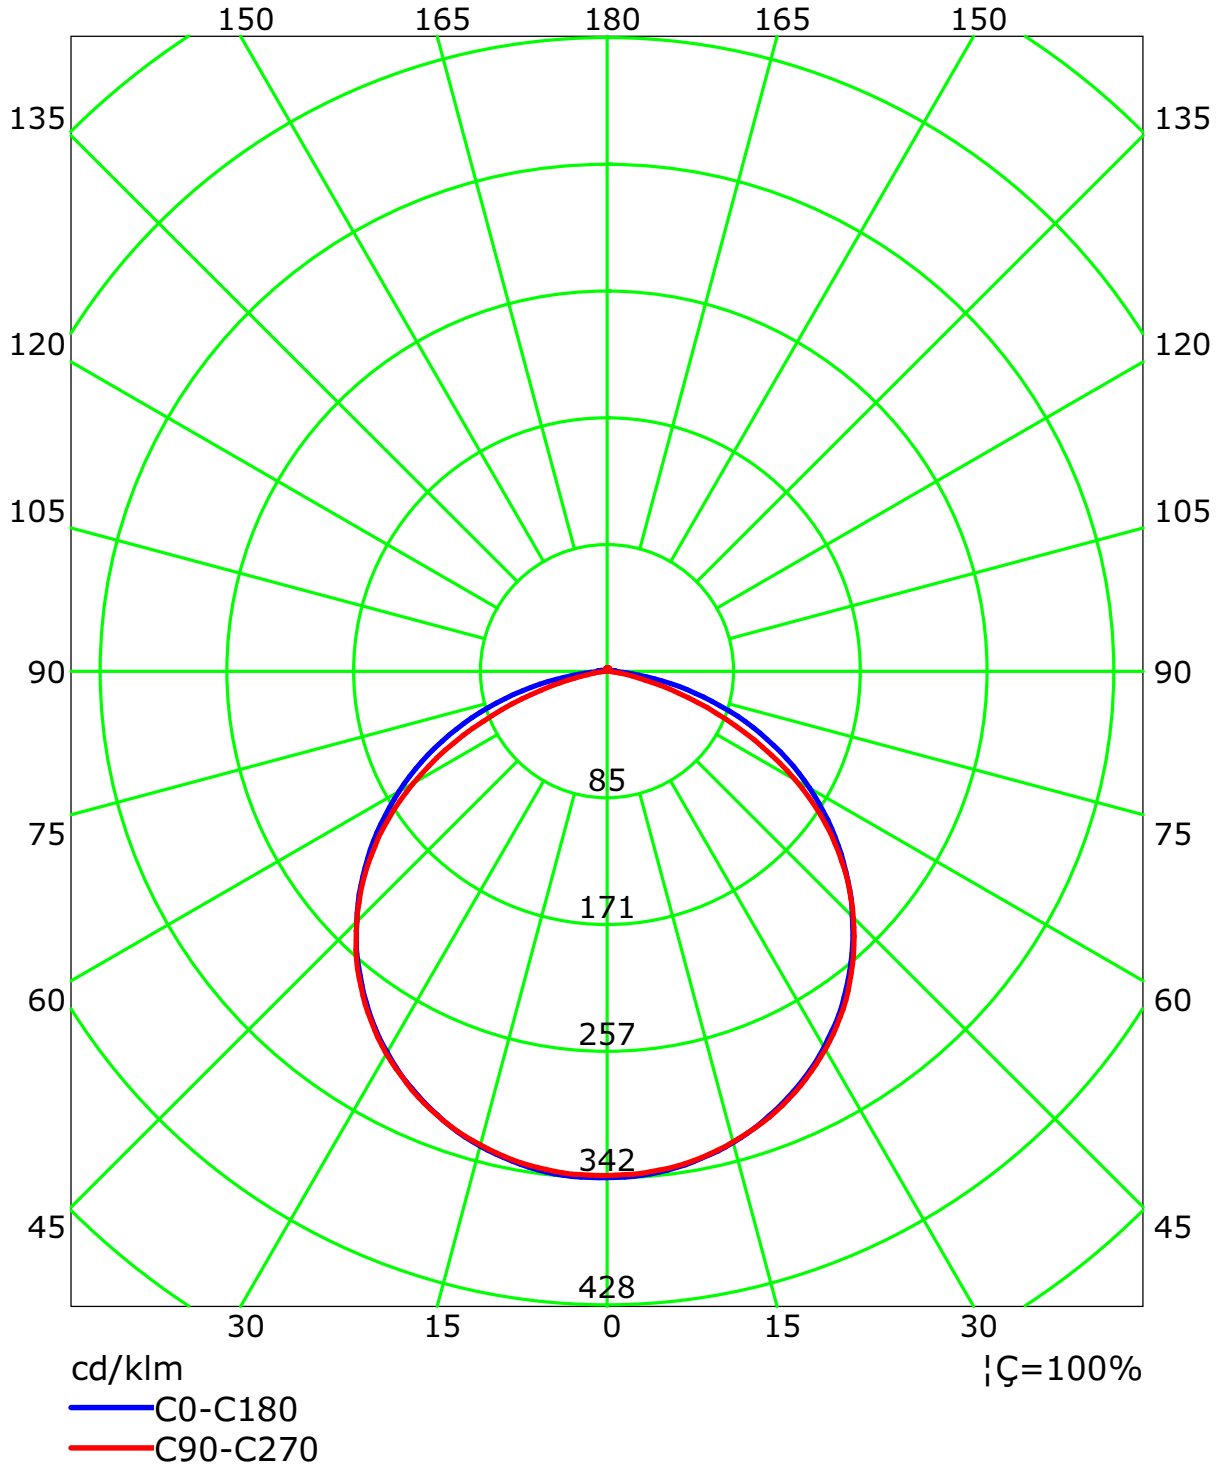

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40


Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	109	104	100	96	106	102	98	94	97	94	91	93	90	88	89	87	85	83
2	99	91	84	78	96	89	82	77	85	80	75	81	77	73	78	75	72	69
3	90	80	71	65	87	78	70	64	75	68	63	72	66	62	69	65	61	58
4	82	70	62	55	80	69	61	55	66	59	54	64	58	53	62	56	52	50
5	76	63	54	47	74	62	53	47	59	52	46	57	51	46	55	50	45	43
6	70	57	48	41	68	56	47	41	54	46	40	52	45	40	50	44	40	37
7	65	51	42	36	63	50	42	36	49	41	36	47	40	35	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	29
9	56	43	35	29	55	42	34	29	41	34	29	40	33	28	39	33	28	26
10	53	39	32	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24

Spacing Criteria (0-180): 1.28
 Spacing Criteria (90-270): 1.29
 Spacing Criteria (Diagonal): 1.40


Curves of Luminaires vs Lighting Area

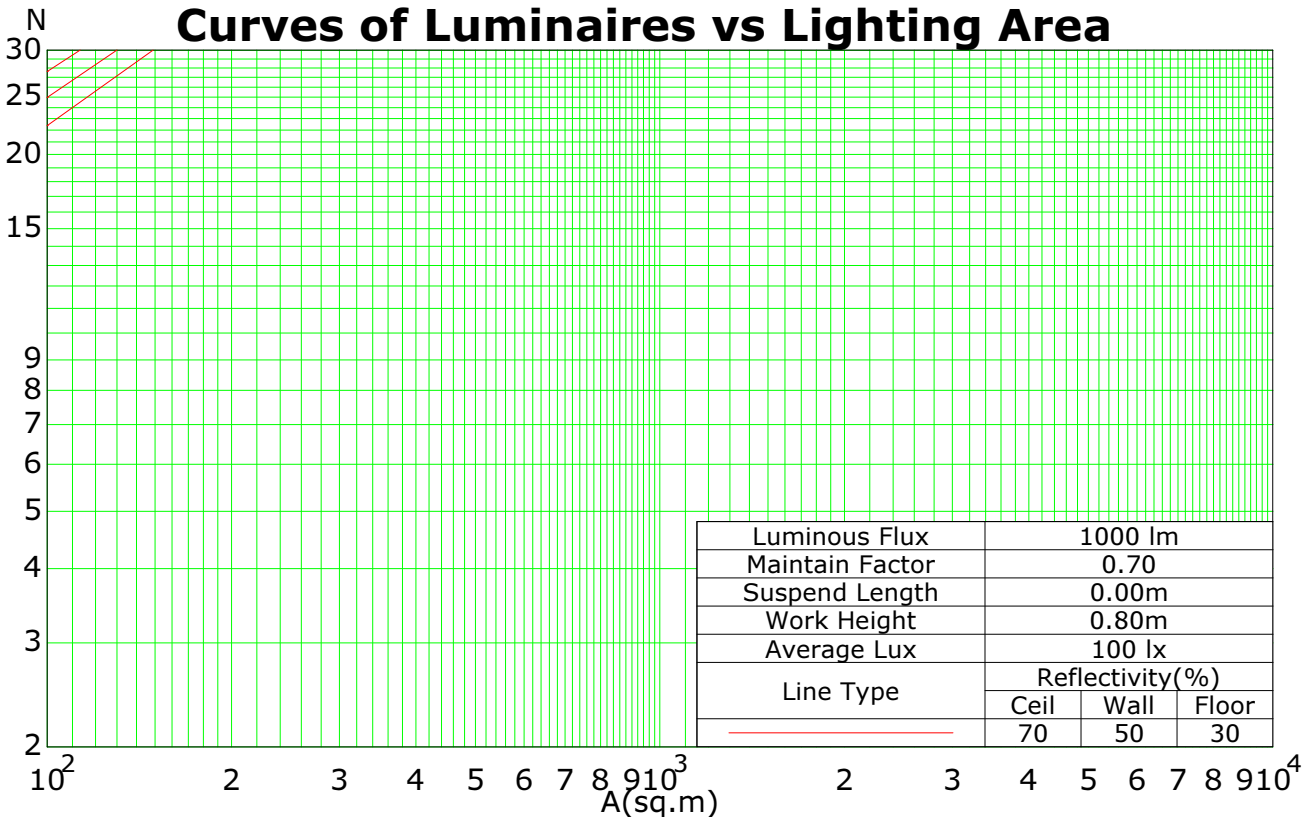

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

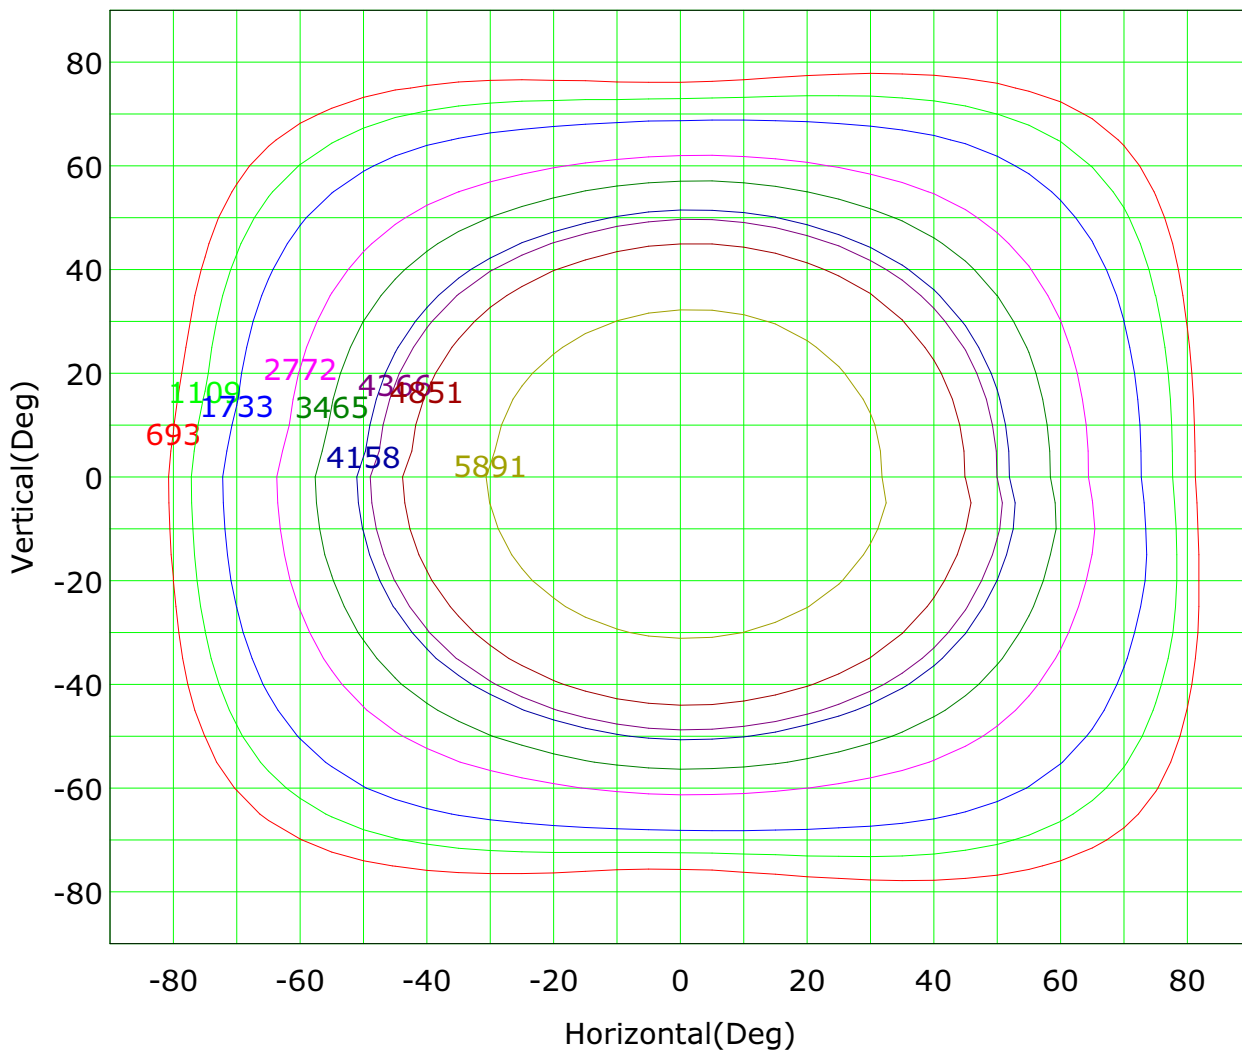


Imax (100%): 6931 cd

- | | |
|-------------------|-------------------|
| — (10%): 693 cd | — (16%): 1109 cd |
| — (25%): 1733 cd | — (40%): 2772 cd |
| — (63%): 4366 cd | — (100%): 6931 cd |
| — (50%): 3465 cd | — (60%): 4158 cd |
| — (70%): 4851 cd | — (85%): 5891 cd |

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Isocandela (sphere)

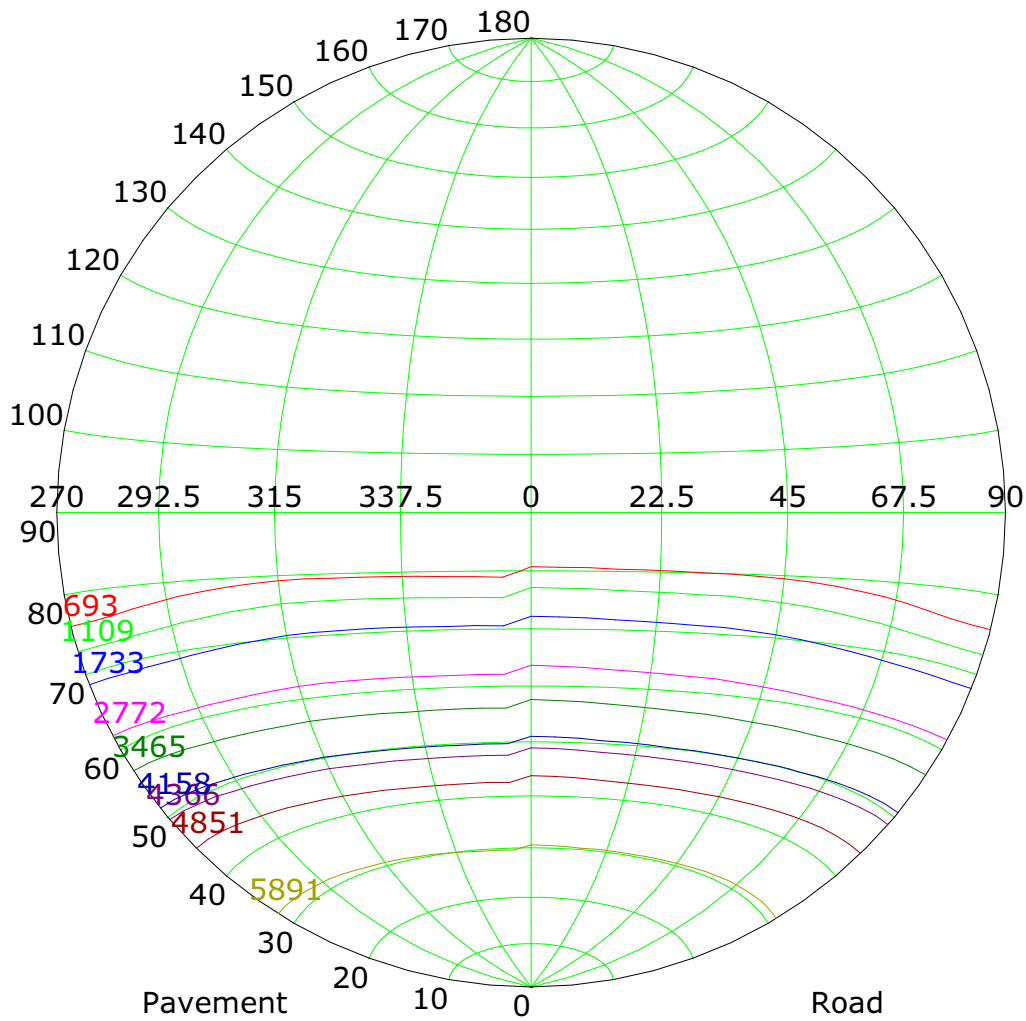

Imax (100%): 6931 cd

— (10%): 693 cd	— (16%): 1109 cd
— (25%): 1733 cd	— (40%): 2772 cd
— (63%): 4366 cd	— (100%): 6931 cd
— (50%): 3465 cd	— (60%): 4158 cd
— (70%): 4851 cd	— (85%): 5891 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

IsoLux Plot

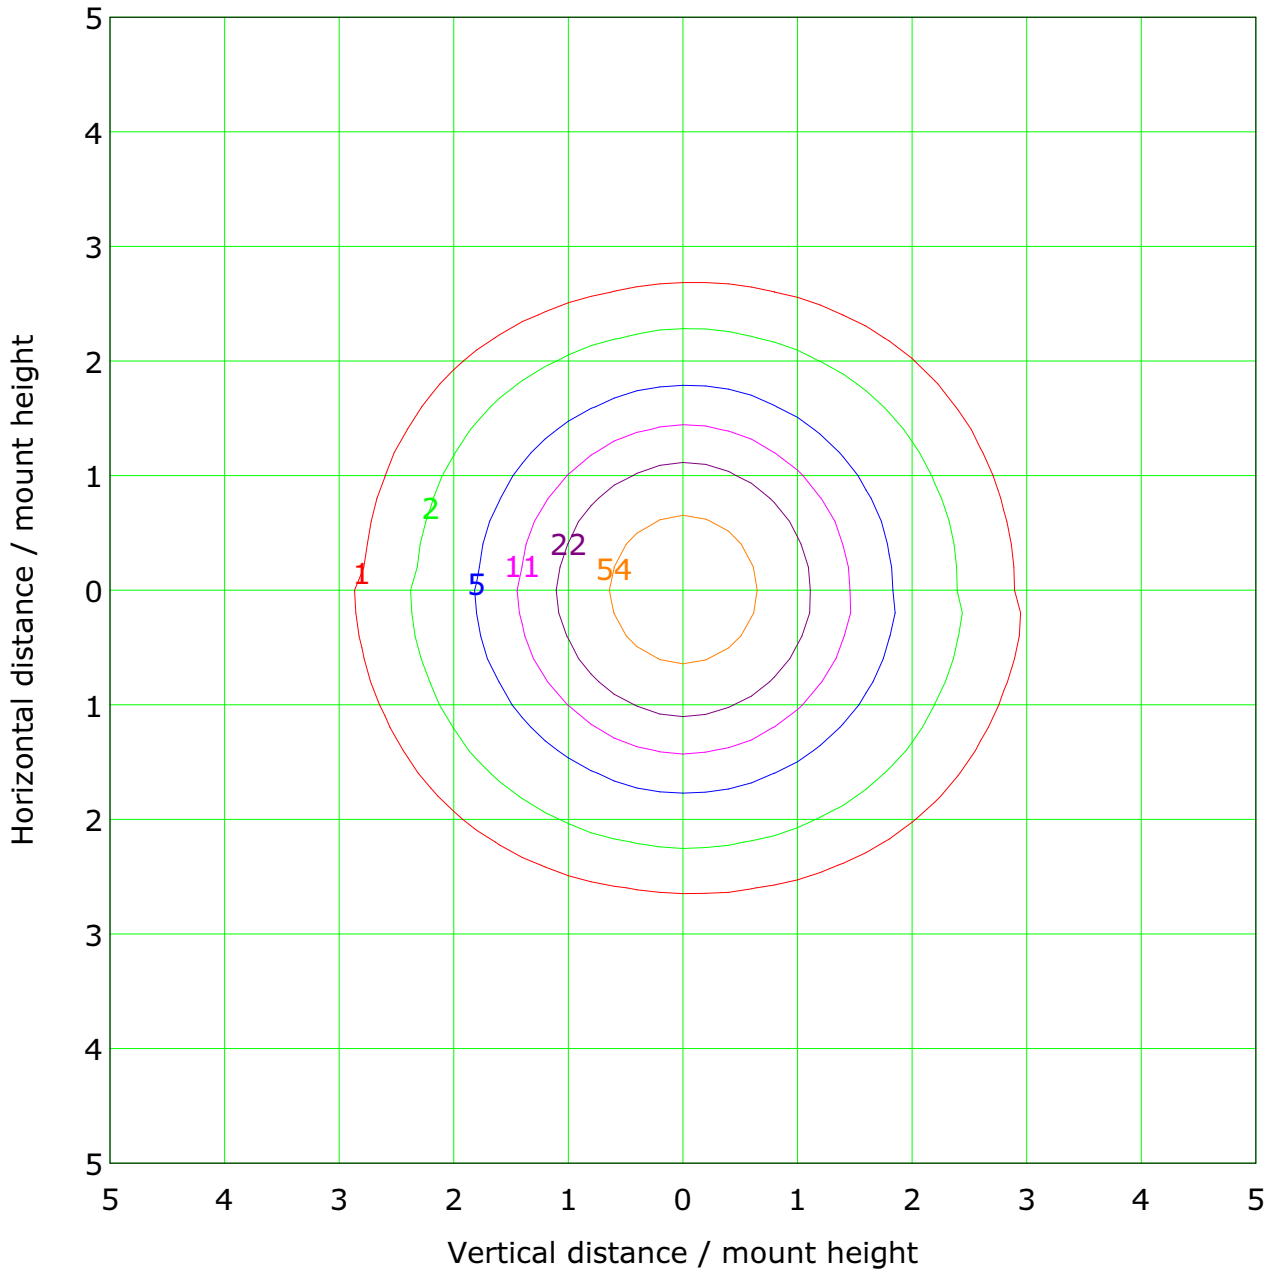

Mounting Height: 8.0m		Max Lux(100%): 108.2 lx	
<ul style="list-style-type: none"> — (1%): 1.1 lx — (5%): 5.4 lx — (20%): 21.6 lx — (100%): 108.2 lx — (300%): 324.6 lx 	<ul style="list-style-type: none"> — (2%): 2.2 lx — (10%): 10.8 lx — (50%): 54.1 lx — (200%): 216.4 lx — (500%): 541.0 lx 		

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.000 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

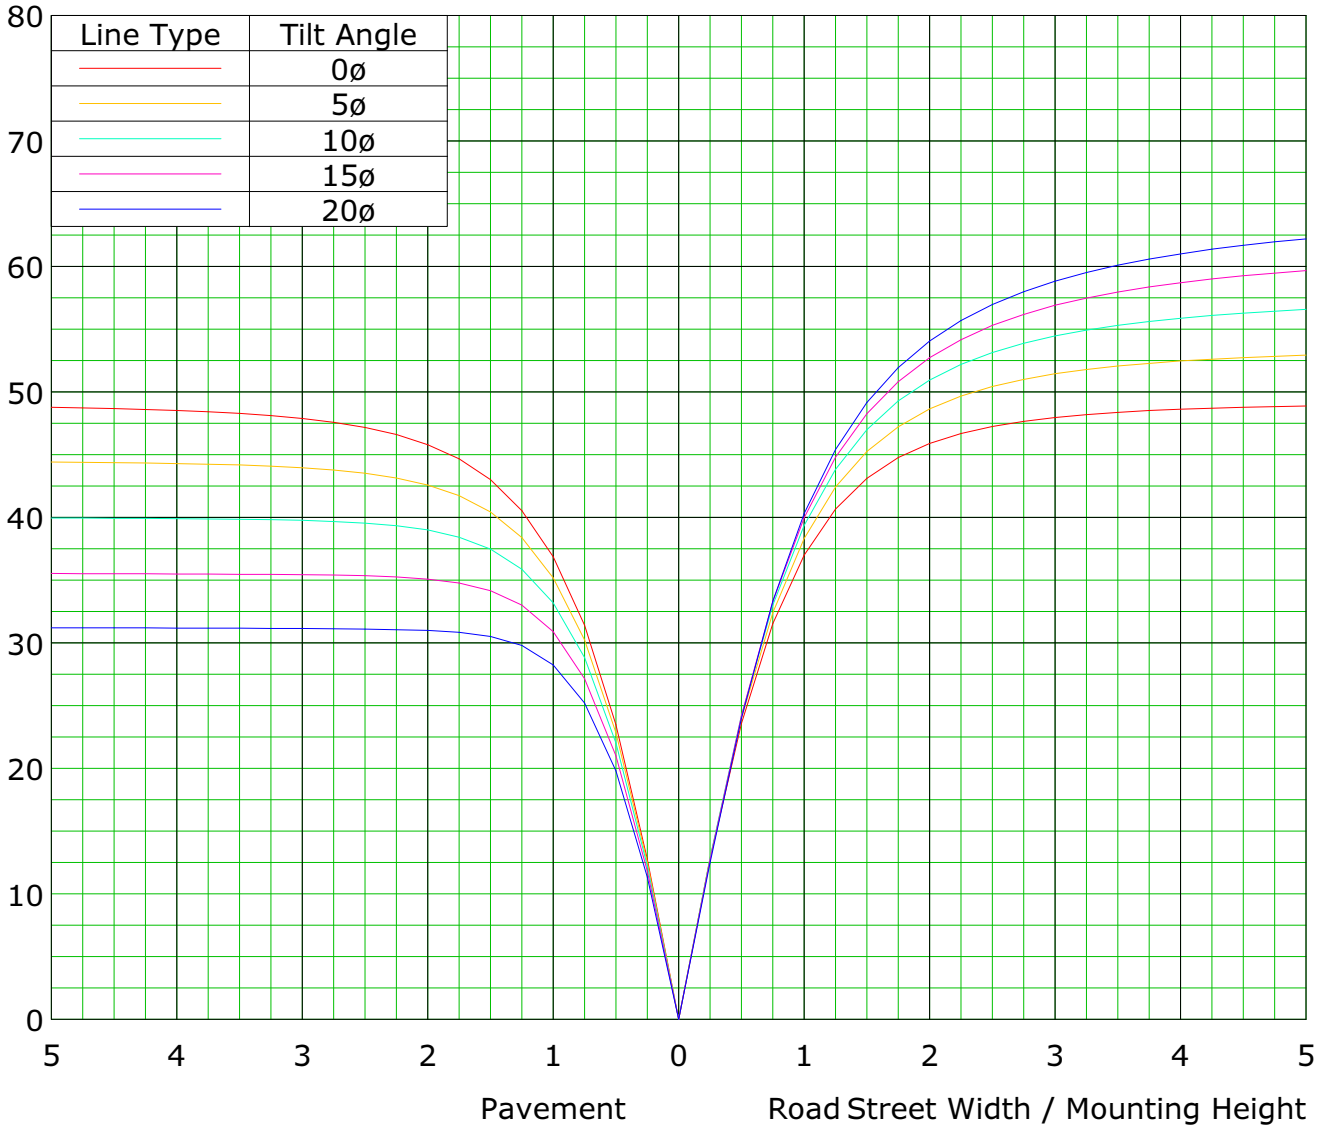

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

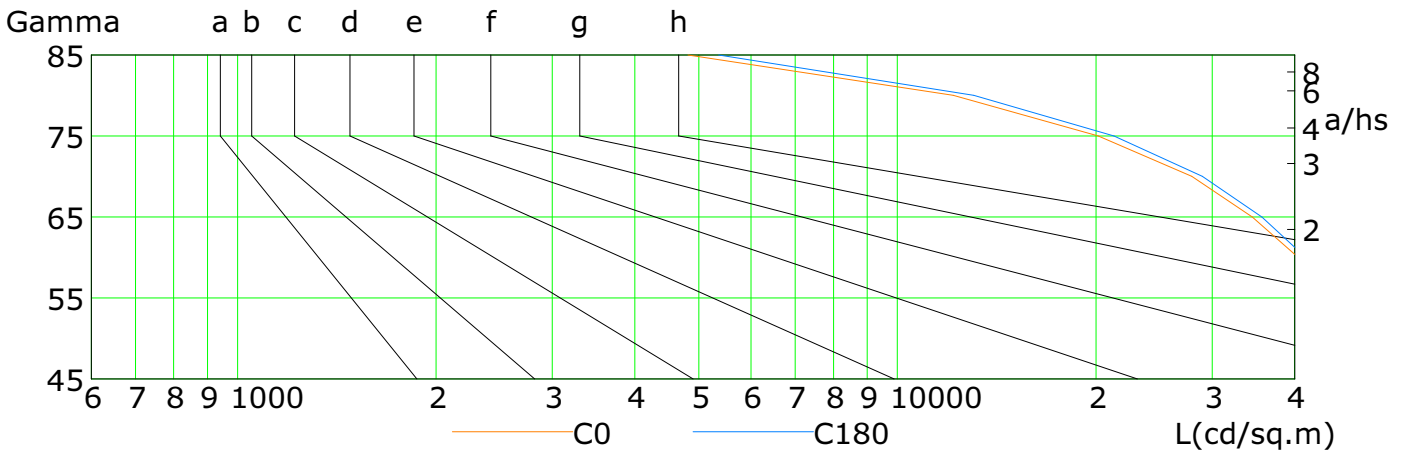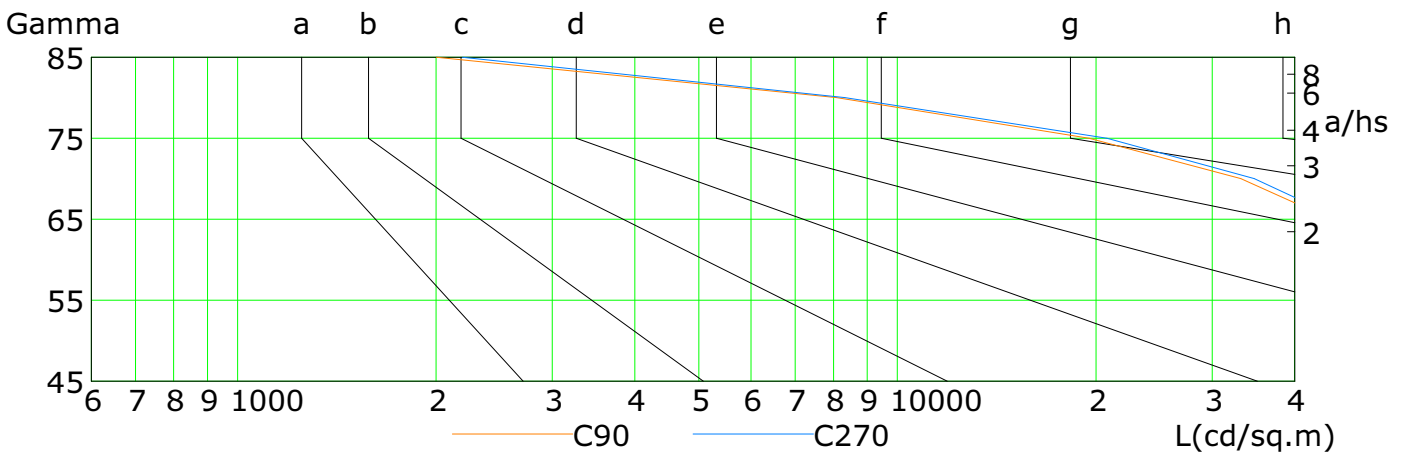

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	55931	51034	45998	40513	34492	27926	20160	12149	4815
C90	74754	69996	63987	55959	45571	33126	19521	8086	2001
C180	57096	52208	47109	41593	35682	28981	21296	13058	5361
C270	76007	71393	65393	57648	47359	34723	20778	8327	2192

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Illuminance at a Distance

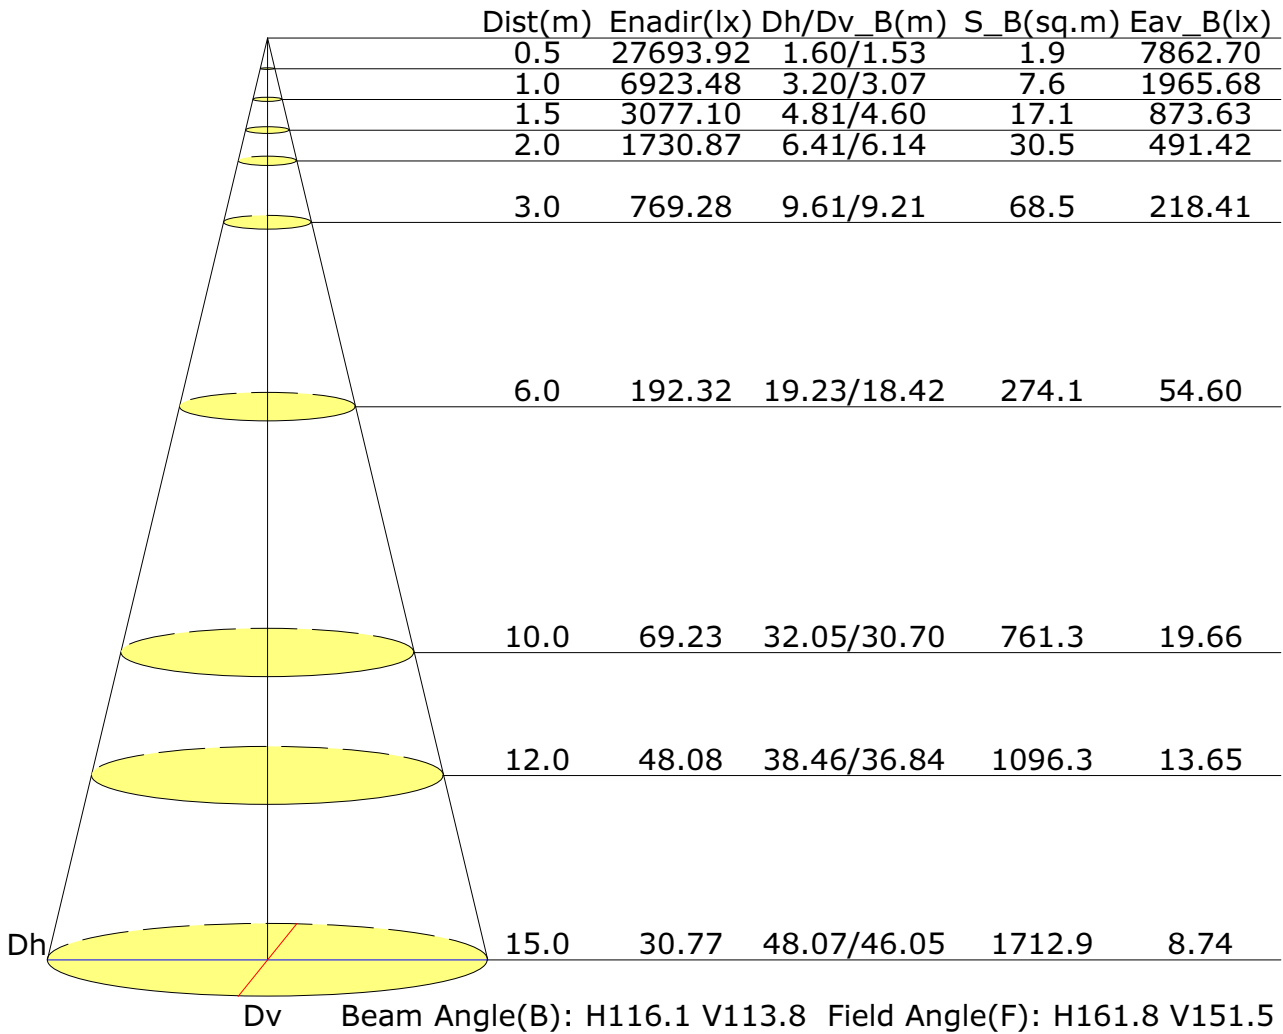

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Vertical IsoLux Plot

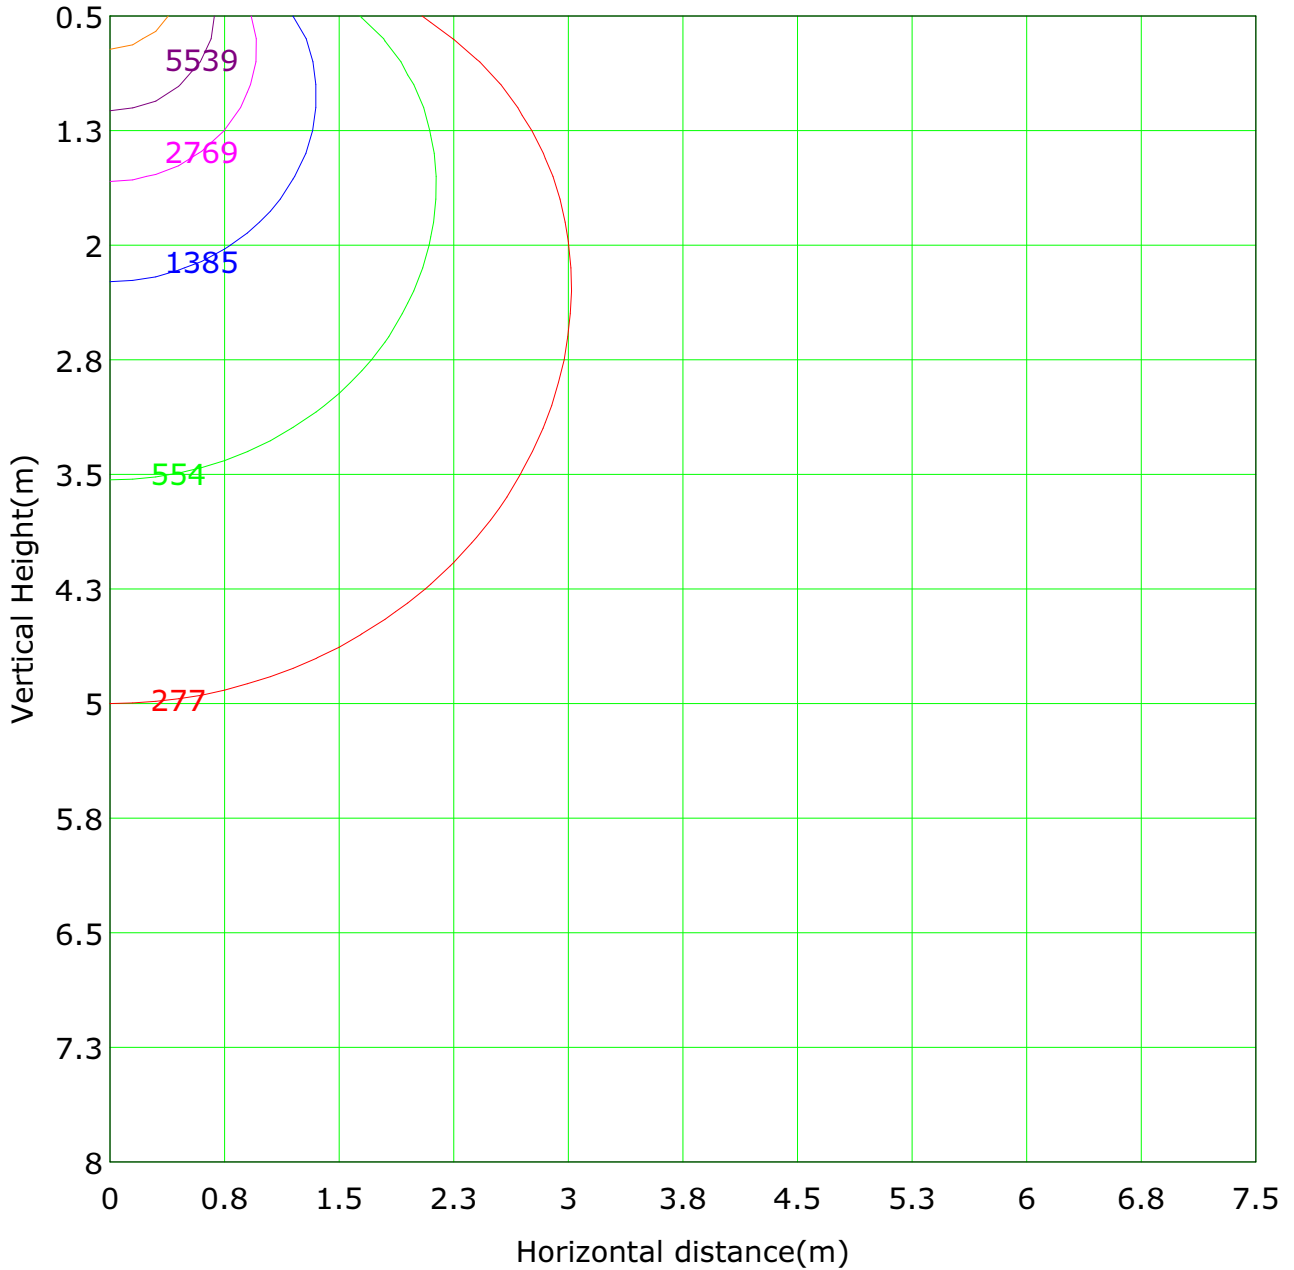


Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 27693.9 lx	
— (1%): 276.9 lx	— (2%): 553.9 lx
— (5%): 1384.7 lx	— (10%): 2769.4 lx
— (20%): 5538.8 lx	— (50%): 13847.0 lx
— (100%): 27693.9 lx	— (200%): 55387.8 lx
— (300%): 83081.8 lx	— (500%): 138469.6 lx

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

The Average Illuminance Effective Figure

Flux Out: 19726.19lm

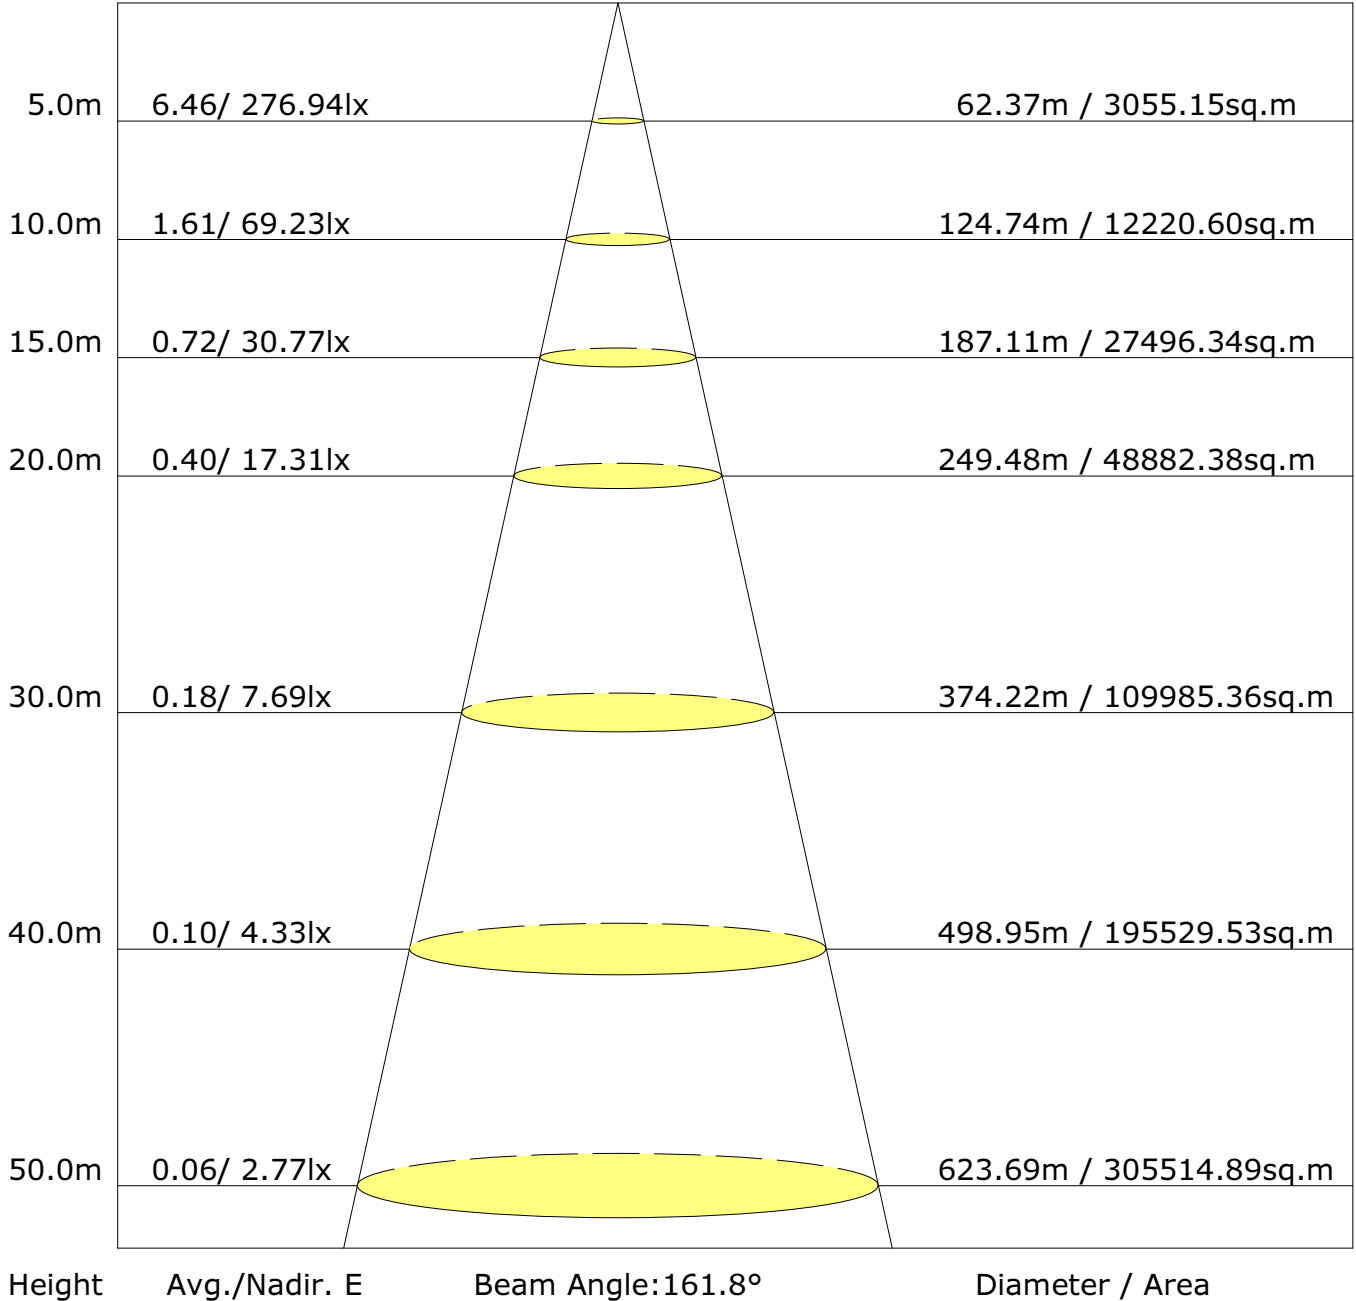

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

UGR Table


Reflectance:											
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
X=2H Y=2H	15.2	16.8	15.6	17.2	17.5	14.4	16.0	14.8	16.4	16.7	
3H	16.8	18.3	17.2	18.6	19.0	15.4	16.9	15.8	17.2	17.6	
4H	17.3	18.7	17.7	19.0	19.4	15.6	17.0	16.0	17.3	17.8	
6H	17.5	18.8	18.0	19.2	19.6	15.6	16.9	16.1	17.3	17.7	
8H	17.6	18.8	18.0	19.2	19.6	15.6	16.8	16.1	17.2	17.7	
12H	17.6	18.7	18.0	19.2	19.6	15.6	16.7	16.0	17.1	17.6	
X=4H Y=2H	15.6	17.0	16.0	17.4	17.8	15.0	16.4	15.4	16.7	17.1	
3H	17.4	18.5	17.8	18.9	19.3	16.2	17.3	16.6	17.8	18.2	
4H	17.9	18.9	18.4	19.4	19.8	16.4	17.5	16.9	17.9	18.4	
6H	18.2	19.1	18.7	19.6	20.1	16.5	17.4	17.0	17.9	18.4	
8H	18.3	19.1	18.8	19.6	20.1	16.5	17.3	17.0	17.8	18.3	
12H	18.3	19.1	18.8	19.6	20.1	16.5	17.2	17.0	17.7	18.2	
X=8H Y=4H	18.0	18.8	18.5	19.3	19.8	16.7	17.5	17.2	18.0	18.5	
6H	18.4	19.1	18.9	19.6	20.1	16.8	17.5	17.3	18.0	18.5	
8H	18.5	19.1	19.0	19.6	20.1	16.8	17.4	17.3	18.0	18.5	
12H	18.5	19.1	19.0	19.6	20.2	16.8	17.4	17.3	17.9	18.5	
X=12H Y=4H	18.0	18.7	18.5	19.2	19.7	16.7	17.5	17.2	18.0	18.5	
6H	18.4	19.0	18.9	19.5	20.0	16.9	17.5	17.4	18.0	18.5	
8H	18.5	19.0	19.0	19.5	20.1	16.9	17.4	17.4	17.9	18.5	

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

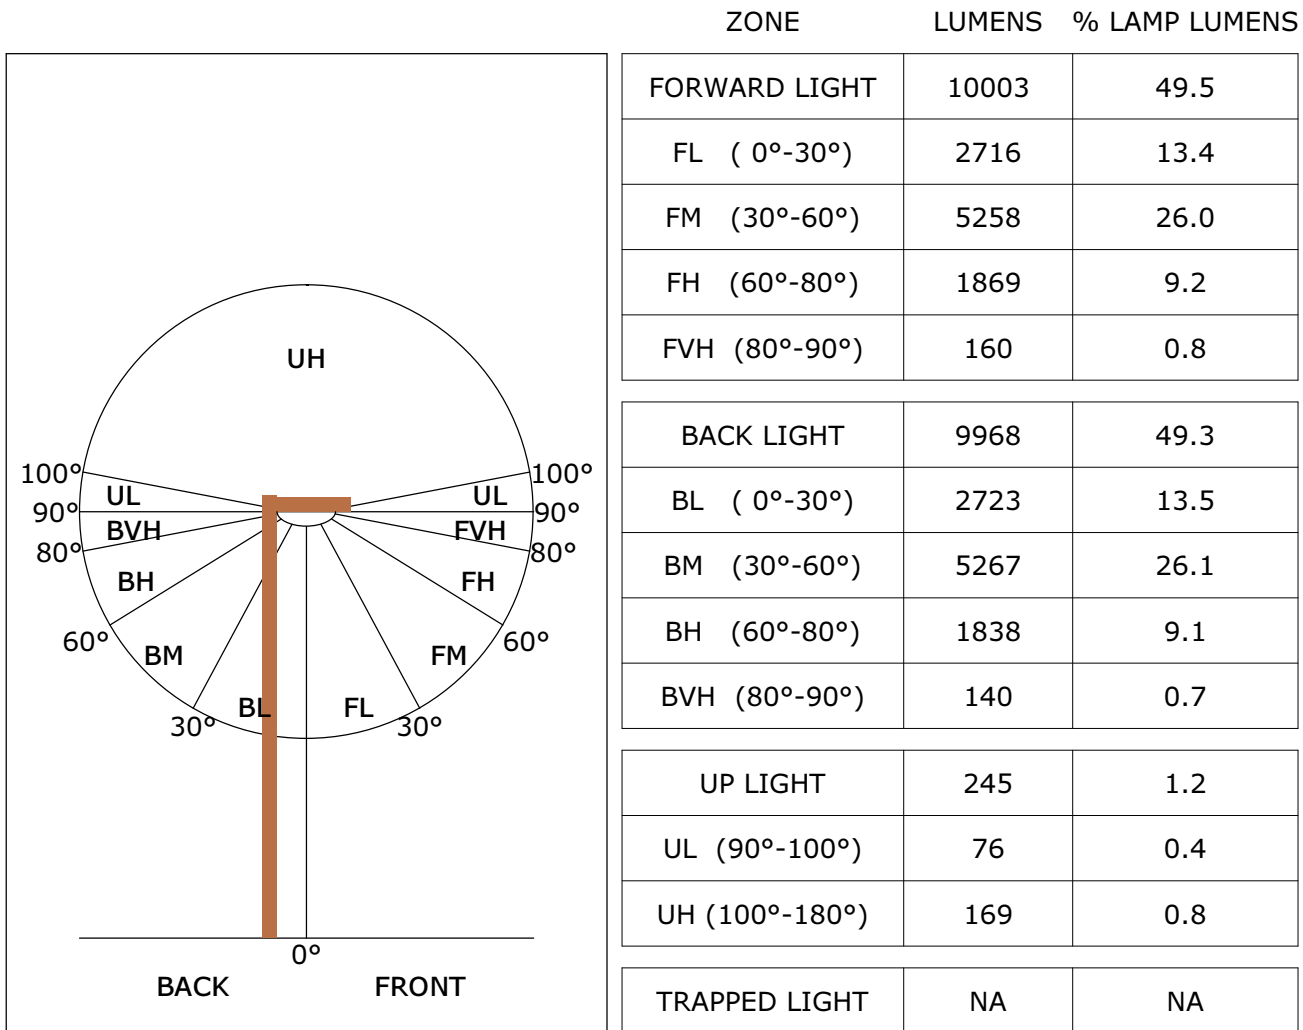


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B4 U5 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B4 U5 G2

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

LCS Graph

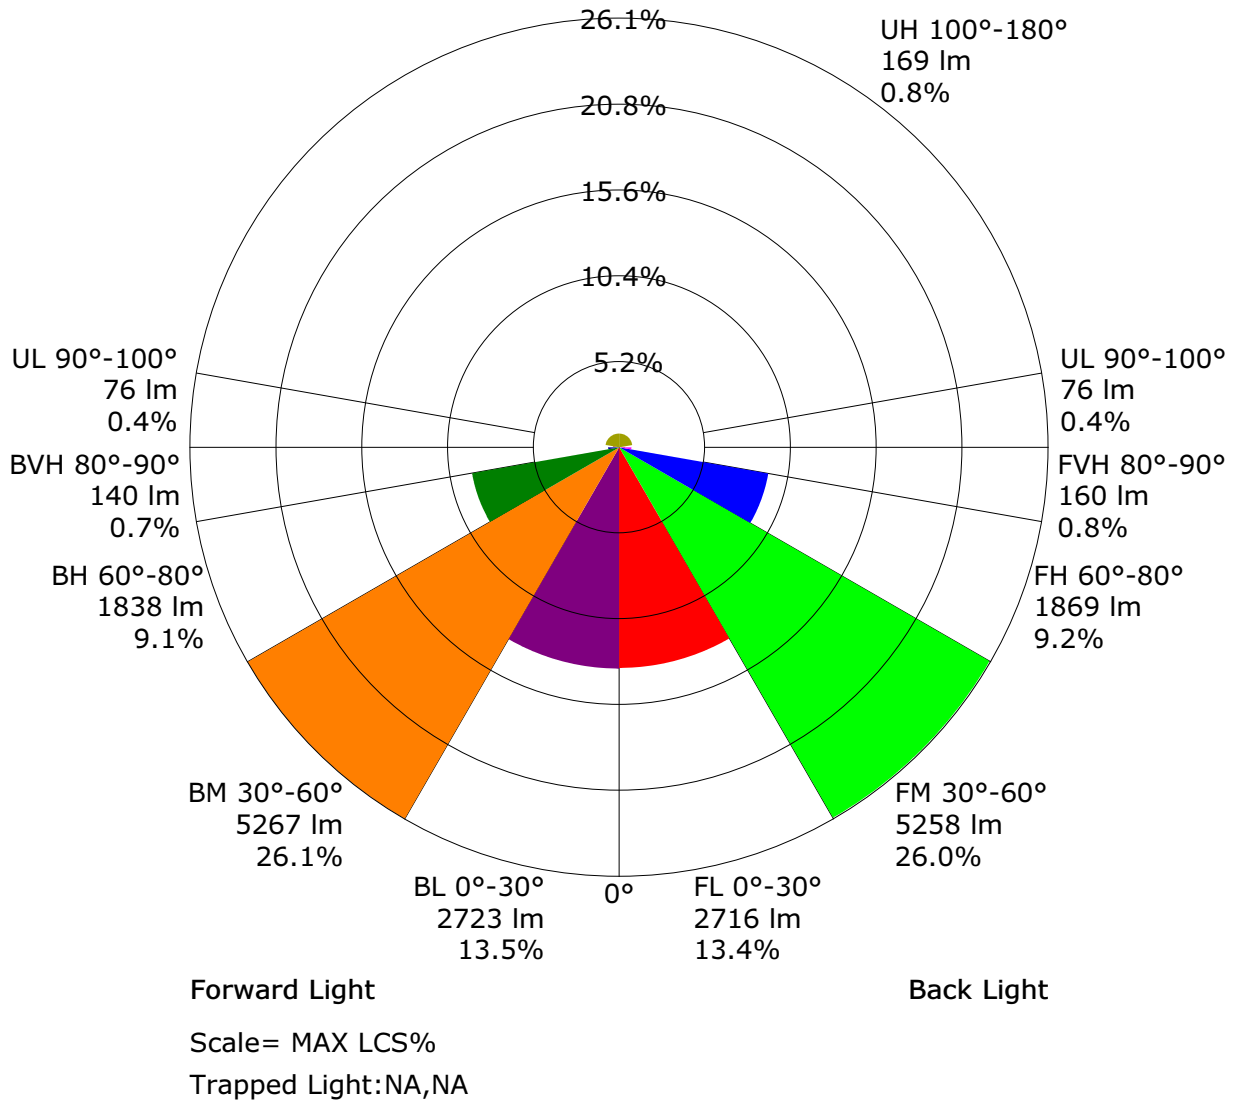

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	6910.8	6.6	6.6	0.03	0.03
1.0-2.0	6909.6	19.8	26.4	0.10	0.13
2.0-3.0	6907.4	33.0	59.5	0.16	0.29
3.0-4.0	6903.9	46.2	105.7	0.23	0.52
4.0-5.0	6897.8	59.3	165.1	0.29	0.82
5.0-6.0	6888.6	72.4	237.5	0.36	1.17
6.0-7.0	6877.2	85.4	322.8	0.42	1.60
7.0-8.0	6863.8	98.2	421.1	0.49	2.08
8.0-9.0	6847.9	111.0	532.1	0.55	2.63
9.0-10.0	6829.5	123.6	655.7	0.61	3.24
10.0-11.0	6808.8	136.1	791.8	0.67	3.92
11.0-12.0	6786.1	148.4	940.1	0.73	4.65
12.0-13.0	6761.3	160.5	1100.6	0.79	5.44
13.0-14.0	6734.6	172.4	1273.0	0.85	6.30
14.0-15.0	6706.3	184.1	1457.1	0.91	7.21
15.0-16.0	6676.2	195.6	1652.8	0.97	8.18
16.0-17.0	6643.9	206.9	1859.7	1.02	9.20
17.0-18.0	6609.6	218.0	2077.7	1.08	10.28
18.0-19.0	6573.0	228.7	2306.4	1.13	11.41
19.0-20.0	6533.7	239.2	2545.5	1.18	12.59
20.0-21.0	6491.7	249.3	2794.9	1.23	13.83
21.0-22.0	6447.2	259.1	3054.0	1.28	15.11
22.0-23.0	6400.6	268.6	3322.6	1.33	16.44
23.0-24.0	6352.1	277.8	3600.3	1.37	17.81
24.0-25.0	6301.9	286.6	3886.9	1.42	19.23
25.0-26.0	6250.1	295.1	4182.0	1.46	20.69
26.0-27.0	6195.6	303.2	4485.1	1.50	22.19
27.0-28.0	6138.6	310.8	4796.0	1.54	23.72
28.0-29.0	6079.3	318.1	5114.1	1.57	25.30
29.0-30.0	6017.6	324.9	5439.0	1.61	26.91
30.0-31.0	5953.9	331.4	5770.4	1.64	28.54
31.0-32.0	5888.1	337.4	6107.8	1.67	30.21
32.0-33.0	5819.8	342.9	6450.7	1.70	31.91
33.0-34.0	5749.4	348.0	6798.7	1.72	33.63
34.0-35.0	5676.8	352.6	7151.3	1.74	35.38
35.0-36.0	5601.5	356.7	7508.0	1.76	37.14

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	5524.1	360.3	7868.3	1.78	38.92
37.0-38.0	5444.1	363.4	8231.7	1.80	40.72
38.0-39.0	5361.7	366.0	8597.8	1.81	42.53
39.0-40.0	5277.8	368.1	8965.9	1.82	44.35
40.0-41.0	5191.8	369.8	9335.7	1.83	46.18
41.0-42.0	5103.4	370.8	9706.5	1.83	48.02
42.0-43.0	5012.2	371.3	10077.8	1.84	49.85
43.0-44.0	4919.1	371.3	10449.2	1.84	51.69
44.0-45.0	4824.1	370.8	10819.9	1.83	53.52
45.0-46.0	4727.5	369.8	11189.7	1.83	55.35
46.0-47.0	4629.0	368.2	11557.9	1.82	57.17
47.0-48.0	4528.4	366.1	11924.0	1.81	58.99
48.0-49.0	4426.0	363.5	12287.5	1.80	60.78
49.0-50.0	4321.7	360.4	12647.9	1.78	62.57
50.0-51.0	4215.3	356.7	13004.6	1.76	64.33
51.0-52.0	4107.2	352.5	13357.1	1.74	66.07
52.0-53.0	3996.8	347.7	13704.8	1.72	67.79
53.0-54.0	3885.1	342.5	14047.3	1.69	69.49
54.0-55.0	3772.1	336.8	14384.0	1.67	71.15
55.0-56.0	3657.2	330.5	14714.6	1.63	72.79
56.0-57.0	3540.7	323.8	15038.3	1.60	74.39
57.0-58.0	3421.6	316.5	15354.8	1.57	75.96
58.0-59.0	3300.3	308.6	15663.4	1.53	77.48
59.0-60.0	3177.7	300.3	15963.6	1.49	78.97
60.0-61.0	3053.6	291.4	16255.1	1.44	80.41
61.0-62.0	2927.6	282.1	16537.2	1.40	81.81
62.0-63.0	2799.8	272.3	16809.6	1.35	83.15
63.0-64.0	2670.8	262.1	17071.7	1.30	84.45
64.0-65.0	2541.2	251.5	17323.2	1.24	85.69
65.0-66.0	2410.8	240.6	17563.7	1.19	86.88
66.0-67.0	2279.5	229.2	17793.0	1.13	88.02
67.0-68.0	2148.3	217.7	18010.6	1.08	89.09
68.0-69.0	2017.5	205.8	18216.5	1.02	90.11
69.0-70.0	1886.6	193.8	18410.3	0.96	91.07
70.0-71.0	1756.1	181.5	18591.8	0.90	91.97
71.0-72.0	1625.9	169.1	18760.9	0.84	92.81

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	1496.4	156.5	18917.4	0.77	93.58
73.0-74.0	1368.7	143.9	19061.3	0.71	94.29
74.0-75.0	1243.5	131.4	19192.7	0.65	94.94
75.0-76.0	1121.7	119.1	19311.8	0.59	95.53
76.0-77.0	1003.1	107.0	19418.8	0.53	96.06
77.0-78.0	888.3	95.1	19513.9	0.47	96.53
78.0-79.0	778.3	83.6	19597.5	0.41	96.94
79.0-80.0	673.6	72.6	19670.1	0.36	97.30
80.0-81.0	575.9	62.3	19732.4	0.31	97.61
81.0-82.0	486.5	52.8	19785.2	0.26	97.87
82.0-83.0	404.6	44.0	19829.2	0.22	98.09
83.0-84.0	330.1	36.0	19865.1	0.18	98.27
84.0-85.0	264.5	28.9	19894.0	0.14	98.41
85.0-86.0	208.9	22.8	19916.8	0.11	98.52
86.0-87.0	164.3	18.0	19934.8	0.09	98.61
87.0-88.0	129.8	14.2	19949.0	0.07	98.68
88.0-89.0	104.6	11.5	19960.5	0.06	98.74
89.0-90.0	90.4	9.9	19970.4	0.05	98.79
90.0-91.0	85.7	9.4	19979.8	0.05	98.84
91.0-92.0	84.8	9.3	19989.1	0.05	98.88
92.0-93.0	83.7	9.2	19998.3	0.05	98.93
93.0-94.0	80.2	8.8	20007.1	0.04	98.97
94.0-95.0	74.9	8.2	20015.2	0.04	99.01
95.0-96.0	68.6	7.5	20022.7	0.04	99.05
96.0-97.0	61.9	6.7	20029.5	0.03	99.08
97.0-98.0	55.9	6.1	20035.6	0.03	99.11
98.0-99.0	51.0	5.5	20041.1	0.03	99.14
99.0-100.0	46.6	5.0	20046.1	0.02	99.16
100.0-101.0	42.0	4.5	20050.7	0.02	99.19
101.0-102.0	37.1	4.0	20054.7	0.02	99.21
102.0-103.0	32.5	3.5	20058.1	0.02	99.22
103.0-104.0	28.9	3.1	20061.2	0.02	99.24
104.0-105.0	26.0	2.8	20064.0	0.01	99.25
105.0-106.0	23.9	2.5	20066.5	0.01	99.26
106.0-107.0	22.4	2.4	20068.9	0.01	99.28
107.0-108.0	21.6	2.3	20071.1	0.01	99.29

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	21.2	2.2	20073.3	0.01	99.30
109.0-110.0	21.1	2.2	20075.5	0.01	99.31
110.0-111.0	21.2	2.2	20077.7	0.01	99.32
111.0-112.0	21.4	2.2	20079.9	0.01	99.33
112.0-113.0	21.7	2.2	20082.1	0.01	99.34
113.0-114.0	22.0	2.2	20084.3	0.01	99.35
114.0-115.0	22.4	2.2	20086.5	0.01	99.36
115.0-116.0	22.9	2.3	20088.8	0.01	99.37
116.0-117.0	23.4	2.3	20091.1	0.01	99.39
117.0-118.0	23.9	2.3	20093.4	0.01	99.40
118.0-119.0	24.5	2.4	20095.8	0.01	99.41
119.0-120.0	25.0	2.4	20098.2	0.01	99.42
120.0-121.0	25.7	2.4	20100.6	0.01	99.43
121.0-122.0	26.3	2.5	20103.0	0.01	99.44
122.0-123.0	26.9	2.5	20105.5	0.01	99.46
123.0-124.0	27.6	2.5	20108.1	0.01	99.47
124.0-125.0	28.2	2.6	20110.6	0.01	99.48
125.0-126.0	28.9	2.6	20113.2	0.01	99.49
126.0-127.0	29.6	2.6	20115.8	0.01	99.51
127.0-128.0	30.2	2.6	20118.4	0.01	99.52
128.0-129.0	30.9	2.6	20121.1	0.01	99.53
129.0-130.0	31.5	2.7	20123.7	0.01	99.55
130.0-131.0	32.1	2.7	20126.4	0.01	99.56
131.0-132.0	32.8	2.7	20129.1	0.01	99.57
132.0-133.0	33.4	2.7	20131.8	0.01	99.59
133.0-134.0	34.0	2.7	20134.5	0.01	99.60
134.0-135.0	34.6	2.7	20137.2	0.01	99.61
135.0-136.0	35.2	2.7	20139.9	0.01	99.63
136.0-137.0	35.8	2.7	20142.6	0.01	99.64
137.0-138.0	36.4	2.7	20145.3	0.01	99.65
138.0-139.0	36.9	2.7	20148.0	0.01	99.67
139.0-140.0	37.5	2.7	20150.7	0.01	99.68
140.0-141.0	38.1	2.7	20153.3	0.01	99.69
141.0-142.0	38.6	2.6	20156.0	0.01	99.71
142.0-143.0	39.1	2.6	20158.6	0.01	99.72
143.0-144.0	39.6	2.6	20161.2	0.01	99.73

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	40.1	2.6	20163.7	0.01	99.74
145.0-146.0	40.6	2.5	20166.2	0.01	99.76
146.0-147.0	41.1	2.5	20168.7	0.01	99.77
147.0-148.0	41.6	2.5	20171.2	0.01	99.78
148.0-149.0	42.1	2.4	20173.6	0.01	99.79
149.0-150.0	42.5	2.4	20176.0	0.01	99.81
150.0-151.0	43.0	2.3	20178.3	0.01	99.82
151.0-152.0	43.5	2.3	20180.6	0.01	99.83
152.0-153.0	43.9	2.2	20182.8	0.01	99.84
153.0-154.0	44.3	2.2	20184.9	0.01	99.85
154.0-155.0	44.8	2.1	20187.1	0.01	99.86
155.0-156.0	45.2	2.1	20189.1	0.01	99.87
156.0-157.0	45.6	2.0	20191.1	0.01	99.88
157.0-158.0	46.0	1.9	20193.0	0.01	99.89
158.0-159.0	46.4	1.9	20194.9	0.01	99.90
159.0-160.0	46.8	1.8	20196.7	0.01	99.91
160.0-161.0	47.2	1.7	20198.4	0.01	99.92
161.0-162.0	47.5	1.7	20200.1	0.01	99.92
162.0-163.0	47.9	1.6	20201.7	0.01	99.93
163.0-164.0	48.2	1.5	20203.2	0.01	99.94
164.0-165.0	48.6	1.4	20204.6	0.01	99.95
165.0-166.0	48.9	1.3	20205.9	0.01	99.95
166.0-167.0	49.1	1.3	20207.2	0.01	99.96
167.0-168.0	49.4	1.2	20208.4	0.01	99.97
168.0-169.0	49.7	1.1	20209.4	0.01	99.97
169.0-170.0	49.9	1.0	20210.4	0.00	99.98
170.0-171.0	50.2	0.9	20211.4	0.00	99.98
171.0-172.0	50.4	0.8	20212.2	0.00	99.98
172.0-173.0	50.6	0.7	20212.9	0.00	99.99
173.0-174.0	50.7	0.6	20213.5	0.00	99.99
174.0-175.0	50.9	0.5	20214.1	0.00	99.99
175.0-176.0	51.0	0.4	20214.5	0.00	100.00
176.0-177.0	51.1	0.3	20214.8	0.00	100.00
177.0-178.0	51.2	0.2	20215.1	0.00	100.00
178.0-179.0	51.2	0.1	20215.2	0.00	100.00
179.0-180.0	51.3	0.0	20215.3	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	6923.5	6923.0	6922.3	6923.5	6922.1	6923.0	6922.8	6921.6	6922.3	6922.1
G1.0	6921.6	6920.7	6918.6	6921.4	6919.8	6917.7	6919.1	6917.7	6917.5	6919.1
G2.0	6920.2	6919.5	6915.1	6917.2	6917.2	6913.7	6914.9	6912.8	6912.6	6912.6
G3.0	6914.7	6913.5	6912.1	6912.1	6912.1	6908.6	6910.7	6908.6	6908.2	6907.9
G4.0	6907.2	6905.1	6901.9	6903.1	6903.8	6901.7	6903.1	6901.9	6902.8	6902.6
G5.0	6897.0	6894.3	6890.1	6891.0	6892.9	6892.4	6894.5	6893.5	6894.3	6893.8
G6.0	6883.1	6879.6	6875.9	6876.9	6879.2	6878.2	6881.3	6880.6	6880.3	6879.9
G7.0	6869.4	6863.6	6859.9	6861.5	6863.6	6863.4	6865.9	6865.0	6864.3	6865.5
G8.0	6850.6	6846.5	6843.0	6844.4	6846.5	6845.1	6846.7	6846.5	6848.1	6849.5
G9.0	6832.3	6826.5	6824.6	6824.9	6827.4	6825.3	6827.9	6827.0	6829.5	6832.3
G10.0	6807.7	6804.0	6803.5	6803.3	6804.5	6799.8	6802.8	6806.1	6807.5	6810.0
G11.0	6782.4	6779.4	6780.3	6779.6	6779.9	6773.6	6777.1	6781.3	6781.3	6783.4
G12.0	6758.5	6753.9	6754.4	6755.3	6753.6	6744.6	6750.2	6750.6	6751.3	6754.8
G13.0	6732.3	6727.7	6727.7	6726.5	6724.9	6720.9	6720.5	6721.4	6721.9	6726.3
G14.0	6704.2	6698.7	6700.8	6693.6	6696.1	6691.9	6689.1	6688.9	6690.1	6694.7
G15.0	6671.1	6666.0	6665.3	6662.2	6662.0	6659.2	6659.5	6659.2	6660.1	6662.7
G16.0	6636.0	6630.7	6630.0	6626.5	6631.1	6624.4	6625.1	6628.6	6626.8	6629.3
G17.0	6599.4	6593.6	6593.8	6591.7	6594.3	6589.6	6591.9	6594.3	6592.6	6595.7
G18.0	6559.5	6554.8	6556.0	6553.0	6558.1	6551.6	6552.3	6558.5	6557.1	6560.2
G19.0	6517.2	6511.7	6513.3	6515.1	6517.2	6510.7	6513.5	6516.1	6517.5	6520.3
G20.0	6471.3	6468.8	6469.5	6468.8	6469.9	6468.5	6467.8	6473.9	6474.3	6477.8
G21.0	6427.2	6423.3	6422.1	6423.7	6425.8	6421.4	6421.9	6427.2	6428.1	6431.9
G22.0	6379.4	6374.8	6376.2	6372.2	6377.3	6372.7	6372.2	6377.3	6376.9	6381.0
G23.0	6330.2	6329.8	6326.8	6322.4	6328.2	6321.9	6321.2	6325.6	6325.1	6332.3
G24.0	6282.2	6278.0	6277.6	6272.0	6275.0	6266.0	6266.7	6272.0	6271.3	6279.2
G25.0	6232.6	6226.8	6228.9	6220.7	6223.8	6214.7	6212.6	6218.0	6215.9	6226.5
G26.0	6175.7	6171.1	6173.9	6164.6	6166.2	6162.5	6157.2	6159.0	6159.7	6166.9
G27.0	6119.8	6114.7	6114.9	6106.4	6105.9	6103.3	6097.5	6103.6	6101.7	6111.0
G28.0	6061.6	6054.6	6056.5	6046.3	6047.9	6042.6	6039.5	6046.0	6043.3	6050.2
G29.0	5998.9	5990.6	5989.2	5982.0	5982.0	5981.5	5979.5	5984.6	5982.5	5986.9
G30.0	5933.3	5925.2	5920.5	5911.9	5917.3	5915.0	5911.9	5918.9	5918.4	5922.6
G31.0	5869.5	5860.7	5852.8	5843.7	5848.1	5848.8	5850.0	5855.3	5852.5	5856.3
G32.0	5802.0	5795.2	5785.0	5775.5	5777.1	5775.5	5775.3	5785.3	5779.5	5787.8
G33.0	5737.7	5727.7	5716.6	5709.2	5707.8	5704.5	5700.8	5708.2	5708.2	5716.1
G34.0	5666.7	5657.4	5650.5	5635.4	5637.3	5628.0	5621.5	5630.5	5634.7	5641.0
G35.0	5593.2	5585.5	5576.5	5564.4	5561.8	5557.0	5550.2	5553.0	5557.9	5567.0
G36.0	5513.1	5504.1	5501.3	5487.6	5482.0	5476.7	5470.4	5473.7	5476.5	5485.0

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	5432.1	5422.2	5420.3	5406.4	5405.5	5396.7	5391.1	5397.8	5392.0	5406.2
G38.0	5351.9	5341.9	5335.9	5319.4	5317.3	5314.1	5309.4	5314.5	5310.1	5318.0
G39.0	5271.4	5266.3	5254.9	5236.6	5230.3	5228.5	5224.3	5233.1	5226.1	5232.6
G40.0	5188.8	5184.8	5172.8	5150.5	5145.2	5138.9	5137.7	5141.2	5137.3	5141.2
G41.0	5108.3	5102.7	5093.0	5069.3	5060.0	5051.0	5045.4	5056.8	5050.3	5051.9
G42.0	5021.0	5015.7	5005.7	4983.7	4973.7	4963.3	4951.0	4961.4	4957.9	4961.0
G43.0	4933.6	4922.0	4914.5	4895.5	4885.3	4878.6	4862.4	4863.3	4866.8	4867.7
G44.0	4836.6	4822.0	4811.8	4798.3	4788.3	4778.1	4770.5	4767.2	4767.7	4772.8
G45.0	4745.9	4736.1	4723.6	4704.6	4688.6	4683.9	4679.1	4677.0	4667.9	4675.8
G46.0	4655.2	4645.0	4632.4	4612.5	4595.3	4584.4	4582.3	4582.5	4569.6	4573.0
G47.0	4568.6	4558.4	4541.3	4517.8	4500.0	4487.0	4484.9	4486.5	4472.1	4470.3
G48.0	4465.2	4460.0	4443.4	4420.6	4403.9	4389.1	4380.3	4385.6	4371.0	4363.8
G49.0	4361.5	4354.5	4340.6	4320.2	4308.6	4290.0	4277.9	4278.4	4272.8	4261.5
G50.0	4263.5	4254.5	4236.9	4211.8	4204.6	4189.5	4173.3	4172.8	4165.4	4157.1
G51.0	4165.4	4152.6	4139.7	4116.0	4102.3	4084.2	4076.1	4073.5	4053.1	4052.4
G52.0	4067.0	4056.4	4040.8	4013.0	3992.1	3974.7	3966.8	3964.3	3946.6	3941.5
G53.0	3958.5	3946.9	3937.1	3910.7	3892.6	3867.5	3854.8	3861.0	3835.3	3824.4
G54.0	3855.2	3844.1	3827.8	3799.3	3786.6	3765.4	3752.4	3744.8	3725.5	3716.9
G55.0	3753.4	3741.8	3724.8	3699.1	3677.3	3655.2	3640.4	3634.1	3617.9	3600.0
G56.0	3645.5	3633.2	3618.8	3586.8	3570.6	3545.3	3533.9	3525.8	3505.1	3491.2
G57.0	3531.1	3517.9	3506.8	3475.4	3463.8	3435.1	3423.2	3418.6	3391.4	3375.9
G58.0	3422.3	3409.5	3392.4	3358.3	3343.6	3325.8	3309.1	3301.0	3275.0	3256.4
G59.0	3311.6	3295.4	3282.2	3247.4	3233.7	3208.6	3198.9	3189.8	3160.8	3138.3
G60.0	3201.9	3187.7	3167.8	3133.4	3117.9	3095.4	3080.8	3073.8	3044.8	3018.8
G61.0	3090.3	3079.9	3057.4	3024.2	3002.6	2980.6	2964.3	2959.0	2925.8	2902.6
G62.0	2976.6	2965.3	2941.1	2911.7	2889.9	2868.5	2850.2	2839.3	2813.3	2783.8
G63.0	2859.0	2847.6	2829.3	2793.6	2776.6	2753.0	2732.1	2717.9	2688.7	2658.5
G64.0	2739.3	2723.3	2703.6	2676.2	2658.1	2634.6	2617.7	2598.7	2570.6	2543.7
G65.0	2616.8	2601.0	2584.1	2550.7	2534.2	2514.2	2492.4	2482.9	2447.9	2414.9
G66.0	2497.8	2481.8	2461.3	2430.9	2414.9	2389.9	2377.8	2363.9	2328.9	2292.0
G67.0	2375.5	2361.1	2342.3	2308.9	2294.8	2268.1	2253.2	2246.3	2203.1	2165.1
G68.0	2260.2	2246.5	2223.8	2193.1	2172.5	2147.7	2131.4	2118.4	2084.6	2045.8
G69.0	2140.5	2124.0	2106.6	2071.6	2050.7	2025.2	2008.7	1997.6	1959.7	1919.6
G70.0	2014.0	2003.1	1982.5	1953.3	1930.3	1907.8	1888.8	1871.3	1837.7	1796.2
G71.0	1889.0	1873.7	1863.7	1831.2	1809.2	1786.2	1764.6	1752.6	1709.4	1673.7
G72.0	1757.7	1744.7	1724.5	1700.1	1681.3	1666.9	1641.9	1627.1	1589.9	1552.3
G73.0	1619.6	1608.0	1595.3	1563.9	1556.5	1536.1	1517.1	1505.0	1467.4	1426.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	1493.7	1479.3	1463.7	1439.1	1424.3	1407.6	1392.7	1380.0	1344.9	1308.7
G75.0	1367.4	1354.2	1343.8	1313.2	1301.6	1283.7	1265.3	1256.8	1222.9	1186.7
G76.0	1248.7	1235.0	1221.0	1195.3	1183.7	1164.7	1149.6	1138.2	1102.5	1076.7
G77.0	1124.8	1112.0	1105.3	1080.2	1065.6	1047.7	1027.3	1018.7	988.3	958.6
G78.0	1006.9	996.7	984.2	966.1	953.1	934.5	914.6	902.7	876.3	848.0
G79.0	883.2	872.3	865.4	845.0	837.8	818.0	800.9	798.1	767.7	739.9
G80.0	765.6	754.5	747.5	727.8	719.9	710.6	696.3	689.0	663.3	639.9
G81.0	651.5	642.7	635.9	621.3	614.3	600.2	587.7	583.3	566.1	541.3
G82.0	546.4	537.8	533.2	521.3	514.1	503.0	492.1	488.1	471.9	455.0
G83.0	444.8	436.4	434.5	423.6	418.5	412.3	404.9	400.9	384.9	371.2
G84.0	352.4	346.1	344.3	336.4	333.4	327.6	321.6	319.5	308.8	296.5
G85.0	277.9	273.3	272.1	265.6	266.6	262.2	253.8	251.7	243.4	232.5
G86.0	217.6	213.2	216.0	213.2	213.9	211.8	205.8	203.9	195.6	185.1
G87.0	174.5	174.5	178.4	181.0	182.8	181.2	176.3	171.7	164.3	154.8
G88.0	143.1	145.0	151.0	155.4	159.9	158.5	154.8	151.3	144.1	136.6
G89.0	112.1	113.9	119.7	124.1	127.8	126.2	123.2	119.5	112.1	104.6
G90.0	97.7	100.5	106.7	112.1	115.5	115.3	112.8	107.9	100.9	92.8
G91.0	99.5	102.3	109.0	117.2	121.6	122.7	120.2	114.8	106.3	93.7
G92.0	113.9	117.6	124.8	135.0	141.5	142.4	138.0	127.8	111.8	92.6
G93.0	126.4	129.2	136.9	146.6	152.7	148.3	137.8	122.7	101.8	81.9
G94.0	121.1	122.5	129.2	135.3	138.5	129.5	116.5	103.0	89.1	84.4
G95.0	102.1	103.5	109.0	114.4	117.2	113.0	107.4	102.1	101.2	95.8
G96.0	92.1	94.7	101.4	109.5	114.6	115.3	117.4	112.8	93.3	67.3
G97.0	92.6	97.0	105.3	116.7	122.7	120.9	107.7	84.9	67.1	55.7
G98.0	96.3	99.1	106.0	109.7	104.6	92.8	80.5	71.2	59.6	48.7
G99.0	82.6	82.1	85.6	87.0	84.9	80.0	73.3	63.3	49.9	40.4
G100.0	73.8	74.2	77.3	78.4	77.0	71.0	61.3	49.2	38.7	33.2
G101.0	69.8	68.7	70.8	69.6	65.0	55.5	46.6	37.3	32.0	26.9
G102.0	62.9	60.8	60.3	56.6	51.5	42.2	35.7	31.3	27.1	23.2
G103.0	54.8	51.3	49.0	45.5	40.4	34.1	30.9	27.4	23.7	21.1
G104.0	45.0	42.7	40.8	37.6	34.1	29.9	26.5	23.9	21.8	20.4
G105.0	37.3	36.0	34.8	32.7	29.7	26.0	23.4	22.5	21.3	19.7
G106.0	32.3	31.1	30.2	27.8	25.5	23.9	22.7	22.0	20.6	19.3
G107.0	27.4	26.7	25.5	24.6	24.1	23.2	22.3	21.3	20.4	19.0
G108.0	24.6	24.6	24.4	24.1	23.9	23.0	22.0	21.1	20.0	18.8
G109.0	24.4	24.4	24.1	23.9	23.4	22.7	21.8	20.6	20.0	19.0
G110.0	24.1	24.1	24.1	23.9	23.4	22.5	21.8	20.9	20.0	19.3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	24.1	23.9	23.9	23.7	23.2	22.5	21.8	20.9	20.2	19.5
G112.0	24.1	24.1	23.9	23.7	23.0	22.5	21.8	20.9	20.4	19.7
G113.0	23.9	23.9	23.7	23.4	23.0	22.5	21.8	21.1	20.9	20.4
G114.0	23.9	23.9	23.7	23.7	23.0	22.5	22.3	21.6	21.3	20.9
G115.0	23.9	23.9	23.7	23.7	23.2	23.0	22.5	22.0	21.8	21.6
G116.0	24.1	23.9	23.9	23.9	23.4	23.0	22.7	22.5	22.3	22.3
G117.0	24.4	24.1	24.1	23.9	23.7	23.4	23.2	23.0	23.0	23.0
G118.0	24.6	24.6	24.4	24.4	24.1	23.9	23.9	23.9	23.7	23.4
G119.0	25.1	24.8	24.8	24.6	24.6	24.6	24.4	24.4	24.4	24.1
G120.0	25.1	25.1	25.1	25.1	25.1	25.3	25.1	25.1	25.1	25.1
G121.0	25.8	25.8	25.8	25.8	25.8	25.8	25.8	25.5	25.8	25.5
G122.0	26.5	26.5	26.2	26.5	26.5	26.5	26.2	26.5	26.2	26.2
G123.0	27.1	27.1	26.9	27.1	26.9	27.1	26.9	26.9	26.9	26.7
G124.0	27.6	27.6	27.8	27.8	27.6	27.6	27.6	27.6	27.6	27.6
G125.0	28.3	28.3	28.1	28.3	28.3	28.1	28.3	28.1	28.3	28.1
G126.0	29.0	28.8	29.0	29.0	28.8	28.8	29.0	29.0	28.8	28.8
G127.0	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.7	29.5	29.2
G128.0	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2
G129.0	30.9	30.6	30.6	30.6	30.9	30.9	30.6	30.6	30.9	30.9
G130.0	31.3	31.3	31.3	31.3	31.3	31.5	31.5	31.3	31.5	31.5
G131.0	32.0	31.8	32.0	32.0	31.8	32.0	32.0	32.0	32.3	32.0
G132.0	32.7	32.5	32.7	32.7	32.7	32.5	32.7	32.7	32.7	32.7
G133.0	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.4	33.4
G134.0	33.6	33.9	33.9	33.9	33.9	33.6	33.9	33.9	34.1	33.9
G135.0	34.3	34.3	34.3	34.3	34.3	34.3	34.6	34.6	34.6	34.3
G136.0	35.0	35.0	35.0	35.0	35.0	34.8	35.0	35.0	35.3	35.3
G137.0	35.5	35.5	35.5	35.5	35.5	35.5	35.5	35.7	35.7	35.7
G138.0	36.2	36.0	36.2	36.2	36.0	36.0	36.2	36.2	36.4	36.2
G139.0	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.9	36.9	36.9
G140.0	37.3	37.1	37.1	37.3	37.1	37.1	37.1	37.3	37.6	37.3
G141.0	37.8	37.6	37.8	37.8	37.8	37.6	37.8	37.8	38.0	38.0
G142.0	38.3	38.3	38.3	38.3	38.0	38.0	38.3	38.3	38.5	38.5
G143.0	38.7	38.7	38.7	38.7	38.7	38.5	38.7	38.7	39.0	39.0
G144.0	39.2	39.2	39.2	39.2	39.2	39.2	39.2	39.2	39.4	39.7
G145.0	39.4	39.7	39.7	39.7	39.7	39.4	39.7	39.7	39.9	40.1
G146.0	40.1	40.1	40.1	40.1	40.1	39.9	40.1	40.4	40.6	40.6
G147.0	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6	41.1	41.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	40.8	41.1	41.1	41.1	41.1	40.8	40.8	41.3	41.5	41.5
G149.0	41.5	41.3	41.5	41.5	41.5	41.5	41.5	41.5	42.0	42.0
G150.0	42.0	41.8	41.8	42.0	42.0	41.8	42.0	42.2	42.5	42.5
G151.0	42.5	42.2	42.2	42.5	42.2	42.5	42.2	42.5	42.9	42.9
G152.0	42.7	42.7	42.7	42.7	42.9	42.7	42.9	43.2	43.4	43.4
G153.0	43.2	43.2	43.4	43.4	43.2	43.4	43.4	43.6	43.8	43.8
G154.0	43.6	43.6	43.6	43.8	43.8	43.8	43.8	44.1	44.3	44.3
G155.0	43.8	44.1	44.1	44.3	44.1	44.3	44.3	44.5	44.5	44.8
G156.0	44.3	44.5	44.5	44.5	44.5	44.8	44.8	44.8	45.0	45.2
G157.0	44.8	44.8	44.8	45.0	45.0	45.2	45.0	45.2	45.5	45.5
G158.0	45.2	45.2	45.2	45.5	45.5	45.5	45.7	45.7	45.9	45.9
G159.0	45.5	45.7	45.7	45.7	45.7	45.9	45.9	46.2	46.4	46.4
G160.0	45.9	46.2	46.2	46.2	46.2	46.2	46.4	46.4	46.6	46.6
G161.0	46.4	46.4	46.4	46.6	46.6	46.6	46.9	46.9	47.1	47.1
G162.0	46.6	46.9	46.9	46.9	47.1	47.1	47.1	47.3	47.3	47.3
G163.0	47.1	47.1	47.1	47.3	47.3	47.3	47.3	47.6	47.8	47.8
G164.0	47.6	47.6	47.6	47.6	47.8	47.8	47.8	48.0	48.0	48.0
G165.0	47.8	47.8	47.8	48.0	48.0	48.0	48.0	48.3	48.3	48.5
G166.0	48.0	48.0	48.0	48.0	48.3	48.3	48.5	48.5	48.7	48.7
G167.0	48.5	48.3	48.3	48.5	48.7	48.5	48.5	49.0	49.0	49.2
G168.0	48.7	48.7	48.7	48.7	48.7	49.0	49.0	49.2	49.2	49.4
G169.0	49.2	49.0	49.0	49.0	49.2	49.2	49.2	49.2	49.4	49.7
G170.0	49.7	49.2	49.2	49.2	49.4	49.4	49.4	49.7	49.9	49.9
G171.0	49.9	49.7	49.4	49.4	49.7	49.7	49.9	49.9	50.1	50.1
G172.0	50.1	49.9	49.9	49.9	49.9	49.9	50.1	50.1	50.3	50.3
G173.0	50.6	50.1	50.1	50.1	50.3	50.1	50.1	50.3	50.6	50.6
G174.0	50.8	50.3	50.3	50.6	50.3	50.3	50.3	50.3	50.6	50.8
G175.0	51.0	50.6	50.3	50.6	50.3	50.6	50.6	50.6	50.8	51.0
G176.0	51.5	50.8	50.8	50.8	50.6	50.8	50.8	50.8	50.8	50.8
G177.0	51.5	51.0	51.0	50.8	50.8	50.8	50.8	50.8	51.0	51.0
G178.0	51.7	51.0	51.0	51.3	51.0	51.0	51.0	51.0	51.0	51.3
G179.0	52.0	51.0	51.3	51.5	51.3	51.3	51.0	51.3	51.3	51.3
G180.0	52.0	51.5	51.3	51.5	51.3	51.3	51.3	51.3	51.3	51.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	6920.7	6920.5	6918.6	6915.4	6910.5	6904.7	6903.5	6897.5	6893.8	6892.4
G1.0	6914.9	6913.5	6913.0	6912.3	6905.4	6900.0	6897.5	6893.1	6888.2	6887.8
G2.0	6909.8	6910.3	6909.1	6904.9	6901.4	6896.3	6894.3	6889.8	6886.6	6885.7
G3.0	6906.5	6906.5	6905.6	6901.9	6898.4	6894.0	6891.9	6888.9	6885.0	6883.8
G4.0	6900.5	6899.6	6898.0	6894.3	6891.2	6887.3	6884.5	6881.5	6879.6	6878.0
G5.0	6890.5	6889.4	6887.5	6882.9	6881.5	6876.4	6874.1	6870.8	6868.3	6868.0
G6.0	6877.5	6876.4	6875.9	6873.1	6868.3	6865.5	6863.9	6859.5	6856.9	6856.4
G7.0	6864.1	6865.3	6865.3	6862.5	6859.7	6853.9	6853.2	6849.2	6846.5	6846.0
G8.0	6849.7	6849.7	6849.2	6846.5	6844.1	6839.3	6837.9	6835.1	6831.4	6832.1
G9.0	6830.2	6830.0	6830.7	6828.4	6824.6	6819.5	6817.9	6815.1	6813.5	6814.4
G10.0	6806.5	6808.4	6807.2	6806.8	6803.5	6800.0	6798.0	6795.9	6795.6	6796.1
G11.0	6779.9	6783.4	6785.2	6783.8	6781.0	6778.2	6776.2	6774.5	6772.9	6774.1
G12.0	6753.9	6758.8	6761.3	6759.0	6754.6	6751.8	6749.2	6746.9	6746.0	6748.3
G13.0	6729.1	6731.8	6732.3	6732.3	6729.8	6724.9	6723.3	6721.2	6720.2	6721.9
G14.0	6695.9	6700.3	6706.5	6706.1	6702.6	6699.1	6696.4	6691.7	6692.2	6692.4
G15.0	6662.9	6670.6	6677.1	6676.6	6673.6	6667.6	6667.1	6664.3	6660.6	6662.2
G16.0	6629.8	6637.2	6640.2	6644.4	6639.5	6634.9	6636.5	6630.2	6628.4	6628.8
G17.0	6595.9	6599.6	6604.5	6606.8	6604.2	6601.7	6603.5	6598.4	6595.9	6595.9
G18.0	6558.3	6562.5	6566.0	6569.2	6567.8	6567.6	6568.5	6562.0	6562.9	6562.5
G19.0	6521.2	6524.2	6527.0	6529.8	6531.6	6531.6	6531.4	6525.8	6525.6	6527.5
G20.0	6477.6	6482.9	6481.7	6484.8	6488.5	6488.7	6490.8	6486.9	6486.6	6488.7
G21.0	6431.6	6436.0	6434.9	6440.0	6443.9	6446.3	6447.2	6444.2	6446.3	6447.2
G22.0	6382.7	6390.8	6388.2	6393.6	6396.4	6398.0	6399.8	6397.5	6403.3	6404.3
G23.0	6335.1	6340.5	6340.9	6341.4	6346.3	6348.3	6351.6	6352.5	6354.6	6357.6
G24.0	6285.0	6291.0	6286.2	6292.0	6295.2	6298.5	6301.9	6301.2	6307.3	6308.7
G25.0	6233.0	6236.8	6237.2	6237.7	6242.5	6247.2	6250.9	6248.4	6253.5	6257.4
G26.0	6176.0	6182.2	6183.4	6186.6	6186.4	6193.1	6197.8	6193.1	6198.7	6202.6
G27.0	6119.6	6124.9	6126.8	6129.8	6131.4	6138.1	6141.4	6137.2	6143.7	6149.7
G28.0	6058.3	6067.4	6067.1	6074.3	6073.0	6080.4	6083.4	6082.7	6086.2	6092.4
G29.0	5994.5	6003.6	6006.6	6014.5	6014.5	6020.8	6023.5	6024.0	6028.6	6036.5
G30.0	5926.6	5936.8	5942.1	5951.4	5950.9	5957.9	5964.8	5963.9	5968.8	5975.7
G31.0	5859.5	5868.1	5876.9	5885.3	5888.0	5893.4	5903.8	5904.0	5905.7	5915.9
G32.0	5789.4	5798.3	5806.1	5816.1	5818.7	5825.9	5835.1	5835.4	5841.4	5848.1
G33.0	5718.0	5726.3	5737.0	5747.5	5749.8	5754.6	5765.5	5767.2	5772.3	5779.2
G34.0	5644.2	5652.3	5658.1	5673.2	5676.0	5681.8	5695.3	5696.2	5702.7	5707.3
G35.0	5570.9	5573.7	5583.9	5597.1	5601.3	5604.8	5621.7	5621.5	5630.8	5634.9
G36.0	5490.1	5495.7	5504.8	5513.4	5521.5	5529.8	5542.6	5546.5	5555.8	5560.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	5407.8	5417.5	5423.8	5432.6	5442.6	5451.0	5463.2	5469.3	5475.3	5481.6
G38.0	5325.0	5334.9	5338.2	5352.1	5360.9	5368.6	5380.0	5382.5	5391.3	5401.3
G39.0	5238.4	5252.1	5254.7	5264.6	5276.5	5287.4	5295.5	5301.1	5307.3	5318.5
G40.0	5147.0	5162.6	5162.8	5176.5	5188.3	5197.8	5206.9	5217.8	5223.4	5231.0
G41.0	5056.8	5070.9	5074.6	5088.8	5100.6	5112.2	5119.4	5129.6	5137.3	5148.6
G42.0	4962.6	4977.0	4981.6	4990.2	5009.2	5016.9	5029.9	5041.5	5045.4	5056.3
G43.0	4868.6	4881.1	4886.7	4896.9	4913.4	4924.1	4932.6	4948.0	4954.5	4968.1
G44.0	4774.6	4782.3	4789.0	4802.5	4813.2	4825.0	4837.1	4851.0	4860.5	4867.2
G45.0	4675.6	4679.5	4694.1	4703.2	4715.5	4729.0	4742.9	4754.0	4762.6	4771.4
G46.0	4576.1	4577.7	4587.0	4601.4	4613.2	4631.5	4643.3	4658.9	4665.6	4671.9
G47.0	4478.9	4476.5	4482.8	4500.9	4509.2	4528.5	4543.1	4553.8	4564.0	4569.3
G48.0	4371.7	4369.8	4375.6	4390.7	4399.5	4419.7	4434.8	4453.1	4460.3	4468.4
G49.0	4262.4	4266.8	4263.1	4283.0	4290.7	4310.4	4326.0	4345.7	4354.3	4360.5
G50.0	4152.2	4160.3	4156.6	4171.4	4183.3	4198.8	4217.8	4234.5	4244.5	4250.3
G51.0	4042.0	4049.6	4044.8	4061.0	4070.5	4084.7	4103.5	4121.3	4131.3	4139.7
G52.0	3933.2	3929.5	3931.6	3946.4	3957.5	3974.2	3990.0	4006.7	4014.8	4025.1
G53.0	3818.1	3811.4	3813.7	3824.1	3838.3	3852.9	3872.4	3886.1	3897.7	3905.1
G54.0	3707.7	3694.4	3695.8	3706.3	3716.3	3732.5	3752.7	3766.1	3780.8	3784.2
G55.0	3593.3	3581.9	3576.4	3587.3	3595.8	3611.9	3626.7	3640.6	3654.1	3654.5
G56.0	3475.2	3467.8	3460.4	3465.9	3478.9	3483.8	3499.3	3514.9	3528.6	3533.2
G57.0	3354.1	3350.1	3335.3	3344.1	3345.7	3356.9	3371.7	3379.4	3393.5	3401.6
G58.0	3239.5	3226.0	3207.5	3214.9	3219.1	3227.4	3235.1	3242.3	3251.3	3262.7
G59.0	3121.2	3101.9	3088.0	3088.4	3078.2	3085.7	3093.6	3099.8	3114.0	3127.6
G60.0	2999.6	2976.6	2961.1	2950.9	2940.0	2944.1	2950.9	2960.6	2973.6	2984.5
G61.0	2871.1	2854.6	2829.1	2813.5	2803.8	2801.9	2802.1	2808.6	2828.8	2831.9
G62.0	2756.4	2724.7	2691.5	2671.1	2664.3	2661.6	2656.4	2659.2	2676.4	2684.8
G63.0	2630.9	2592.9	2556.5	2537.9	2515.9	2506.6	2506.1	2509.1	2525.4	2533.3
G64.0	2500.8	2462.3	2422.8	2401.7	2378.3	2359.3	2357.6	2360.6	2370.2	2382.7
G65.0	2372.0	2330.7	2291.5	2262.7	2229.3	2214.3	2200.8	2202.6	2222.4	2225.2
G66.0	2252.8	2202.6	2156.3	2125.2	2086.2	2069.7	2056.7	2053.2	2068.3	2071.3
G67.0	2124.9	2074.4	2025.2	1987.6	1943.7	1921.2	1904.5	1896.9	1910.6	1924.7
G68.0	2002.9	1950.0	1895.9	1851.9	1812.2	1773.9	1760.2	1743.8	1759.3	1766.9
G69.0	1875.5	1827.3	1766.3	1723.6	1672.3	1633.3	1602.0	1600.8	1602.2	1621.5
G70.0	1752.3	1696.4	1640.5	1589.2	1531.9	1496.2	1470.4	1446.1	1458.4	1476.2
G71.0	1624.7	1574.8	1511.3	1468.6	1402.9	1358.6	1321.3	1304.8	1308.3	1329.2
G72.0	1502.2	1453.7	1388.3	1334.0	1270.2	1220.3	1184.6	1165.6	1165.6	1186.0
G73.0	1383.2	1333.8	1267.9	1213.6	1147.5	1087.4	1046.8	1021.3	1023.4	1046.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	1261.2	1209.9	1149.8	1091.6	1024.5	963.3	913.9	889.7	888.3	912.2
G75.0	1144.5	1093.9	1030.3	980.2	907.8	840.8	790.2	764.0	760.3	778.6
G76.0	1032.0	982.3	921.1	863.3	799.7	730.6	674.4	638.5	639.9	662.8
G77.0	917.6	870.5	812.5	754.3	688.8	626.6	563.8	528.7	527.3	548.9
G78.0	809.5	760.5	706.7	651.7	588.8	526.0	468.9	434.8	429.9	448.7
G79.0	702.0	662.6	608.1	558.2	494.4	435.2	382.3	346.4	341.0	361.5
G80.0	609.7	566.6	515.3	469.6	415.5	359.6	311.1	275.4	271.5	287.5
G81.0	511.6	478.2	435.9	389.3	343.1	294.0	252.2	217.4	212.8	231.5
G82.0	427.8	395.6	360.5	324.1	281.9	238.3	202.5	172.1	166.1	183.8
G83.0	346.6	321.1	291.9	263.1	228.3	190.0	157.1	132.9	127.6	142.2
G84.0	280.0	258.0	232.2	211.6	182.4	149.2	116.0	93.3	88.9	103.7
G85.0	218.1	202.8	183.8	165.6	141.5	112.1	82.6	60.3	55.9	68.9
G86.0	171.0	156.4	141.5	128.1	107.7	81.9	58.5	39.7	35.3	46.4
G87.0	142.2	130.6	116.7	98.1	79.8	59.6	41.3	26.9	23.0	32.3
G88.0	128.8	125.3	116.5	95.6	63.8	43.6	29.2	18.8	16.2	22.5
G89.0	99.1	97.0	93.5	81.4	51.5	32.3	21.8	13.5	9.7	15.5
G90.0	86.1	81.9	77.0	62.2	36.9	26.0	17.2	10.4	6.5	11.8
G91.0	81.9	75.2	68.2	51.5	30.6	21.8	13.9	8.8	7.0	9.5
G92.0	75.9	70.3	65.4	52.2	26.5	18.3	11.8	7.7	7.4	8.4
G93.0	70.5	74.0	83.3	48.7	21.8	15.3	10.2	7.9	7.9	7.9
G94.0	91.9	84.0	51.3	31.3	18.6	13.2	9.5	8.4	8.4	8.4
G95.0	74.5	51.5	39.2	25.5	16.0	11.6	9.3	8.8	8.8	8.8
G96.0	51.7	43.2	32.7	20.6	13.7	10.7	9.5	9.5	9.3	9.5
G97.0	45.5	37.1	27.1	16.7	12.3	10.2	10.0	10.0	10.0	10.0
G98.0	39.7	32.3	20.9	14.6	11.8	10.4	10.7	10.4	10.4	10.2
G99.0	34.3	25.5	17.4	14.1	11.6	11.4	11.1	11.1	10.9	10.9
G100.0	27.6	20.4	16.7	13.7	11.8	11.6	11.6	11.6	11.6	11.6
G101.0	22.7	18.8	16.0	13.7	12.3	12.3	12.3	12.1	12.1	12.3
G102.0	20.0	17.9	15.5	13.7	13.0	13.0	13.0	12.8	12.8	12.8
G103.0	19.3	17.2	15.3	13.9	13.7	13.5	13.5	13.5	13.5	13.5
G104.0	18.3	16.7	15.1	14.1	14.1	14.1	14.1	14.1	13.9	13.9
G105.0	18.1	16.5	15.3	14.9	14.9	14.6	14.6	14.6	14.6	14.6
G106.0	18.1	16.5	15.5	15.3	15.3	15.3	15.3	15.3	15.3	15.1
G107.0	17.9	16.7	16.0	16.0	16.0	16.0	16.0	16.0	15.8	15.8
G108.0	18.1	17.2	16.9	16.7	16.7	16.5	16.5	16.5	16.5	16.7
G109.0	18.3	17.6	17.4	17.2	17.2	17.2	17.2	17.2	17.2	17.2
G110.0	18.3	18.1	17.9	17.9	17.9	17.9	17.9	17.9	17.6	17.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	19.0	18.8	18.8	18.3	18.6	18.6	18.6	18.6	18.3	18.6
G112.0	19.7	19.3	19.3	19.0	19.0	19.0	19.0	19.0	19.0	19.0
G113.0	20.2	20.2	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7
G114.0	20.9	20.6	20.4	20.4	20.4	20.4	20.4	20.6	20.4	20.4
G115.0	21.3	21.1	21.1	21.1	21.1	21.1	21.1	21.1	21.1	20.9
G116.0	22.0	22.0	21.8	21.8	21.6	21.8	21.8	21.8	21.8	21.8
G117.0	22.7	22.5	22.5	22.5	22.3	22.5	22.3	22.5	22.3	22.3
G118.0	23.4	23.2	23.2	23.0	23.0	23.0	23.2	23.2	23.0	23.0
G119.0	24.1	23.9	23.9	23.7	23.7	23.7	23.7	23.9	23.7	23.9
G120.0	24.6	24.6	24.4	24.4	24.1	24.4	24.4	24.4	24.4	24.4
G121.0	25.3	25.1	25.3	25.1	25.1	24.8	25.1	25.1	25.1	25.1
G122.0	26.0	26.0	25.8	25.5	25.5	25.8	25.8	25.8	25.8	25.8
G123.0	26.7	26.5	26.5	26.5	26.2	26.5	26.5	26.5	26.5	26.2
G124.0	27.4	27.4	26.9	26.9	26.9	27.1	27.1	27.1	27.1	27.1
G125.0	28.1	27.8	27.6	27.6	27.6	27.8	27.8	27.8	27.8	27.8
G126.0	28.8	28.5	28.5	28.3	28.3	28.5	28.5	28.5	28.5	28.5
G127.0	29.2	29.0	29.0	29.0	29.0	29.2	29.0	29.2	29.0	29.0
G128.0	29.9	29.7	29.7	29.7	29.7	29.7	29.9	29.7	29.7	29.7
G129.0	30.6	30.4	30.4	30.4	30.4	30.4	30.4	30.4	30.4	30.6
G130.0	31.3	31.1	31.1	31.1	31.1	31.1	31.1	31.1	31.1	31.1
G131.0	32.0	31.8	31.8	31.5	31.5	31.8	31.8	31.8	31.8	31.8
G132.0	32.7	32.3	32.3	32.3	32.3	32.5	32.3	32.3	32.5	32.5
G133.0	33.2	33.2	32.9	32.9	32.9	32.9	32.9	32.9	32.9	32.9
G134.0	33.9	33.6	33.6	33.6	33.6	33.6	33.6	33.6	33.6	33.6
G135.0	34.6	34.3	34.3	34.1	34.3	34.3	34.1	34.3	34.1	34.1
G136.0	35.0	35.0	35.0	34.8	35.0	34.8	34.8	34.8	34.8	34.8
G137.0	35.7	35.5	35.5	35.5	35.5	35.5	35.5	35.5	35.3	35.5
G138.0	36.2	36.2	36.2	36.2	36.2	36.2	36.0	36.2	36.0	36.0
G139.0	36.9	36.9	36.9	36.7	36.7	36.7	36.7	36.7	36.7	36.4
G140.0	37.3	37.3	37.3	37.1	37.3	37.1	37.3	37.3	37.1	37.1
G141.0	38.0	38.0	38.0	37.8	38.0	37.8	37.8	37.8	37.8	37.8
G142.0	38.5	38.5	38.5	38.5	38.5	38.3	38.3	38.5	38.3	38.3
G143.0	39.2	39.2	39.2	39.0	39.0	39.0	39.0	39.0	39.0	38.7
G144.0	39.7	39.7	39.7	39.7	39.4	39.4	39.4	39.4	39.4	39.4
G145.0	40.1	40.4	40.4	40.1	40.1	39.9	39.9	40.1	39.9	39.9
G146.0	40.8	40.8	40.8	40.6	40.6	40.4	40.6	40.6	40.4	40.4
G147.0	41.3	41.3	41.5	41.1	41.1	41.1	41.1	41.1	41.1	40.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	41.8	41.8	42.0	41.8	41.5	41.5	41.3	41.5	41.5	41.5
G149.0	42.2	42.5	42.2	42.2	42.0	42.0	42.0	42.0	42.0	42.0
G150.0	42.7	42.7	42.7	42.7	42.5	42.5	42.2	42.5	42.5	42.2
G151.0	43.2	43.4	43.4	43.2	43.2	42.9	42.9	42.9	42.9	42.9
G152.0	43.6	43.8	43.6	43.6	43.6	43.4	43.4	43.4	43.4	43.4
G153.0	44.1	44.1	44.1	44.1	44.1	43.8	43.8	43.8	43.8	43.8
G154.0	44.5	44.8	44.8	44.5	44.5	44.3	44.3	44.3	44.3	44.3
G155.0	44.8	45.0	45.0	45.0	45.0	44.8	44.8	44.8	44.5	44.8
G156.0	45.2	45.2	45.5	45.5	45.5	45.2	45.0	45.0	45.2	45.0
G157.0	45.7	45.7	45.9	45.9	45.7	45.7	45.5	45.5	45.5	45.7
G158.0	46.2	46.4	46.4	46.4	46.2	46.2	45.9	45.9	45.9	45.9
G159.0	46.6	46.6	46.9	46.6	46.6	46.6	46.4	46.4	46.2	46.2
G160.0	46.9	46.9	47.1	47.1	47.1	47.1	46.9	46.6	46.6	46.6
G161.0	47.3	47.3	47.3	47.6	47.6	47.6	47.3	47.1	47.1	46.9
G162.0	47.6	47.8	47.8	48.0	48.0	47.8	47.8	47.6	47.6	47.3
G163.0	47.8	48.0	48.0	48.3	48.3	48.3	48.3	48.0	47.8	47.8
G164.0	48.0	48.3	48.5	48.7	48.7	48.7	48.5	48.3	48.3	48.0
G165.0	48.7	48.7	49.0	49.0	49.0	49.2	49.0	48.7	48.3	48.3
G166.0	48.7	49.0	49.2	49.2	49.2	49.4	49.2	49.0	48.7	48.5
G167.0	49.2	49.4	49.4	49.4	49.7	49.7	49.4	49.4	49.2	49.0
G168.0	49.4	49.7	49.7	49.7	49.9	49.9	49.9	49.7	49.4	49.2
G169.0	49.9	49.9	49.9	49.9	50.1	50.1	50.1	49.9	49.7	49.7
G170.0	49.9	50.1	50.1	50.1	50.3	50.6	50.3	50.1	49.9	49.9
G171.0	50.3	50.3	50.3	50.3	50.6	50.6	50.6	50.6	50.1	49.9
G172.0	50.3	50.3	50.6	50.6	50.8	50.8	50.8	50.8	50.3	50.3
G173.0	50.6	50.8	50.6	50.8	51.0	51.0	51.0	50.8	50.6	50.3
G174.0	50.8	50.8	51.0	50.8	51.0	51.0	51.0	51.3	50.8	50.6
G175.0	51.0	51.0	51.0	51.0	51.3	51.3	51.3	51.3	51.0	50.6
G176.0	51.0	51.0	51.3	51.0	51.3	51.3	51.3	51.5	51.0	50.8
G177.0	51.0	51.0	51.0	51.3	51.3	51.3	51.5	51.3	51.3	51.0
G178.0	51.3	51.3	51.3	51.3	51.3	51.5	51.5	51.5	51.5	51.0
G179.0	51.3	51.5	51.3	51.3	51.3	51.5	51.5	51.5	51.5	51.0
G180.0	51.3	51.5	51.5	51.5	51.3	51.5	51.5	51.5	51.5	51.5

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	6889.8	6889.1	6889.8	6891.7	6894.9	6899.4	6903.1	6906.1	6908.6	6912.3
G1.0	6885.2	6884.0	6886.1	6888.2	6892.2	6896.1	6901.2	6903.8	6907.5	6911.4
G2.0	6882.6	6882.0	6883.6	6885.9	6889.8	6894.7	6899.8	6902.8	6906.1	6910.0
G3.0	6882.2	6881.5	6883.8	6885.4	6890.3	6895.2	6899.6	6902.8	6905.1	6909.8
G4.0	6877.8	6877.3	6881.3	6882.6	6888.2	6893.5	6898.6	6901.4	6904.5	6908.6
G5.0	6867.8	6867.8	6871.3	6873.6	6878.9	6886.4	6892.9	6895.6	6900.7	6903.5
G6.0	6857.6	6858.0	6861.5	6864.5	6868.7	6875.7	6881.3	6885.2	6889.6	6894.5
G7.0	6847.6	6848.3	6852.0	6854.3	6859.2	6865.3	6871.3	6873.6	6877.5	6882.9
G8.0	6833.7	6833.9	6839.5	6842.3	6847.1	6852.3	6858.0	6860.8	6864.1	6870.6
G9.0	6817.0	6817.2	6821.6	6825.8	6830.5	6836.7	6840.9	6845.5	6849.2	6854.8
G10.0	6798.4	6798.7	6802.8	6805.6	6811.2	6816.5	6823.3	6828.6	6830.7	6836.9
G11.0	6778.0	6779.2	6783.6	6785.4	6790.1	6795.4	6801.0	6806.3	6810.5	6816.1
G12.0	6753.4	6753.9	6761.1	6763.9	6770.1	6775.2	6779.4	6781.3	6786.1	6793.8
G13.0	6726.0	6729.1	6736.0	6739.0	6746.2	6750.6	6754.6	6755.3	6759.2	6766.2
G14.0	6699.8	6702.4	6710.5	6711.7	6717.7	6722.1	6727.0	6728.8	6729.8	6736.5
G15.0	6669.0	6672.2	6680.1	6682.9	6687.8	6689.6	6696.1	6699.4	6702.1	6708.4
G16.0	6637.9	6640.4	6649.3	6652.3	6657.4	6659.0	6664.8	6666.4	6672.2	6677.1
G17.0	6604.9	6608.0	6612.8	6617.5	6622.3	6626.5	6630.2	6636.5	6639.3	6648.1
G18.0	6571.3	6574.5	6579.2	6580.1	6586.1	6591.5	6598.4	6600.8	6605.4	6618.4
G19.0	6534.2	6537.9	6541.4	6544.9	6549.3	6554.8	6560.6	6566.9	6572.0	6582.0
G20.0	6497.3	6497.8	6503.3	6502.6	6508.9	6514.9	6523.5	6527.2	6535.1	6545.1
G21.0	6454.1	6456.0	6459.7	6458.8	6463.2	6472.7	6480.4	6486.6	6495.2	6502.2
G22.0	6410.8	6411.0	6415.9	6414.0	6417.5	6426.1	6438.6	6442.5	6451.1	6460.2
G23.0	6362.5	6365.3	6368.5	6368.3	6372.0	6380.8	6391.7	6399.1	6405.9	6411.7
G24.0	6314.9	6316.6	6321.9	6318.2	6324.2	6334.4	6345.1	6350.2	6353.4	6362.0
G25.0	6263.7	6268.1	6271.3	6268.1	6273.9	6285.0	6299.1	6302.6	6303.8	6309.1
G26.0	6213.1	6214.5	6218.6	6216.6	6224.0	6234.9	6248.1	6248.4	6251.1	6256.5
G27.0	6160.9	6160.9	6162.3	6161.3	6169.9	6180.8	6192.7	6192.9	6194.1	6200.5
G28.0	6104.5	6103.3	6103.6	6106.1	6116.3	6123.8	6134.0	6133.3	6135.8	6144.2
G29.0	6044.2	6043.5	6045.1	6048.6	6058.6	6064.1	6072.0	6074.1	6079.0	6089.2
G30.0	5982.5	5980.1	5983.9	5987.6	5997.8	6000.6	6008.7	6011.2	6018.4	6028.4
G31.0	5919.6	5917.5	5923.8	5928.9	5934.0	5935.4	5942.3	5950.5	5956.0	5967.6
G32.0	5851.1	5848.1	5853.9	5861.8	5869.7	5869.0	5875.8	5882.9	5888.7	5900.3
G33.0	5782.5	5778.8	5787.4	5793.9	5799.0	5802.7	5806.8	5814.5	5820.3	5830.5
G34.0	5711.7	5707.3	5716.8	5725.4	5730.0	5729.6	5738.4	5742.8	5748.1	5761.6
G35.0	5640.3	5636.5	5641.9	5653.7	5656.0	5657.4	5664.6	5671.8	5677.1	5686.2
G36.0	5564.9	5560.5	5565.3	5575.1	5576.7	5582.5	5589.7	5596.6	5601.5	5610.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	5489.9	5484.1	5490.1	5496.6	5500.4	5504.5	5512.4	5520.5	5524.5	5532.6
G38.0	5405.9	5400.8	5408.7	5415.7	5417.1	5423.8	5427.8	5438.0	5443.8	5454.7
G39.0	5325.0	5319.2	5329.1	5328.7	5335.6	5340.7	5346.1	5353.3	5364.4	5378.8
G40.0	5239.1	5236.1	5246.1	5238.9	5250.0	5257.0	5263.7	5270.5	5284.4	5296.7
G41.0	5151.7	5149.1	5156.5	5154.9	5161.4	5168.8	5177.4	5184.4	5199.2	5211.0
G42.0	5058.6	5058.2	5069.3	5060.3	5069.5	5079.0	5087.9	5094.4	5110.8	5123.1
G43.0	4964.7	4966.8	4975.1	4968.1	4976.5	4986.5	4996.7	5008.8	5023.6	5034.5
G44.0	4869.8	4870.2	4878.4	4875.1	4882.1	4891.1	4899.7	4914.8	4932.9	4943.3
G45.0	4772.6	4772.1	4783.5	4779.8	4790.7	4795.8	4810.6	4822.2	4833.8	4848.4
G46.0	4672.6	4674.0	4680.9	4684.2	4685.6	4699.7	4714.3	4724.8	4738.5	4757.5
G47.0	4571.4	4576.5	4584.4	4581.2	4588.8	4600.6	4617.4	4626.2	4644.0	4667.7
G48.0	4471.2	4469.6	4475.4	4480.7	4483.5	4497.2	4519.0	4525.0	4547.5	4570.0
G49.0	4361.2	4365.2	4367.3	4372.1	4383.7	4391.9	4415.3	4427.8	4449.4	4469.1
G50.0	4254.7	4257.0	4257.5	4262.4	4271.7	4287.9	4309.0	4318.1	4347.5	4367.3
G51.0	4143.4	4143.4	4150.3	4149.9	4166.1	4179.6	4201.4	4219.0	4245.9	4264.9
G52.0	4032.9	4025.7	4038.7	4036.6	4049.2	4068.9	4092.3	4114.6	4136.4	4158.2
G53.0	3912.8	3910.0	3919.3	3913.9	3939.9	3950.3	3980.5	4004.6	4025.7	4057.8
G54.0	3789.3	3791.4	3800.9	3803.3	3826.9	3840.1	3876.1	3887.9	3920.6	3947.6
G55.0	3670.3	3668.7	3684.0	3686.1	3710.2	3724.8	3757.8	3780.1	3812.5	3840.8
G56.0	3541.6	3543.2	3559.4	3569.6	3592.4	3615.1	3645.0	3670.3	3705.8	3730.4
G57.0	3418.6	3417.9	3439.5	3445.0	3471.0	3499.6	3527.2	3556.6	3593.1	3624.4
G58.0	3283.3	3291.7	3306.8	3318.4	3342.7	3377.3	3409.5	3445.0	3477.1	3512.3
G59.0	3146.9	3146.9	3173.6	3192.1	3221.6	3249.5	3288.7	3327.4	3362.2	3399.1
G60.0	2999.1	3012.6	3035.1	3061.3	3094.7	3127.6	3174.5	3209.6	3244.4	3283.1
G61.0	2857.4	2870.8	2898.7	2925.6	2970.4	3002.8	3052.3	3087.8	3131.8	3173.6
G62.0	2707.3	2731.9	2759.0	2785.2	2835.6	2882.7	2930.4	2971.3	3017.7	3053.6
G63.0	2562.3	2576.9	2620.0	2650.4	2698.7	2750.4	2810.7	2848.8	2899.8	2940.0
G64.0	2410.1	2427.7	2472.9	2509.8	2563.2	2618.9	2683.1	2730.2	2776.4	2823.7
G65.0	2261.6	2279.2	2333.7	2367.6	2431.9	2486.4	2556.9	2608.0	2657.1	2700.1
G66.0	2108.2	2132.4	2184.6	2228.9	2292.2	2353.7	2430.0	2483.4	2540.4	2586.6
G67.0	1952.3	1990.8	2042.8	2096.4	2160.2	2223.3	2305.7	2357.9	2416.1	2468.8
G68.0	1807.6	1842.3	1899.4	1956.3	2025.6	2099.4	2172.3	2234.4	2299.9	2345.3
G69.0	1667.2	1697.6	1763.5	1816.1	1895.0	1976.0	2048.8	2109.9	2172.0	2231.0
G70.0	1515.4	1557.0	1625.0	1679.7	1762.5	1839.3	1917.5	1986.7	2050.0	2099.2
G71.0	1372.1	1417.3	1486.2	1551.7	1638.2	1711.5	1798.7	1860.7	1924.0	1978.3
G72.0	1229.9	1281.4	1356.8	1428.4	1509.7	1587.4	1672.5	1738.4	1800.8	1857.2
G73.0	1090.7	1149.1	1224.8	1296.4	1387.2	1467.9	1551.9	1614.8	1676.5	1731.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	960.7	1023.1	1107.1	1179.1	1261.9	1347.5	1426.8	1493.7	1553.3	1603.6
G75.0	834.8	895.3	983.0	1062.1	1148.9	1228.9	1310.1	1369.1	1429.6	1483.7
G76.0	717.1	785.8	870.3	948.9	1032.7	1111.5	1189.3	1251.7	1313.4	1359.6
G77.0	604.4	669.8	758.4	834.5	924.1	998.3	1073.7	1131.5	1193.2	1239.6
G78.0	501.1	572.4	659.6	733.8	812.5	889.0	959.6	1019.2	1073.7	1120.8
G79.0	412.7	480.0	558.2	631.0	710.2	781.4	855.2	906.2	957.7	1001.8
G80.0	340.4	398.8	471.4	541.5	609.9	678.4	746.8	797.6	847.3	885.6
G81.0	276.3	330.1	395.1	455.4	522.7	583.0	643.3	693.7	740.3	776.5
G82.0	224.6	272.6	328.0	383.7	441.3	498.8	550.5	596.3	637.8	671.2
G83.0	176.1	220.4	270.3	318.5	366.3	414.8	467.3	504.1	539.0	570.3
G84.0	137.6	177.3	220.9	261.9	300.9	343.6	386.3	419.0	451.9	478.6
G85.0	100.7	137.8	177.0	210.0	245.7	278.4	313.7	342.0	368.4	392.5
G86.0	74.0	104.4	138.7	167.7	196.0	223.0	251.5	274.5	296.3	315.1
G87.0	52.4	77.9	105.8	130.1	153.8	174.7	196.7	214.4	231.8	245.5
G88.0	38.7	58.2	81.2	100.5	119.3	134.6	151.7	165.0	177.9	187.9
G89.0	28.3	43.2	59.9	75.2	88.6	100.2	115.5	126.7	138.3	145.0
G90.0	21.1	32.0	45.0	59.6	68.7	75.6	87.0	99.8	111.1	119.5
G91.0	16.5	26.5	41.1	74.0	81.9	78.4	79.1	88.2	100.2	110.2
G92.0	13.5	22.0	31.3	60.1	83.3	87.0	88.2	94.4	103.9	113.7
G93.0	11.4	18.3	26.5	45.7	69.1	76.6	82.8	93.7	108.3	120.9
G94.0	10.2	15.3	22.7	37.1	48.0	67.1	76.3	86.5	102.6	120.6
G95.0	9.5	13.0	19.0	43.2	48.0	47.8	64.3	79.8	94.4	110.7
G96.0	9.3	11.6	16.5	29.7	57.3	54.8	50.3	63.1	80.5	96.8
G97.0	9.7	10.7	14.6	22.5	41.1	61.3	58.9	63.6	69.6	77.5
G98.0	10.2	10.7	13.2	18.1	31.1	46.9	62.6	68.7	78.2	80.5
G99.0	10.9	11.1	12.5	16.0	23.4	36.7	49.4	62.4	74.5	87.9
G100.0	11.6	11.6	12.8	14.9	19.0	28.3	39.2	49.2	60.8	76.6
G101.0	12.1	12.1	12.8	14.4	17.9	23.7	31.3	40.1	49.4	62.4
G102.0	12.5	12.5	13.2	14.4	16.9	20.2	26.2	32.5	40.4	51.3
G103.0	13.5	13.2	13.5	14.1	16.2	19.0	22.5	27.6	33.4	41.8
G104.0	13.9	13.9	13.9	14.4	15.8	18.1	21.1	24.4	28.5	34.3
G105.0	14.4	14.4	14.4	14.9	15.8	17.4	19.7	22.5	25.3	29.2
G106.0	15.1	15.1	14.9	15.3	16.0	17.4	19.3	21.1	23.4	26.0
G107.0	15.8	15.5	15.8	15.5	16.0	17.2	18.8	20.4	22.0	24.1
G108.0	16.5	16.2	16.2	16.2	16.5	17.2	18.6	19.7	21.3	22.7
G109.0	16.9	16.9	16.9	16.9	17.2	17.4	18.3	19.5	20.9	22.3
G110.0	17.6	17.6	17.6	17.6	17.4	17.9	18.6	19.3	20.6	21.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	18.3	18.1	18.3	18.1	18.1	18.3	18.8	19.5	20.4	21.3
G112.0	19.0	18.8	18.8	18.8	18.8	18.8	19.0	19.7	20.4	21.3
G113.0	19.7	19.5	19.5	19.5	19.3	19.5	19.5	20.0	20.4	21.3
G114.0	20.2	20.2	20.2	20.0	20.0	20.2	20.0	20.2	20.6	21.3
G115.0	20.9	20.6	20.9	20.6	20.6	20.6	20.6	20.6	20.9	21.6
G116.0	21.6	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.8
G117.0	22.3	22.0	22.0	22.0	22.0	22.0	21.8	22.0	21.8	22.0
G118.0	23.0	22.7	22.7	22.7	22.5	22.5	22.5	22.5	22.5	22.7
G119.0	23.7	23.4	23.4	23.4	23.4	23.2	23.2	23.0	23.0	23.2
G120.0	24.4	23.9	24.1	23.9	23.9	23.9	23.9	23.7	23.9	23.9
G121.0	24.8	24.6	24.8	24.6	24.6	24.6	24.6	24.4	24.4	24.4
G122.0	25.8	25.5	25.3	25.3	25.3	25.1	25.1	25.1	24.8	24.8
G123.0	26.2	26.0	26.0	26.0	25.8	26.0	25.8	25.5	25.5	25.8
G124.0	26.9	26.7	26.7	26.5	26.7	26.7	26.5	26.5	26.2	26.5
G125.0	27.6	27.4	27.4	27.1	27.1	27.4	27.1	26.9	26.9	26.9
G126.0	28.3	28.1	28.1	28.1	27.8	27.8	27.8	27.4	27.6	27.6
G127.0	29.0	29.0	28.8	28.5	28.5	28.5	28.5	28.3	28.1	28.3
G128.0	29.7	29.7	29.5	29.2	29.2	29.2	29.0	29.0	28.8	28.8
G129.0	30.4	30.2	29.9	29.9	29.9	29.7	29.7	29.7	29.2	29.5
G130.0	31.1	30.9	30.9	30.6	30.4	30.6	30.4	30.2	30.2	29.9
G131.0	31.5	31.3	31.3	31.3	31.3	31.1	30.9	30.6	30.9	30.6
G132.0	32.3	32.3	32.0	32.0	32.0	31.8	31.5	31.3	31.3	31.1
G133.0	32.7	32.7	32.7	32.5	32.5	32.3	32.3	32.0	31.8	31.8
G134.0	33.6	33.2	33.2	33.2	33.2	32.9	32.7	32.5	32.5	32.5
G135.0	34.1	34.1	33.9	33.6	33.4	33.4	33.4	33.4	33.2	33.2
G136.0	34.6	34.6	34.3	34.1	34.3	34.1	34.1	33.6	33.6	33.6
G137.0	35.3	35.0	35.0	34.8	34.8	34.8	34.6	34.3	34.3	34.1
G138.0	36.0	35.7	35.7	35.3	35.3	35.3	35.0	35.0	34.8	35.0
G139.0	36.4	36.4	36.2	36.0	36.0	35.7	35.7	35.5	35.5	35.5
G140.0	37.1	36.9	36.7	36.4	36.4	36.4	36.2	36.0	36.2	36.0
G141.0	37.8	37.3	37.3	37.1	37.1	37.1	36.9	36.7	36.4	36.4
G142.0	38.0	38.0	38.0	37.6	37.6	37.6	37.3	37.1	37.1	37.1
G143.0	38.7	38.5	38.5	38.3	38.0	38.0	37.8	37.6	37.6	37.6
G144.0	39.2	39.0	39.0	38.7	38.7	38.5	38.3	38.3	38.3	38.0
G145.0	39.9	39.4	39.4	39.2	39.2	39.0	38.7	38.7	38.7	38.5
G146.0	40.1	40.1	39.9	39.7	39.4	39.4	39.4	39.2	39.2	39.2
G147.0	40.8	40.8	40.6	40.4	40.1	40.1	39.9	39.7	39.7	39.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	41.3	41.1	41.1	40.8	40.8	40.6	40.4	40.1	40.1	40.1
G149.0	41.8	41.5	41.5	41.5	41.3	40.8	40.8	40.6	40.4	40.4
G150.0	42.2	42.0	42.0	41.8	41.5	41.5	41.3	41.1	41.1	41.1
G151.0	42.7	42.7	42.5	42.2	42.2	41.8	41.8	41.5	41.5	41.5
G152.0	43.4	43.2	42.9	42.7	42.7	42.2	42.2	42.0	41.8	42.0
G153.0	43.8	43.4	43.4	43.2	43.2	42.9	42.7	42.5	42.5	42.5
G154.0	44.1	43.8	43.8	43.6	43.6	43.6	43.2	42.9	42.9	42.9
G155.0	44.5	44.3	44.3	44.1	43.8	43.8	43.6	43.4	43.4	43.4
G156.0	45.0	45.0	44.8	44.5	44.5	44.5	44.1	43.8	43.6	43.8
G157.0	45.2	45.0	45.2	45.0	45.0	44.8	44.5	44.3	44.1	44.1
G158.0	45.7	45.5	45.7	45.5	45.2	45.0	45.0	44.8	44.5	44.8
G159.0	46.4	46.2	45.9	45.9	45.9	45.7	45.5	45.2	45.0	45.0
G160.0	46.6	46.6	46.4	46.2	46.2	45.9	45.7	45.5	45.5	45.5
G161.0	47.1	46.9	46.9	46.6	46.4	46.4	46.2	46.2	45.9	45.9
G162.0	47.6	47.3	47.1	47.1	47.1	47.1	46.6	46.4	46.4	46.2
G163.0	47.6	47.8	47.6	47.6	47.6	47.3	47.1	46.9	46.6	46.6
G164.0	48.3	48.0	48.0	47.8	47.8	47.6	47.6	47.1	47.1	47.1
G165.0	48.3	48.3	48.3	48.0	48.0	48.0	48.0	47.6	47.6	47.6
G166.0	48.7	48.5	48.5	48.5	48.5	48.3	48.3	48.0	47.8	47.8
G167.0	49.0	49.0	49.0	48.7	48.7	48.5	48.5	48.3	48.3	48.3
G168.0	49.2	49.2	49.2	49.0	49.0	49.0	49.0	48.5	48.5	48.5
G169.0	49.4	49.4	49.4	49.4	49.2	49.4	49.2	49.0	49.0	49.0
G170.0	49.7	49.7	49.7	49.7	49.4	49.4	49.4	49.2	49.4	49.4
G171.0	49.9	49.9	49.9	49.7	49.7	49.7	49.9	49.4	49.4	49.7
G172.0	50.1	50.1	49.9	49.9	50.1	49.9	50.1	49.7	49.9	49.9
G173.0	50.3	50.1	50.1	50.3	50.3	50.1	50.1	49.9	50.1	50.1
G174.0	50.6	50.3	50.3	50.3	50.3	50.3	50.3	50.1	50.1	50.1
G175.0	50.6	50.3	50.3	50.3	50.3	50.6	50.6	50.3	50.3	50.3
G176.0	50.6	50.8	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6
G177.0	50.8	50.8	50.6	50.6	50.6	50.8	50.6	50.8	50.6	50.8
G178.0	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.6	50.8	50.8
G179.0	51.0	51.0	51.0	51.0	50.8	51.0	51.0	50.8	50.8	51.0
G180.0	51.0	51.0	51.0	51.0	50.8	51.0	50.8	50.8	50.8	51.0

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	6914.4	6915.6	6919.1	6919.3	6920.9	6922.3	6923.5	6923.0	6922.3	6923.5
G1.0	6913.7	6915.6	6919.3	6919.3	6921.6	6923.0	6924.2	6925.3	6923.7	6926.0
G2.0	6914.0	6916.0	6919.5	6919.3	6922.3	6923.0	6925.3	6927.0	6925.3	6929.0
G3.0	6912.3	6914.2	6917.5	6918.1	6921.6	6923.9	6926.0	6927.4	6926.0	6930.7
G4.0	6911.6	6912.6	6915.4	6916.5	6920.7	6923.3	6923.0	6926.5	6925.3	6927.9
G5.0	6906.5	6907.7	6910.7	6911.6	6915.8	6917.7	6917.0	6920.9	6920.9	6923.5
G6.0	6899.4	6901.7	6903.3	6903.3	6906.5	6911.6	6907.5	6911.6	6911.9	6913.7
G7.0	6888.9	6891.7	6895.6	6895.2	6897.7	6899.8	6894.7	6899.6	6898.4	6901.4
G8.0	6873.4	6878.2	6883.8	6883.1	6885.9	6888.0	6880.6	6884.3	6881.5	6884.3
G9.0	6857.1	6863.2	6868.5	6869.2	6870.6	6873.8	6862.5	6865.9	6863.9	6866.6
G10.0	6839.7	6844.8	6851.1	6853.4	6852.7	6854.6	6842.3	6846.5	6844.1	6844.8
G11.0	6820.0	6822.8	6831.1	6833.7	6833.2	6834.6	6820.7	6826.3	6820.2	6823.0
G12.0	6796.8	6799.4	6806.1	6811.2	6812.6	6813.3	6798.9	6803.3	6798.7	6802.1
G13.0	6770.1	6772.2	6780.3	6787.3	6790.5	6790.5	6775.2	6779.4	6773.4	6777.5
G14.0	6742.0	6745.5	6750.6	6759.7	6763.6	6766.0	6749.0	6754.4	6749.7	6753.9
G15.0	6711.7	6718.4	6724.9	6730.7	6735.6	6739.7	6720.9	6728.1	6722.6	6727.9
G16.0	6680.1	6689.6	6697.0	6701.5	6708.0	6710.7	6689.9	6697.7	6694.0	6698.7
G17.0	6650.9	6659.7	6670.1	6671.5	6679.2	6680.6	6657.4	6663.9	6658.5	6666.2
G18.0	6620.3	6627.9	6637.9	6641.4	6648.1	6648.8	6621.4	6627.0	6624.7	6630.2
G19.0	6588.5	6592.4	6603.3	6604.7	6611.9	6614.9	6582.7	6586.1	6586.4	6593.8
G20.0	6548.3	6555.5	6565.3	6566.2	6570.8	6576.9	6540.4	6545.8	6546.0	6553.0
G21.0	6505.2	6512.8	6522.1	6525.1	6528.8	6533.0	6493.6	6503.1	6505.2	6510.3
G22.0	6459.0	6467.6	6475.9	6480.1	6482.4	6489.6	6448.6	6457.9	6462.7	6465.0
G23.0	6412.8	6423.0	6430.2	6435.3	6437.0	6444.6	6404.0	6412.4	6414.7	6422.6
G24.0	6363.4	6371.8	6383.4	6390.1	6390.6	6400.3	6353.7	6361.8	6365.5	6375.0
G25.0	6313.8	6325.1	6336.7	6342.8	6343.2	6352.0	6304.7	6312.1	6310.8	6323.8
G26.0	6262.0	6271.3	6283.4	6291.0	6293.4	6301.5	6253.0	6260.4	6256.9	6269.9
G27.0	6207.5	6216.8	6226.5	6234.7	6241.4	6248.1	6198.5	6205.7	6202.6	6212.1
G28.0	6151.6	6160.2	6170.4	6180.4	6185.0	6197.5	6140.0	6147.7	6147.7	6155.3
G29.0	6093.1	6105.7	6114.7	6121.4	6127.0	6140.0	6081.5	6088.3	6087.3	6096.4
G30.0	6031.9	6043.0	6053.9	6062.7	6065.5	6080.8	6015.2	6023.1	6022.6	6032.8
G31.0	5970.6	5981.8	5995.0	6000.3	6006.8	6022.8	5955.3	5960.9	5958.8	5970.4
G32.0	5905.2	5914.7	5927.3	5935.6	5943.7	5962.5	5892.7	5897.3	5894.8	5903.6
G33.0	5837.2	5847.0	5860.0	5867.6	5879.5	5897.5	5824.0	5828.0	5826.8	5840.5
G34.0	5765.5	5778.3	5792.2	5803.4	5812.2	5829.4	5752.3	5760.4	5759.5	5769.7
G35.0	5694.5	5708.9	5724.3	5734.7	5745.8	5760.9	5681.6	5687.8	5688.0	5695.9
G36.0	5618.9	5633.8	5649.3	5663.0	5675.1	5689.5	5602.9	5610.3	5612.9	5625.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	5543.5	5559.5	5573.9	5587.4	5601.3	5618.2	5529.4	5537.5	5537.7	5546.5
G38.0	5466.7	5479.5	5494.8	5508.5	5524.0	5539.8	5445.8	5459.5	5460.2	5462.8
G39.0	5388.5	5404.5	5415.2	5429.4	5444.5	5461.1	5363.9	5380.9	5379.5	5380.9
G40.0	5306.6	5319.9	5331.0	5348.9	5365.6	5383.2	5285.5	5298.8	5302.0	5301.5
G41.0	5219.2	5231.5	5247.0	5265.1	5288.3	5303.9	5206.4	5215.0	5215.5	5217.3
G42.0	5127.3	5144.9	5164.4	5183.0	5205.5	5223.1	5121.7	5127.1	5129.4	5131.9
G43.0	5043.3	5060.3	5079.0	5103.4	5119.0	5137.7	5028.0	5038.0	5036.1	5042.4
G44.0	4954.0	4972.1	4994.4	5014.3	5028.5	5051.0	4937.1	4942.9	4948.0	4950.3
G45.0	4864.0	4883.0	4899.7	4922.4	4940.5	4957.9	4844.7	4849.6	4856.1	4855.2
G46.0	4774.9	4788.6	4809.2	4830.6	4842.2	4865.8	4752.1	4758.2	4763.8	4761.7
G47.0	4680.7	4697.6	4716.4	4738.9	4754.0	4778.4	4655.6	4668.4	4666.3	4670.5
G48.0	4581.2	4594.1	4618.5	4644.5	4663.5	4688.1	4563.1	4574.0	4569.6	4574.2
G49.0	4480.0	4493.2	4519.5	4551.9	4572.4	4597.9	4458.9	4473.5	4470.7	4473.7
G50.0	4381.9	4399.0	4424.6	4449.4	4469.8	4496.5	4361.7	4373.8	4367.7	4369.8
G51.0	4280.5	4302.5	4327.1	4351.9	4372.6	4396.7	4259.8	4264.0	4267.5	4267.7
G52.0	4181.0	4199.3	4225.3	4243.6	4273.1	4300.7	4157.1	4164.7	4165.0	4164.0
G53.0	4077.0	4095.3	4118.5	4145.0	4167.0	4195.6	4055.2	4059.6	4062.6	4061.2
G54.0	3969.8	3988.2	4014.4	4040.1	4065.9	4093.0	3949.2	3957.1	3957.5	3954.3
G55.0	3861.5	3883.3	3907.6	3937.8	3962.4	3994.0	3844.1	3851.3	3850.1	3844.6
G56.0	3753.1	3775.6	3805.6	3830.2	3857.8	3886.1	3735.7	3743.6	3736.2	3736.0
G57.0	3643.4	3667.1	3699.5	3729.0	3752.9	3780.8	3619.7	3635.3	3625.1	3627.6
G58.0	3533.9	3559.2	3590.7	3617.4	3642.7	3671.7	3512.3	3524.8	3513.9	3516.5
G59.0	3426.0	3449.2	3474.7	3510.0	3530.9	3563.1	3397.2	3408.1	3404.0	3403.3
G60.0	3314.2	3334.1	3363.4	3394.5	3420.9	3457.6	3287.3	3298.4	3289.1	3290.3
G61.0	3196.1	3221.1	3252.5	3282.4	3306.3	3341.1	3175.4	3183.1	3175.9	3172.0
G62.0	3081.3	3108.6	3139.7	3165.7	3199.8	3226.7	3058.3	3068.0	3059.4	3060.1
G63.0	2967.3	2989.1	3024.2	3061.3	3083.8	3120.2	2939.3	2949.7	2941.8	2938.8
G64.0	2846.5	2877.8	2915.1	2940.4	2968.0	3002.6	2824.9	2831.6	2825.4	2821.9
G65.0	2729.1	2761.1	2790.8	2825.4	2853.9	2888.5	2707.0	2711.7	2708.4	2701.9
G66.0	2615.9	2645.6	2672.9	2703.3	2737.6	2769.2	2579.0	2588.7	2584.8	2584.8
G67.0	2498.7	2521.7	2551.1	2591.7	2619.1	2652.3	2455.8	2466.7	2460.6	2459.7
G68.0	2376.4	2405.6	2434.7	2467.1	2495.4	2529.1	2333.0	2346.5	2338.1	2340.9
G69.0	2251.6	2280.6	2310.3	2349.1	2375.0	2414.5	2210.1	2223.5	2219.8	2213.8
G70.0	2131.7	2160.0	2193.1	2226.1	2257.4	2288.5	2090.1	2096.4	2090.1	2093.8
G71.0	2010.1	2039.6	2066.9	2108.2	2129.3	2169.9	1958.1	1964.6	1963.2	1961.1
G72.0	1884.8	1916.8	1949.8	1981.1	2008.5	2041.4	1831.7	1838.9	1830.5	1834.7
G73.0	1766.5	1794.1	1824.9	1857.4	1884.3	1913.6	1701.8	1710.6	1705.7	1710.6

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	1644.0	1671.1	1701.1	1728.9	1759.5	1787.4	1576.0	1582.3	1577.9	1584.1
G75.0	1516.6	1545.8	1577.9	1604.1	1628.2	1662.1	1444.5	1454.7	1457.0	1457.2
G76.0	1394.6	1420.8	1455.6	1479.7	1508.3	1537.3	1319.2	1329.8	1331.0	1330.6
G77.0	1270.5	1297.8	1329.6	1363.7	1379.5	1409.9	1191.8	1199.5	1203.9	1211.3
G78.0	1153.1	1180.9	1211.5	1236.3	1261.9	1287.2	1067.9	1077.0	1079.1	1091.6
G79.0	1030.3	1063.3	1087.4	1111.8	1136.8	1165.1	939.2	951.7	959.3	965.8
G80.0	915.7	946.3	967.2	990.2	1013.9	1040.8	822.9	836.6	838.9	847.5
G81.0	803.0	828.0	854.9	875.8	894.6	918.7	708.1	721.8	724.5	730.6
G82.0	693.5	722.7	743.8	764.9	781.6	802.7	597.6	608.1	615.5	622.0
G83.0	592.5	617.6	635.0	659.4	670.0	688.6	489.1	499.0	508.3	518.1
G84.0	499.3	517.1	534.8	552.9	564.2	581.2	395.1	404.4	411.6	421.5
G85.0	409.0	424.6	443.1	453.3	466.1	479.3	309.5	318.1	324.3	335.0
G86.0	328.5	344.1	356.4	368.2	377.0	386.1	232.0	240.6	243.4	252.6
G87.0	255.0	267.0	277.3	284.7	291.2	302.3	170.8	177.5	181.9	191.2
G88.0	194.6	204.4	210.7	217.6	221.3	228.8	126.4	131.6	137.6	145.7
G89.0	151.0	158.0	161.9	166.1	166.1	171.2	108.8	111.8	117.6	124.6
G90.0	124.6	129.7	132.2	131.8	128.8	128.5	108.6	110.9	117.6	124.8
G91.0	117.6	122.7	125.1	122.3	116.7	111.4	118.8	120.2	126.9	134.3
G92.0	122.5	129.0	131.6	125.8	117.2	109.3	129.7	130.6	137.6	145.0
G93.0	130.6	137.6	140.6	135.7	127.6	118.8	134.6	136.2	144.1	153.6
G94.0	135.7	146.2	151.3	147.8	139.7	130.6	126.9	129.7	138.0	148.5
G95.0	126.7	141.3	151.0	152.0	146.2	138.3	112.1	115.1	123.4	132.7
G96.0	112.1	126.0	136.9	140.6	136.9	131.8	89.3	91.2	96.8	104.2
G97.0	89.8	102.6	114.2	119.7	118.1	115.3	74.0	75.9	80.5	86.5
G98.0	81.2	84.2	89.8	93.5	92.1	91.9	79.3	81.2	87.5	95.3
G99.0	95.6	93.0	88.6	83.5	79.6	77.0	93.7	95.6	101.6	108.1
G100.0	91.9	102.3	105.3	97.7	89.1	81.4	88.2	90.5	94.7	98.4
G101.0	76.1	90.0	101.6	103.0	98.1	94.0	79.6	80.5	82.8	85.8
G102.0	63.1	75.6	87.2	91.6	90.3	88.9	69.6	69.8	71.9	73.3
G103.0	52.7	63.8	74.2	79.6	81.0	81.0	60.3	60.8	61.0	61.3
G104.0	42.7	53.4	62.6	68.4	70.1	71.0	51.5	51.0	51.0	49.4
G105.0	34.6	43.2	52.2	57.5	60.3	61.3	42.7	42.7	41.3	39.7
G106.0	30.2	34.6	41.5	47.3	49.9	52.0	34.8	34.6	34.1	33.2
G107.0	26.2	30.4	34.3	37.8	41.1	43.4	30.9	30.6	29.9	29.2
G108.0	24.6	26.2	29.9	32.7	33.9	35.3	26.7	26.7	26.7	26.5
G109.0	23.4	24.8	26.0	27.8	29.7	30.9	25.8	25.8	26.0	26.0
G110.0	23.0	23.9	24.8	25.5	25.8	26.5	25.5	25.5	25.5	25.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	22.5	23.4	24.4	24.8	24.8	25.1	25.3	25.5	25.3	25.3
G112.0	22.3	23.2	23.9	24.4	24.6	24.6	25.3	25.3	25.3	25.1
G113.0	22.0	23.0	23.4	24.1	24.4	24.4	25.3	25.3	25.1	24.8
G114.0	22.0	22.7	23.4	23.9	23.9	24.1	25.1	25.3	25.1	24.8
G115.0	22.0	22.7	23.2	23.7	23.7	23.9	25.3	25.3	25.1	24.8
G116.0	22.3	22.7	23.2	23.7	23.7	23.9	25.5	25.5	25.3	25.1
G117.0	22.5	23.0	23.4	23.4	23.7	23.9	25.8	25.5	25.5	25.3
G118.0	22.7	23.2	23.4	23.7	23.9	23.9	26.0	26.0	25.8	25.5
G119.0	23.2	23.4	23.7	23.9	24.1	24.1	26.2	26.2	26.0	26.0
G120.0	23.9	23.9	24.1	24.1	24.4	24.4	26.7	26.5	26.5	26.2
G121.0	24.4	24.4	24.6	24.6	24.6	24.6	27.1	27.1	27.1	26.9
G122.0	25.1	25.1	25.1	25.1	24.8	24.8	27.8	27.8	27.8	27.6
G123.0	25.5	25.5	25.5	25.5	25.5	25.5	28.5	28.5	28.3	28.1
G124.0	26.2	26.2	26.2	26.2	26.0	26.2	29.0	29.2	29.0	28.8
G125.0	26.9	26.7	26.7	26.9	26.7	26.9	29.7	29.7	29.7	29.5
G126.0	27.4	27.6	27.6	27.4	27.4	27.4	30.4	30.4	30.4	30.2
G127.0	28.1	28.1	28.1	28.1	28.1	27.8	31.1	31.1	30.9	30.6
G128.0	28.8	28.8	28.5	28.5	28.8	28.5	31.8	31.5	31.5	31.5
G129.0	29.2	29.2	29.5	29.2	29.2	29.2	32.5	32.3	32.0	32.0
G130.0	29.9	29.9	29.9	29.9	29.9	29.9	32.9	32.9	32.7	32.7
G131.0	30.6	30.4	30.6	30.4	30.6	30.4	33.6	33.4	33.4	33.2
G132.0	31.3	31.1	31.1	31.1	31.1	31.1	34.1	34.1	34.1	33.9
G133.0	31.8	31.8	31.5	31.8	31.8	31.8	34.8	34.8	34.8	34.6
G134.0	32.5	32.3	32.5	32.3	32.3	32.3	35.5	35.3	35.3	35.3
G135.0	32.9	32.9	32.9	32.7	32.9	32.7	36.0	36.0	35.7	35.7
G136.0	33.9	33.6	33.4	33.4	33.6	33.4	36.7	36.4	36.4	36.2
G137.0	34.3	34.1	34.1	33.9	34.1	33.9	37.3	37.1	37.1	36.9
G138.0	34.8	34.8	34.8	34.6	34.6	34.6	37.6	37.6	37.6	37.3
G139.0	35.5	35.3	35.5	35.3	35.3	35.3	38.3	38.3	38.0	38.0
G140.0	36.0	36.0	36.0	35.7	35.7	35.7	39.0	38.7	38.5	38.5
G141.0	36.4	36.4	36.4	36.2	36.4	36.4	39.2	39.2	39.0	39.0
G142.0	36.9	36.9	36.9	36.9	36.9	36.9	39.7	39.9	39.7	39.7
G143.0	37.6	37.6	37.6	37.3	37.3	37.3	40.4	40.4	40.1	40.1
G144.0	38.0	38.0	38.0	37.8	37.8	37.8	40.6	40.8	40.6	40.6
G145.0	38.5	38.5	38.7	38.5	38.3	38.5	41.1	41.1	41.1	41.1
G146.0	39.0	39.0	39.0	39.0	38.7	38.7	41.5	41.5	41.5	41.8
G147.0	39.7	39.4	39.4	39.4	39.4	39.2	42.2	42.0	42.0	42.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	39.9	39.9	39.9	39.9	39.9	39.7	42.5	42.5	42.5	42.5
G149.0	40.4	40.6	40.6	40.4	40.1	40.4	42.9	42.9	42.9	43.2
G150.0	40.8	40.8	40.8	40.8	40.8	40.8	43.2	43.2	43.4	43.6
G151.0	41.5	41.3	41.5	41.3	41.3	41.1	43.8	43.8	43.8	44.1
G152.0	42.0	42.0	42.0	41.8	41.8	41.5	44.1	44.1	44.5	44.5
G153.0	42.5	42.5	42.5	42.2	42.2	42.0	44.5	44.8	45.0	45.0
G154.0	42.9	42.7	42.9	42.7	42.7	42.5	45.0	45.0	45.2	45.2
G155.0	43.4	43.2	43.2	43.2	43.4	42.9	45.5	45.5	45.7	45.7
G156.0	43.8	43.8	43.8	43.8	43.8	43.2	45.7	45.9	46.2	46.2
G157.0	44.3	44.1	44.3	44.3	44.1	43.8	46.2	46.4	46.6	46.6
G158.0	44.8	44.8	44.8	44.5	44.5	44.1	46.6	46.9	47.1	46.9
G159.0	45.0	45.2	45.2	45.2	45.2	44.8	46.9	47.3	47.3	47.3
G160.0	45.5	45.5	45.7	45.7	45.5	45.2	47.1	47.6	47.8	47.6
G161.0	45.9	45.9	46.2	46.2	46.2	45.7	47.6	48.0	48.3	48.3
G162.0	46.4	46.4	46.6	46.6	46.6	46.2	48.0	48.5	48.7	48.5
G163.0	46.6	46.6	46.9	47.1	47.1	46.6	48.3	49.0	48.7	48.7
G164.0	47.1	47.1	47.3	47.6	47.6	47.1	48.7	49.2	49.2	49.0
G165.0	47.6	47.8	47.8	47.8	48.0	47.6	49.0	49.4	49.4	49.4
G166.0	47.8	48.0	48.0	48.0	48.3	48.0	49.4	49.9	49.9	49.4
G167.0	48.0	48.3	48.5	48.5	48.7	48.5	49.9	50.1	50.1	49.9
G168.0	48.5	48.7	48.7	49.0	49.2	49.0	50.1	50.6	50.3	49.9
G169.0	49.0	48.7	49.0	49.2	49.4	49.4	50.3	50.8	50.6	50.1
G170.0	49.2	49.4	49.4	49.4	49.7	49.9	50.6	51.0	50.6	50.6
G171.0	49.4	49.4	49.7	49.9	50.1	50.1	51.0	51.3	51.0	50.8
G172.0	49.9	49.9	49.9	50.1	50.3	50.6	51.3	51.5	51.0	50.8
G173.0	50.1	50.1	50.3	50.1	50.3	50.8	51.5	51.5	51.0	51.0
G174.0	50.3	50.3	50.3	50.6	50.8	51.0	51.5	51.5	51.3	51.0
G175.0	50.6	50.6	50.6	50.6	50.8	51.0	51.7	51.7	51.3	51.0
G176.0	50.6	50.8	50.8	50.8	51.0	51.3	52.0	51.5	51.3	51.3
G177.0	50.8	50.8	50.8	51.0	51.0	51.3	52.0	51.5	51.3	51.3
G178.0	50.8	50.8	51.0	51.0	51.0	51.5	52.2	51.5	51.3	51.3
G179.0	51.0	51.0	51.0	51.0	51.3	51.5	52.2	51.3	51.3	51.5
G180.0	51.0	51.0	51.3	51.3	51.3	51.5	52.0	51.3	51.3	51.5

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	6922.1	6923.0	6922.8	6921.6	6922.3	6922.1	6920.7	6920.5	6918.6	6915.4
G1.0	6928.1	6925.3	6926.3	6925.8	6925.6	6925.6	6923.3	6921.6	6922.1	6917.7
G2.0	6930.2	6928.6	6930.0	6928.4	6928.4	6925.8	6923.9	6923.0	6921.2	6916.8
G3.0	6930.2	6928.8	6928.4	6926.3	6924.4	6923.9	6921.4	6920.9	6920.7	6915.8
G4.0	6927.9	6924.9	6923.9	6920.9	6920.5	6920.0	6919.1	6918.4	6917.7	6913.3
G5.0	6920.2	6917.7	6916.0	6914.7	6912.8	6914.4	6913.3	6913.5	6912.1	6909.3
G6.0	6912.3	6907.9	6906.8	6906.3	6905.9	6907.9	6906.3	6904.0	6904.2	6900.5
G7.0	6900.5	6898.4	6898.2	6898.2	6897.5	6897.0	6894.9	6893.8	6893.3	6891.5
G8.0	6883.3	6884.5	6886.1	6888.0	6883.1	6884.3	6882.2	6882.0	6883.6	6880.3
G9.0	6866.9	6869.6	6871.7	6871.0	6869.0	6869.0	6869.6	6869.2	6871.5	6868.0
G10.0	6846.0	6849.0	6851.8	6852.0	6851.3	6854.3	6855.7	6856.0	6856.2	6853.6
G11.0	6825.1	6828.8	6829.3	6829.5	6833.2	6836.3	6837.9	6837.9	6836.5	6834.2
G12.0	6803.3	6805.2	6805.2	6809.1	6810.3	6814.4	6815.4	6817.0	6817.0	6814.0
G13.0	6779.6	6779.2	6780.8	6783.8	6786.8	6789.8	6792.6	6795.0	6795.6	6790.3
G14.0	6754.8	6753.0	6755.3	6758.8	6759.2	6766.0	6767.6	6769.9	6770.1	6766.6
G15.0	6727.0	6728.4	6731.6	6730.7	6734.9	6740.4	6742.0	6743.9	6743.4	6740.4
G16.0	6698.4	6700.8	6702.8	6702.8	6706.3	6711.9	6709.8	6713.0	6714.7	6712.1
G17.0	6666.2	6672.5	6673.4	6673.8	6675.7	6679.2	6678.7	6679.6	6682.0	6679.6
G18.0	6633.7	6639.7	6639.7	6641.8	6640.4	6645.5	6645.3	6644.6	6651.1	6644.6
G19.0	6597.5	6603.5	6604.0	6605.2	6603.5	6608.0	6609.1	6608.6	6610.7	6609.1
G20.0	6557.4	6560.6	6566.7	6567.4	6565.7	6571.5	6570.6	6568.5	6571.3	6571.1
G21.0	6512.1	6517.5	6523.7	6522.8	6528.4	6532.5	6530.5	6527.5	6530.7	6529.8
G22.0	6466.9	6472.9	6476.9	6479.0	6485.5	6490.3	6488.0	6486.4	6488.5	6485.9
G23.0	6422.6	6423.7	6428.1	6431.6	6437.9	6446.3	6444.9	6441.4	6442.3	6440.0
G24.0	6375.0	6377.1	6378.3	6382.9	6389.4	6397.3	6398.2	6396.6	6395.4	6391.7
G25.0	6325.1	6328.4	6328.2	6330.2	6341.4	6347.9	6350.9	6351.8	6348.8	6342.8
G26.0	6273.4	6275.7	6276.9	6280.1	6290.3	6295.7	6300.3	6302.6	6300.1	6297.8
G27.0	6217.3	6218.6	6218.9	6227.9	6236.5	6243.9	6245.3	6247.2	6247.6	6244.9
G28.0	6160.6	6160.2	6163.9	6171.8	6180.4	6185.2	6187.3	6189.9	6191.7	6189.9
G29.0	6098.7	6103.6	6107.0	6106.8	6121.2	6124.9	6129.1	6131.6	6132.8	6132.6
G30.0	6037.9	6042.8	6044.2	6045.6	6058.1	6063.2	6066.9	6071.3	6072.0	6070.6
G31.0	5973.6	5976.9	5983.6	5980.6	5993.4	5997.5	6000.3	6005.0	6011.2	6006.8
G32.0	5909.4	5909.6	5914.0	5915.2	5924.0	5931.7	5931.9	5940.2	5947.0	5943.0
G33.0	5841.4	5843.0	5843.5	5847.0	5856.5	5861.1	5860.4	5870.9	5880.1	5876.7
G34.0	5772.0	5771.6	5770.2	5775.3	5783.9	5790.6	5795.2	5800.6	5806.6	5808.9
G35.0	5693.9	5699.4	5698.3	5699.9	5713.3	5719.6	5722.9	5727.0	5734.7	5735.1
G36.0	5618.2	5621.5	5622.2	5626.3	5636.3	5644.9	5644.0	5652.1	5658.6	5659.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	5541.7	5548.2	5547.9	5550.2	5561.4	5567.2	5570.7	5579.7	5582.7	5583.6
G38.0	5462.5	5467.2	5470.0	5473.2	5478.8	5484.1	5487.6	5497.4	5500.1	5500.1
G39.0	5378.6	5386.5	5388.5	5387.8	5397.8	5401.3	5407.6	5409.2	5417.1	5417.3
G40.0	5298.1	5300.8	5302.5	5302.0	5313.4	5314.8	5319.6	5324.7	5333.1	5331.5
G41.0	5212.0	5217.3	5214.5	5211.5	5223.1	5225.2	5232.2	5238.0	5247.3	5241.2
G42.0	5127.3	5125.7	5122.9	5119.2	5134.5	5138.2	5139.8	5147.5	5152.6	5154.7
G43.0	5037.5	5033.3	5031.0	5028.0	5040.8	5045.6	5049.1	5052.8	5055.8	5061.6
G44.0	4945.6	4947.0	4939.8	4941.9	4948.4	4953.5	4955.1	4958.9	4963.3	4966.5
G45.0	4849.8	4848.4	4848.4	4849.4	4852.6	4857.3	4861.6	4858.6	4862.8	4866.1
G46.0	4750.1	4753.3	4754.2	4751.2	4755.2	4757.3	4761.4	4758.4	4765.1	4770.9
G47.0	4651.0	4653.8	4652.1	4649.1	4651.9	4654.2	4657.5	4651.9	4658.4	4662.4
G48.0	4558.7	4556.8	4551.9	4549.6	4551.9	4553.8	4552.9	4548.9	4556.3	4554.9
G49.0	4464.7	4458.2	4449.6	4449.4	4453.1	4452.4	4446.8	4444.7	4451.2	4450.8
G50.0	4361.7	4357.7	4346.8	4346.1	4347.3	4348.2	4344.3	4339.0	4342.2	4343.8
G51.0	4252.4	4250.8	4246.8	4239.4	4240.4	4237.8	4231.3	4229.0	4228.3	4229.9
G52.0	4147.1	4144.3	4144.5	4136.6	4129.9	4126.2	4120.9	4115.3	4117.1	4117.6
G53.0	4043.4	4038.7	4038.0	4031.1	4019.5	4016.0	4008.3	3996.5	4000.2	3998.8
G54.0	3942.4	3934.1	3926.2	3923.2	3914.1	3906.0	3893.5	3887.0	3884.2	3878.0
G55.0	3834.1	3822.7	3812.1	3807.4	3803.7	3794.7	3780.3	3768.9	3765.9	3759.4
G56.0	3721.6	3713.2	3705.6	3697.7	3693.3	3681.4	3663.4	3648.5	3645.0	3632.5
G57.0	3612.3	3602.1	3599.1	3585.9	3574.7	3563.4	3540.9	3528.8	3521.8	3513.5
G58.0	3499.6	3489.1	3483.6	3470.1	3461.5	3449.4	3425.6	3404.0	3401.4	3382.2
G59.0	3383.8	3375.7	3368.7	3358.5	3340.9	3328.1	3306.1	3281.9	3270.6	3258.7
G60.0	3270.6	3261.8	3255.5	3239.5	3230.4	3203.3	3182.9	3157.4	3143.4	3130.9
G61.0	3153.2	3146.9	3137.4	3122.6	3108.6	3084.0	3060.1	3032.5	3015.1	2995.2
G62.0	3037.9	3029.5	3021.9	3005.6	2991.5	2967.1	2937.2	2906.8	2887.3	2859.2
G63.0	2922.1	2913.5	2904.5	2893.1	2869.2	2847.2	2811.7	2780.1	2749.7	2718.9
G64.0	2804.7	2795.2	2786.6	2770.1	2751.1	2725.4	2694.5	2650.0	2614.9	2575.9
G65.0	2689.2	2681.3	2668.8	2652.7	2634.6	2600.8	2566.7	2520.0	2480.4	2439.5
G66.0	2565.3	2557.9	2545.8	2527.2	2514.7	2485.2	2441.6	2384.3	2345.8	2296.1
G67.0	2444.6	2432.6	2424.0	2407.1	2389.4	2356.0	2309.6	2252.5	2205.0	2154.9
G68.0	2321.7	2312.6	2304.0	2281.1	2267.6	2228.4	2182.5	2123.1	2072.0	2013.6
G69.0	2201.0	2186.4	2179.2	2159.5	2138.1	2100.1	2051.9	1991.5	1933.1	1877.2
G70.0	2076.0	2067.2	2055.8	2028.4	2015.0	1975.1	1920.8	1861.4	1801.3	1739.3
G71.0	1944.7	1937.9	1929.8	1908.9	1885.5	1846.1	1793.9	1737.0	1673.7	1608.3
G72.0	1819.8	1812.9	1805.5	1783.7	1762.5	1722.4	1670.0	1605.5	1549.3	1473.2
G73.0	1696.7	1687.1	1675.3	1657.2	1630.8	1592.7	1541.7	1478.1	1417.1	1345.4

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	1570.7	1562.3	1551.2	1525.2	1507.3	1470.0	1422.7	1352.8	1292.0	1216.9
G75.0	1442.1	1440.1	1427.8	1399.0	1380.0	1340.5	1297.4	1236.3	1171.2	1103.9
G76.0	1318.0	1315.2	1303.2	1278.6	1254.9	1218.3	1176.7	1115.5	1055.6	978.8
G77.0	1197.8	1191.6	1180.4	1157.5	1134.3	1097.4	1050.5	999.7	941.7	864.5
G78.0	1073.5	1067.7	1061.9	1036.6	1017.3	983.0	943.6	876.8	829.2	754.3
G79.0	953.8	954.7	941.9	922.0	903.7	868.2	828.0	775.6	717.1	647.3
G80.0	837.1	836.4	823.8	808.1	793.0	758.0	720.1	668.2	612.0	544.3
G81.0	727.1	721.3	712.7	698.6	678.6	648.9	615.7	569.8	517.8	457.7
G82.0	619.5	617.8	610.2	594.4	578.6	555.9	522.7	477.0	429.4	376.8
G83.0	514.1	515.8	508.3	494.2	484.4	458.9	432.0	394.6	351.3	308.6
G84.0	419.9	420.9	414.1	402.3	396.7	377.9	352.2	318.1	286.3	249.4
G85.0	333.4	334.5	329.7	322.0	315.1	302.1	282.6	255.0	229.2	200.0
G86.0	252.4	257.8	256.4	249.9	247.1	235.3	221.1	199.1	179.8	156.6
G87.0	193.0	196.5	193.7	189.3	186.8	179.8	167.5	152.7	137.6	120.2
G88.0	148.3	152.7	151.7	150.1	146.4	139.9	129.9	116.9	103.9	90.7
G89.0	129.2	132.2	131.3	129.2	125.8	119.9	111.8	102.6	93.7	81.9
G90.0	130.9	132.9	131.8	128.3	121.3	113.0	104.4	98.6	95.8	84.9
G91.0	139.2	139.4	135.7	127.8	116.7	103.2	89.6	81.4	77.9	63.3
G92.0	151.3	151.5	145.7	135.0	119.3	100.0	82.6	74.5	69.4	51.0
G93.0	160.8	159.2	149.6	133.4	113.0	92.6	76.3	67.1	54.5	49.0
G94.0	154.5	149.2	136.6	118.3	100.0	80.0	63.8	61.0	74.5	48.0
G95.0	136.2	127.6	112.1	94.9	79.1	70.8	71.2	85.8	59.4	32.7
G96.0	104.6	96.8	88.4	82.6	81.0	87.5	83.5	56.4	41.3	26.2
G97.0	90.3	90.3	92.3	97.0	94.0	77.9	56.6	45.2	35.0	21.1
G98.0	104.9	107.7	104.4	93.3	75.2	59.6	47.1	39.4	28.8	17.6
G99.0	110.0	103.2	90.3	77.0	63.6	49.2	41.3	34.1	22.5	16.7
G100.0	95.1	87.9	77.3	64.5	50.8	41.5	36.0	27.1	19.7	15.8
G101.0	82.1	74.5	62.6	50.6	41.1	35.3	29.9	22.7	18.6	15.3
G102.0	68.9	59.9	49.0	39.7	34.3	30.4	25.5	21.1	17.9	15.3
G103.0	55.0	47.1	38.5	33.2	30.4	26.7	23.0	20.2	17.4	15.3
G104.0	44.1	38.0	32.5	29.5	26.9	24.1	21.8	19.5	17.2	15.5
G105.0	35.7	32.3	28.8	26.5	24.8	23.0	20.9	19.0	17.2	16.0
G106.0	31.1	28.5	26.2	25.1	23.7	22.0	20.4	18.6	17.2	16.5
G107.0	27.4	26.2	25.3	24.1	23.0	21.6	20.2	18.6	17.2	16.9
G108.0	26.2	25.5	24.6	23.4	22.5	21.1	20.0	18.6	18.1	17.6
G109.0	25.8	25.1	24.1	23.2	21.8	20.9	19.7	18.8	18.6	18.3
G110.0	25.1	24.6	23.7	22.7	21.8	20.9	20.0	19.3	19.3	19.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	24.8	24.4	23.4	22.5	21.8	20.9	20.2	20.0	19.7	19.7
G112.0	24.6	24.1	23.4	22.5	21.8	21.1	20.6	20.4	20.4	20.2
G113.0	24.6	23.9	23.4	22.7	22.0	21.3	21.1	21.1	21.1	21.1
G114.0	24.6	24.1	23.4	23.0	22.3	22.0	21.8	21.6	21.8	21.6
G115.0	24.6	24.1	23.7	23.2	22.5	22.5	22.5	22.5	22.5	22.5
G116.0	24.8	24.4	23.9	23.4	23.4	23.2	23.2	23.2	23.0	23.2
G117.0	25.1	24.6	24.1	24.1	23.9	23.9	23.9	23.9	23.7	23.7
G118.0	25.3	25.1	24.8	24.6	24.6	24.6	24.6	24.6	24.6	24.4
G119.0	25.5	25.5	25.3	25.3	25.3	25.1	25.3	25.3	25.3	25.1
G120.0	26.2	26.2	26.0	26.0	25.8	26.0	26.0	25.8	25.8	25.8
G121.0	26.9	26.9	26.7	26.7	26.5	26.7	26.7	26.7	26.5	26.5
G122.0	27.6	27.4	27.4	27.1	27.4	27.1	27.4	27.4	27.4	27.1
G123.0	28.1	28.1	28.1	27.8	27.8	27.8	28.1	28.1	27.8	27.8
G124.0	28.8	28.8	28.5	28.5	28.5	28.5	28.8	28.8	28.5	28.5
G125.0	29.5	29.2	29.2	29.2	29.2	29.2	29.5	29.2	29.2	29.2
G126.0	30.2	29.9	29.9	29.9	29.9	29.9	29.9	30.2	29.9	29.7
G127.0	30.6	30.6	30.6	30.4	30.6	30.6	30.6	30.6	30.6	30.6
G128.0	31.3	31.3	31.3	31.1	31.3	31.3	31.3	31.3	31.3	31.3
G129.0	32.0	32.0	32.0	31.8	32.0	32.0	32.0	32.0	32.0	31.8
G130.0	32.5	32.5	32.5	32.5	32.5	32.7	32.7	32.7	32.7	32.7
G131.0	33.2	33.2	33.2	33.2	32.9	33.2	33.4	33.4	33.4	33.2
G132.0	33.9	33.9	33.9	33.9	33.6	33.9	33.9	34.1	33.9	33.9
G133.0	34.6	34.6	34.3	34.3	34.6	34.6	34.6	34.6	34.6	34.3
G134.0	35.0	35.0	35.0	34.8	34.8	35.0	35.3	35.3	35.3	35.0
G135.0	35.7	35.7	35.7	35.7	35.5	35.7	35.7	35.7	35.7	35.7
G136.0	36.2	36.2	36.2	36.2	36.2	36.4	36.4	36.4	36.4	36.4
G137.0	36.9	36.9	36.9	36.9	36.7	36.9	36.9	36.9	36.9	36.9
G138.0	37.3	37.3	37.3	37.1	37.3	37.3	37.6	37.6	37.3	37.6
G139.0	38.0	38.0	38.0	38.0	37.8	38.0	38.0	38.0	38.0	38.0
G140.0	38.5	38.5	38.5	38.5	38.5	38.5	38.7	38.7	38.7	38.7
G141.0	39.2	39.0	39.0	39.0	39.0	39.2	39.2	39.4	39.2	39.2
G142.0	39.7	39.4	39.4	39.4	39.4	39.7	39.7	39.7	39.7	39.7
G143.0	40.1	40.1	40.1	39.9	39.9	40.1	40.4	40.4	40.4	40.4
G144.0	40.6	40.6	40.4	40.6	40.6	40.8	40.6	40.8	40.8	40.8
G145.0	41.1	41.1	40.8	41.1	41.1	41.3	41.3	41.5	41.3	41.3
G146.0	41.8	41.5	41.3	41.3	41.5	41.8	41.8	42.0	41.8	42.0
G147.0	42.0	42.0	42.0	41.8	42.0	42.2	42.2	42.5	42.2	42.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	42.7	42.5	42.5	42.2	42.5	42.7	42.7	42.7	42.9	42.9
G149.0	42.9	42.9	42.9	42.7	42.9	43.2	43.2	43.4	43.4	43.4
G150.0	43.4	43.4	43.2	43.2	43.4	43.6	43.6	43.8	43.8	43.8
G151.0	43.8	43.8	43.8	43.8	43.8	44.1	44.1	44.1	44.1	44.3
G152.0	44.3	44.3	44.3	44.1	44.3	44.3	44.5	44.8	44.5	44.8
G153.0	44.8	44.8	44.8	44.5	44.8	44.8	45.0	45.0	45.0	45.0
G154.0	45.2	45.0	45.0	45.0	45.2	45.2	45.5	45.5	45.5	45.5
G155.0	45.5	45.5	45.2	45.5	45.5	45.7	45.9	45.7	45.9	45.9
G156.0	45.9	45.9	45.9	45.9	45.9	46.2	46.2	46.4	46.2	46.4
G157.0	46.6	46.2	46.2	46.2	46.4	46.4	46.6	46.6	46.6	46.9
G158.0	46.9	46.6	46.4	46.6	46.9	46.9	47.1	47.1	47.1	47.1
G159.0	47.3	47.1	47.1	47.1	47.1	47.3	47.3	47.6	47.3	47.6
G160.0	47.6	47.3	47.6	47.6	47.6	47.6	47.6	47.8	47.8	48.0
G161.0	47.8	47.8	47.8	47.8	47.8	47.8	48.3	48.3	48.3	48.3
G162.0	48.3	48.0	48.3	48.3	48.3	48.3	48.5	48.5	48.5	48.5
G163.0	48.7	48.5	48.5	48.5	48.7	48.7	48.7	48.7	49.0	48.7
G164.0	48.7	49.0	48.7	48.7	49.0	49.0	49.2	49.0	49.2	49.2
G165.0	49.2	49.2	49.0	49.2	49.2	49.4	49.4	49.4	49.4	49.4
G166.0	49.7	49.4	49.4	49.4	49.4	49.7	49.7	49.7	49.7	49.7
G167.0	49.7	49.7	49.7	49.7	49.7	49.9	49.9	49.9	49.9	49.9
G168.0	49.9	49.9	49.9	50.1	49.9	50.1	50.1	50.1	50.1	50.1
G169.0	50.1	50.1	50.1	50.3	50.3	50.3	50.3	50.3	50.3	50.3
G170.0	50.3	50.6	50.6	50.6	50.6	50.6	50.6	50.3	50.6	50.6
G171.0	50.6	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.6
G172.0	50.8	50.8	50.8	50.8	50.8	50.8	51.0	50.8	50.8	50.8
G173.0	51.0	50.8	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0
G174.0	51.0	51.0	51.0	51.3	51.0	51.3	51.0	51.0	51.0	51.0
G175.0	51.3	51.3	51.3	51.3	51.0	51.0	51.3	51.3	51.3	51.0
G176.0	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3
G177.0	51.3	51.5	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.5
G178.0	51.5	51.3	51.5	51.3	51.3	51.5	51.5	51.5	51.5	51.5
G179.0	51.5	51.3	51.3	51.3	51.3	51.3	51.5	51.3	51.5	51.5
G180.0	51.5	51.3	51.3	51.3	51.3	51.3	51.5	51.5	51.5	51.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	6910.5	6904.7	6903.5	6897.5	6893.8	6892.4	6889.8	6889.1	6889.8	6891.7
G1.0	6912.3	6907.9	6905.4	6900.0	6894.7	6894.3	6890.5	6890.8	6891.0	6893.8
G2.0	6911.2	6905.9	6903.3	6897.5	6893.5	6891.2	6888.5	6887.3	6887.8	6890.5
G3.0	6911.2	6905.4	6903.8	6895.6	6891.9	6890.8	6886.4	6883.8	6883.8	6885.7
G4.0	6909.3	6904.2	6901.4	6895.9	6891.0	6888.7	6884.7	6882.4	6880.8	6882.2
G5.0	6905.1	6899.6	6896.6	6891.2	6884.3	6881.0	6877.8	6876.9	6876.1	6877.8
G6.0	6896.8	6890.1	6886.4	6879.2	6874.8	6870.6	6866.4	6864.8	6864.1	6865.5
G7.0	6886.6	6879.4	6875.9	6870.4	6863.2	6859.2	6855.0	6853.6	6851.3	6852.7
G8.0	6876.4	6869.2	6866.2	6859.7	6850.6	6848.1	6843.0	6841.1	6838.6	6838.3
G9.0	6862.5	6855.7	6851.6	6843.7	6837.9	6833.5	6829.3	6827.0	6824.6	6824.4
G10.0	6847.1	6837.4	6834.6	6825.6	6820.5	6816.3	6811.4	6811.2	6807.7	6807.9
G11.0	6829.5	6821.2	6816.1	6809.1	6802.1	6798.4	6794.0	6790.8	6787.1	6785.9
G12.0	6808.4	6800.5	6795.4	6788.5	6780.6	6777.5	6772.7	6769.2	6764.8	6762.5
G13.0	6785.7	6778.7	6772.9	6765.0	6757.1	6753.2	6746.9	6744.6	6739.5	6738.6
G14.0	6761.8	6753.6	6749.5	6740.0	6731.6	6727.7	6721.2	6716.8	6710.7	6709.1
G15.0	6737.0	6730.7	6725.1	6715.1	6703.5	6701.5	6694.5	6688.9	6685.4	6682.7
G16.0	6708.0	6701.7	6695.6	6687.5	6677.3	6672.5	6664.6	6659.9	6657.1	6653.2
G17.0	6677.1	6669.7	6666.2	6656.7	6647.4	6642.3	6633.2	6631.1	6626.5	6620.9
G18.0	6641.8	6635.3	6629.8	6624.9	6615.4	6609.8	6602.1	6597.3	6589.6	6581.3
G19.0	6608.4	6598.2	6594.5	6588.0	6579.4	6573.9	6566.2	6560.9	6551.1	6543.9
G20.0	6570.6	6560.6	6558.1	6550.6	6540.2	6534.6	6529.1	6521.0	6509.8	6502.2
G21.0	6529.3	6522.6	6518.6	6511.9	6497.8	6494.7	6487.5	6480.8	6466.9	6461.8
G22.0	6487.3	6481.3	6477.8	6468.3	6458.5	6453.0	6446.3	6438.1	6424.0	6414.2
G23.0	6443.5	6437.2	6432.1	6423.5	6412.8	6407.5	6399.8	6392.9	6378.0	6367.1
G24.0	6395.2	6391.5	6385.9	6376.2	6366.9	6361.1	6350.0	6342.8	6330.0	6318.9
G25.0	6346.0	6344.2	6338.8	6329.1	6317.3	6312.1	6299.9	6291.5	6280.4	6270.4
G26.0	6300.3	6292.7	6290.6	6278.7	6264.8	6259.3	6247.2	6239.8	6228.4	6218.6
G27.0	6246.7	6240.9	6237.7	6226.5	6206.4	6205.0	6193.6	6184.3	6170.4	6166.2
G28.0	6186.4	6184.8	6181.3	6169.0	6152.5	6146.0	6137.5	6127.0	6113.5	6106.4
G29.0	6131.6	6127.7	6124.5	6110.5	6097.3	6089.0	6075.7	6066.2	6053.2	6044.9
G30.0	6069.0	6066.0	6061.6	6051.8	6041.4	6028.2	6018.0	6005.4	5988.5	5985.3
G31.0	6005.7	6003.6	5993.8	5992.4	5977.1	5969.2	5955.3	5940.9	5924.9	5922.6
G32.0	5939.8	5936.5	5929.1	5926.3	5912.6	5905.7	5891.3	5875.5	5861.6	5852.1
G33.0	5874.6	5869.5	5865.1	5858.4	5842.3	5840.7	5824.2	5808.9	5792.9	5785.0
G34.0	5807.5	5797.3	5794.8	5789.2	5772.3	5769.5	5754.2	5737.2	5719.4	5709.2
G35.0	5734.5	5727.5	5723.1	5717.5	5700.8	5696.6	5678.3	5665.3	5647.0	5636.3
G36.0	5660.2	5652.3	5650.9	5641.4	5630.0	5620.5	5605.9	5589.9	5572.0	5554.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	5584.1	5577.2	5578.3	5568.3	5551.2	5547.0	5527.5	5512.7	5489.9	5473.5
G38.0	5502.9	5497.1	5497.8	5488.5	5472.1	5464.9	5446.1	5432.1	5407.3	5388.5
G39.0	5420.3	5415.9	5415.9	5410.6	5393.6	5382.7	5356.3	5347.2	5324.3	5303.4
G40.0	5334.9	5328.2	5334.7	5325.0	5309.9	5294.6	5268.6	5260.0	5237.7	5216.6
G41.0	5252.8	5240.3	5247.0	5235.0	5224.5	5209.4	5182.8	5170.9	5147.0	5131.0
G42.0	5160.9	5155.4	5153.0	5145.2	5133.6	5118.7	5095.0	5078.8	5057.9	5036.1
G43.0	5067.9	5062.1	5061.9	5051.9	5032.9	5027.1	5002.3	4986.7	4962.3	4941.9
G44.0	4975.3	4969.8	4965.8	4958.2	4938.9	4933.1	4909.2	4893.4	4864.7	4845.2
G45.0	4876.0	4873.3	4870.7	4860.0	4842.4	4833.1	4813.6	4789.7	4760.0	4745.9
G46.0	4774.9	4775.4	4768.6	4763.8	4746.1	4735.9	4710.9	4689.0	4655.2	4644.3
G47.0	4670.3	4669.1	4665.8	4660.7	4641.3	4629.0	4604.8	4585.1	4552.4	4535.9
G48.0	4564.7	4564.2	4560.5	4560.0	4542.4	4525.0	4499.0	4477.5	4447.8	4431.5
G49.0	4457.0	4456.1	4456.3	4453.3	4439.9	4416.0	4389.5	4371.0	4337.1	4326.0
G50.0	4350.3	4350.1	4345.4	4345.4	4329.2	4311.6	4282.1	4262.9	4230.6	4217.4
G51.0	4238.7	4239.0	4235.2	4227.8	4213.0	4198.1	4168.9	4145.0	4120.2	4099.8
G52.0	4125.0	4124.1	4126.0	4116.5	4096.7	4086.3	4059.6	4026.7	4003.0	3983.3
G53.0	4003.5	4008.1	4003.5	4000.2	3976.3	3964.5	3940.6	3907.9	3881.0	3866.1
G54.0	3885.1	3889.3	3882.8	3880.5	3861.9	3845.0	3820.2	3790.3	3765.4	3748.5
G55.0	3757.8	3766.4	3760.8	3756.6	3734.3	3720.7	3695.8	3671.2	3641.8	3624.8
G56.0	3642.0	3640.6	3634.6	3632.5	3608.4	3594.2	3564.3	3544.6	3521.1	3506.5
G57.0	3518.4	3508.1	3507.4	3500.9	3478.0	3463.4	3437.8	3415.8	3390.3	3381.0
G58.0	3389.8	3383.6	3380.1	3367.3	3342.0	3328.8	3303.5	3285.4	3261.8	3253.6
G59.0	3256.2	3247.1	3235.8	3225.6	3202.8	3186.8	3167.8	3151.1	3127.6	3125.1
G60.0	3126.0	3114.7	3099.8	3085.7	3063.4	3046.9	3023.3	3014.0	2988.2	2997.7
G61.0	2980.3	2966.9	2957.1	2936.9	2916.5	2901.4	2881.3	2872.9	2854.8	2861.3
G62.0	2844.6	2819.8	2811.7	2791.0	2764.3	2753.0	2731.4	2733.0	2716.3	2722.6
G63.0	2697.1	2672.7	2656.4	2636.3	2618.4	2599.6	2580.4	2581.5	2568.3	2584.1
G64.0	2554.8	2533.0	2507.3	2485.5	2463.7	2447.6	2427.2	2432.8	2429.1	2448.6
G65.0	2411.4	2379.0	2359.9	2330.5	2309.6	2300.3	2279.7	2283.2	2282.5	2305.2
G66.0	2271.3	2228.2	2201.7	2180.1	2156.3	2143.9	2126.3	2135.1	2137.7	2167.4
G67.0	2116.4	2083.6	2049.8	2024.2	1999.4	1987.8	1978.1	1984.1	1997.8	2023.8
G68.0	1971.3	1933.5	1896.2	1870.2	1835.6	1838.4	1821.5	1841.9	1849.8	1888.1
G69.0	1830.1	1782.7	1747.2	1709.2	1687.1	1676.2	1673.2	1694.1	1711.7	1746.3
G70.0	1693.4	1638.9	1592.7	1561.6	1528.7	1528.0	1522.4	1547.7	1565.1	1617.3
G71.0	1548.9	1494.6	1446.1	1404.8	1380.7	1370.4	1376.5	1407.1	1432.9	1482.5
G72.0	1413.4	1355.6	1294.1	1255.1	1226.4	1228.9	1234.5	1270.2	1299.2	1356.5
G73.0	1280.9	1217.1	1154.4	1111.5	1083.7	1083.7	1092.3	1133.6	1167.7	1227.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	1154.0	1081.1	1018.5	974.0	940.3	945.2	955.4	1001.8	1044.5	1107.6
G75.0	1027.8	952.4	881.6	835.2	809.2	810.6	829.4	877.0	926.2	985.8
G76.0	909.5	830.1	757.5	707.6	679.5	686.5	702.7	762.1	810.4	870.9
G77.0	793.7	711.3	639.2	584.2	557.3	562.4	592.5	649.4	701.3	762.1
G78.0	687.7	603.2	529.2	476.3	447.8	460.3	487.0	546.8	595.1	657.5
G79.0	579.1	501.6	431.5	380.5	356.6	366.8	400.0	456.1	504.4	557.3
G80.0	483.5	411.6	348.0	297.0	279.6	289.5	322.3	375.9	416.9	468.2
G81.0	398.6	334.5	277.3	235.9	215.8	228.5	259.1	305.5	342.9	390.5
G82.0	323.9	272.6	227.1	186.8	170.3	183.1	211.4	248.9	282.1	321.1
G83.0	265.4	220.2	180.0	146.4	132.9	144.1	168.9	202.1	229.2	260.3
G84.0	214.4	175.6	139.0	109.3	97.4	106.5	127.4	158.7	184.0	209.5
G85.0	170.3	135.9	100.9	72.2	61.3	69.1	93.0	122.5	144.8	163.8
G86.0	132.9	103.9	71.5	46.6	35.5	45.0	64.5	90.7	109.5	126.7
G87.0	101.4	76.3	51.3	31.8	24.1	30.9	46.4	66.3	83.3	97.2
G88.0	75.4	55.5	37.3	22.5	16.7	21.1	33.2	48.3	61.3	72.4
G89.0	60.1	42.0	27.6	16.0	10.9	15.1	24.1	35.3	45.0	58.2
G90.0	51.0	31.3	20.4	12.1	7.0	11.4	18.6	27.8	43.2	77.3
G91.0	36.9	25.8	16.5	9.7	7.7	9.5	15.3	23.2	32.0	58.5
G92.0	31.3	21.8	13.5	8.8	8.1	8.4	12.8	19.3	27.1	39.9
G93.0	26.9	18.1	11.6	8.6	8.6	8.6	11.1	16.5	22.7	39.0
G94.0	22.3	15.5	10.4	9.1	9.1	9.1	10.2	14.1	19.3	34.8
G95.0	19.0	13.2	10.0	9.5	9.5	9.5	10.0	12.5	16.5	25.8
G96.0	16.5	11.8	10.2	10.2	10.2	10.2	10.4	11.4	14.4	19.7
G97.0	15.1	11.4	10.7	10.7	10.7	10.7	10.9	11.1	13.2	16.9
G98.0	13.9	11.6	11.4	11.4	11.4	11.4	11.4	11.4	12.8	15.3
G99.0	13.5	12.1	11.8	11.8	11.8	11.8	12.1	12.1	12.8	14.9
G100.0	13.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	13.0	14.6
G101.0	13.7	13.2	13.2	13.2	13.2	13.2	13.2	13.5	13.5	14.4
G102.0	14.1	13.7	13.7	13.7	13.7	13.7	13.9	13.9	14.1	14.6
G103.0	14.6	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.6	14.9
G104.0	15.1	15.1	15.1	15.1	15.1	15.1	15.1	15.3	15.1	15.3
G105.0	15.8	15.5	15.8	15.8	15.8	15.5	15.8	15.8	15.8	16.0
G106.0	16.2	16.2	16.2	16.5	16.5	16.5	16.5	16.5	16.5	16.5
G107.0	16.9	16.9	16.9	16.9	17.2	16.9	17.2	16.9	17.2	17.2
G108.0	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6
G109.0	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.6
G110.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	19.5	19.5	19.7	19.7	19.7	19.5	19.5	19.5	19.7	19.7
G112.0	20.2	20.2	20.4	20.4	20.4	20.2	20.4	20.4	20.4	20.4
G113.0	20.9	21.1	20.9	20.9	21.1	20.9	20.9	20.9	20.9	20.9
G114.0	21.6	21.6	21.6	21.6	21.6	21.6	21.6	21.6	21.6	21.6
G115.0	22.3	22.3	22.3	22.3	22.3	22.3	22.5	22.3	22.3	22.3
G116.0	23.0	23.0	23.0	23.0	23.0	23.0	23.0	22.7	23.0	23.0
G117.0	23.7	23.7	23.7	23.7	23.7	23.7	23.4	23.7	23.7	23.7
G118.0	24.4	24.4	24.6	24.4	24.4	24.4	24.1	24.1	24.1	24.4
G119.0	25.1	25.1	25.1	25.1	25.1	25.1	25.1	24.8	24.8	25.1
G120.0	25.8	25.8	25.8	25.8	25.8	25.8	25.8	25.5	25.5	25.5
G121.0	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.2	26.2	26.2
G122.0	26.9	27.1	27.1	27.1	27.1	26.9	26.9	26.7	26.9	26.9
G123.0	27.8	27.8	27.8	27.8	27.8	27.6	27.8	27.6	27.6	27.6
G124.0	28.3	28.5	28.5	28.5	28.5	28.3	28.3	28.1	28.3	28.1
G125.0	29.0	29.2	29.2	29.2	29.0	29.0	29.0	29.0	29.0	28.8
G126.0	29.9	29.9	29.9	29.9	29.9	29.7	29.7	29.5	29.5	29.5
G127.0	30.6	30.6	30.6	30.6	30.6	30.4	30.2	30.2	30.2	30.2
G128.0	31.3	31.3	31.3	31.1	31.1	31.1	31.1	31.1	30.9	30.9
G129.0	32.0	32.0	31.8	31.8	31.8	31.5	31.5	31.5	31.5	31.5
G130.0	32.5	32.5	32.7	32.5	32.5	32.3	32.3	32.3	32.3	32.3
G131.0	33.2	33.2	33.2	33.2	33.2	32.9	32.7	32.9	32.9	32.7
G132.0	33.6	33.9	33.9	33.6	33.6	33.6	33.6	33.4	33.4	33.6
G133.0	34.6	34.6	34.6	34.3	34.3	34.3	34.3	34.3	34.3	34.1
G134.0	35.0	35.3	35.0	35.0	35.0	34.8	35.0	34.8	34.8	34.8
G135.0	35.7	35.7	35.7	35.7	35.7	35.5	35.5	35.5	35.5	35.5
G136.0	36.2	36.4	36.2	36.2	36.2	36.0	36.2	36.2	36.2	36.2
G137.0	37.1	37.1	36.9	36.9	36.9	36.7	36.7	36.7	36.9	36.9
G138.0	37.3	37.6	37.3	37.6	37.3	37.3	37.3	37.3	37.3	37.3
G139.0	38.0	38.3	38.0	38.0	38.0	38.0	38.0	37.8	37.8	38.0
G140.0	38.7	38.7	38.7	38.5	38.7	38.5	38.5	38.5	38.5	38.7
G141.0	39.4	39.2	39.2	39.2	39.2	39.2	39.0	39.2	39.0	39.2
G142.0	39.7	39.9	39.9	39.9	39.7	39.7	39.7	39.4	39.7	39.7
G143.0	40.4	40.4	40.4	40.4	40.4	40.4	40.1	40.1	40.1	40.1
G144.0	40.8	40.8	40.8	40.8	40.8	40.8	40.6	40.8	40.8	40.8
G145.0	41.3	41.5	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3
G146.0	42.0	42.0	42.0	41.8	41.8	41.8	41.8	41.8	42.0	41.8
G147.0	42.5	42.5	42.5	42.5	42.5	42.2	42.2	42.2	42.5	42.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	42.9	42.9	42.9	42.9	42.9	42.7	42.7	42.7	42.9	42.7
G149.0	43.4	43.4	43.4	43.4	43.4	43.2	43.2	43.2	43.4	43.4
G150.0	43.8	43.8	43.8	43.8	43.8	43.8	43.6	43.8	43.8	43.8
G151.0	44.3	44.3	44.3	44.1	44.1	44.1	44.1	44.1	44.3	44.3
G152.0	44.8	44.8	44.8	44.8	44.8	44.5	44.5	44.8	44.8	44.8
G153.0	45.2	45.0	45.2	45.0	45.0	45.0	45.0	45.2	45.0	45.2
G154.0	45.5	45.7	45.5	45.5	45.5	45.5	45.5	45.5	45.5	45.7
G155.0	45.9	45.9	45.9	45.9	45.9	45.9	45.9	46.2	45.9	45.9
G156.0	46.4	46.4	46.4	46.2	46.2	46.2	46.4	46.4	46.4	46.4
G157.0	46.9	46.9	46.6	46.9	46.6	46.6	46.9	46.9	46.9	46.6
G158.0	47.1	47.1	47.1	46.9	47.1	47.1	47.1	47.3	47.1	46.9
G159.0	47.6	47.6	47.6	47.6	47.6	47.3	47.6	47.6	47.6	47.3
G160.0	47.8	47.8	47.8	47.8	47.8	47.8	47.8	48.0	48.0	47.6
G161.0	48.3	48.3	48.0	48.0	48.0	48.0	48.3	48.3	48.3	48.3
G162.0	48.5	48.5	48.5	48.3	48.5	48.5	48.5	48.5	48.5	48.5
G163.0	49.0	48.7	49.0	48.7	48.7	48.7	49.0	49.0	48.7	48.5
G164.0	49.2	49.0	49.2	49.0	49.2	49.4	49.2	49.4	49.2	49.0
G165.0	49.4	49.4	49.4	49.2	49.4	49.4	49.7	49.7	49.2	49.2
G166.0	49.7	49.7	49.4	49.7	49.7	49.9	49.9	49.9	49.7	49.7
G167.0	49.9	49.9	49.9	49.9	49.9	49.9	50.1	50.1	49.9	49.7
G168.0	50.1	50.1	50.1	50.1	50.3	50.3	50.3	50.1	50.1	49.9
G169.0	50.3	50.1	50.3	50.1	50.3	50.3	50.6	50.3	50.1	50.1
G170.0	50.3	50.6	50.3	50.3	50.6	50.8	50.8	50.6	50.6	50.6
G171.0	50.6	50.6	50.8	50.6	50.8	50.8	50.8	50.6	50.6	50.6
G172.0	50.8	50.8	50.8	51.0	51.0	51.0	51.0	50.8	50.6	50.6
G173.0	50.8	50.8	51.0	51.0	51.3	51.3	51.0	50.8	50.8	50.8
G174.0	51.0	51.0	51.0	51.3	51.3	51.3	51.0	51.0	50.8	51.0
G175.0	51.0	51.3	51.3	51.3	51.3	51.3	51.0	51.0	50.8	51.0
G176.0	51.3	51.3	51.5	51.5	51.5	51.3	51.3	51.0	51.0	51.0
G177.0	51.5	51.3	51.3	51.5	51.5	51.5	51.3	51.0	51.0	51.0
G178.0	51.5	51.5	51.5	51.7	51.7	51.3	51.3	51.3	51.0	51.0
G179.0	51.5	51.5	51.5	51.5	51.7	51.5	51.3	51.3	51.0	51.0
G180.0	51.3	51.5	51.7	51.5	51.5	51.3	51.0	51.0	50.8	51.0

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	6894.9	6899.4	6903.1	6906.1	6908.6	6912.3	6914.4	6915.6	6919.1	6919.3
G1.0	6897.5	6901.2	6905.4	6907.9	6910.7	6914.2	6915.8	6917.0	6920.2	6919.3
G2.0	6893.5	6898.9	6902.4	6904.2	6908.2	6910.0	6914.2	6915.1	6917.0	6915.6
G3.0	6888.5	6891.9	6893.8	6898.6	6902.1	6903.8	6906.8	6908.9	6911.2	6909.3
G4.0	6884.7	6887.3	6887.0	6890.8	6893.8	6895.6	6899.1	6899.1	6904.0	6901.2
G5.0	6879.9	6881.7	6881.7	6882.4	6884.3	6885.0	6888.9	6889.4	6893.3	6891.9
G6.0	6868.3	6871.3	6872.7	6875.0	6875.0	6874.1	6876.1	6876.4	6877.3	6877.3
G7.0	6854.6	6859.0	6858.3	6860.6	6861.3	6859.9	6858.8	6858.3	6860.1	6858.8
G8.0	6840.9	6842.3	6842.7	6843.2	6844.8	6843.2	6842.0	6837.4	6839.3	6836.5
G9.0	6825.8	6824.9	6824.4	6823.0	6823.0	6822.8	6821.9	6816.5	6814.2	6813.5
G10.0	6809.1	6808.4	6804.9	6803.3	6800.0	6797.5	6797.7	6794.3	6791.5	6787.3
G11.0	6785.9	6787.1	6783.8	6783.6	6777.1	6773.8	6773.6	6771.5	6768.7	6762.2
G12.0	6762.0	6761.1	6758.3	6758.8	6753.6	6747.2	6745.1	6744.1	6744.4	6737.2
G13.0	6734.9	6735.6	6731.8	6729.5	6725.8	6720.5	6717.0	6716.8	6717.2	6708.2
G14.0	6708.6	6707.0	6701.9	6700.3	6695.9	6691.7	6688.5	6683.8	6686.4	6679.2
G15.0	6678.7	6676.6	6672.9	6672.5	6665.5	6660.1	6657.8	6653.4	6654.4	6645.8
G16.0	6647.9	6643.0	6638.8	6640.9	6634.4	6626.8	6625.1	6618.2	6616.3	6610.7
G17.0	6614.7	6608.6	6602.1	6605.6	6601.2	6594.7	6591.3	6583.8	6576.2	6571.1
G18.0	6578.0	6572.2	6566.2	6567.4	6562.7	6555.8	6551.1	6545.5	6537.0	6530.7
G19.0	6536.5	6536.0	6530.2	6528.4	6521.6	6516.3	6511.4	6505.6	6498.7	6488.0
G20.0	6497.5	6496.8	6490.8	6486.9	6478.5	6471.3	6467.6	6459.7	6453.4	6443.2
G21.0	6457.4	6455.8	6444.9	6443.2	6434.9	6426.3	6422.4	6412.4	6406.8	6395.2
G22.0	6411.4	6407.0	6400.3	6396.1	6387.8	6375.3	6371.3	6358.5	6356.7	6349.0
G23.0	6364.1	6360.2	6347.6	6343.0	6333.5	6322.6	6318.2	6310.8	6306.1	6295.4
G24.0	6315.2	6308.0	6295.4	6291.0	6278.5	6269.5	6263.0	6257.9	6253.9	6246.7
G25.0	6262.3	6254.8	6242.3	6234.0	6227.7	6214.9	6210.3	6206.8	6202.9	6191.3
G26.0	6209.8	6202.6	6188.5	6180.6	6170.4	6160.6	6153.5	6149.3	6147.9	6138.1
G27.0	6152.5	6143.5	6132.3	6122.4	6112.9	6103.3	6096.9	6090.8	6088.3	6078.5
G28.0	6093.1	6084.8	6067.1	6060.0	6052.3	6039.1	6034.7	6024.9	6024.5	6014.5
G29.0	6034.2	6023.1	6004.0	5997.8	5992.4	5977.6	5974.1	5961.8	5958.6	5943.3
G30.0	5971.8	5958.3	5943.7	5935.4	5926.3	5913.8	5906.8	5891.3	5884.8	5871.6
G31.0	5908.2	5891.8	5875.5	5871.1	5857.6	5841.2	5834.5	5821.2	5817.0	5805.0
G32.0	5841.4	5822.4	5805.5	5801.7	5789.0	5774.1	5760.0	5746.8	5744.7	5735.4
G33.0	5770.0	5750.2	5733.5	5730.3	5716.4	5695.9	5688.5	5677.4	5675.5	5664.4
G34.0	5694.3	5676.0	5661.6	5654.2	5638.9	5618.2	5612.0	5604.8	5601.5	5592.9
G35.0	5615.9	5600.1	5584.8	5576.0	5560.5	5541.7	5536.1	5531.2	5527.7	5514.3
G36.0	5534.0	5523.8	5509.2	5496.0	5478.8	5464.4	5457.2	5451.6	5448.4	5434.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	5453.7	5443.3	5425.4	5412.7	5394.6	5383.0	5378.1	5372.1	5362.8	5349.8
G38.0	5371.1	5362.5	5343.1	5325.2	5311.7	5300.4	5295.5	5283.7	5274.2	5269.5
G39.0	5287.6	5279.3	5256.1	5239.8	5229.1	5213.6	5208.3	5194.4	5189.3	5183.9
G40.0	5198.5	5190.6	5168.6	5152.6	5144.2	5129.4	5114.5	5107.1	5103.2	5100.9
G41.0	5110.1	5101.8	5075.8	5065.4	5054.5	5035.9	5025.9	5019.2	5017.3	5013.9
G42.0	5022.0	5005.0	4984.4	4973.9	4963.0	4940.5	4935.0	4926.9	4924.8	4922.7
G43.0	4924.3	4910.4	4889.3	4884.6	4867.7	4848.0	4840.3	4836.8	4828.3	4820.4
G44.0	4826.6	4810.1	4793.7	4790.0	4767.2	4756.8	4751.7	4743.1	4732.9	4728.3
G45.0	4728.0	4707.8	4696.9	4687.2	4668.6	4658.9	4651.9	4643.3	4633.1	4630.6
G46.0	4624.3	4604.4	4596.2	4587.0	4572.8	4561.7	4554.9	4543.1	4539.4	4539.6
G47.0	4515.3	4498.6	4491.8	4481.9	4470.5	4459.1	4446.8	4441.5	4441.7	4440.3
G48.0	4413.0	4399.5	4389.3	4383.3	4369.1	4357.3	4348.9	4343.1	4345.9	4339.6
G49.0	4303.5	4294.4	4279.8	4278.4	4267.7	4250.5	4245.0	4241.5	4239.0	4232.9
G50.0	4194.6	4187.2	4175.6	4177.2	4159.4	4149.6	4144.5	4137.1	4132.7	4129.0
G51.0	4080.0	4073.1	4061.7	4066.8	4049.9	4042.9	4040.4	4027.6	4023.4	4027.6
G52.0	3970.5	3959.4	3952.0	3954.1	3942.2	3940.6	3933.9	3924.4	3923.2	3921.1
G53.0	3856.1	3844.8	3842.2	3840.8	3835.3	3829.5	3819.9	3816.2	3819.0	3809.3
G54.0	3734.8	3731.1	3727.9	3730.6	3727.1	3717.9	3714.2	3709.5	3706.5	3705.8
G55.0	3616.0	3611.4	3609.1	3616.0	3611.1	3606.3	3603.5	3592.4	3597.7	3598.2
G56.0	3491.0	3496.1	3491.0	3503.7	3498.6	3495.6	3490.5	3485.9	3488.4	3477.3
G57.0	3372.9	3377.1	3376.4	3389.6	3382.9	3379.4	3380.8	3370.1	3371.0	3365.9
G58.0	3246.0	3249.5	3255.9	3269.2	3269.9	3261.5	3267.6	3253.9	3257.1	3252.7
G59.0	3120.5	3123.5	3138.3	3146.4	3151.6	3152.0	3148.8	3137.6	3140.4	3139.3
G60.0	2994.5	3002.1	3017.2	3030.2	3037.6	3033.0	3032.8	3027.4	3027.0	3023.7
G61.0	2865.5	2882.0	2894.0	2909.6	2917.7	2914.4	2916.5	2904.5	2907.0	2910.3
G62.0	2726.8	2755.1	2765.5	2792.2	2794.5	2791.0	2796.8	2790.6	2790.3	2788.9
G63.0	2597.8	2624.9	2643.7	2668.8	2672.2	2669.4	2674.8	2667.1	2669.7	2670.8
G64.0	2461.3	2495.0	2517.9	2543.7	2553.2	2549.7	2555.5	2552.8	2547.9	2545.3
G65.0	2328.4	2363.7	2395.9	2425.1	2432.3	2437.0	2437.9	2432.3	2429.3	2423.8
G66.0	2190.8	2233.3	2264.4	2298.0	2310.1	2313.6	2316.8	2304.5	2306.6	2302.9
G67.0	2056.5	2098.3	2137.2	2172.5	2186.9	2187.1	2188.3	2185.5	2181.8	2180.8
G68.0	1921.9	1973.0	2002.9	2043.5	2063.9	2063.9	2064.6	2060.9	2060.7	2057.9
G69.0	1792.0	1837.9	1876.4	1917.5	1933.5	1935.8	1940.3	1938.2	1937.2	1936.1
G70.0	1656.1	1707.3	1746.3	1787.6	1808.5	1810.8	1817.5	1819.8	1817.1	1808.7
G71.0	1531.0	1582.7	1623.8	1660.7	1678.8	1689.9	1690.2	1694.1	1687.6	1680.4
G72.0	1403.6	1456.5	1492.9	1534.5	1548.9	1560.2	1568.3	1566.5	1561.4	1544.0
G73.0	1276.7	1328.2	1369.8	1407.1	1426.8	1436.3	1440.3	1434.9	1430.3	1415.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	1153.8	1208.3	1248.7	1284.6	1304.6	1308.0	1313.4	1306.4	1306.4	1293.9
G75.0	1035.9	1089.5	1125.7	1164.7	1177.9	1184.6	1184.2	1180.7	1177.9	1168.8
G76.0	919.2	974.4	1006.9	1040.5	1061.0	1060.3	1063.5	1063.5	1061.2	1049.8
G77.0	809.5	858.0	888.6	922.5	937.1	941.7	946.1	943.6	941.2	933.3
G78.0	700.2	748.0	779.3	811.8	825.2	827.3	836.8	831.5	829.2	811.8
G79.0	604.8	639.9	676.1	705.8	714.8	721.3	722.2	719.2	711.1	697.4
G80.0	506.5	548.5	575.6	600.9	614.8	610.2	613.7	611.1	603.9	589.5
G81.0	423.9	458.4	484.2	506.5	512.5	512.5	516.0	507.2	503.0	490.5
G82.0	349.4	381.6	398.8	419.0	423.2	419.2	419.9	417.4	410.2	394.9
G83.0	284.7	306.0	325.5	339.0	341.7	337.8	335.5	331.5	322.7	310.6
G84.0	224.4	244.5	256.8	268.2	269.6	261.9	262.6	260.1	256.1	245.5
G85.0	177.9	190.5	200.0	206.9	210.0	208.8	209.3	210.2	206.0	197.2
G86.0	136.2	147.6	154.1	162.9	165.9	167.5	173.1	176.6	177.3	170.5
G87.0	104.9	110.9	117.6	129.9	139.9	145.9	151.3	155.0	154.5	146.4
G88.0	77.9	81.7	89.3	101.6	111.8	119.0	124.8	129.7	130.6	124.6
G89.0	67.1	71.0	77.5	87.5	98.4	109.0	117.4	123.9	126.9	122.3
G90.0	90.9	88.9	89.8	95.3	105.1	116.7	126.2	132.9	136.6	133.9
G91.0	78.2	83.8	86.5	95.8	107.7	121.1	133.2	142.2	147.8	144.5
G92.0	58.2	70.1	75.4	85.4	95.8	108.1	121.1	131.6	139.2	136.6
G93.0	42.9	50.6	62.2	76.1	87.0	95.1	103.5	110.9	117.2	115.3
G94.0	51.7	49.9	51.0	63.8	77.3	88.2	97.2	103.5	106.3	103.9
G95.0	42.7	57.1	56.8	61.7	74.2	88.2	97.7	103.7	106.3	104.2
G96.0	31.1	44.8	57.1	62.6	68.9	79.1	92.6	103.7	110.2	109.3
G97.0	23.4	34.3	44.8	54.3	61.5	68.4	78.2	88.4	96.3	97.0
G98.0	18.8	26.7	36.4	44.5	49.9	55.5	64.5	74.5	82.4	84.0
G99.0	17.6	22.0	28.8	36.9	41.5	46.2	52.9	62.0	70.3	74.2
G100.0	16.9	19.7	24.8	30.2	34.8	38.3	43.4	51.3	58.9	63.3
G101.0	16.5	19.0	21.8	26.2	29.7	32.0	36.0	41.8	48.7	53.1
G102.0	16.2	18.3	21.1	23.7	26.2	28.5	30.6	34.3	39.7	42.9
G103.0	16.2	18.1	20.2	22.5	24.4	25.5	27.6	30.6	33.6	36.2
G104.0	16.2	17.6	19.7	21.6	23.2	24.4	25.5	27.1	29.9	31.8
G105.0	16.2	17.6	19.3	21.1	22.5	23.7	24.6	26.0	26.9	27.8
G106.0	16.7	17.6	19.0	20.6	22.0	23.2	24.1	25.3	26.2	26.5
G107.0	17.4	17.9	19.0	20.4	21.8	23.0	23.9	25.1	25.5	26.0
G108.0	17.9	18.3	19.0	20.2	21.6	22.5	23.7	24.6	25.3	25.5
G109.0	18.8	19.0	19.5	20.4	21.3	22.5	23.4	24.4	25.1	25.5
G110.0	19.3	19.3	19.7	20.4	21.3	22.5	23.2	23.9	24.8	25.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	19.7	20.0	20.4	20.6	21.6	22.3	23.2	23.9	24.6	25.1
G112.0	20.4	20.6	20.9	21.3	21.8	22.5	23.4	24.1	24.6	25.1
G113.0	21.1	21.3	21.6	21.8	22.3	22.7	23.4	23.9	24.6	25.1
G114.0	21.8	21.8	22.3	22.5	23.0	23.2	23.9	24.1	24.8	25.3
G115.0	22.5	22.7	23.0	23.2	23.4	23.7	24.1	24.4	25.1	25.3
G116.0	23.2	23.2	23.4	23.9	24.1	24.4	24.6	24.8	25.3	25.8
G117.0	23.9	24.1	24.1	24.4	24.8	25.1	25.3	25.3	25.5	25.8
G118.0	24.4	24.6	24.8	25.3	25.3	25.5	26.0	26.2	26.2	26.5
G119.0	25.1	25.3	25.5	25.8	26.0	26.5	26.5	26.7	26.9	27.1
G120.0	25.8	26.0	26.2	26.5	26.7	26.9	27.1	27.1	27.4	27.6
G121.0	26.5	26.5	26.9	27.1	27.4	27.6	27.8	28.1	28.3	28.3
G122.0	26.9	27.1	27.6	27.6	28.1	28.3	28.3	28.8	28.8	29.0
G123.0	27.8	27.8	28.3	28.5	28.5	29.0	29.0	29.2	29.5	29.7
G124.0	28.3	28.5	28.8	29.0	29.5	29.5	29.7	29.7	30.2	30.4
G125.0	29.0	29.2	29.5	29.9	29.9	30.2	30.4	30.4	30.6	30.9
G126.0	29.7	29.9	30.2	30.4	30.6	30.9	30.9	31.3	31.3	31.5
G127.0	30.4	30.4	30.9	31.1	31.3	31.5	31.5	31.8	32.0	32.0
G128.0	30.9	31.3	31.5	31.8	31.8	32.3	32.3	32.3	32.5	32.7
G129.0	31.8	31.8	32.0	32.3	32.5	32.7	32.7	33.2	33.2	33.4
G130.0	32.3	32.5	32.7	32.9	33.2	33.2	33.4	33.6	33.9	34.1
G131.0	32.9	33.2	33.4	33.6	33.6	34.1	34.1	34.1	34.3	34.6
G132.0	33.6	33.6	34.1	34.3	34.3	34.6	34.6	34.8	35.0	35.3
G133.0	34.3	34.3	34.8	34.8	34.8	35.3	35.3	35.5	35.7	35.7
G134.0	34.8	35.0	35.3	35.3	35.5	35.7	35.7	36.2	36.2	36.4
G135.0	35.5	35.7	36.0	36.0	36.0	36.4	36.4	36.4	36.7	37.1
G136.0	36.2	36.2	36.7	36.4	36.7	36.9	36.9	36.9	37.3	37.6
G137.0	36.9	36.9	37.1	37.3	37.1	37.3	37.6	37.6	38.0	37.8
G138.0	37.3	37.6	37.8	37.8	37.8	37.8	38.0	38.3	38.3	38.5
G139.0	38.0	38.0	38.3	38.3	38.3	38.5	38.5	38.5	38.7	39.2
G140.0	38.5	38.7	38.7	39.0	38.7	39.0	39.0	39.2	39.4	39.7
G141.0	39.2	39.4	39.4	39.2	39.2	39.4	39.4	39.7	39.9	40.1
G142.0	39.7	39.7	39.9	39.9	39.9	39.9	39.9	40.1	40.1	40.6
G143.0	40.4	40.4	40.6	40.4	40.4	40.4	40.4	40.6	40.8	40.8
G144.0	41.1	40.8	41.1	41.1	40.8	40.8	40.8	41.1	41.1	41.5
G145.0	41.3	41.3	41.5	41.3	41.3	41.3	41.3	41.5	41.8	41.8
G146.0	42.0	42.0	42.0	41.8	41.8	42.0	41.8	41.8	42.0	42.2
G147.0	42.5	42.5	42.5	42.5	42.2	42.5	42.2	42.5	42.5	42.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	42.9	42.9	42.9	42.7	42.7	42.7	42.7	42.9	42.9	43.2
G149.0	43.4	43.6	43.4	43.4	43.4	43.4	43.2	43.4	43.6	43.6
G150.0	43.8	43.8	43.8	43.8	43.6	43.6	43.8	43.8	43.8	44.1
G151.0	44.3	44.3	44.3	44.1	44.1	44.1	44.1	44.1	44.3	44.3
G152.0	44.8	44.8	44.8	44.5	44.5	44.5	44.3	44.8	44.8	44.8
G153.0	45.0	45.2	45.2	45.2	45.0	45.0	45.0	45.0	45.2	45.0
G154.0	45.5	45.5	45.5	45.5	45.2	45.2	45.2	45.5	45.5	45.7
G155.0	45.9	45.7	45.9	45.9	45.7	45.7	45.7	45.7	45.9	45.9
G156.0	46.2	46.4	46.4	46.2	46.2	46.2	46.2	46.2	46.2	46.4
G157.0	46.6	46.6	46.9	46.4	46.4	46.6	46.4	46.6	46.6	46.6
G158.0	47.1	47.1	47.1	46.9	46.9	46.9	47.1	46.9	47.1	47.1
G159.0	47.3	47.3	47.3	47.3	47.3	47.3	47.1	47.3	47.3	47.3
G160.0	47.6	47.6	47.8	47.6	47.6	47.6	47.6	47.6	47.6	47.8
G161.0	48.0	48.0	48.0	47.8	47.8	48.0	47.8	48.0	48.0	48.0
G162.0	48.3	48.3	48.5	48.3	48.3	48.3	48.0	48.3	48.3	48.3
G163.0	48.7	48.5	48.7	48.5	48.5	48.5	48.5	48.7	48.5	48.7
G164.0	49.0	49.0	49.0	48.7	48.7	48.7	49.0	49.0	48.7	49.0
G165.0	49.2	49.2	49.2	49.2	49.0	49.0	49.0	49.0	49.2	49.2
G166.0	49.4	49.4	49.4	49.4	49.2	49.2	49.2	49.4	49.4	49.4
G167.0	49.7	49.7	49.7	49.7	49.4	49.7	49.4	49.7	49.7	49.7
G168.0	49.9	49.9	49.9	49.9	49.7	49.7	49.7	49.9	49.7	49.7
G169.0	50.1	50.1	50.1	50.1	49.9	50.1	49.9	50.1	50.1	50.1
G170.0	50.3	50.3	50.3	50.3	50.1	50.3	50.1	50.1	50.3	50.1
G171.0	50.6	50.6	50.8	50.6	50.3	50.3	50.3	50.3	50.6	50.3
G172.0	50.8	50.8	50.8	50.6	50.6	50.3	50.3	50.6	50.6	50.6
G173.0	50.8	50.8	50.8	50.8	50.6	50.6	50.6	50.6	50.8	50.8
G174.0	51.0	50.8	50.8	50.6	50.8	50.8	50.6	50.8	50.8	51.0
G175.0	51.0	51.0	51.0	50.8	50.8	50.8	50.8	51.0	50.8	51.0
G176.0	51.0	51.0	50.8	50.8	50.8	51.0	51.0	51.0	51.3	51.3
G177.0	51.3	51.0	51.0	50.8	50.8	50.8	51.0	51.0	51.3	51.3
G178.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.3	51.3	51.3
G179.0	51.0	50.8	51.0	50.8	51.0	51.0	51.3	51.0	51.3	51.3
G180.0	51.0	51.0	51.0	50.8	50.8	51.0	51.0	51.3	51.3	51.3

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	6920.9	6922.3	6923.5						
G1.0	6920.7	6921.2	6921.6						
G2.0	6917.5	6917.7	6920.2						
G3.0	6911.0	6910.5	6914.7						
G4.0	6902.1	6901.0	6907.2						
G5.0	6891.5	6889.4	6897.0						
G6.0	6878.0	6876.6	6883.1						
G7.0	6860.4	6858.3	6869.4						
G8.0	6839.7	6839.0	6850.6						
G9.0	6816.5	6815.1	6832.3						
G10.0	6789.6	6790.1	6807.7						
G11.0	6765.5	6765.0	6782.4						
G12.0	6738.8	6738.8	6758.5						
G13.0	6710.0	6711.4	6732.3						
G14.0	6679.2	6681.0	6704.2						
G15.0	6646.0	6646.5	6671.1						
G16.0	6608.2	6610.3	6636.0						
G17.0	6568.5	6569.0	6599.4						
G18.0	6527.7	6524.4	6559.5						
G19.0	6484.3	6480.4	6517.2						
G20.0	6439.0	6433.0	6471.3						
G21.0	6391.7	6385.0	6427.2						
G22.0	6344.6	6337.2	6379.4						
G23.0	6295.9	6288.3	6330.2						
G24.0	6242.1	6237.2	6282.2						
G25.0	6185.2	6181.1	6232.6						
G26.0	6129.6	6127.0	6175.7						
G27.0	6070.6	6063.4	6119.8						
G28.0	6005.2	5999.9	6061.6						
G29.0	5938.4	5932.4	5998.9						
G30.0	5869.7	5866.5	5933.3						
G31.0	5802.2	5797.6	5869.5						
G32.0	5732.1	5728.7	5802.0						
G33.0	5660.5	5653.7	5737.7						
G34.0	5587.1	5579.9	5666.7						
G35.0	5509.0	5499.4	5593.2						
G36.0	5427.5	5417.5	5513.1						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	5347.0	5339.8	5432.1						
G38.0	5264.2	5257.2	5351.9						
G39.0	5183.7	5173.0	5271.4						
G40.0	5101.5	5091.3	5188.8						
G41.0	5016.6	5003.2	5108.3						
G42.0	4919.2	4907.6	5021.0						
G43.0	4819.2	4810.9	4933.6						
G44.0	4728.3	4722.7	4836.6						
G45.0	4635.7	4623.9	4745.9						
G46.0	4543.1	4532.2	4655.2						
G47.0	4438.3	4431.8	4568.6						
G48.0	4335.0	4328.5	4465.2						
G49.0	4237.3	4226.4	4361.5						
G50.0	4133.2	4126.4	4263.5						
G51.0	4027.6	4018.6	4165.4						
G52.0	3921.8	3911.4	4067.0						
G53.0	3818.6	3808.4	3958.5						
G54.0	3710.4	3705.6	3855.2						
G55.0	3602.3	3592.4	3753.4						
G56.0	3484.0	3477.1	3645.5						
G57.0	3372.6	3367.8	3531.1						
G58.0	3260.8	3249.0	3422.3						
G59.0	3143.7	3138.8	3311.6						
G60.0	3029.1	3026.3	3201.9						
G61.0	2917.2	2906.8	3090.3						
G62.0	2793.6	2783.6	2976.6						
G63.0	2671.3	2666.9	2859.0						
G64.0	2547.4	2543.5	2739.3						
G65.0	2429.6	2425.6	2616.8						
G66.0	2306.8	2300.1	2497.8						
G67.0	2182.7	2178.5	2375.5						
G68.0	2064.6	2055.6	2260.2						
G69.0	1934.2	1934.4	2140.5						
G70.0	1814.0	1801.1	2014.0						
G71.0	1678.3	1664.9	1889.0						
G72.0	1546.5	1534.5	1757.7						
G73.0	1417.6	1405.0	1619.6						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	1295.1	1276.5	1493.7						
G75.0	1168.1	1158.2	1367.4						
G76.0	1047.0	1033.3	1248.7						
G77.0	926.2	913.2	1124.8						
G78.0	809.5	788.8	1006.9						
G79.0	689.0	675.6	883.2						
G80.0	580.9	565.4	765.6						
G81.0	480.7	464.9	651.5						
G82.0	384.9	367.5	546.4						
G83.0	302.3	289.5	444.8						
G84.0	239.0	226.7	352.4						
G85.0	190.7	181.9	277.9						
G86.0	163.1	153.1	217.6						
G87.0	135.7	124.6	174.5						
G88.0	116.5	108.3	143.1						
G89.0	115.1	108.6	112.1						
G90.0	126.4	120.9	97.7						
G91.0	137.4	129.7	99.5						
G92.0	130.4	122.0	113.9						
G93.0	108.8	101.8	126.4						
G94.0	98.8	93.3	121.1						
G95.0	99.8	95.6	102.1						
G96.0	104.9	100.0	92.1						
G97.0	93.5	88.2	92.6						
G98.0	81.4	77.5	96.3						
G99.0	73.6	71.2	82.6						
G100.0	64.0	62.9	73.8						
G101.0	54.8	54.1	69.8						
G102.0	45.0	45.0	62.9						
G103.0	37.6	37.8	54.8						
G104.0	32.7	32.9	45.0						
G105.0	28.5	29.0	37.3						
G106.0	26.9	26.9	32.3						
G107.0	26.2	26.2	27.4						
G108.0	25.8	26.0	24.6						
G109.0	25.8	25.8	24.4						
G110.0	25.5	25.8	24.1						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	25.5	25.5	24.1							
G112.0	25.3	25.5	24.1							
G113.0	25.3	25.5	23.9							
G114.0	25.5	25.5	23.9							
G115.0	25.5	25.8	23.9							
G116.0	26.0	26.0	24.1							
G117.0	26.2	26.5	24.4							
G118.0	26.5	26.7	24.6							
G119.0	27.4	27.4	25.1							
G120.0	27.8	28.1	25.1							
G121.0	28.5	28.5	25.8							
G122.0	29.0	29.2	26.5							
G123.0	29.7	29.9	27.1							
G124.0	30.4	30.6	27.6							
G125.0	30.9	31.3	28.3							
G126.0	31.8	31.8	29.0							
G127.0	32.3	32.5	29.5							
G128.0	32.9	33.2	30.2							
G129.0	33.6	33.6	30.9							
G130.0	34.3	34.3	31.3							
G131.0	34.8	34.8	32.0							
G132.0	35.5	35.5	32.7							
G133.0	36.0	36.2	33.2							
G134.0	36.4	36.7	33.6							
G135.0	37.1	37.1	34.3							
G136.0	37.6	37.8	35.0							
G137.0	38.0	38.3	35.5							
G138.0	38.7	38.7	36.2							
G139.0	39.2	39.2	36.7							
G140.0	39.7	39.9	37.3							
G141.0	40.1	40.1	37.8							
G142.0	40.6	40.6	38.3							
G143.0	41.1	41.1	38.7							
G144.0	41.5	41.5	39.2							
G145.0	42.0	42.0	39.4							
G146.0	42.2	42.5	40.1							
G147.0	42.7	42.9	40.6							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	43.2	43.4	40.8							
G149.0	43.6	43.6	41.5							
G150.0	44.1	44.1	42.0							
G151.0	44.5	44.5	42.5							
G152.0	44.8	44.8	42.7							
G153.0	45.2	45.2	43.2							
G154.0	45.5	45.5	43.6							
G155.0	45.9	46.2	43.8							
G156.0	46.4	46.4	44.3							
G157.0	46.6	46.9	44.8							
G158.0	47.1	47.1	45.2							
G159.0	47.3	47.6	45.5							
G160.0	47.8	47.8	45.9							
G161.0	48.0	48.3	46.4							
G162.0	48.3	48.5	46.6							
G163.0	48.7	49.0	47.1							
G164.0	49.0	49.0	47.6							
G165.0	49.2	49.2	47.8							
G166.0	49.4	49.7	48.0							
G167.0	49.4	49.7	48.5							
G168.0	49.9	50.1	48.7							
G169.0	50.1	50.1	49.2							
G170.0	50.1	50.6	49.7							
G171.0	50.6	50.6	49.9							
G172.0	50.6	50.8	50.1							
G173.0	50.8	51.0	50.6							
G174.0	51.0	51.3	50.8							
G175.0	51.3	51.3	51.0							
G176.0	51.0	51.5	51.5							
G177.0	51.3	51.5	51.5							
G178.0	51.5	51.3	51.7							
G179.0	51.5	51.5	52.0							
G180.0	51.3	51.5	52.0							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector: