

Report No.:

Test Time: 2021-02-26 13:21

Luminaire Property

Luminaire Manufacturer:
Lamp Catalog: Magistral 50w
Luminous Width (mm): 195
Voltage: 226.1 V
Power: 49.19 W

Luminous Length (mm): 205
Luminous Height (mm): 60
Current: 0.222 A
Power Factor: 0.979


Photometric Results

CIE Class: Direct
Measurement Flux: 7006.5 lm
Downward Ratio: 99%
Horizontal Diffuse Angle(50%): H59.2
Vertical Diffuse Angle(50%): V58.9
Luminaire Efficacy Rating (LER): 142
Max. Intensity: 5854.94 cd


Total Rated Lamp Lumens: 7006.5 lm
Efficiency: 100%
Upward Ratio: 1%

Central Intensity: 5854.93 cd
Pos of Max. Intensity: H0 V0

Picture Of Luminaire





Luminous Intensity Distribution Curve

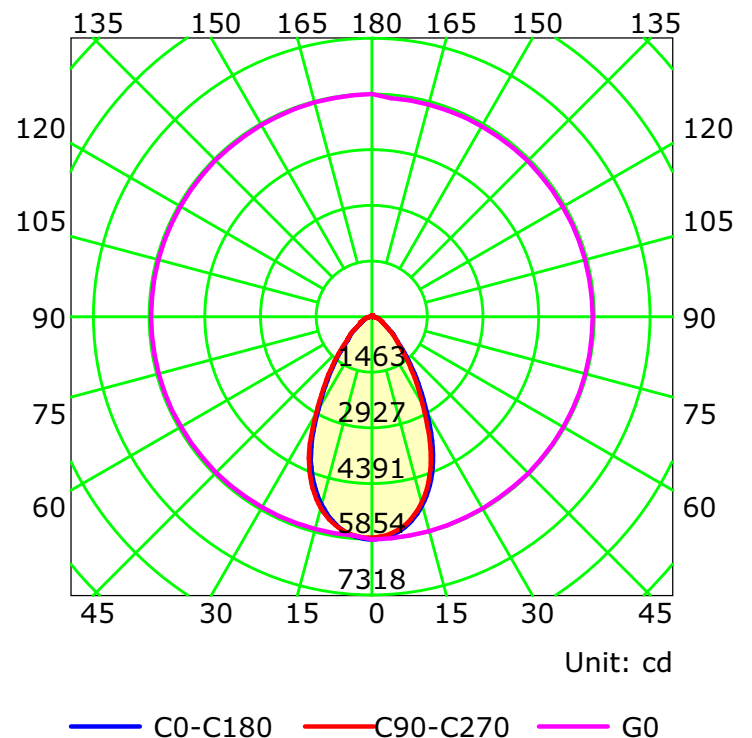

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:


Luminous Intensity Distribution Curve

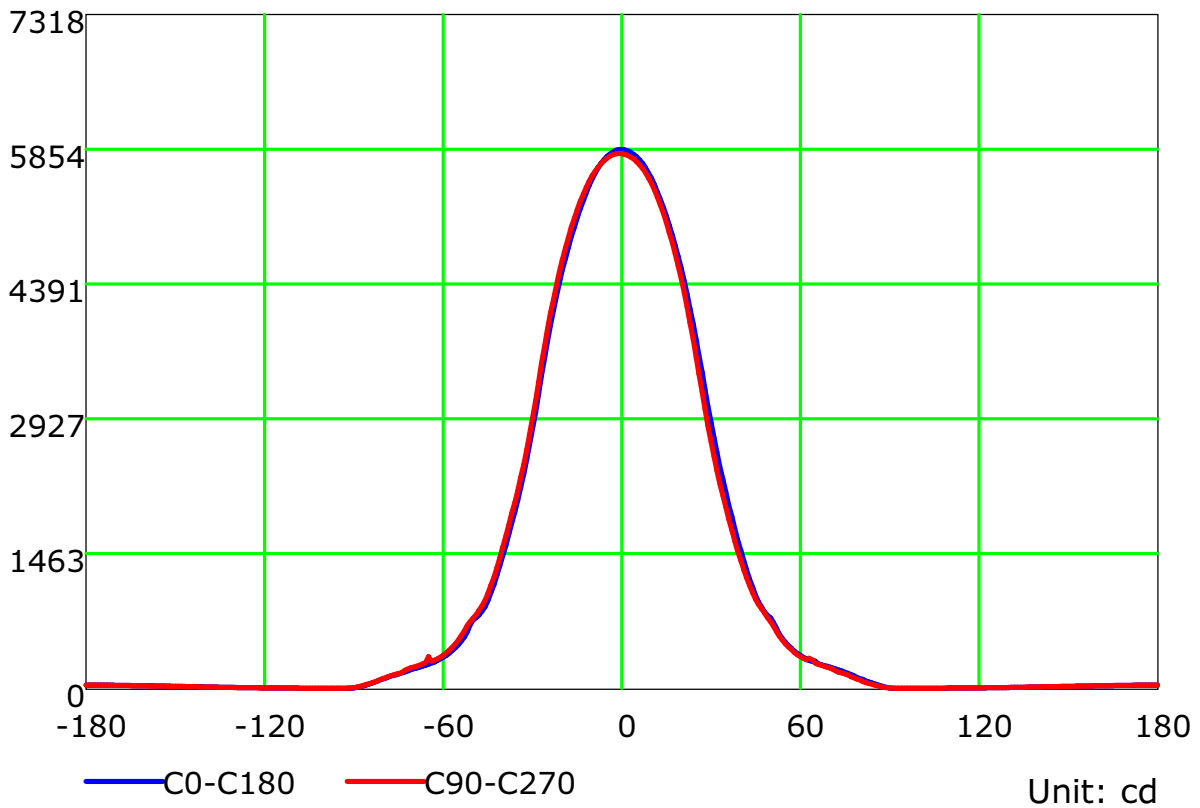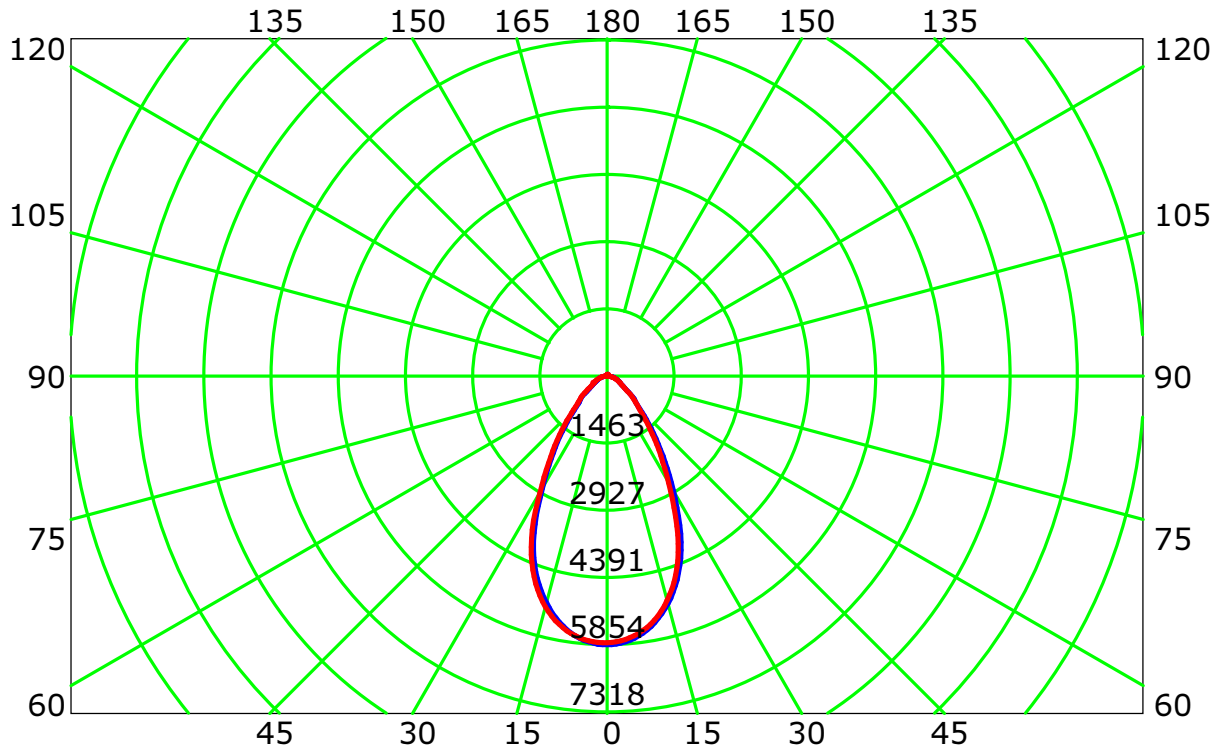

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

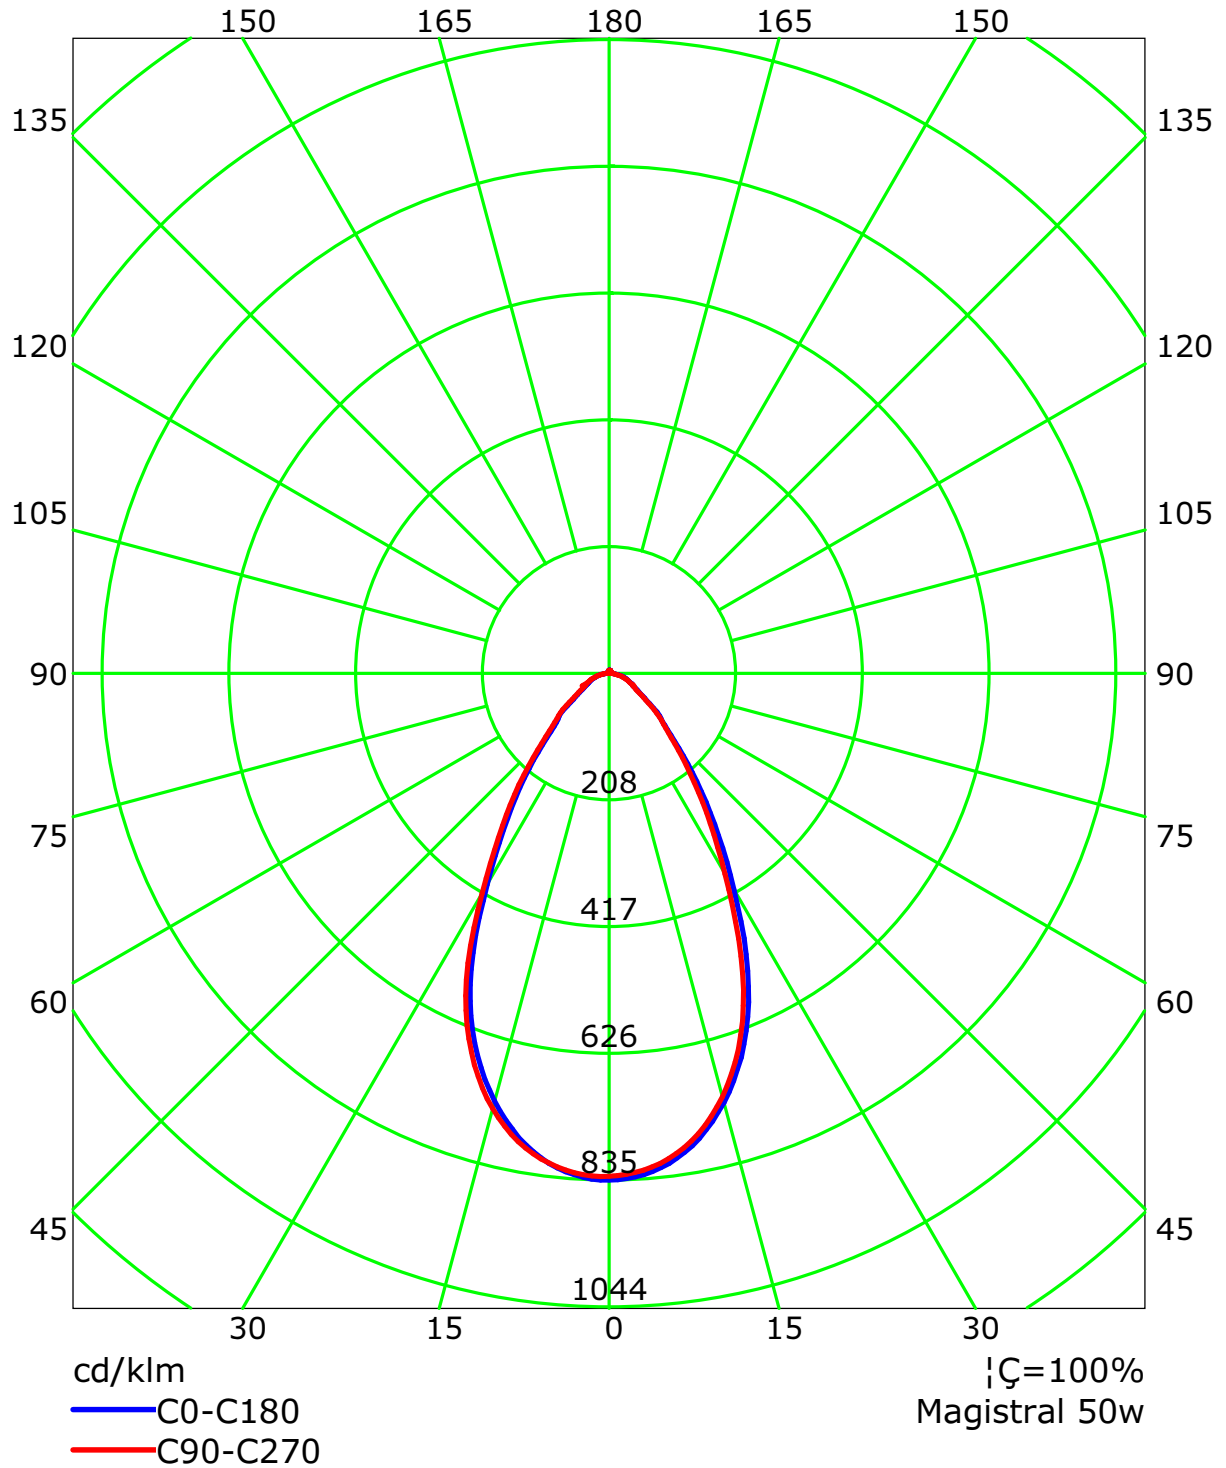

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m


Humidity: 40

Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	111	108	105	102	109	105	103	100	101	99	97	97	95	94	94	92	91	89
2	104	98	93	88	102	96	91	87	93	89	85	89	86	83	86	84	81	79
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	76	73	71
4	91	82	75	70	89	81	74	69	78	73	68	76	71	67	74	70	67	65
5	86	75	68	63	84	74	68	63	72	67	62	70	65	61	69	64	61	59
6	81	70	63	58	79	69	62	57	67	61	57	66	60	56	64	59	56	54
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	51	50
8	72	60	53	49	70	60	53	49	59	53	48	57	52	48	56	51	48	46
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40


Spacing Criteria (0-180): 0.91
 Spacing Criteria (90-270): 0.91
 Spacing Criteria (Diagonal): 0.94

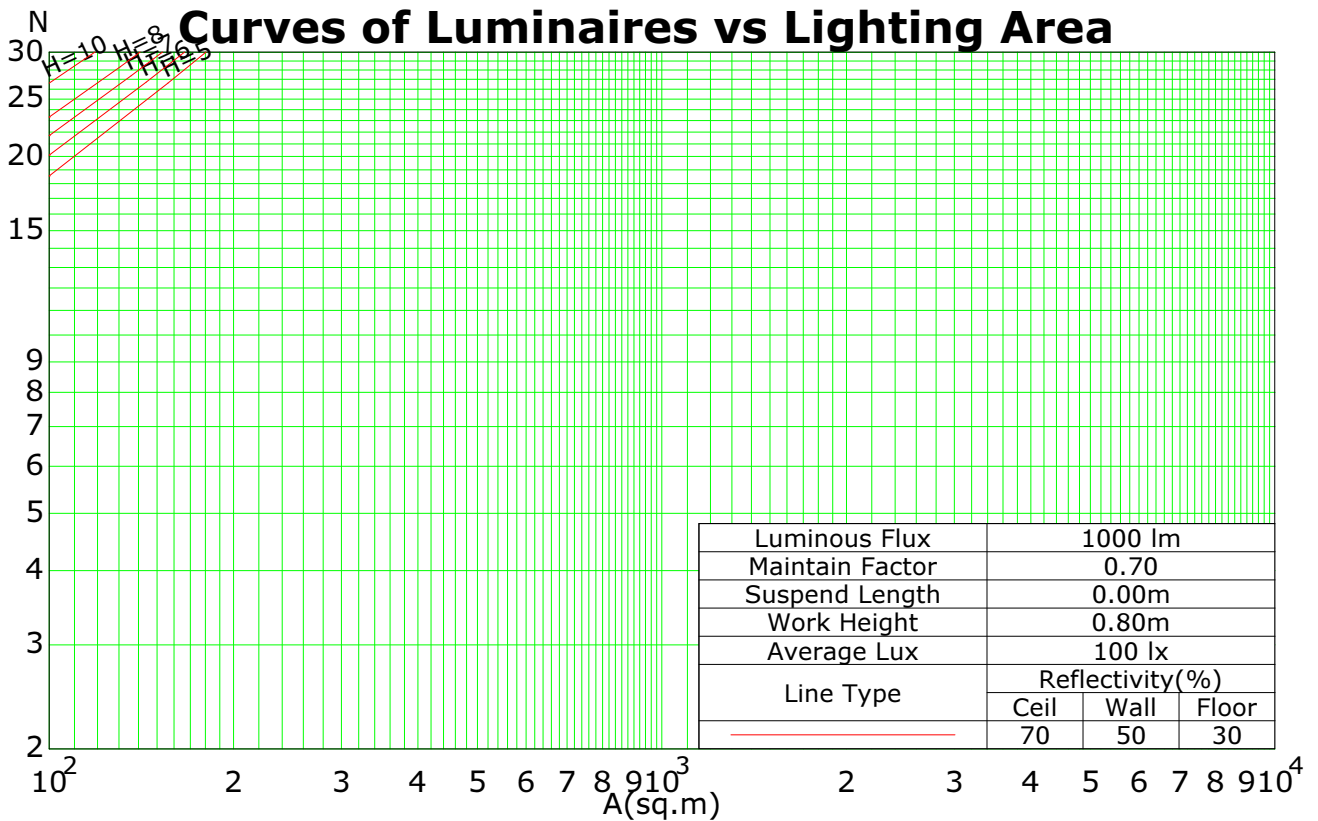

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

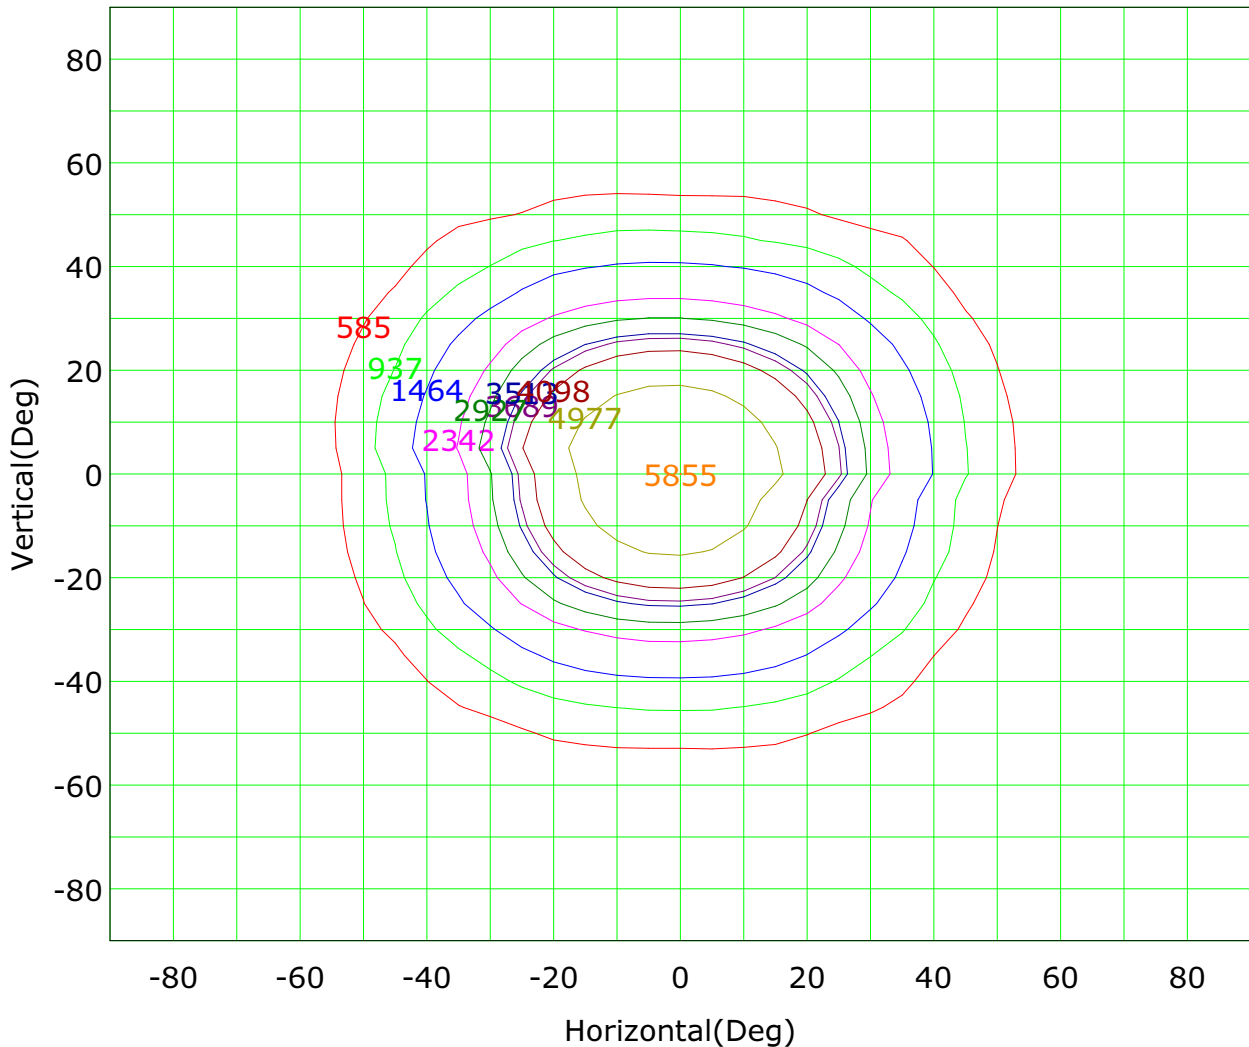

Imax (100%): 5855 cd

(10%): 585 cd	(16%): 937 cd
(25%): 1464 cd	(40%): 2342 cd
(63%): 3689 cd	(100%): 5855 cd
(50%): 2927 cd	(60%): 3513 cd
(70%): 4098 cd	(85%): 4977 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Isocandela (sphere)

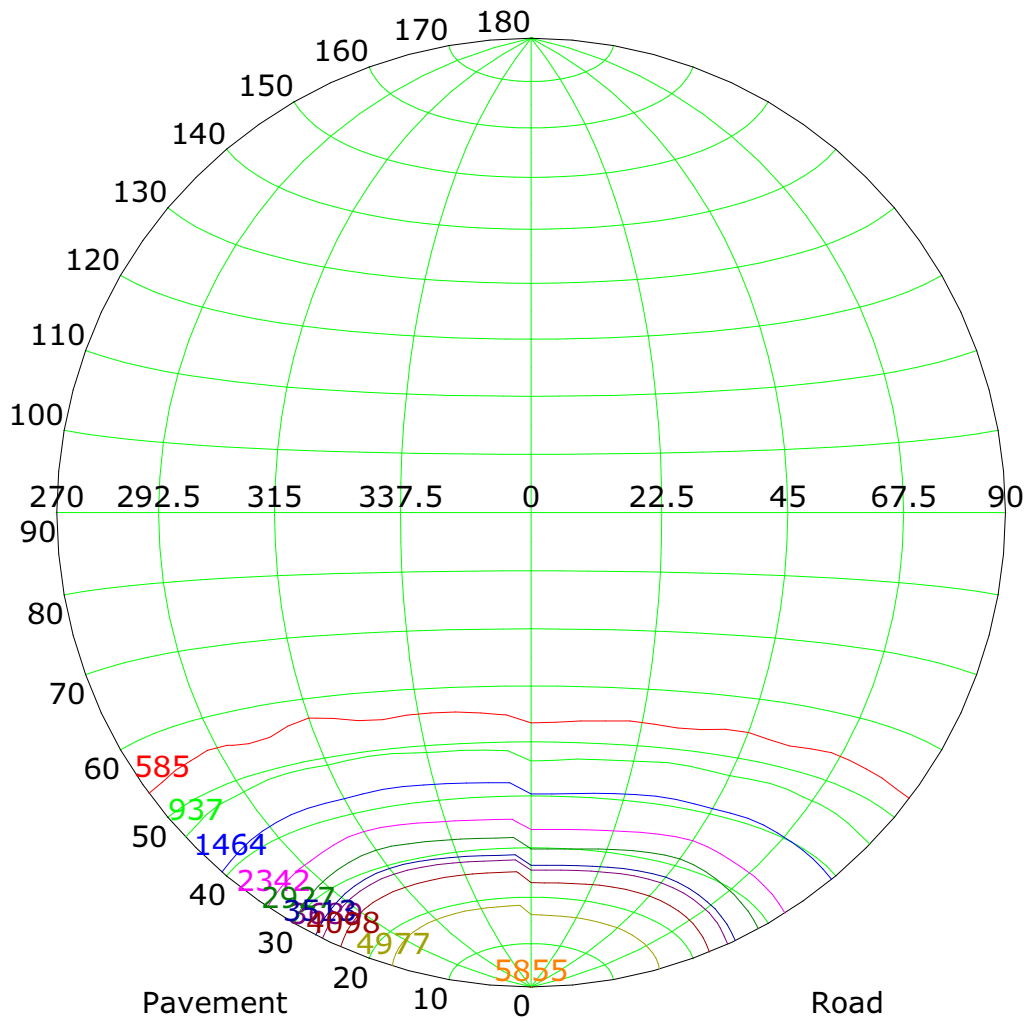

Imax (100%): 5855 cd

— (10%): 585 cd	— (16%): 937 cd
— (25%): 1464 cd	— (40%): 2342 cd
— (63%): 3689 cd	— (100%): 5855 cd
— (50%): 2927 cd	— (60%): 3513 cd
— (70%): 4098 cd	— (85%): 4977 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

IsoLux Plot

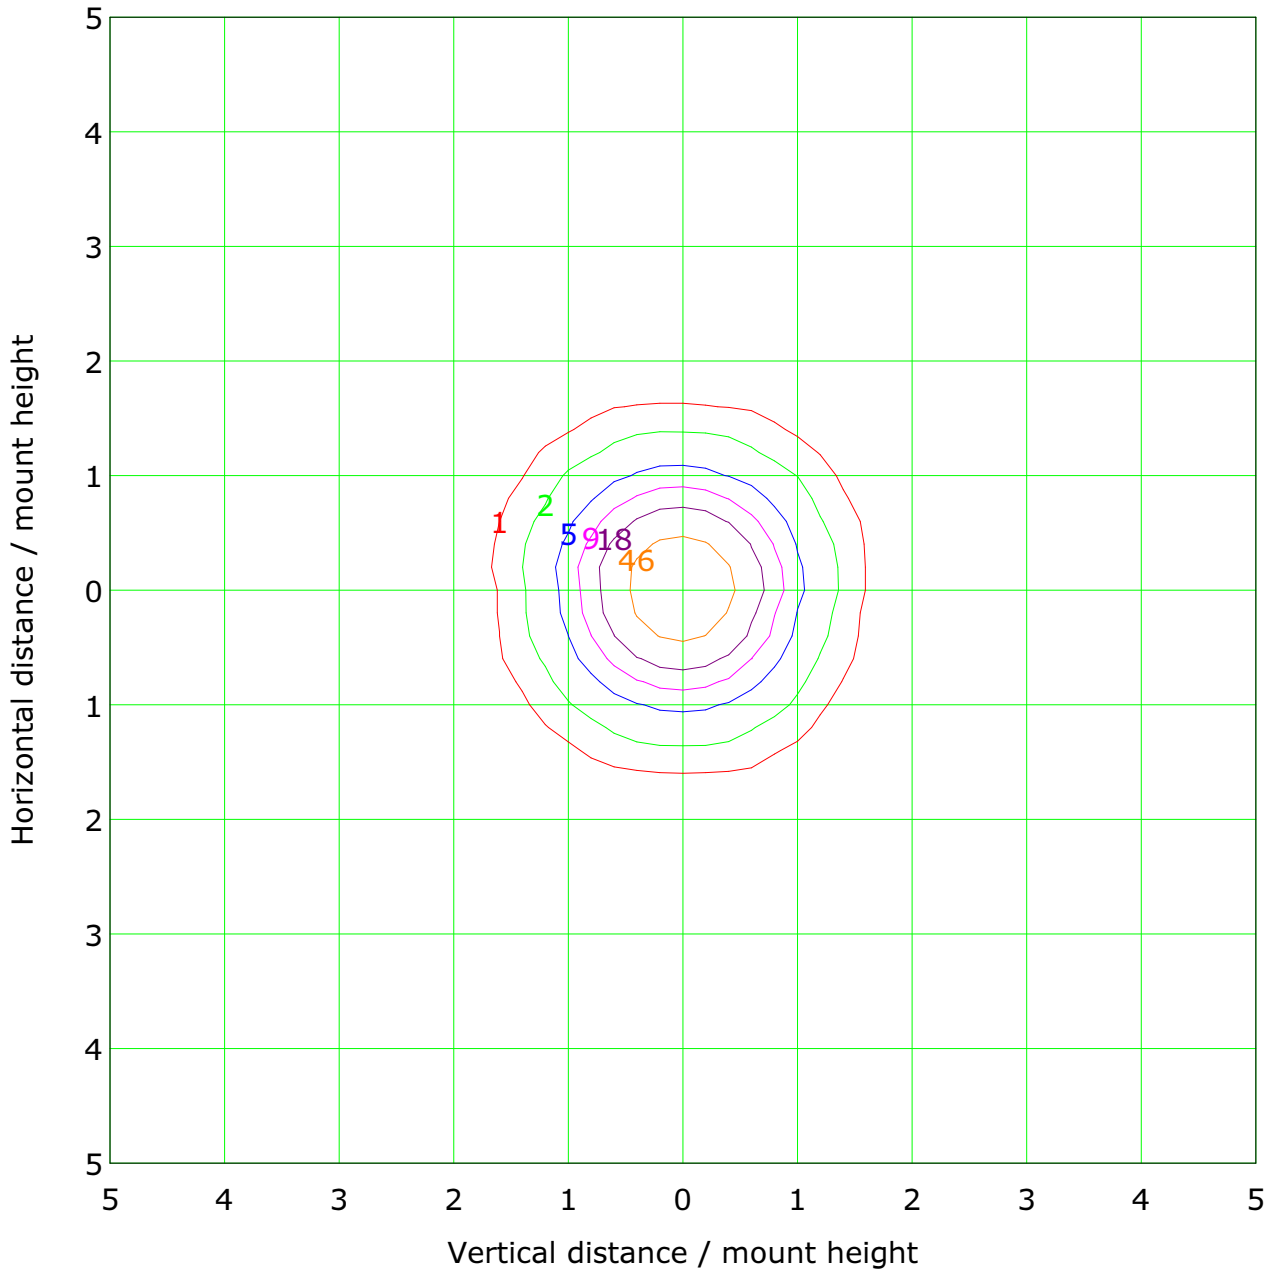

Mounting Height: 8.0m		Max Lux(100%): 91.5 lx	
— (1%):	0.9 lx	— (2%):	1.8 lx
— (5%):	4.6 lx	— (10%):	9.1 lx
— (20%):	18.3 lx	— (50%):	45.7 lx
— (100%):	91.5 lx	— (200%):	183.0 lx
— (300%):	274.4 lx	— (500%):	457.4 lx

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.100 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

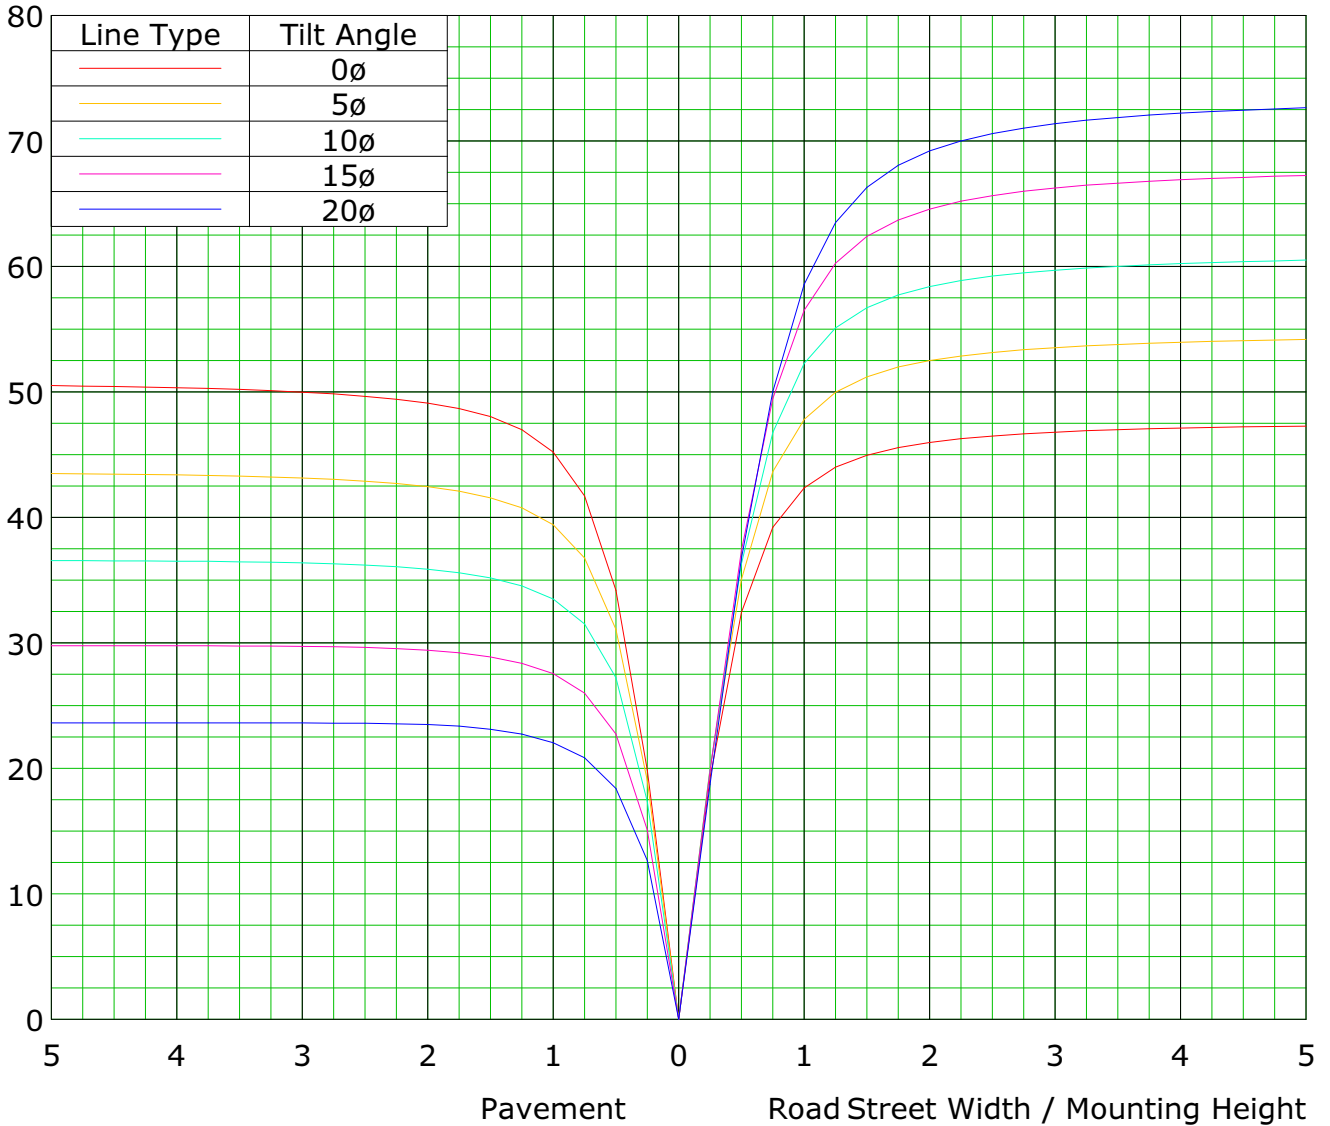

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

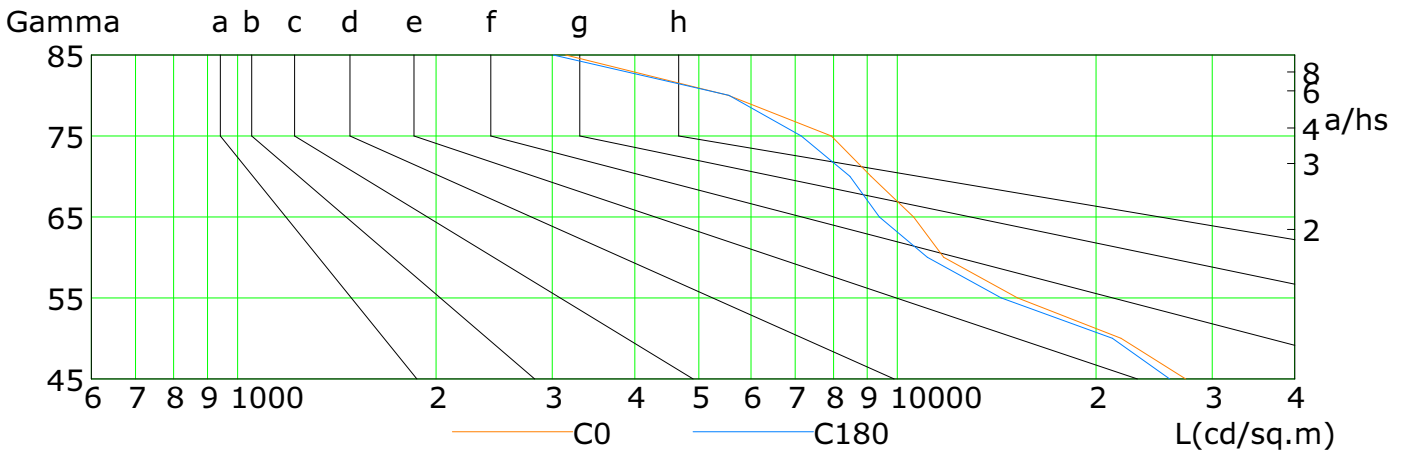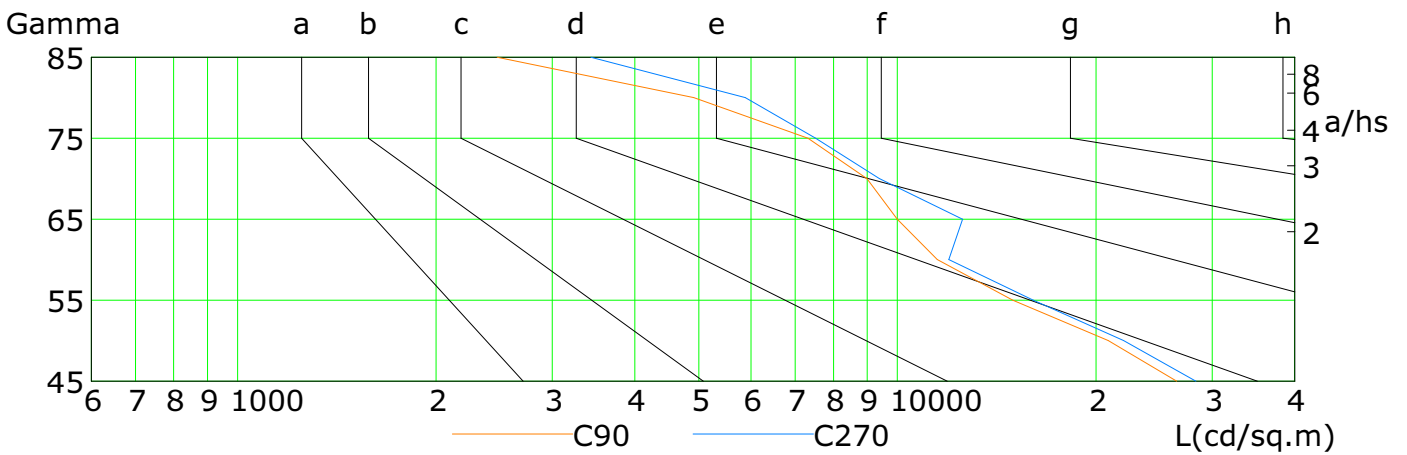

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	27346	21818	15209	11749	10585	9120	7945	5542	3143
C90	26492	20869	14956	11497	9999	8987	7323	4914	2474
C180	25873	21171	14373	11104	9389	8475	7153	5555	3008
C270	28344	22015	16064	11959	12555	9392	7520	5880	3433

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m


Humidity: 40

Inspector:

Illuminance at a Distance

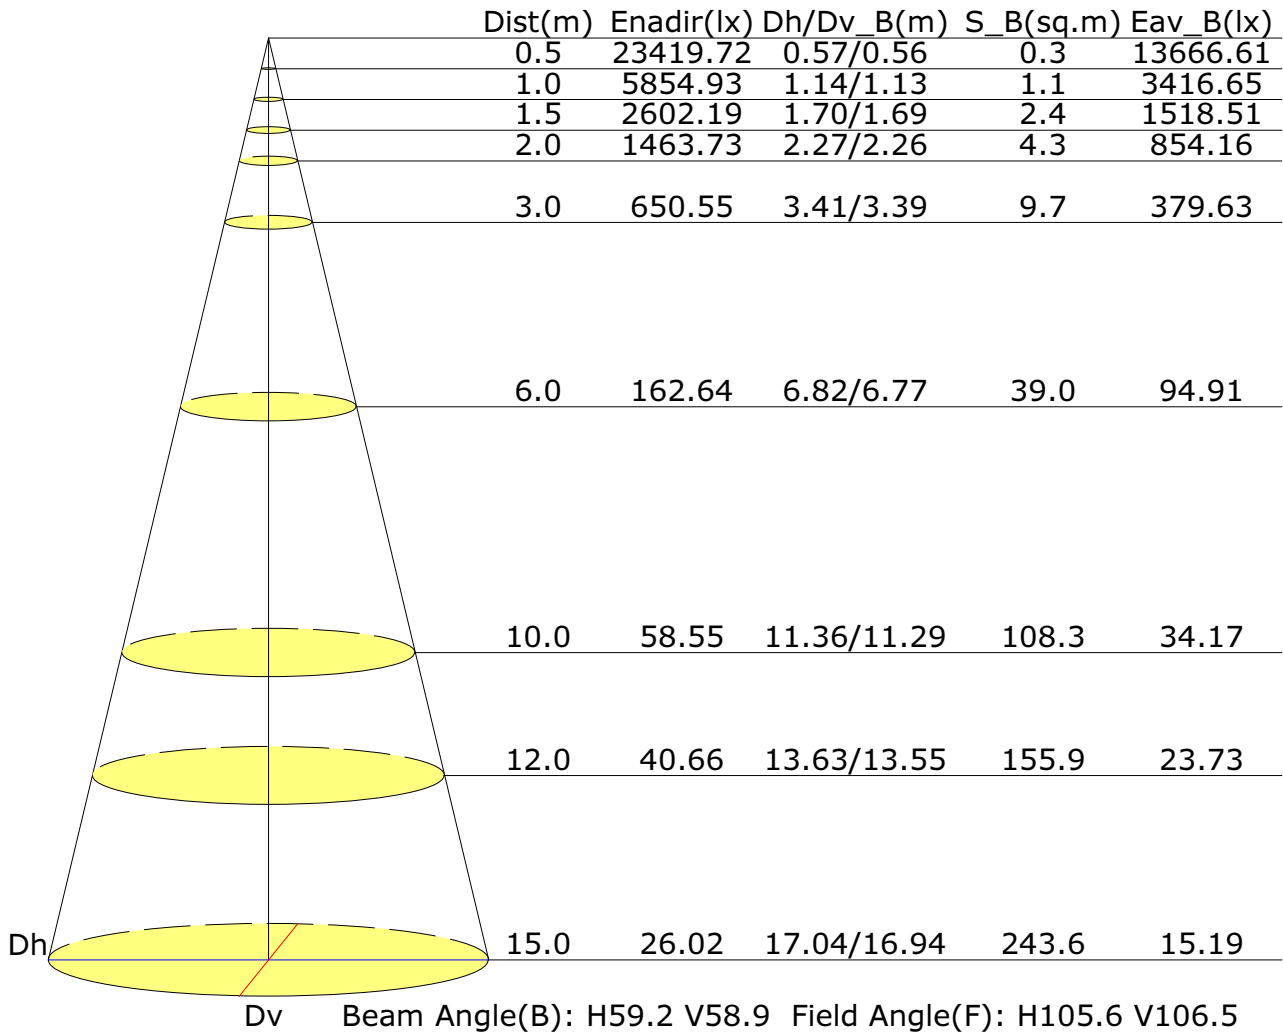

Vertical IsoLux Plot

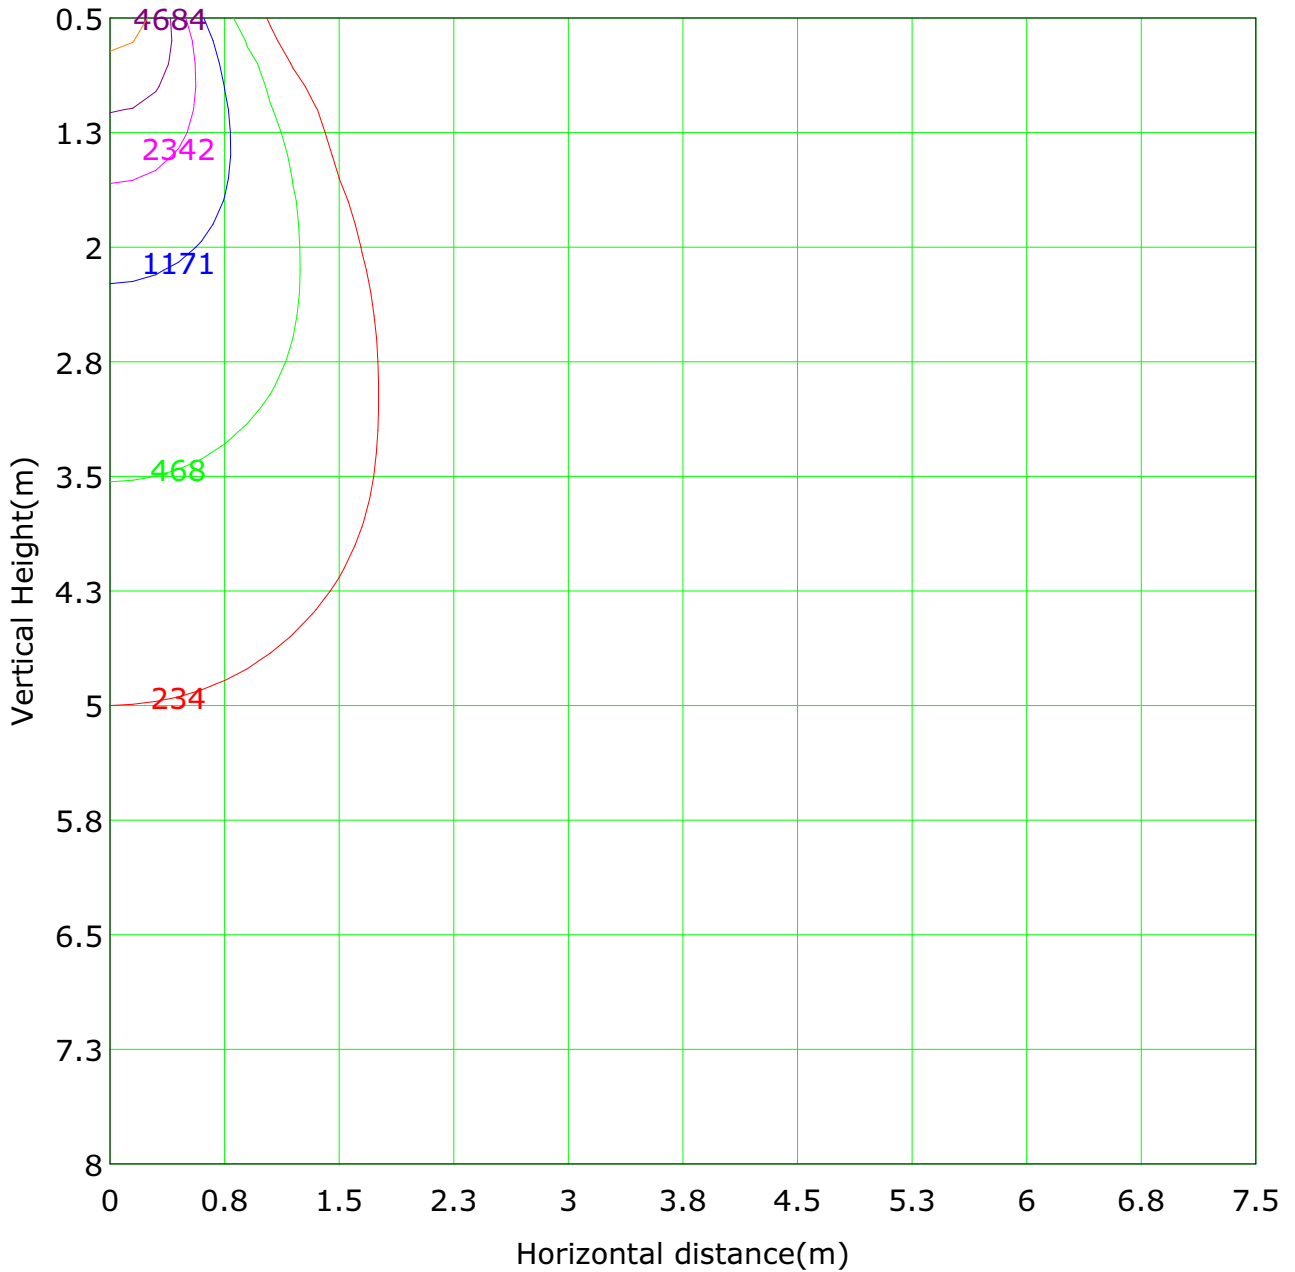

Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 23419.7 lx


— (1%): 234.2 lx	— (2%): 468.4 lx
— (5%):1171.0 lx	— (10%):2342.0 lx
— (20%):4683.9 lx	— (50%):11709.9 lx
— (100%):23419.7 lx	— (200%):46839.4 lx
— (300%):70259.2 lx	— (500%):117098.6 lx

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

The Average Illuminance Effective Figure

Flux Out: 6063.84lm

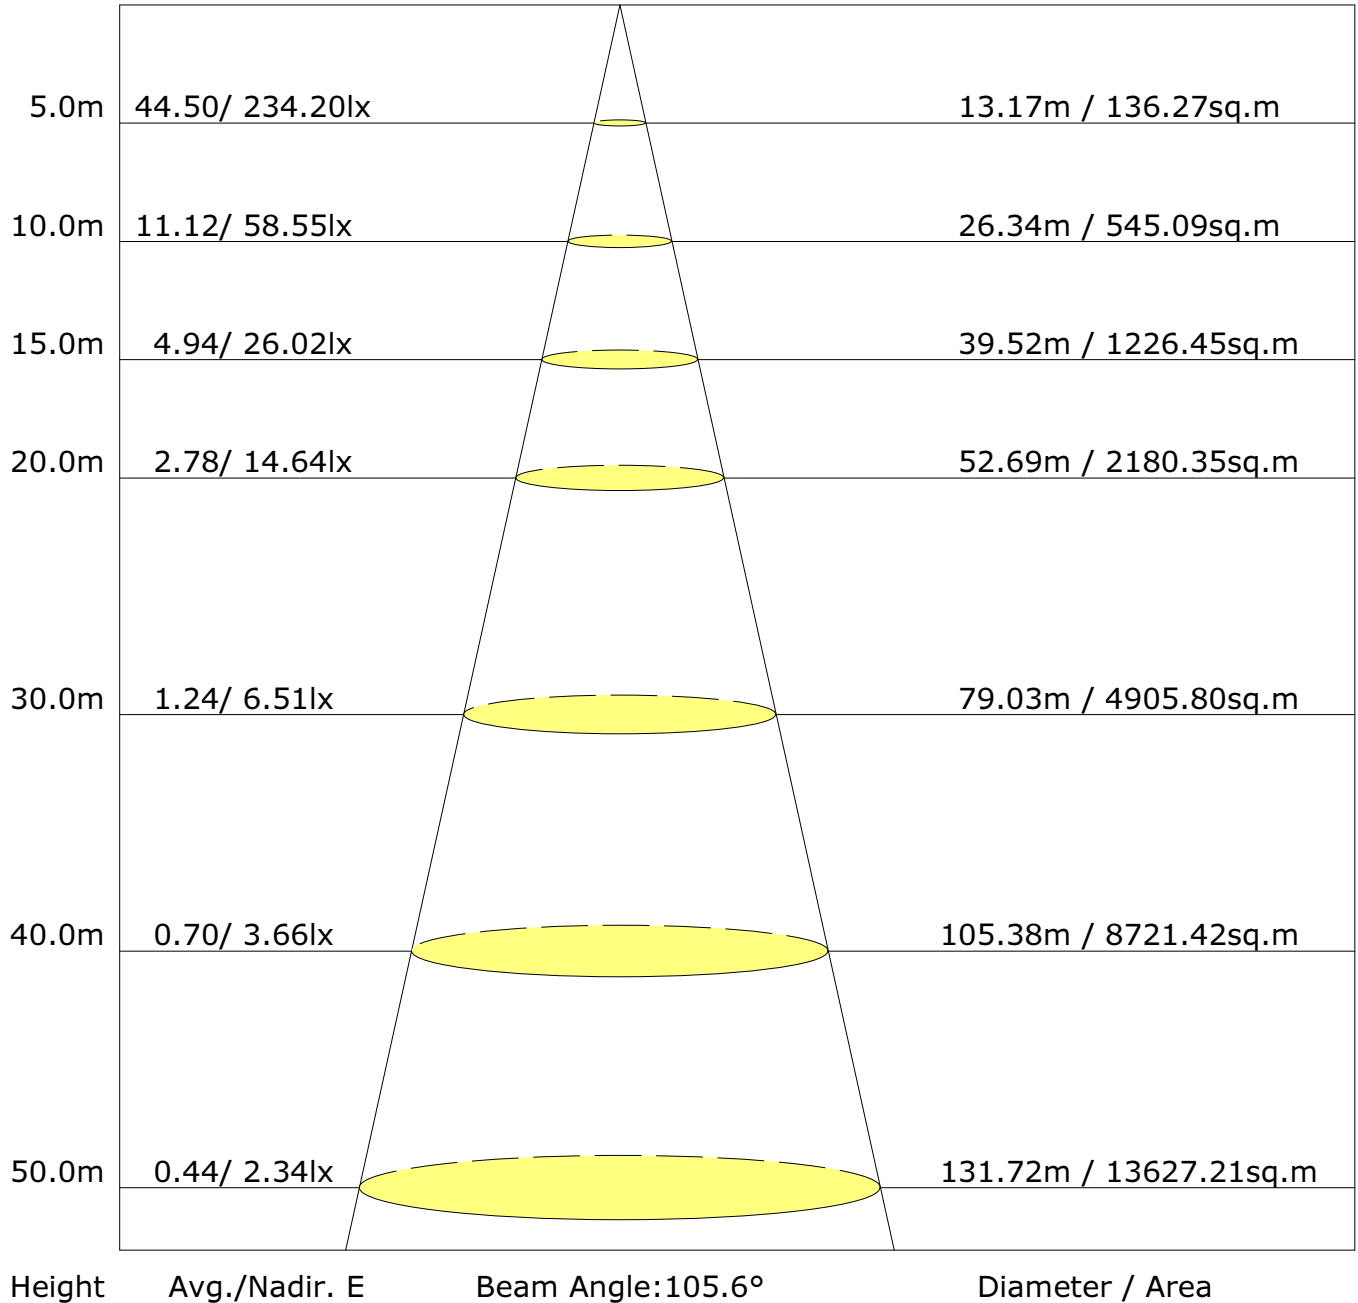

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

UGR Table


Reflectance:											
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
X=2H Y=2H	12.1	13.4	12.5	13.7	14.1	11.4	12.6	11.8	13.0	13.3	
3H	13.2	14.4	13.6	14.7	15.1	12.5	13.7	12.9	14.0	14.4	
4H	13.7	14.8	14.2	15.2	15.6	13.0	14.0	13.4	14.4	14.8	
6H	14.1	15.1	14.5	15.4	15.9	13.2	14.2	13.7	14.6	15.0	
8H	14.2	15.1	14.6	15.5	15.9	13.3	14.2	13.7	14.6	15.0	
12H	14.2	15.1	14.7	15.5	15.9	13.3	14.1	13.7	14.5	15.0	
X=4H Y=2H	12.4	13.5	12.9	13.8	14.2	11.7	12.7	12.1	13.1	13.5	
3H	13.8	14.7	14.2	15.1	15.5	13.1	14.0	13.6	14.4	14.8	
4H	14.5	15.3	14.9	15.7	16.2	13.7	14.5	14.2	14.9	15.4	
6H	15.0	15.7	15.5	16.1	16.6	14.1	14.8	14.6	15.3	15.7	
8H	15.1	15.8	15.6	16.2	16.7	14.2	14.8	14.7	15.3	15.8	
12H	15.2	15.8	15.7	16.3	16.7	14.2	14.8	14.7	15.3	15.8	
X=8H Y=4H	14.7	15.3	15.2	15.8	16.3	13.9	14.6	14.4	15.0	15.5	
6H	15.4	15.9	15.9	16.4	16.9	14.5	15.0	15.0	15.5	16.0	
8H	15.6	16.0	16.1	16.6	17.1	14.6	15.0	15.1	15.6	16.1	
12H	15.7	16.1	16.3	16.6	17.2	14.7	15.1	15.2	15.6	16.2	
X=12H Y=4H	14.7	15.2	15.2	15.7	16.2	13.9	14.5	14.4	15.0	15.5	
6H	15.4	15.8	15.9	16.3	16.9	14.5	15.0	15.0	15.4	16.0	
8H	15.7	16.1	16.2	16.6	17.2	14.7	15.1	15.2	15.6	16.2	

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

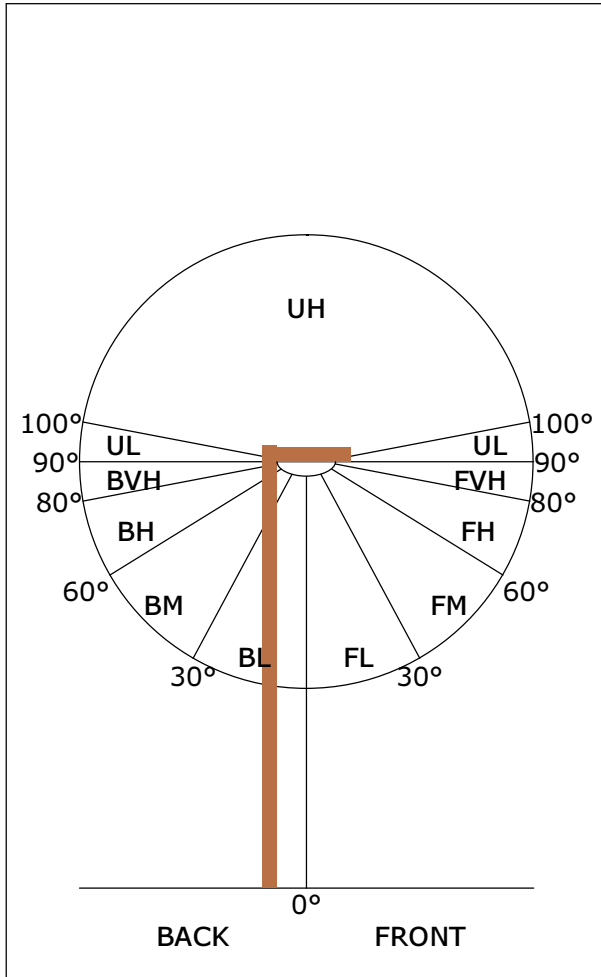


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	3338	47.6
FL (0°-30°)	1806	25.8
FM (30°-60°)	1267	18.1
FH (60°-80°)	236	3.4
FVH (80°-90°)	29	0.4
BACK LIGHT	3604	51.4
BL (0°-30°)	1902	27.1
BM (30°-60°)	1413	20.2
BH (60°-80°)	253	3.6
BVH (80°-90°)	37	0.5
UP LIGHT	64	0.9
UL (90°-100°)	3	0.0
UH (100°-180°)	61	0.9
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U2 G1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

LCS Graph

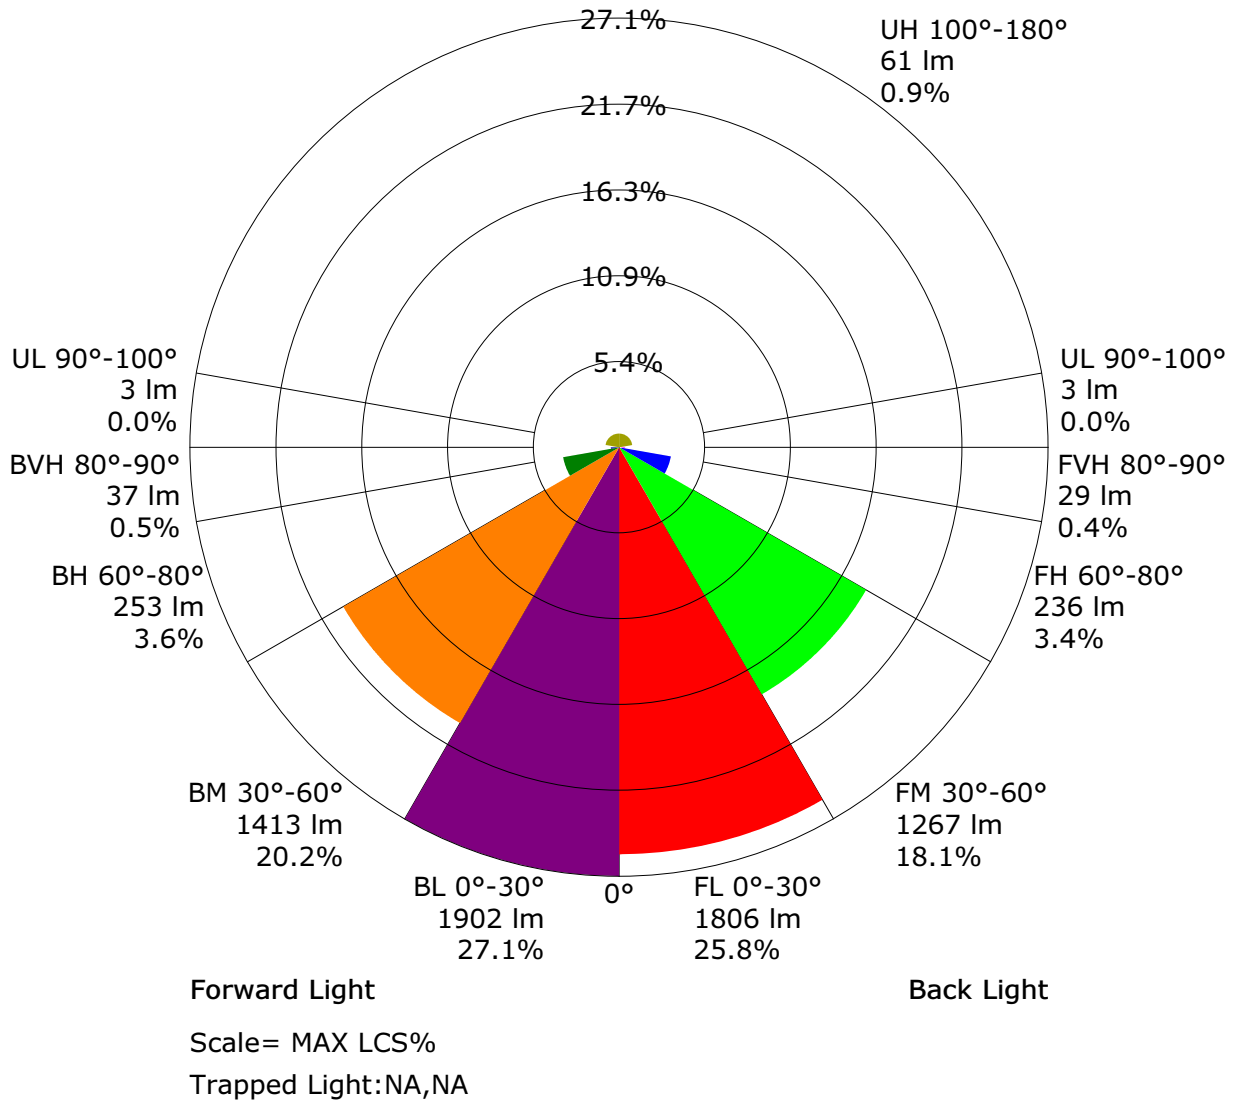

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	5806.7	5.6	5.6	0.08	0.08
1.0-2.0	5800.6	16.7	22.2	0.24	0.32
2.0-3.0	5788.6	27.7	49.9	0.40	0.71
3.0-4.0	5770.9	38.6	88.5	0.55	1.26
4.0-5.0	5747.3	49.4	138.0	0.71	1.97
5.0-6.0	5717.9	60.1	198.1	0.86	2.83
6.0-7.0	5682.8	70.5	268.6	1.01	3.83
7.0-8.0	5641.0	80.7	349.4	1.15	4.99
8.0-9.0	5592.8	90.7	440.0	1.29	6.28
9.0-10.0	5537.9	100.2	540.3	1.43	7.71
10.0-11.0	5476.0	109.4	649.7	1.56	9.27
11.0-12.0	5407.5	118.2	767.9	1.69	10.96
12.0-13.0	5332.4	126.6	894.5	1.81	12.77
13.0-14.0	5250.5	134.4	1028.9	1.92	14.68
14.0-15.0	5161.9	141.7	1170.6	2.02	16.71
15.0-16.0	5066.8	148.5	1319.1	2.12	18.83
16.0-17.0	4965.1	154.6	1473.7	2.21	21.03
17.0-18.0	4857.1	160.2	1633.9	2.29	23.32
18.0-19.0	4743.2	165.0	1798.9	2.36	25.68
19.0-20.0	4622.4	169.2	1968.2	2.41	28.09
20.0-21.0	4494.6	172.6	2140.8	2.46	30.55
21.0-22.0	4359.6	175.2	2316.0	2.50	33.05
22.0-23.0	4217.3	177.0	2493.0	2.53	35.58
23.0-24.0	4068.1	177.9	2670.8	2.54	38.12
24.0-25.0	3912.7	177.9	2848.8	2.54	40.66
25.0-26.0	3750.7	177.1	3025.9	2.53	43.19
26.0-27.0	3582.0	175.3	3201.1	2.50	45.69
27.0-28.0	3408.2	172.6	3373.7	2.46	48.15
28.0-29.0	3231.9	169.1	3542.8	2.41	50.56
29.0-30.0	3056.1	165.0	3707.8	2.36	52.92
30.0-31.0	2882.8	160.4	3868.3	2.29	55.21
31.0-32.0	2713.9	155.5	4023.8	2.22	57.43
32.0-33.0	2550.1	150.3	4174.0	2.14	59.57
33.0-34.0	2392.7	144.8	4318.9	2.07	61.64
34.0-35.0	2242.0	139.3	4458.1	1.99	63.63
35.0-36.0	2097.7	133.6	4591.7	1.91	65.53

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1960.9	127.9	4719.6	1.83	67.36
37.0-38.0	1830.4	122.2	4841.8	1.74	69.10
38.0-39.0	1705.6	116.4	4958.2	1.66	70.77
39.0-40.0	1587.2	110.7	5068.9	1.58	72.35
40.0-41.0	1475.4	105.1	5174.0	1.50	73.85
41.0-42.0	1370.0	99.5	5273.6	1.42	75.27
42.0-43.0	1270.9	94.2	5367.7	1.34	76.61
43.0-44.0	1179.1	89.0	5456.7	1.27	77.88
44.0-45.0	1093.9	84.1	5540.8	1.20	79.08
45.0-46.0	1016.3	79.5	5620.3	1.13	80.22
46.0-47.0	946.4	75.3	5695.6	1.07	81.29
47.0-48.0	884.0	71.5	5767.0	1.02	82.31
48.0-49.0	827.8	68.0	5835.0	0.97	83.28
49.0-50.0	776.1	64.7	5899.7	0.92	84.20
50.0-51.0	727.3	61.5	5961.3	0.88	85.08
51.0-52.0	680.2	58.4	6019.7	0.83	85.92
52.0-53.0	635.1	55.3	6074.9	0.79	86.70
53.0-54.0	592.8	52.3	6127.2	0.75	87.45
54.0-55.0	553.8	49.4	6176.6	0.71	88.16
55.0-56.0	517.9	46.8	6223.4	0.67	88.82
56.0-57.0	484.8	44.3	6267.7	0.63	89.46
57.0-58.0	453.9	42.0	6309.7	0.60	90.06
58.0-59.0	425.5	39.8	6349.5	0.57	90.62
59.0-60.0	399.7	37.8	6387.3	0.54	91.16
60.0-61.0	376.1	35.9	6423.2	0.51	91.67
61.0-62.0	354.6	34.2	6457.3	0.49	92.16
62.0-63.0	336.7	32.8	6490.1	0.47	92.63
63.0-64.0	320.7	31.5	6521.6	0.45	93.08
64.0-65.0	306.4	30.3	6551.9	0.43	93.51
65.0-66.0	291.3	29.1	6581.0	0.41	93.93
66.0-67.0	275.2	27.7	6608.6	0.39	94.32
67.0-68.0	262.1	26.6	6635.2	0.38	94.70
68.0-69.0	250.6	25.6	6660.8	0.36	95.07
69.0-70.0	240.1	24.7	6685.4	0.35	95.42
70.0-71.0	229.9	23.8	6709.2	0.34	95.76
71.0-72.0	219.3	22.8	6732.0	0.33	96.08

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	208.4	21.8	6753.8	0.31	96.39
73.0-74.0	197.5	20.8	6774.6	0.30	96.69
74.0-75.0	186.8	19.7	6794.3	0.28	96.97
75.0-76.0	176.3	18.7	6813.0	0.27	97.24
76.0-77.0	165.0	17.6	6830.6	0.25	97.49
77.0-78.0	153.2	16.4	6847.0	0.23	97.72
78.0-79.0	141.6	15.2	6862.2	0.22	97.94
79.0-80.0	130.1	14.0	6876.3	0.20	98.14
80.0-81.0	118.3	12.8	6889.0	0.18	98.32
81.0-82.0	105.4	11.4	6900.5	0.16	98.49
82.0-83.0	91.5	9.9	6910.4	0.14	98.63
83.0-84.0	77.4	8.4	6918.9	0.12	98.75
84.0-85.0	63.9	7.0	6925.8	0.10	98.85
85.0-86.0	50.9	5.6	6931.4	0.08	98.93
86.0-87.0	38.7	4.2	6935.6	0.06	98.99
87.0-88.0	27.9	3.1	6938.7	0.04	99.03
88.0-89.0	19.0	2.1	6940.8	0.03	99.06
89.0-90.0	11.8	1.3	6942.1	0.02	99.08
90.0-91.0	6.9	0.8	6942.8	0.01	99.09
91.0-92.0	4.2	0.5	6943.3	0.01	99.10
92.0-93.0	2.8	0.3	6943.6	0.00	99.10
93.0-94.0	2.1	0.2	6943.8	0.00	99.11
94.0-95.0	1.9	0.2	6944.0	0.00	99.11
95.0-96.0	1.9	0.2	6944.2	0.00	99.11
96.0-97.0	2.0	0.2	6944.4	0.00	99.11
97.0-98.0	2.1	0.2	6944.7	0.00	99.12
98.0-99.0	2.2	0.2	6944.9	0.00	99.12
99.0-100.0	2.3	0.2	6945.2	0.00	99.12
100.0-101.0	2.4	0.3	6945.4	0.00	99.13
101.0-102.0	2.5	0.3	6945.7	0.00	99.13
102.0-103.0	2.6	0.3	6946.0	0.00	99.14
103.0-104.0	2.7	0.3	6946.2	0.00	99.14
104.0-105.0	2.8	0.3	6946.5	0.00	99.14
105.0-106.0	3.0	0.3	6946.9	0.00	99.15
106.0-107.0	3.1	0.3	6947.2	0.00	99.15
107.0-108.0	3.3	0.3	6947.5	0.00	99.16

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	3.4	0.4	6947.9	0.01	99.16
109.0-110.0	3.6	0.4	6948.3	0.01	99.17
110.0-111.0	3.8	0.4	6948.6	0.01	99.17
111.0-112.0	4.0	0.4	6949.1	0.01	99.18
112.0-113.0	4.2	0.4	6949.5	0.01	99.19
113.0-114.0	4.4	0.4	6949.9	0.01	99.19
114.0-115.0	4.7	0.5	6950.4	0.01	99.20
115.0-116.0	4.9	0.5	6950.9	0.01	99.21
116.0-117.0	5.2	0.5	6951.4	0.01	99.21
117.0-118.0	5.4	0.5	6951.9	0.01	99.22
118.0-119.0	5.7	0.6	6952.5	0.01	99.23
119.0-120.0	6.1	0.6	6953.0	0.01	99.24
120.0-121.0	6.4	0.6	6953.6	0.01	99.25
121.0-122.0	6.7	0.6	6954.3	0.01	99.25
122.0-123.0	7.1	0.7	6954.9	0.01	99.26
123.0-124.0	7.5	0.7	6955.6	0.01	99.27
124.0-125.0	7.9	0.7	6956.3	0.01	99.28
125.0-126.0	8.4	0.7	6957.1	0.01	99.29
126.0-127.0	8.8	0.8	6957.9	0.01	99.31
127.0-128.0	9.3	0.8	6958.7	0.01	99.32
128.0-129.0	9.8	0.8	6959.5	0.01	99.33
129.0-130.0	10.3	0.9	6960.4	0.01	99.34
130.0-131.0	10.8	0.9	6961.3	0.01	99.35
131.0-132.0	11.3	0.9	6962.2	0.01	99.37
132.0-133.0	11.8	1.0	6963.2	0.01	99.38
133.0-134.0	12.4	1.0	6964.1	0.01	99.40
134.0-135.0	13.0	1.0	6965.2	0.01	99.41
135.0-136.0	13.5	1.0	6966.2	0.01	99.42
136.0-137.0	14.1	1.1	6967.3	0.02	99.44
137.0-138.0	14.7	1.1	6968.3	0.02	99.46
138.0-139.0	15.3	1.1	6969.5	0.02	99.47
139.0-140.0	15.9	1.1	6970.6	0.02	99.49
140.0-141.0	16.6	1.2	6971.8	0.02	99.50
141.0-142.0	17.2	1.2	6972.9	0.02	99.52
142.0-143.0	17.8	1.2	6974.1	0.02	99.54
143.0-144.0	18.4	1.2	6975.3	0.02	99.56

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	19.1	1.2	6976.5	0.02	99.57
145.0-146.0	19.7	1.2	6977.8	0.02	99.59
146.0-147.0	20.3	1.2	6979.0	0.02	99.61
147.0-148.0	21.0	1.2	6980.2	0.02	99.62
148.0-149.0	21.6	1.2	6981.5	0.02	99.64
149.0-150.0	22.2	1.2	6982.7	0.02	99.66
150.0-151.0	22.8	1.2	6983.9	0.02	99.68
151.0-152.0	23.4	1.2	6985.2	0.02	99.70
152.0-153.0	24.0	1.2	6986.4	0.02	99.71
153.0-154.0	24.6	1.2	6987.6	0.02	99.73
154.0-155.0	25.2	1.2	6988.8	0.02	99.75
155.0-156.0	25.8	1.2	6989.9	0.02	99.76
156.0-157.0	26.4	1.2	6991.1	0.02	99.78
157.0-158.0	27.0	1.1	6992.2	0.02	99.80
158.0-159.0	27.6	1.1	6993.3	0.02	99.81
159.0-160.0	28.2	1.1	6994.4	0.02	99.83
160.0-161.0	28.7	1.1	6995.5	0.02	99.84
161.0-162.0	29.3	1.0	6996.5	0.01	99.86
162.0-163.0	29.8	1.0	6997.5	0.01	99.87
163.0-164.0	30.4	0.9	6998.4	0.01	99.88
164.0-165.0	30.9	0.9	6999.3	0.01	99.90
165.0-166.0	31.4	0.9	7000.2	0.01	99.91
166.0-167.0	31.9	0.8	7001.0	0.01	99.92
167.0-168.0	32.5	0.8	7001.8	0.01	99.93
168.0-169.0	32.9	0.7	7002.5	0.01	99.94
169.0-170.0	33.4	0.7	7003.2	0.01	99.95
170.0-171.0	33.9	0.6	7003.8	0.01	99.96
171.0-172.0	34.3	0.6	7004.3	0.01	99.97
172.0-173.0	34.7	0.5	7004.8	0.01	99.98
173.0-174.0	35.0	0.4	7005.3	0.01	99.98
174.0-175.0	35.3	0.4	7005.6	0.01	99.99
175.0-176.0	35.6	0.3	7005.9	0.00	99.99
176.0-177.0	35.9	0.2	7006.2	0.00	100.00
177.0-178.0	36.0	0.2	7006.4	0.00	100.00
178.0-179.0	36.2	0.1	7006.5	0.00	100.00
179.0-180.0	36.3	0.0	7006.5	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	5854.9	5847.0	5840.5	5835.3	5830.9	5824.7	5821.5	5821.9	5817.1	5818.7
G1.0	5849.1	5846.7	5837.1	5831.5	5827.1	5822.5	5818.7	5817.1	5815.1	5820.3
G2.0	5838.0	5834.5	5825.8	5820.0	5817.4	5813.1	5808.2	5808.5	5801.5	5808.1
G3.0	5824.5	5820.2	5812.5	5808.3	5799.0	5796.1	5791.2	5792.1	5784.8	5784.0
G4.0	5802.6	5797.0	5789.5	5787.4	5777.2	5773.5	5770.1	5770.4	5764.4	5768.1
G5.0	5775.9	5770.5	5762.0	5760.7	5750.9	5748.7	5744.6	5741.7	5740.3	5743.9
G6.0	5740.9	5736.8	5729.4	5731.1	5717.5	5715.3	5713.6	5709.3	5708.5	5713.9
G7.0	5702.1	5696.5	5690.6	5692.1	5680.2	5678.5	5672.4	5671.9	5669.5	5677.6
G8.0	5654.0	5647.3	5642.7	5640.5	5633.3	5631.0	5626.8	5631.1	5623.5	5628.4
G9.0	5599.6	5593.4	5589.3	5584.6	5580.2	5577.5	5577.8	5579.1	5573.8	5578.7
G10.0	5540.6	5532.4	5525.6	5522.5	5520.8	5517.5	5519.0	5522.2	5518.6	5522.4
G11.0	5471.8	5462.7	5458.2	5459.3	5454.4	5454.2	5455.4	5458.2	5451.1	5457.5
G12.0	5392.0	5386.1	5383.3	5382.3	5382.9	5379.4	5384.2	5387.6	5379.3	5384.2
G13.0	5313.4	5307.1	5301.5	5301.1	5302.1	5301.1	5305.4	5306.9	5304.7	5305.8
G14.0	5222.3	5217.2	5213.2	5212.8	5218.1	5216.6	5221.7	5220.1	5218.8	5217.6
G15.0	5133.0	5125.2	5121.7	5120.4	5123.1	5127.0	5127.5	5130.4	5127.5	5129.9
G16.0	5033.1	5023.7	5020.8	5023.6	5027.2	5025.9	5030.7	5035.3	5030.0	5028.5
G17.0	4923.0	4915.8	4916.6	4918.1	4922.7	4926.5	4926.8	4930.4	4927.0	4928.1
G18.0	4807.0	4800.9	4807.0	4807.2	4816.3	4819.6	4825.1	4824.5	4818.7	4820.1
G19.0	4692.0	4685.0	4688.4	4692.5	4697.8	4705.7	4710.1	4710.7	4708.8	4706.2
G20.0	4560.0	4558.9	4558.8	4569.8	4578.0	4585.5	4589.5	4588.0	4585.2	4586.4
G21.0	4423.6	4421.9	4426.0	4443.1	4451.1	4457.9	4464.8	4465.9	4462.1	4461.5
G22.0	4280.0	4277.1	4286.7	4301.8	4316.2	4326.9	4336.1	4331.7	4334.1	4328.9
G23.0	4126.8	4126.9	4139.4	4153.5	4173.3	4184.3	4197.4	4200.9	4196.9	4196.6
G24.0	3960.9	3960.6	3978.5	3997.9	4023.2	4035.1	4056.5	4059.9	4056.5	4054.2
G25.0	3794.4	3797.8	3815.4	3837.4	3865.6	3888.6	3904.0	3915.6	3914.5	3912.3
G26.0	3614.6	3618.9	3640.0	3667.0	3701.8	3726.6	3752.8	3766.4	3769.8	3764.1
G27.0	3436.2	3440.6	3460.4	3491.9	3531.6	3561.1	3593.2	3613.3	3618.0	3610.2
G28.0	3247.2	3251.2	3278.5	3311.9	3356.5	3396.0	3432.6	3451.7	3466.2	3453.2
G29.0	3064.6	3077.2	3097.6	3134.5	3176.0	3220.1	3263.4	3289.6	3305.6	3302.1
G30.0	2888.0	2891.4	2915.0	2949.9	2996.9	3040.1	3097.4	3125.2	3146.2	3143.3
G31.0	2723.8	2727.6	2752.6	2777.9	2821.6	2867.4	2918.8	2963.1	2983.8	2977.9
G32.0	2567.7	2571.4	2589.3	2621.4	2659.8	2694.9	2749.2	2794.5	2817.7	2813.3
G33.0	2409.7	2416.6	2435.5	2461.8	2495.3	2528.8	2575.9	2623.6	2652.2	2648.7
G34.0	2267.2	2271.1	2289.8	2309.4	2343.4	2374.5	2420.0	2461.2	2486.5	2487.7
G35.0	2132.5	2137.0	2156.9	2172.0	2197.8	2224.6	2263.8	2302.9	2328.0	2322.3
G36.0	1992.0	2003.8	2019.9	2035.3	2057.0	2076.0	2111.4	2138.7	2162.9	2156.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	1863.8	1873.1	1888.1	1908.9	1929.4	1946.4	1969.6	1994.4	2010.2	1996.6
G38.0	1734.2	1741.9	1761.9	1780.7	1801.4	1817.9	1841.8	1853.6	1859.2	1838.8
G39.0	1612.3	1623.0	1644.7	1659.5	1681.8	1698.5	1716.0	1722.2	1712.2	1693.4
G40.0	1497.8	1504.3	1523.3	1546.1	1566.1	1584.1	1597.9	1596.4	1578.9	1563.0
G41.0	1388.5	1397.4	1416.2	1438.8	1457.7	1475.7	1491.6	1484.3	1456.5	1437.8
G42.0	1283.6	1291.5	1314.8	1332.3	1352.7	1373.9	1389.8	1375.8	1339.2	1318.8
G43.0	1186.0	1197.2	1216.0	1239.0	1257.9	1279.6	1292.6	1278.9	1237.0	1219.5
G44.0	1095.4	1104.3	1126.1	1147.6	1166.5	1186.8	1202.6	1185.8	1142.2	1124.9
G45.0	1010.8	1019.4	1044.4	1063.3	1080.6	1100.6	1117.1	1099.8	1061.4	1045.9
G46.0	938.8	945.7	967.8	986.8	999.7	1019.4	1038.9	1024.0	988.3	975.0
G47.0	880.6	886.2	902.6	915.6	926.4	944.8	961.5	949.3	921.3	912.6
G48.0	830.1	839.6	852.9	853.7	856.5	873.1	889.6	882.9	862.0	854.7
G49.0	796.0	803.7	814.3	807.0	793.7	806.6	823.5	818.7	808.8	803.7
G50.0	766.2	770.6	775.6	760.4	742.1	744.1	758.5	762.2	760.1	756.2
G51.0	714.5	718.6	725.1	712.0	700.9	690.9	699.6	708.2	714.4	712.0
G52.0	654.4	660.8	669.5	664.7	662.7	649.4	645.5	658.2	672.5	672.0
G53.0	589.1	599.7	620.7	621.8	626.8	612.9	598.8	613.4	633.4	632.7
G54.0	542.3	553.9	573.4	582.7	592.8	579.6	556.8	571.1	596.4	597.2
G55.0	502.0	512.0	531.5	546.2	558.8	547.0	523.0	533.2	559.8	562.8
G56.0	468.1	476.6	494.1	511.6	526.8	515.8	494.4	497.1	525.8	531.5
G57.0	435.4	443.0	458.2	477.6	497.7	484.6	468.1	463.5	492.9	501.1
G58.0	406.4	412.9	425.3	445.0	468.8	455.7	443.9	437.4	460.8	472.8
G59.0	380.1	387.3	397.3	413.4	442.0	427.4	419.3	415.0	431.0	443.1
G60.0	360.0	366.6	372.5	386.3	415.4	400.6	395.3	394.3	403.5	416.2
G61.0	340.2	344.0	348.9	360.9	390.9	376.7	373.9	375.8	378.2	389.1
G62.0	320.9	324.8	330.0	340.6	368.2	355.6	352.8	358.8	357.5	363.7
G63.0	303.8	307.3	314.2	323.7	346.9	337.1	335.7	342.4	338.9	339.9
G64.0	295.0	298.4	304.8	313.5	326.9	321.0	320.9	328.0	322.4	318.7
G65.0	296.8	295.9	301.7	304.1	310.9	305.9	306.3	314.1	307.8	300.5
G66.0	270.8	271.3	274.4	279.8	294.3	292.5	292.9	301.0	294.3	285.4
G67.0	260.0	261.3	262.9	267.2	278.6	279.2	280.8	286.4	281.1	271.6
G68.0	250.2	252.1	253.1	256.4	263.6	267.3	269.4	274.0	267.9	260.0
G69.0	240.0	242.5	244.3	246.3	252.6	256.0	258.9	262.8	255.7	250.0
G70.0	230.1	233.0	235.6	236.5	242.0	246.4	249.4	252.6	244.0	240.5
G71.0	221.1	223.2	226.3	226.4	231.9	237.3	242.5	240.6	231.5	231.3
G72.0	209.4	211.6	214.8	216.0	223.0	231.1	234.5	229.8	220.8	222.5
G73.0	198.4	200.9	204.2	206.7	216.2	228.1	230.1	218.6	212.1	213.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	188.3	190.1	192.9	196.8	208.5	216.4	212.6	208.5	204.1	205.1
G75.0	176.6	179.0	181.6	188.1	201.0	207.6	201.7	198.6	196.0	195.9
G76.0	164.9	167.9	170.6	179.6	193.8	198.4	190.8	188.7	186.2	185.2
G77.0	150.9	152.7	156.5	167.8	183.4	186.6	179.7	178.3	174.8	170.9
G78.0	136.3	139.4	142.8	156.4	172.7	172.1	168.5	167.8	163.2	155.7
G79.0	118.3	121.5	125.3	143.1	160.2	160.8	155.7	154.8	150.0	142.7
G80.0	105.6	109.1	113.9	128.7	143.5	140.8	142.1	139.7	134.6	131.6
G81.0	98.9	103.5	102.2	118.3	133.4	128.2	124.4	121.8	122.3	119.2
G82.0	83.2	86.0	91.9	108.6	124.8	114.9	110.6	110.5	107.7	105.1
G83.0	71.3	73.8	81.0	97.9	112.1	99.3	98.2	94.9	93.6	90.4
G84.0	59.5	62.1	69.1	77.4	83.7	79.7	83.4	80.0	77.5	75.8
G85.0	49.5	51.8	57.9	66.6	66.7	63.0	63.0	63.0	62.1	61.5
G86.0	38.5	40.5	43.9	48.4	50.0	48.5	49.6	49.3	48.0	46.1
G87.0	28.2	30.0	32.1	35.0	35.7	36.3	37.1	35.7	34.7	33.1
G88.0	19.6	20.9	23.1	24.6	25.8	26.4	26.2	25.0	23.9	22.7
G89.0	12.3	13.3	14.8	16.0	16.3	16.6	16.3	16.3	15.1	14.6
G90.0	4.3	5.1	5.7	6.1	6.7	6.8	7.4	7.5	7.4	7.3
G91.0	2.5	2.7	2.8	3.0	3.3	3.8	4.0	4.4	4.5	4.5
G92.0	2.0	2.1	2.1	2.1	2.4	2.6	2.7	3.0	3.1	3.3
G93.0	2.1	2.0	2.0	2.0	2.3	2.4	2.4	2.4	2.3	2.0
G94.0	1.9	2.0	1.9	2.0	2.0	2.0	1.9	1.9	1.8	1.8
G95.0	1.9	1.8	1.9	1.8	1.8	1.9	1.9	1.8	1.9	1.8
G96.0	1.9	1.9	1.8	1.8	1.9	2.0	1.9	1.9	1.9	1.9
G97.0	1.9	2.0	1.9	1.9	2.0	1.9	2.0	2.0	2.0	2.0
G98.0	2.0	2.0	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.0
G99.0	2.3	2.1	2.1	2.0	2.3	2.1	2.1	2.1	2.1	2.1
G100.0	2.3	2.4	2.3	2.1	2.3	2.3	2.4	2.3	2.3	2.4
G101.0	2.4	2.4	2.3	2.3	2.4	2.3	2.4	2.4	2.5	2.4
G102.0	2.5	2.5	2.5	2.4	2.5	2.5	2.6	2.5	2.5	2.6
G103.0	2.6	2.6	2.5	2.6	2.6	2.6	2.6	2.6	2.6	2.6
G104.0	2.7	2.7	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.7
G105.0	2.8	2.8	2.8	2.8	2.8	2.7	2.8	2.8	2.8	3.3
G106.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.1	3.1
G107.0	3.1	3.2	3.1	3.1	3.1	3.2	3.1	3.2	3.1	3.2
G108.0	3.3	3.3	3.2	3.2	3.2	3.3	3.2	3.3	3.3	3.3
G109.0	3.1	3.5	3.3	3.5	3.5	3.5	3.5	3.5	3.5	3.5
G110.0	3.7	3.7	3.6	3.6	3.6	3.7	3.6	3.6	3.7	3.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	3.8	3.8	3.8	3.7	3.8	3.8	3.8	3.8	3.8	3.8
G112.0	4.0	4.0	4.0	3.9	3.9	3.9	4.0	4.0	4.0	4.0
G113.0	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.3	4.2
G114.0	4.4	4.4	4.4	4.4	4.4	4.5	4.5	4.4	4.4	4.5
G115.0	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
G116.0	4.9	4.9	5.0	4.9	4.9	4.9	4.9	4.9	5.0	5.0
G117.0	5.1	5.1	5.2	5.1	5.1	5.1	5.1	5.2	5.1	5.2
G118.0	5.5	5.5	5.5	5.3	5.3	5.3	5.3	5.5	5.6	5.5
G119.0	5.7	5.7	5.7	5.7	5.7	5.7	5.8	5.8	5.8	5.8
G120.0	6.1	6.1	6.1	5.9	5.9	6.1	6.1	6.1	6.1	6.2
G121.0	6.4	6.4	6.3	6.3	6.4	6.4	6.3	6.4	6.5	6.5
G122.0	6.8	6.8	6.7	6.5	6.7	6.8	6.8	6.8	6.8	6.9
G123.0	7.1	7.1	7.0	7.0	7.1	7.1	7.1	7.1	7.1	7.1
G124.0	7.5	7.5	7.4	7.4	7.5	7.5	7.6	7.6	7.6	7.6
G125.0	8.0	7.8	7.8	7.8	8.0	7.8	8.0	8.0	8.0	8.0
G126.0	8.4	8.3	8.3	8.2	8.4	8.3	8.3	8.4	8.3	8.4
G127.0	8.8	8.8	8.7	8.8	8.8	8.8	8.8	8.8	8.8	8.9
G128.0	9.3	9.3	9.2	9.2	9.3	9.3	9.3	9.3	9.3	9.4
G129.0	9.9	9.8	9.6	9.6	9.8	9.8	9.8	9.9	9.8	9.8
G130.0	10.4	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2
G131.0	10.8	10.8	10.7	10.7	10.8	10.7	10.7	10.7	10.8	10.8
G132.0	11.4	11.3	11.3	11.3	11.2	11.3	11.3	11.2	11.3	11.2
G133.0	11.9	11.9	11.9	11.8	11.8	11.8	11.9	11.9	11.8	11.8
G134.0	12.6	12.4	12.4	12.4	12.3	12.4	12.4	12.4	12.4	12.4
G135.0	13.2	13.1	13.0	13.0	13.0	13.0	13.0	13.0	12.8	13.0
G136.0	13.8	13.7	13.6	13.6	13.6	13.6	13.6	13.6	13.4	13.6
G137.0	14.4	14.3	14.1	14.1	14.1	14.1	14.0	14.1	14.0	14.1
G138.0	15.1	14.9	14.8	14.8	14.8	14.8	14.8	14.8	14.8	14.8
G139.0	15.7	15.6	15.5	15.5	15.3	15.3	15.3	15.3	15.2	15.3
G140.0	16.3	16.2	16.0	16.0	16.0	16.0	15.9	15.9	15.9	15.9
G141.0	16.9	16.8	16.8	16.6	16.6	16.5	16.5	16.5	16.5	16.6
G142.0	17.6	17.5	17.4	17.1	17.1	17.2	17.1	17.1	17.1	17.1
G143.0	18.2	18.0	18.0	18.0	17.8	17.8	17.7	17.8	17.7	17.8
G144.0	18.9	18.7	18.7	18.5	18.5	18.3	18.3	18.4	18.3	18.3
G145.0	19.5	19.3	19.3	19.1	19.1	19.1	19.0	19.0	19.0	19.0
G146.0	20.2	20.0	20.0	19.9	19.7	19.7	19.7	19.6	19.6	19.6
G147.0	20.8	20.7	20.6	20.5	20.5	20.5	20.3	20.3	20.2	20.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	21.4	21.4	21.3	21.2	21.2	21.0	20.9	20.8	20.9	20.9
G149.0	22.1	21.9	21.9	21.6	21.8	21.6	21.5	21.5	21.5	21.5
G150.0	22.7	22.6	22.5	22.4	22.4	22.2	22.2	22.1	22.1	22.1
G151.0	23.4	23.2	23.1	23.1	23.1	23.0	22.8	22.8	22.7	22.8
G152.0	23.9	23.9	23.7	23.7	23.7	23.5	23.4	23.3	23.3	23.4
G153.0	24.6	24.5	24.4	24.3	24.3	24.1	24.0	24.0	24.0	24.0
G154.0	25.2	25.1	25.0	24.9	24.9	24.7	24.7	24.7	24.6	24.6
G155.0	25.8	25.7	25.6	25.5	25.5	25.3	25.3	25.2	25.2	25.3
G156.0	26.5	26.3	26.2	26.0	26.0	25.9	25.9	25.9	25.7	25.8
G157.0	27.0	26.8	26.8	26.6	26.6	26.5	26.5	26.4	26.4	26.4
G158.0	27.5	27.5	27.2	27.2	27.2	27.2	27.1	27.0	27.0	27.0
G159.0	28.1	28.0	28.0	28.0	27.7	27.8	27.7	27.7	27.6	27.6
G160.0	28.7	28.5	28.4	28.4	28.3	28.3	28.3	28.3	28.1	28.2
G161.0	29.3	29.1	29.0	29.0	28.9	28.9	28.8	28.8	28.9	28.8
G162.0	29.7	29.6	29.6	29.5	29.6	29.5	29.4	29.4	29.4	29.4
G163.0	30.2	30.1	30.0	30.2	30.1	30.0	30.0	29.9	30.0	29.9
G164.0	30.7	30.7	30.7	30.7	30.6	30.4	30.4	30.4	30.4	30.4
G165.0	31.3	31.3	31.2	31.2	31.2	31.0	30.9	31.0	31.0	31.2
G166.0	31.8	31.6	31.8	31.8	31.6	31.5	31.5	31.5	31.5	31.6
G167.0	32.2	32.2	32.2	32.2	32.1	32.0	32.0	32.0	32.1	32.2
G168.0	32.8	32.6	32.7	32.6	32.6	32.5	32.5	32.5	32.7	32.7
G169.0	33.3	33.2	33.2	33.1	32.9	32.9	32.9	33.1	33.1	33.2
G170.0	33.8	33.5	33.5	33.5	33.4	33.5	33.5	33.5	33.4	33.5
G171.0	34.3	33.9	34.0	34.0	33.9	33.9	33.9	33.9	34.0	34.0
G172.0	34.7	34.4	34.4	34.4	34.4	34.3	34.3	34.4	34.4	34.5
G173.0	35.1	34.8	34.8	34.7	34.6	34.6	34.6	34.7	34.8	34.8
G174.0	35.4	35.1	35.2	35.0	35.0	34.8	35.0	35.0	35.1	35.3
G175.0	35.8	35.6	35.4	35.2	35.2	35.3	35.3	35.3	35.3	35.4
G176.0	36.2	35.8	35.7	35.6	35.4	35.3	35.6	35.6	35.6	35.7
G177.0	36.4	36.2	35.8	35.8	35.8	35.7	35.8	35.8	35.8	35.9
G178.0	36.8	36.4	36.0	36.0	36.0	35.9	35.9	36.0	36.0	36.0
G179.0	37.0	36.5	36.3	36.2	36.2	36.2	36.2	36.2	36.2	36.2
G180.0	37.0	36.6	36.3	36.3	36.2	36.2	36.2	36.2	36.2	36.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	5815.3	5815.1	5813.2	5812.1	5811.4	5817.1	5810.5	5806.4	5808.9	5806.2
G1.0	5812.6	5809.7	5810.1	5807.7	5805.5	5811.5	5801.9	5800.8	5802.0	5798.1
G2.0	5802.1	5800.0	5799.9	5798.9	5795.5	5801.4	5791.7	5789.8	5789.5	5787.0
G3.0	5786.7	5787.1	5785.2	5782.3	5780.6	5781.4	5775.9	5774.4	5773.4	5769.8
G4.0	5764.2	5765.3	5763.1	5763.1	5759.4	5762.3	5754.6	5754.2	5751.8	5747.0
G5.0	5739.9	5740.9	5736.0	5737.2	5735.2	5737.6	5726.9	5727.2	5722.7	5720.1
G6.0	5708.1	5707.5	5704.1	5704.6	5702.5	5704.7	5693.7	5693.3	5690.3	5685.1
G7.0	5672.4	5669.9	5668.9	5666.3	5665.5	5665.6	5657.8	5655.4	5648.7	5646.6
G8.0	5625.9	5623.8	5625.3	5619.0	5622.4	5615.1	5608.3	5605.2	5601.6	5598.2
G9.0	5575.0	5572.6	5573.4	5568.0	5567.7	5560.6	5558.2	5552.5	5547.5	5544.7
G10.0	5515.2	5513.9	5514.0	5505.9	5506.3	5497.6	5497.6	5488.9	5485.3	5479.9
G11.0	5451.0	5447.6	5445.6	5442.2	5438.0	5429.5	5428.5	5419.6	5416.8	5408.0
G12.0	5382.5	5374.9	5373.4	5368.5	5363.0	5353.7	5351.4	5343.0	5337.9	5333.5
G13.0	5303.3	5298.7	5295.3	5288.4	5280.3	5276.1	5271.3	5261.9	5253.8	5245.3
G14.0	5213.8	5210.7	5206.0	5200.9	5191.5	5184.6	5180.3	5167.8	5161.4	5155.3
G15.0	5125.7	5120.8	5111.9	5106.7	5095.9	5089.1	5083.6	5073.4	5062.8	5057.1
G16.0	5026.0	5022.0	5012.3	5006.1	5000.1	4982.4	4976.9	4961.5	4953.3	4948.8
G17.0	4922.8	4913.9	4908.1	4900.2	4888.8	4874.3	4867.4	4853.3	4840.7	4832.3
G18.0	4813.8	4805.3	4793.9	4784.3	4774.5	4754.0	4751.7	4731.7	4721.0	4714.1
G19.0	4700.2	4687.7	4678.7	4662.3	4654.1	4637.1	4625.6	4605.0	4591.2	4588.4
G20.0	4578.1	4566.1	4551.1	4539.4	4526.2	4499.6	4484.1	4463.9	4448.7	4447.3
G21.0	4449.0	4439.9	4424.8	4403.9	4382.3	4360.2	4338.2	4314.3	4303.4	4295.4
G22.0	4314.7	4305.9	4284.7	4261.8	4235.5	4203.7	4184.9	4152.9	4141.0	4137.8
G23.0	4179.6	4164.5	4141.9	4109.3	4081.7	4045.8	4020.5	3990.7	3973.4	3968.1
G24.0	4038.9	4016.8	3987.1	3954.7	3920.2	3873.1	3845.5	3807.2	3793.7	3793.0
G25.0	3897.5	3868.4	3830.3	3789.3	3750.8	3700.9	3660.3	3623.0	3607.4	3605.7
G26.0	3741.2	3709.6	3666.3	3618.6	3576.2	3513.4	3476.3	3428.8	3416.1	3414.7
G27.0	3585.4	3546.3	3491.6	3438.9	3380.9	3325.4	3284.8	3239.4	3222.9	3221.0
G28.0	3426.2	3381.5	3316.9	3252.7	3203.1	3130.3	3092.1	3045.2	3033.5	3036.0
G29.0	3262.2	3212.8	3144.4	3076.7	3010.0	2952.0	2903.4	2863.8	2853.1	2848.0
G30.0	3097.1	3040.4	2960.8	2884.1	2836.5	2766.9	2735.1	2697.5	2680.4	2687.5
G31.0	2933.8	2867.3	2781.2	2710.1	2654.3	2604.1	2567.0	2537.4	2520.8	2524.1
G32.0	2766.6	2693.4	2605.9	2540.1	2491.6	2447.3	2415.6	2385.5	2369.9	2375.8
G33.0	2598.5	2521.7	2442.3	2380.8	2337.0	2297.5	2265.4	2242.0	2226.7	2232.4
G34.0	2435.3	2357.7	2284.1	2233.9	2195.3	2157.0	2130.1	2101.9	2094.9	2097.6
G35.0	2271.4	2202.8	2136.2	2089.2	2056.1	2024.4	1999.8	1979.3	1969.8	1966.7
G36.0	2108.8	2050.9	1993.9	1955.2	1923.4	1899.5	1873.7	1851.5	1839.3	1845.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	1959.9	1910.9	1866.5	1830.8	1806.2	1778.1	1754.1	1727.9	1717.6	1721.6
G38.0	1810.8	1777.3	1741.5	1712.4	1686.1	1662.3	1633.4	1609.2	1601.0	1604.0
G39.0	1679.9	1656.0	1631.5	1601.0	1572.3	1547.9	1519.7	1503.3	1490.9	1497.0
G40.0	1553.0	1542.8	1522.7	1493.4	1466.1	1438.8	1417.7	1394.9	1388.0	1394.9
G41.0	1440.1	1439.9	1421.1	1391.4	1364.8	1341.8	1319.2	1300.9	1292.9	1299.9
G42.0	1330.5	1340.3	1321.2	1292.7	1270.3	1248.9	1227.1	1210.7	1202.1	1209.8
G43.0	1232.7	1248.8	1230.8	1203.9	1181.7	1163.2	1139.6	1126.7	1120.1	1128.6
G44.0	1143.2	1160.1	1144.5	1116.9	1096.8	1078.7	1057.8	1043.4	1037.3	1044.4
G45.0	1062.8	1078.4	1066.1	1037.7	1023.3	1003.9	986.2	971.0	968.0	973.7
G46.0	992.0	1002.7	989.5	963.6	949.9	934.8	924.1	915.1	912.5	917.7
G47.0	921.5	932.2	920.4	898.4	884.5	880.7	874.2	865.9	864.0	869.5
G48.0	857.9	864.0	853.7	832.6	828.2	837.4	829.6	820.5	817.2	825.2
G49.0	800.2	800.6	792.7	774.5	783.9	795.9	790.8	774.9	771.2	783.9
G50.0	746.6	744.4	735.3	728.3	741.7	753.4	743.8	724.2	723.3	741.9
G51.0	697.2	689.0	682.6	691.0	700.6	706.5	692.0	675.0	674.5	690.8
G52.0	654.1	639.7	639.4	654.7	660.3	656.3	640.4	623.3	619.5	633.5
G53.0	612.0	593.3	603.2	622.1	617.0	604.5	590.4	573.3	567.0	579.3
G54.0	574.3	551.0	571.4	589.0	576.4	558.0	543.6	530.6	524.3	533.8
G55.0	537.4	515.4	540.1	553.2	537.9	514.0	504.1	491.3	486.3	495.4
G56.0	503.9	486.5	511.5	520.5	500.1	475.8	466.6	457.4	453.2	459.3
G57.0	472.0	459.8	481.1	490.5	464.6	439.8	431.8	424.4	421.9	424.1
G58.0	443.8	436.2	451.2	461.5	430.6	409.6	399.0	393.5	391.5	392.6
G59.0	420.4	415.1	423.1	432.9	401.2	382.6	374.4	369.5	366.5	368.6
G60.0	400.9	393.6	397.0	406.6	374.5	359.6	353.1	348.9	346.3	348.1
G61.0	382.0	372.5	373.5	379.0	351.4	338.9	334.3	329.4	327.7	328.7
G62.0	364.4	352.5	351.4	355.2	330.7	321.9	316.7	313.1	311.6	311.2
G63.0	349.0	334.6	331.9	332.0	313.7	317.5	318.7	321.6	327.5	338.0
G64.0	333.1	320.4	313.6	312.2	308.1	322.5	323.7	319.7	309.5	299.6
G65.0	318.2	305.6	296.1	293.7	285.6	282.0	279.8	276.9	274.9	273.2
G66.0	302.6	291.5	281.7	278.6	268.3	267.0	265.5	264.2	262.8	260.9
G67.0	285.8	278.0	267.7	264.8	255.9	254.1	253.1	251.9	250.3	248.5
G68.0	271.0	266.4	256.6	253.5	245.4	244.6	244.1	242.7	240.8	239.6
G69.0	258.4	255.8	247.0	244.3	236.6	235.3	234.9	232.5	231.3	230.5
G70.0	247.2	246.3	239.4	235.7	227.3	225.8	225.4	223.6	221.7	220.4
G71.0	235.6	238.2	230.9	226.3	218.0	213.5	211.2	208.6	206.2	205.7
G72.0	224.5	227.7	223.6	218.0	209.3	200.9	198.7	192.6	188.0	188.6
G73.0	213.6	218.3	215.1	208.5	197.3	184.1	182.7	179.2	176.2	176.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	203.8	206.1	204.2	196.3	188.4	175.3	172.7	170.2	167.7	167.7
G75.0	192.8	192.8	186.1	193.5	183.7	166.7	164.2	160.7	158.5	158.2
G76.0	180.9	177.2	172.6	172.4	169.5	157.9	154.6	150.4	147.3	147.9
G77.0	165.9	167.0	161.5	162.1	160.2	146.9	140.2	129.9	126.8	127.6
G78.0	155.7	155.2	149.4	152.8	146.8	129.5	123.2	119.3	116.8	116.9
G79.0	143.9	143.9	137.6	145.1	140.4	116.8	109.2	103.6	100.8	102.5
G80.0	132.8	131.3	131.3	135.8	133.6	106.6	99.8	93.5	90.7	94.3
G81.0	119.2	120.2	118.3	123.1	125.0	97.0	82.7	78.3	75.3	76.1
G82.0	105.8	106.9	108.7	100.0	99.2	78.8	72.8	66.8	64.2	66.2
G83.0	90.6	90.6	85.9	76.5	74.7	67.6	63.9	58.2	55.3	57.1
G84.0	75.0	74.8	72.2	63.0	60.4	57.2	54.3	49.1	46.6	47.7
G85.0	60.5	59.7	56.3	50.2	48.5	46.0	43.0	39.1	37.5	37.7
G86.0	45.4	44.5	42.6	38.2	37.0	34.6	32.5	29.5	27.8	28.1
G87.0	32.5	31.4	29.7	27.0	25.8	24.1	22.1	20.5	19.4	19.4
G88.0	22.2	21.0	20.1	19.4	18.5	17.6	16.0	14.3	13.2	13.4
G89.0	13.9	13.2	12.7	12.4	12.0	10.8	9.6	8.3	7.4	7.3
G90.0	6.8	6.3	6.7	6.7	6.8	5.3	4.8	4.5	4.2	4.2
G91.0	4.8	4.6	4.9	4.6	4.5	3.8	3.7	3.7	3.6	3.3
G92.0	3.0	3.0	2.7	2.6	2.6	2.5	2.4	2.4	2.3	2.3
G93.0	1.8	1.8	1.7	1.8	1.8	1.8	1.8	1.8	1.8	1.8
G94.0	1.8	1.8	1.8	1.8	1.8	1.7	1.8	1.7	1.8	1.8
G95.0	1.8	1.9	1.9	1.8	1.9	1.8	1.8	1.7	1.8	1.8
G96.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.8
G97.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9	2.0	2.0
G98.0	2.1	2.1	2.1	2.1	2.1	2.0	2.0	2.1	2.1	2.1
G99.0	2.1	2.3	2.3	2.1	2.1	2.1	2.1	2.3	2.3	2.3
G100.0	2.3	2.3	2.3	2.4	2.3	2.3	2.1	2.3	2.3	2.4
G101.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
G102.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
G103.0	2.5	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.7
G104.0	2.7	2.7	2.7	2.8	2.7	2.7	2.7	2.7	2.7	2.8
G105.0	2.8	3.0	2.8	3.0	2.8	2.8	2.8	2.8	2.8	2.8
G106.0	3.0	3.1	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.1
G107.0	3.1	3.1	3.1	3.2	3.2	3.1	3.2	3.2	3.1	3.2
G108.0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
G109.0	3.5	3.5	3.5	3.5	3.5	3.5	3.6	3.6	3.6	3.5
G110.0	3.6	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	3.8	3.9	3.8	3.9	3.9	3.8	3.8	3.9	3.9	3.9
G112.0	4.0	4.0	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0
G113.0	4.2	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
G114.0	4.5	4.5	4.5	4.5	4.5	4.4	4.5	4.5	4.5	4.5
G115.0	4.6	4.6	4.8	4.8	4.8	4.6	4.8	4.8	4.8	4.8
G116.0	5.0	5.0	5.0	5.0	4.9	5.0	5.0	5.0	5.1	5.1
G117.0	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.3	5.3	5.3
G118.0	5.5	5.6	5.5	5.5	5.6	5.6	5.6	5.6	5.7	5.6
G119.0	5.8	5.8	5.8	5.8	5.8	5.8	5.8	5.9	5.9	5.9
G120.0	6.1	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.3
G121.0	6.4	6.4	6.4	6.4	6.5	6.5	6.5	6.5	6.7	6.8
G122.0	6.8	6.9	6.8	6.9	6.9	6.9	6.9	6.9	7.0	6.9
G123.0	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.4	7.4	7.4
G124.0	7.5	7.6	7.6	7.6	7.6	7.7	7.7	7.7	7.7	7.8
G125.0	8.0	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.2	8.3
G126.0	8.3	8.4	8.4	8.4	8.4	8.4	8.6	8.6	8.6	8.7
G127.0	8.8	8.9	8.9	8.9	8.9	8.9	9.0	9.0	9.2	9.2
G128.0	9.4	9.3	9.4	9.4	9.4	9.4	9.5	9.5	9.6	9.6
G129.0	9.8	9.9	9.9	10.0	9.9	10.0	10.0	10.1	10.1	10.1
G130.0	10.4	10.4	10.4	10.5	10.5	10.5	10.5	10.6	10.6	10.7
G131.0	10.8	10.8	10.8	10.9	10.9	10.9	10.9	11.2	11.2	11.2
G132.0	11.2	11.3	11.3	11.4	11.5	11.5	11.6	11.6	11.6	11.8
G133.0	11.9	11.9	11.9	12.0	12.0	12.0	12.1	12.3	12.3	12.4
G134.0	12.4	12.5	12.4	12.5	12.6	12.6	12.7	12.8	13.0	13.0
G135.0	12.8	13.0	13.1	13.0	13.2	13.2	13.2	13.4	13.4	13.6
G136.0	13.6	13.7	13.7	13.7	13.7	13.8	13.9	13.9	14.0	14.0
G137.0	14.0	14.1	14.3	14.3	14.4	14.4	14.5	14.6	14.6	14.8
G138.0	14.8	14.8	14.8	14.8	14.9	15.0	15.1	15.2	15.3	15.5
G139.0	15.2	15.3	15.5	15.5	15.6	15.6	15.6	15.8	15.9	16.0
G140.0	15.9	15.9	16.0	16.0	16.0	16.2	16.3	16.4	16.5	16.6
G141.0	16.5	16.5	16.6	16.8	16.8	16.9	16.9	17.1	17.1	17.2
G142.0	17.1	17.2	17.2	17.4	17.4	17.4	17.6	17.6	17.8	18.0
G143.0	17.8	17.8	17.8	18.0	18.0	18.1	18.2	18.3	18.4	18.5
G144.0	18.3	18.4	18.4	18.5	18.7	18.7	18.9	19.0	19.1	19.1
G145.0	19.0	19.1	19.1	19.1	19.3	19.5	19.5	19.6	19.7	19.9
G146.0	19.6	19.7	19.7	19.9	19.9	20.0	20.1	20.3	20.3	20.5
G147.0	20.3	20.3	20.3	20.5	20.6	20.7	20.8	20.9	21.0	21.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	20.9	21.0	21.0	21.0	21.2	21.3	21.4	21.5	21.6	21.8
G149.0	21.4	21.6	21.6	21.8	21.8	21.9	22.0	22.2	22.4	22.4
G150.0	22.1	22.2	22.2	22.4	22.5	22.6	22.7	22.8	23.0	23.0
G151.0	22.8	22.8	23.0	23.1	23.1	23.2	23.3	23.4	23.7	23.5
G152.0	23.4	23.5	23.5	23.7	23.7	23.8	23.9	24.0	24.1	24.3
G153.0	24.0	24.0	24.1	24.3	24.3	24.5	24.5	24.7	24.7	24.9
G154.0	24.6	24.6	24.7	24.9	25.0	25.1	25.2	25.3	25.3	25.5
G155.0	25.2	25.3	25.3	25.5	25.6	25.7	25.7	25.9	26.0	26.0
G156.0	25.9	25.9	25.9	26.0	26.2	26.3	26.3	26.4	26.6	26.6
G157.0	26.5	26.5	26.5	26.6	26.8	26.9	26.9	27.1	27.2	27.2
G158.0	27.1	27.1	27.1	27.4	27.4	27.4	27.6	27.6	27.7	27.7
G159.0	27.7	27.7	27.8	28.0	28.1	28.1	28.1	28.1	28.3	28.3
G160.0	28.2	28.3	28.4	28.5	28.5	28.7	28.7	28.8	28.8	28.9
G161.0	28.9	28.9	29.0	28.9	29.1	29.3	29.4	29.3	29.3	29.4
G162.0	29.4	29.5	29.5	29.6	29.6	29.9	29.9	29.9	30.0	30.0
G163.0	29.9	30.0	30.0	30.2	30.3	30.4	30.4	30.4	30.4	30.4
G164.0	30.6	30.6	30.7	30.8	31.0	31.0	31.0	31.0	30.9	31.0
G165.0	31.0	31.2	31.3	31.4	31.5	31.5	31.6	31.5	31.4	31.5
G166.0	31.6	31.6	31.8	31.8	32.0	32.0	32.1	32.1	32.0	32.0
G167.0	32.2	32.2	32.3	32.5	32.6	32.7	32.7	32.6	32.5	32.5
G168.0	32.7	32.7	32.8	32.9	33.1	33.2	33.1	33.2	33.1	33.1
G169.0	33.1	33.2	33.3	33.4	33.4	33.7	33.7	33.7	33.4	33.4
G170.0	33.5	33.7	33.8	33.9	34.0	34.1	34.3	34.1	33.9	33.5
G171.0	34.0	34.1	34.3	34.4	34.4	34.6	34.6	34.6	34.5	34.4
G172.0	34.5	34.6	34.6	34.7	34.8	35.0	35.0	35.1	34.8	34.8
G173.0	34.8	34.8	35.0	35.1	35.1	35.4	35.3	35.4	35.2	35.1
G174.0	35.2	35.2	35.3	35.3	35.4	35.6	35.7	35.7	35.7	35.4
G175.0	35.4	35.6	35.7	35.7	35.8	35.8	35.9	36.0	35.9	35.8
G176.0	35.7	35.8	35.8	35.9	35.9	36.2	36.2	36.3	36.2	36.0
G177.0	35.8	36.0	35.9	36.2	36.2	36.2	36.3	36.5	36.3	36.3
G178.0	35.9	36.2	36.2	36.3	36.3	36.4	36.5	36.8	36.5	36.4
G179.0	36.2	36.3	36.3	36.3	36.4	36.4	36.5	36.6	36.6	36.5
G180.0	36.3	36.3	36.3	36.4	36.4	36.5	36.5	36.6	36.8	36.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	5803.9	5802.7	5801.8	5802.7	5797.1	5798.9	5793.0	5797.1	5796.1	5791.0
G1.0	5795.7	5791.3	5791.3	5793.2	5786.4	5785.4	5781.6	5777.9	5776.0	5772.8
G2.0	5781.7	5778.1	5774.5	5774.2	5769.5	5766.9	5758.5	5756.1	5756.5	5749.5
G3.0	5764.3	5760.5	5752.8	5752.2	5746.1	5742.4	5733.9	5731.0	5730.9	5722.2
G4.0	5742.4	5735.6	5727.3	5726.3	5719.0	5715.9	5702.5	5698.8	5699.1	5688.3
G5.0	5714.6	5707.5	5696.6	5696.4	5685.9	5678.9	5667.3	5663.1	5658.1	5649.3
G6.0	5679.9	5673.7	5659.4	5656.9	5646.7	5638.4	5628.6	5621.7	5612.7	5604.7
G7.0	5637.7	5625.5	5616.4	5614.7	5604.1	5592.7	5581.9	5576.2	5565.7	5553.5
G8.0	5589.1	5578.2	5569.0	5563.8	5548.2	5541.5	5529.2	5521.2	5505.0	5495.9
G9.0	5536.3	5522.8	5514.2	5509.2	5490.6	5480.3	5468.0	5458.5	5444.8	5431.3
G10.0	5468.2	5462.1	5447.6	5438.6	5426.7	5417.5	5401.6	5392.0	5370.5	5358.6
G11.0	5397.2	5388.5	5378.9	5371.3	5355.3	5344.5	5327.8	5313.8	5300.8	5278.8
G12.0	5322.8	5314.6	5298.3	5287.1	5274.7	5264.5	5243.1	5230.4	5213.4	5196.4
G13.0	5236.0	5229.6	5217.0	5204.2	5189.2	5179.8	5162.1	5142.6	5122.5	5103.1
G14.0	5144.1	5140.0	5121.5	5111.2	5091.7	5086.6	5066.7	5048.9	5023.2	5008.8
G15.0	5045.0	5040.2	5023.3	5010.4	4994.1	4987.6	4964.1	4946.6	4922.7	4905.7
G16.0	4933.9	4933.2	4918.2	4905.4	4888.1	4881.3	4855.5	4836.3	4809.5	4797.4
G17.0	4822.6	4815.6	4805.5	4792.3	4776.1	4764.4	4744.3	4724.1	4699.7	4678.6
G18.0	4700.6	4698.4	4692.8	4676.3	4660.6	4650.3	4624.7	4607.7	4579.6	4564.8
G19.0	4575.8	4574.6	4562.0	4554.4	4534.0	4526.9	4502.5	4482.2	4457.4	4439.8
G20.0	4441.2	4439.8	4423.0	4417.4	4405.2	4396.0	4370.2	4356.8	4325.0	4312.4
G21.0	4291.7	4290.3	4286.4	4279.0	4270.3	4265.7	4236.3	4221.4	4192.1	4175.5
G22.0	4130.9	4140.8	4132.6	4130.9	4126.5	4122.4	4095.5	4083.7	4051.4	4036.3
G23.0	3963.4	3970.5	3974.8	3978.3	3977.3	3972.5	3955.5	3940.6	3908.6	3884.4
G24.0	3789.4	3804.6	3806.5	3817.0	3824.8	3823.3	3803.3	3797.5	3763.8	3734.2
G25.0	3610.9	3624.9	3633.5	3652.8	3658.7	3665.8	3656.8	3648.5	3615.8	3576.1
G26.0	3413.9	3443.3	3454.0	3475.7	3489.5	3510.6	3498.9	3493.5	3450.2	3419.3
G27.0	3228.4	3250.7	3267.5	3297.3	3319.2	3344.9	3344.9	3333.7	3296.4	3243.4
G28.0	3035.2	3057.2	3082.3	3117.0	3145.9	3180.4	3181.1	3177.3	3130.9	3077.1
G29.0	2858.3	2883.4	2906.8	2936.4	2974.1	3008.6	3017.8	3012.4	2964.9	2901.4
G30.0	2687.6	2705.8	2725.4	2756.5	2795.5	2844.2	2855.3	2852.4	2797.3	2729.2
G31.0	2523.5	2546.7	2557.5	2580.8	2624.6	2676.3	2689.4	2681.3	2628.5	2560.5
G32.0	2372.1	2392.9	2399.3	2420.0	2457.0	2508.8	2523.5	2515.8	2457.0	2391.3
G33.0	2228.3	2244.3	2254.4	2267.5	2301.2	2339.9	2357.8	2346.1	2295.6	2227.5
G34.0	2094.8	2106.2	2110.7	2123.0	2150.0	2185.3	2196.0	2190.2	2134.9	2084.7
G35.0	1966.7	1974.8	1981.2	1991.9	2007.4	2033.8	2041.2	2025.4	1984.7	1939.7
G36.0	1844.1	1848.5	1849.9	1861.2	1873.0	1886.2	1885.5	1868.7	1833.4	1808.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	1725.2	1733.0	1735.6	1741.2	1748.8	1758.8	1744.3	1724.3	1705.9	1686.5
G38.0	1609.0	1615.3	1622.9	1630.0	1633.0	1631.8	1606.7	1585.6	1576.2	1568.6
G39.0	1503.0	1507.9	1514.9	1522.9	1525.8	1516.2	1485.4	1459.8	1464.6	1460.6
G40.0	1396.3	1408.3	1410.8	1421.7	1425.7	1406.6	1365.7	1344.6	1351.4	1358.9
G41.0	1305.2	1309.9	1316.7	1327.9	1331.4	1307.1	1264.2	1245.0	1253.5	1270.9
G42.0	1215.7	1220.1	1224.3	1236.3	1241.1	1215.7	1169.1	1151.6	1162.6	1180.5
G43.0	1135.1	1138.9	1141.8	1151.3	1156.6	1133.0	1088.2	1072.8	1082.3	1099.5
G44.0	1051.5	1057.0	1061.8	1072.2	1074.9	1053.0	1012.3	997.4	1007.1	1021.0
G45.0	980.3	986.2	990.6	997.9	999.8	980.7	947.8	935.1	941.4	947.3
G46.0	919.4	920.3	924.1	930.1	931.0	915.9	888.7	880.3	878.3	877.8
G47.0	870.6	863.7	858.1	868.4	866.2	853.3	837.1	830.5	822.0	815.2
G48.0	828.4	820.1	799.7	808.0	805.0	795.2	788.2	782.0	770.1	752.4
G49.0	788.2	778.9	754.7	749.1	746.9	742.9	743.4	740.2	719.8	696.8
G50.0	746.5	733.6	716.6	700.1	694.6	693.1	702.8	699.8	674.3	643.5
G51.0	693.2	688.4	679.8	659.8	645.0	650.0	665.0	663.3	628.6	595.3
G52.0	641.2	644.8	644.1	625.9	600.2	609.1	628.0	626.2	589.0	552.4
G53.0	590.7	603.3	608.2	591.9	558.9	573.5	592.2	591.4	550.1	514.2
G54.0	545.3	564.2	574.3	561.2	528.1	536.5	560.0	556.8	513.7	483.8
G55.0	504.5	527.5	540.6	528.5	498.8	502.6	528.6	525.3	478.8	460.3
G56.0	465.1	488.6	508.6	496.0	472.5	473.7	498.0	492.2	447.5	438.0
G57.0	428.0	455.1	479.4	464.9	448.1	450.0	468.5	460.8	421.5	414.8
G58.0	397.9	423.0	450.8	437.3	425.5	428.7	439.6	430.5	400.6	393.5
G59.0	372.5	392.8	422.2	410.8	400.8	409.6	411.0	401.6	383.5	373.4
G60.0	350.9	366.8	395.5	386.5	378.0	390.9	386.9	374.0	366.3	355.7
G61.0	331.1	343.7	369.4	364.1	358.2	374.5	363.7	350.1	348.4	337.3
G62.0	315.1	325.1	345.1	342.7	340.9	356.8	343.3	328.3	333.1	322.5
G63.0	340.4	328.5	324.2	323.1	323.5	338.3	325.1	309.2	321.0	307.8
G64.0	294.8	296.1	302.9	304.6	307.6	320.7	307.2	294.1	308.8	294.3
G65.0	272.2	274.7	284.7	287.5	293.3	305.0	291.5	279.9	294.2	281.1
G66.0	260.0	260.1	268.6	272.6	279.8	289.3	274.8	265.7	278.4	269.4
G67.0	246.6	247.6	255.1	260.0	267.8	276.0	260.0	254.4	263.8	258.5
G68.0	238.3	237.6	244.9	250.3	256.8	263.0	246.1	244.0	251.2	248.1
G69.0	230.0	229.3	235.5	240.3	248.3	251.5	234.3	234.3	238.7	238.9
G70.0	219.1	218.0	225.2	231.9	240.8	240.7	222.3	224.8	225.5	228.7
G71.0	204.9	207.3	216.7	224.2	230.4	226.5	210.5	216.0	213.5	219.4
G72.0	189.4	196.3	207.2	215.5	219.2	210.3	199.6	206.4	203.4	206.3
G73.0	176.8	181.8	194.8	204.4	201.4	196.5	190.1	196.0	193.5	194.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	167.9	175.3	194.7	197.6	182.3	183.4	180.6	185.0	183.6	183.0
G75.0	158.6	164.8	174.1	170.9	169.0	168.9	170.8	173.6	172.9	173.0
G76.0	148.9	155.3	162.9	155.8	157.6	157.1	158.2	161.9	163.8	164.1
G77.0	129.4	145.4	155.6	145.2	145.7	146.4	146.4	149.0	154.4	154.4
G78.0	117.5	130.2	149.6	131.3	135.2	134.7	135.0	135.1	140.7	144.1
G79.0	106.2	119.2	139.0	121.9	125.7	121.1	123.3	123.6	126.3	130.0
G80.0	93.2	115.1	135.6	115.2	119.0	110.1	109.3	111.9	116.1	116.8
G81.0	80.9	95.1	109.9	102.2	111.8	100.8	99.5	98.7	100.4	105.5
G82.0	69.8	73.5	79.6	77.7	84.3	87.4	86.8	87.3	86.3	87.9
G83.0	60.8	62.4	66.1	66.5	72.8	73.0	72.2	72.7	71.5	72.5
G84.0	50.5	51.4	52.8	54.0	59.0	58.3	58.2	57.4	57.4	57.9
G85.0	39.5	40.2	40.9	41.6	44.8	44.7	44.0	43.2	43.9	44.1
G86.0	28.9	30.0	30.6	30.4	32.0	32.8	32.3	31.6	32.2	32.6
G87.0	20.3	21.3	21.3	21.8	22.0	22.5	22.1	21.8	22.4	23.0
G88.0	13.8	14.3	14.4	14.8	14.6	14.6	14.3	14.3	14.1	14.0
G89.0	7.0	7.4	7.6	7.8	8.0	7.6	7.6	7.4	6.9	6.7
G90.0	4.0	4.5	5.2	5.2	5.5	5.5	5.3	5.2	5.0	4.6
G91.0	3.3	3.2	3.2	3.0	2.7	2.8	3.0	3.2	3.0	3.1
G92.0	2.1	2.0	2.0	1.9	1.9	1.7	1.8	1.9	2.0	2.3
G93.0	1.7	1.8	1.8	1.8	1.9	1.8	1.8	1.9	1.9	1.8
G94.0	1.8	1.8	1.9	1.9	1.9	1.8	1.9	2.0	1.9	1.9
G95.0	1.8	1.9	1.9	1.9	1.9	2.0	2.0	2.0	2.0	2.0
G96.0	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.1	2.0	2.0
G97.0	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.3	2.3	2.3
G98.0	2.1	2.1	2.3	2.3	2.1	2.3	2.3	2.3	2.3	2.4
G99.0	2.1	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.3	2.4
G100.0	2.3	2.4	2.4	2.4	2.4	2.5	2.5	2.6	2.5	2.5
G101.0	2.5	2.5	2.5	2.5	2.5	2.5	2.6	2.6	2.6	2.7
G102.0	2.5	2.6	2.6	2.6	2.7	2.6	2.7	2.7	2.7	2.7
G103.0	2.7	2.7	2.8	2.7	2.7	2.8	2.8	2.8	2.8	2.8
G104.0	2.8	2.8	2.8	3.0	3.0	3.0	3.0	3.0	3.0	3.1
G105.0	2.8	2.8	3.0	3.1	3.1	3.1	3.1	3.1	3.1	3.2
G106.0	3.1	3.1	3.1	3.2	3.3	3.3	3.3	3.3	3.3	3.3
G107.0	3.2	3.3	3.3	3.3	3.3	3.3	3.3	3.6	3.5	3.5
G108.0	3.3	3.5	3.6	3.6	3.5	3.6	3.7	3.7	3.6	3.7
G109.0	3.5	3.7	3.7	3.7	3.7	3.8	3.8	3.9	3.8	3.8
G110.0	3.7	3.8	3.8	3.9	4.0	3.9	3.9	4.0	4.0	4.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	3.8	4.0	4.0	4.0	4.2	4.2	4.3	4.2	4.3	4.3
G112.0	4.2	4.2	4.3	4.3	4.4	4.3	4.4	4.4	4.4	4.5
G113.0	4.3	4.5	4.5	4.5	4.6	4.6	4.6	4.8	4.8	4.8
G114.0	4.6	4.6	4.6	4.9	4.8	4.9	4.9	5.1	5.0	5.0
G115.0	4.9	4.9	5.0	5.0	5.1	5.1	5.2	5.2	5.5	5.3
G116.0	5.1	5.2	5.3	5.2	5.3	5.3	5.5	5.6	5.5	5.6
G117.0	5.3	5.5	5.6	5.6	5.7	5.7	5.8	5.8	5.8	5.8
G118.0	5.8	5.8	5.9	5.9	5.9	6.1	6.1	6.2	6.2	6.2
G119.0	6.1	6.1	6.2	6.2	6.3	6.4	6.4	6.5	6.5	6.5
G120.0	6.4	6.4	6.5	6.5	6.8	6.8	6.8	6.9	6.9	7.0
G121.0	6.7	6.8	6.9	6.9	7.0	7.0	7.1	7.3	7.4	7.3
G122.0	7.0	7.1	7.3	7.4	7.4	7.5	7.6	7.7	7.7	7.7
G123.0	7.5	7.6	7.7	7.8	7.8	8.0	8.0	8.1	8.1	8.2
G124.0	7.8	8.0	8.1	8.2	8.3	8.3	8.4	8.4	8.6	8.6
G125.0	8.3	8.3	8.6	8.6	8.7	8.8	8.8	8.9	8.9	9.0
G126.0	8.8	8.9	8.9	9.0	9.2	9.2	9.4	9.4	9.4	9.5
G127.0	9.3	9.4	9.4	9.5	9.6	9.8	9.8	9.9	10.0	10.0
G128.0	9.6	9.9	10.0	10.1	10.1	10.2	10.2	10.4	10.5	10.5
G129.0	10.2	10.4	10.5	10.6	10.6	10.7	10.8	10.8	10.9	11.1
G130.0	10.7	10.8	10.9	11.1	11.2	11.2	11.3	11.5	11.4	11.6
G131.0	11.3	11.3	11.4	11.5	11.6	11.6	11.9	12.0	12.0	12.1
G132.0	11.9	12.0	12.1	12.1	12.3	12.3	12.4	12.5	12.6	12.6
G133.0	12.5	12.5	12.6	12.7	12.8	13.0	12.8	13.1	13.2	13.2
G134.0	13.0	13.1	13.2	13.2	13.3	13.4	13.6	13.7	13.7	13.8
G135.0	13.6	13.7	13.8	13.9	13.9	14.0	14.1	14.3	14.3	14.4
G136.0	14.3	14.3	14.4	14.5	14.6	14.6	14.8	14.9	15.0	15.1
G137.0	14.8	14.9	15.0	15.1	15.1	15.2	15.3	15.3	15.6	15.7
G138.0	15.5	15.6	15.6	15.6	15.8	15.8	15.9	16.0	16.2	16.3
G139.0	16.0	16.0	16.2	16.3	16.4	16.5	16.5	16.8	16.8	16.9
G140.0	16.8	16.8	16.9	16.9	17.0	17.0	17.2	17.2	17.2	17.5
G141.0	17.1	17.4	17.5	17.5	17.6	17.6	17.7	17.8	18.1	18.1
G142.0	18.0	18.0	18.1	18.1	18.2	18.3	18.4	18.5	18.7	18.8
G143.0	18.5	18.5	18.8	18.8	18.9	19.0	19.0	19.3	19.3	19.4
G144.0	19.1	19.3	19.3	19.4	19.5	19.6	19.7	19.7	19.9	20.0
G145.0	19.7	19.9	20.0	20.1	20.1	20.3	20.3	20.3	20.6	20.6
G146.0	20.2	20.5	20.6	20.7	20.7	20.9	20.9	21.2	21.2	21.3
G147.0	21.2	21.2	21.3	21.4	21.4	21.4	21.5	21.6	21.8	21.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	21.8	21.8	21.9	22.0	22.1	22.0	22.1	22.2	22.4	22.5
G149.0	22.5	22.5	22.5	22.6	22.6	22.8	22.8	23.0	23.0	23.1
G150.0	23.1	23.1	23.2	23.2	23.3	23.4	23.4	23.5	23.5	23.8
G151.0	23.7	23.8	23.8	23.9	23.9	23.9	24.0	24.0	24.3	24.4
G152.0	24.3	24.3	24.4	24.4	24.5	24.6	24.6	24.7	24.9	25.0
G153.0	25.0	24.9	25.0	25.1	25.1	25.2	25.2	25.3	25.3	25.6
G154.0	25.6	25.6	25.6	25.7	25.7	25.7	25.8	25.9	26.0	26.2
G155.0	26.0	26.0	26.2	26.3	26.3	26.3	26.4	26.5	26.6	26.6
G156.0	26.6	26.6	26.8	26.9	26.9	26.9	27.0	27.1	27.2	27.4
G157.0	27.2	27.2	27.4	27.4	27.4	27.5	27.6	27.7	27.8	27.8
G158.0	27.7	28.0	28.0	28.0	28.1	28.1	28.2	28.2	28.3	28.5
G159.0	28.3	28.4	28.4	28.5	28.7	28.7	28.7	28.8	28.9	29.0
G160.0	28.9	28.9	29.0	29.0	29.1	29.3	29.3	29.5	29.5	29.6
G161.0	29.5	29.5	29.6	29.6	29.7	29.7	29.7	30.0	30.0	30.1
G162.0	30.0	30.1	30.2	30.2	30.2	30.2	30.3	30.4	30.4	30.6
G163.0	30.6	30.7	30.7	30.7	30.8	30.8	30.9	30.9	31.0	31.2
G164.0	31.0	31.2	31.2	31.2	31.3	31.3	31.4	31.5	31.5	31.6
G165.0	31.6	31.8	31.8	31.6	31.9	31.9	31.9	32.0	32.1	32.1
G166.0	32.1	32.2	32.2	32.2	32.2	32.5	32.3	32.5	32.6	32.7
G167.0	32.6	32.7	32.7	32.7	32.7	32.8	32.9	32.9	33.1	33.1
G168.0	33.1	33.1	33.1	33.2	33.2	33.3	33.4	33.4	33.4	33.5
G169.0	33.5	33.7	33.7	33.7	33.7	33.7	33.8	33.8	33.9	34.0
G170.0	33.9	34.0	34.0	33.9	34.0	34.3	34.1	34.3	34.3	34.4
G171.0	34.4	34.4	34.4	34.4	34.5	34.5	34.6	34.6	34.5	34.7
G172.0	34.7	34.8	34.7	34.7	34.7	34.8	35.0	35.0	35.1	35.1
G173.0	35.2	35.1	35.1	35.1	35.1	35.2	35.3	35.3	35.3	35.3
G174.0	35.4	35.4	35.4	35.3	35.3	35.4	35.6	35.6	35.6	35.2
G175.0	35.7	35.6	35.6	35.6	35.6	35.7	35.7	35.7	35.8	35.8
G176.0	35.9	35.8	35.9	35.8	35.7	35.9	35.9	35.9	35.9	36.0
G177.0	36.0	36.0	36.0	36.0	35.9	36.0	36.0	36.0	36.0	36.2
G178.0	36.3	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2
G179.0	36.4	36.3	36.2	36.2	36.2	36.2	36.3	36.3	36.2	36.2
G180.0	36.4	36.3	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	5786.5	5788.9	5782.9	5776.8	5776.4	5772.5	5854.9	5847.0	5840.5	5835.3
G1.0	5768.4	5770.4	5764.4	5755.3	5757.4	5751.6	5852.8	5844.4	5835.9	5830.2
G2.0	5745.6	5743.9	5741.4	5731.5	5733.5	5724.6	5844.8	5831.3	5823.8	5819.0
G3.0	5714.8	5712.2	5706.8	5699.7	5700.0	5694.5	5828.0	5813.5	5807.2	5803.8
G4.0	5681.5	5676.7	5671.5	5664.7	5661.2	5655.5	5805.9	5791.4	5784.9	5780.1
G5.0	5640.9	5632.8	5628.1	5620.1	5615.7	5611.3	5779.4	5765.9	5758.3	5752.2
G6.0	5588.8	5585.0	5577.1	5570.8	5566.1	5558.6	5745.4	5731.4	5723.3	5716.5
G7.0	5539.3	5531.4	5523.7	5511.8	5506.4	5500.5	5704.3	5690.7	5682.0	5676.8
G8.0	5477.7	5468.2	5461.0	5448.5	5439.7	5436.5	5654.0	5638.9	5632.2	5629.2
G9.0	5411.2	5399.2	5390.5	5376.4	5369.3	5362.6	5597.8	5583.1	5576.4	5571.9
G10.0	5337.0	5325.5	5309.3	5303.7	5287.0	5280.9	5533.1	5514.9	5513.0	5509.8
G11.0	5263.5	5242.7	5228.9	5215.9	5203.4	5195.2	5464.9	5447.8	5442.3	5436.9
G12.0	5174.7	5157.7	5138.3	5127.1	5111.1	5099.9	5384.8	5370.1	5362.6	5360.3
G13.0	5082.3	5063.4	5046.8	5031.9	5017.0	5010.7	5302.0	5289.3	5280.0	5274.0
G14.0	4982.0	4965.6	4949.2	4934.8	4915.2	4905.2	5210.1	5199.3	5190.6	5187.8
G15.0	4879.5	4858.9	4843.6	4823.4	4806.2	4797.5	5115.4	5103.1	5094.5	5091.5
G16.0	4768.1	4750.2	4729.4	4711.3	4693.8	4681.3	5013.0	4998.7	4994.7	4994.2
G17.0	4653.0	4630.6	4615.5	4592.2	4572.9	4560.5	4906.7	4895.1	4889.3	4886.9
G18.0	4534.1	4515.9	4489.4	4468.9	4449.3	4432.6	4788.6	4776.1	4774.1	4774.2
G19.0	4413.7	4388.4	4363.8	4338.7	4320.3	4305.4	4670.8	4657.5	4655.0	4655.0
G20.0	4276.6	4255.3	4221.6	4201.3	4173.3	4159.0	4545.4	4529.2	4529.6	4528.9
G21.0	4142.8	4113.8	4084.4	4051.1	4025.7	4008.2	4408.0	4399.0	4397.2	4403.4
G22.0	3998.6	3964.9	3925.2	3895.9	3859.9	3835.2	4262.8	4256.3	4255.5	4263.2
G23.0	3844.8	3808.2	3765.9	3725.5	3692.7	3664.5	4113.3	4104.8	4110.7	4119.8
G24.0	3691.5	3646.2	3591.4	3551.2	3510.5	3480.6	3944.6	3942.7	3950.5	3963.9
G25.0	3529.1	3472.5	3418.0	3370.6	3326.0	3297.4	3774.1	3770.5	3784.3	3800.2
G26.0	3353.1	3298.0	3231.5	3183.9	3128.8	3097.5	3591.6	3588.4	3602.2	3623.4
G27.0	3181.8	3117.6	3045.6	2995.4	2943.0	2914.9	3397.4	3401.2	3418.6	3453.3
G28.0	2999.9	2935.0	2861.5	2810.8	2763.0	2744.2	3197.8	3200.3	3224.2	3258.7
G29.0	2820.0	2755.1	2686.1	2646.7	2600.7	2580.7	3003.3	3005.1	3025.0	3070.4
G30.0	2641.7	2582.9	2524.7	2485.9	2446.7	2429.5	2819.8	2821.3	2834.4	2876.3
G31.0	2475.2	2421.3	2376.3	2335.9	2301.1	2276.0	2653.2	2650.7	2668.8	2700.4
G32.0	2313.8	2270.4	2224.2	2194.4	2156.1	2139.9	2488.6	2488.1	2502.9	2534.8
G33.0	2166.5	2127.7	2087.8	2055.1	2020.7	2003.8	2333.6	2336.6	2347.0	2375.2
G34.0	2027.4	1995.1	1953.2	1926.5	1894.6	1876.8	2182.8	2183.5	2199.2	2228.0
G35.0	1897.8	1860.8	1828.2	1806.5	1776.2	1759.7	2045.4	2047.6	2059.6	2081.1
G36.0	1772.0	1739.8	1713.3	1690.1	1659.3	1642.9	1921.4	1918.8	1931.7	1951.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	1653.8	1624.7	1600.3	1578.1	1548.5	1525.9	1797.4	1794.9	1808.3	1826.5
G38.0	1542.8	1518.8	1493.3	1467.6	1440.1	1416.6	1676.5	1678.6	1688.9	1709.5
G39.0	1441.3	1418.1	1390.2	1366.0	1334.3	1316.1	1556.7	1561.9	1575.9	1599.7
G40.0	1346.4	1320.1	1290.6	1267.1	1233.1	1215.4	1441.4	1448.6	1464.2	1486.4
G41.0	1255.1	1227.4	1196.7	1171.7	1137.2	1117.1	1336.9	1341.3	1356.8	1382.4
G42.0	1169.3	1133.4	1104.1	1081.6	1048.6	1028.1	1231.2	1238.2	1255.2	1278.6
G43.0	1084.1	1049.8	1020.9	1001.0	969.9	949.1	1131.2	1138.2	1159.2	1182.5
G44.0	1002.6	968.6	940.8	926.6	895.2	879.1	1040.4	1049.9	1071.0	1092.8
G45.0	927.2	892.3	870.1	861.3	846.0	832.6	956.4	962.9	986.6	1009.4
G46.0	856.8	822.2	803.9	821.5	810.9	794.0	887.6	893.9	911.2	932.5
G47.0	791.7	757.9	756.3	791.2	782.7	767.2	838.5	842.1	852.9	863.8
G48.0	726.4	700.3	713.5	748.8	757.2	744.4	798.1	803.0	815.1	810.7
G49.0	668.8	659.1	668.1	691.4	702.9	696.5	768.9	772.0	782.4	767.2
G50.0	619.1	623.4	627.9	636.5	633.7	621.8	743.5	744.9	745.2	722.1
G51.0	578.5	590.1	592.9	595.3	581.5	563.2	690.9	687.8	680.6	671.4
G52.0	546.6	558.9	559.6	555.4	537.9	519.2	614.8	618.2	625.3	629.1
G53.0	516.6	531.0	524.3	518.4	497.9	480.1	557.6	563.6	581.5	589.5
G54.0	487.8	502.6	492.9	483.3	464.0	449.4	511.4	519.7	541.0	552.9
G55.0	463.4	474.3	463.9	449.9	429.9	417.5	474.4	482.6	503.6	517.3
G56.0	440.2	446.2	437.9	416.2	399.7	390.1	443.7	449.9	467.6	485.9
G57.0	417.3	420.7	410.4	387.2	373.4	364.7	412.8	417.5	431.9	453.9
G58.0	391.3	397.1	384.0	361.3	351.5	343.4	385.8	390.2	401.1	422.4
G59.0	365.8	373.9	359.7	338.7	330.2	324.3	360.8	365.7	374.8	392.6
G60.0	347.0	352.7	338.7	318.8	310.5	305.4	340.2	345.1	351.9	367.2
G61.0	330.7	332.6	319.9	302.5	293.7	289.2	321.2	324.8	329.3	344.3
G62.0	315.4	313.8	302.8	287.7	279.3	276.9	302.5	305.9	311.1	323.5
G63.0	301.6	296.6	287.3	278.1	273.0	270.9	286.8	290.2	295.0	305.6
G64.0	289.0	281.5	270.9	260.7	254.7	253.1	274.9	277.2	281.1	290.6
G65.0	275.5	268.0	255.6	248.9	245.0	243.2	263.3	264.6	269.5	279.6
G66.0	263.2	255.1	243.6	239.4	236.5	235.0	251.5	252.6	255.7	262.3
G67.0	251.0	243.6	233.0	230.6	227.7	225.1	241.6	242.9	244.9	249.6
G68.0	241.1	233.8	223.0	221.6	218.8	216.2	232.4	233.9	235.7	238.9
G69.0	231.7	224.3	213.2	212.1	209.1	205.9	222.3	223.7	225.9	229.4
G70.0	223.6	215.6	203.5	199.4	196.5	193.7	213.8	215.0	217.1	219.2
G71.0	222.7	209.9	194.8	188.6	186.5	182.9	201.7	203.0	205.6	207.9
G72.0	209.3	203.1	188.1	178.7	176.2	173.3	189.3	191.3	194.2	196.5
G73.0	197.8	197.8	181.7	169.5	166.0	163.3	179.2	181.1	183.9	187.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	184.7	193.6	179.3	160.3	156.0	153.8	169.0	171.5	172.8	177.9
G75.0	172.0	183.3	171.5	152.5	146.9	144.5	159.0	161.6	162.3	170.3
G76.0	162.3	168.4	160.9	143.7	137.7	134.7	148.6	151.9	152.7	164.0
G77.0	153.9	159.5	152.2	133.6	127.4	123.8	139.3	142.8	143.1	154.0
G78.0	143.3	146.4	139.6	123.7	115.8	111.1	128.9	131.6	134.0	145.1
G79.0	131.6	135.8	130.0	112.3	106.6	101.1	116.9	119.0	122.8	135.8
G80.0	116.5	124.0	121.3	100.7	92.6	88.7	105.8	108.5	113.8	123.1
G81.0	101.1	103.6	110.9	90.0	81.8	76.5	94.3	95.7	99.9	111.1
G82.0	88.1	86.6	93.2	77.7	70.4	64.7	81.2	83.8	88.8	101.2
G83.0	70.5	71.8	75.4	66.0	58.4	53.8	69.6	71.7	76.8	90.9
G84.0	56.0	56.0	56.4	50.8	47.6	43.5	57.8	60.2	65.2	77.7
G85.0	43.0	42.6	41.6	38.8	36.2	33.1	47.3	49.8	54.0	63.7
G86.0	32.1	31.5	30.2	28.1	26.0	23.8	37.2	39.1	42.0	45.9
G87.0	22.4	22.5	20.9	19.7	17.7	15.9	27.2	28.5	30.7	33.3
G88.0	13.1	12.8	11.4	10.8	9.2	8.0	18.8	19.6	21.6	23.5
G89.0	6.2	5.6	5.0	4.8	4.2	3.6	10.9	12.0	13.6	15.0
G90.0	4.0	3.7	3.3	3.3	2.8	2.6	4.2	4.9	5.5	6.2
G91.0	3.2	3.1	3.0	3.0	2.7	2.7	2.7	2.8	3.1	3.5
G92.0	2.4	2.4	2.4	2.4	2.3	2.3	2.8	2.7	3.0	3.1
G93.0	1.9	1.9	1.8	1.9	1.9	1.9	2.5	2.5	2.5	2.6
G94.0	1.9	1.9	1.8	2.0	1.9	1.9	2.1	2.1	2.0	2.0
G95.0	2.0	2.0	2.1	2.0	1.9	2.0	1.9	1.9	1.9	1.9
G96.0	2.1	2.1	2.1	2.0	2.1	2.0	1.9	1.9	1.9	2.0
G97.0	2.3	2.3	2.1	2.1	2.3	2.3	2.1	2.0	2.1	2.0
G98.0	2.3	2.4	2.4	2.4	2.3	2.3	2.3	2.3	2.1	2.1
G99.0	2.4	2.4	2.4	2.4	2.4	2.4	2.3	2.3	2.3	2.3
G100.0	2.6	2.5	2.5	2.5	2.6	2.5	2.4	2.5	2.4	2.4
G101.0	2.6	2.7	2.6	2.7	2.7	2.6	2.6	2.5	2.5	2.5
G102.0	2.7	2.7	2.7	2.8	2.8	2.7	2.7	2.7	2.6	2.6
G103.0	2.8	2.8	2.8	2.8	2.8	3.0	2.7	2.8	2.7	2.7
G104.0	3.0	3.0	3.0	3.1	3.1	3.1	3.0	3.0	2.8	2.8
G105.0	3.2	3.2	3.2	3.2	3.3	3.2	3.1	3.1	3.1	3.1
G106.0	3.3	3.3	3.3	3.5	3.5	3.5	3.2	3.2	3.2	3.2
G107.0	3.5	3.5	3.6	3.6	3.6	3.5	3.5	3.5	3.2	3.3
G108.0	3.7	3.7	3.7	3.7	3.7	3.8	3.5	3.5	3.5	3.5
G109.0	3.8	3.9	3.9	3.9	3.9	3.9	3.7	3.7	3.6	3.6
G110.0	4.0	4.0	4.2	4.2	4.2	4.0	3.8	3.8	3.8	3.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	4.3	4.4	4.3	4.5	4.4	4.3	4.0	4.0	4.0	4.0
G112.0	4.5	4.5	4.5	4.6	4.6	4.6	4.2	4.3	3.8	4.3
G113.0	4.9	4.8	4.8	4.9	4.9	4.9	4.4	4.4	4.5	4.5
G114.0	5.0	5.1	5.1	5.1	5.1	5.0	4.6	4.8	4.8	4.8
G115.0	5.2	5.3	5.3	5.3	5.3	5.3	5.0	5.0	5.0	5.1
G116.0	5.6	5.6	5.6	5.6	5.7	5.7	5.2	5.2	5.2	5.2
G117.0	5.9	5.8	5.9	5.8	5.9	5.9	5.5	5.5	5.5	5.5
G118.0	6.2	6.2	6.2	6.3	6.3	6.2	5.8	5.8	5.7	5.8
G119.0	6.7	6.5	6.5	6.7	6.7	6.7	6.1	6.1	6.1	6.1
G120.0	7.0	6.9	7.0	7.0	7.0	7.0	6.3	6.4	6.4	6.4
G121.0	7.4	7.4	7.4	7.3	7.4	7.4	6.9	6.8	6.7	6.8
G122.0	7.7	7.7	7.7	7.7	7.7	7.8	7.3	7.1	7.0	7.1
G123.0	8.1	8.2	8.2	8.2	8.2	8.3	7.5	7.5	7.5	7.5
G124.0	8.7	8.7	8.6	8.7	8.7	8.7	8.1	8.0	7.8	8.0
G125.0	9.2	9.2	9.2	9.2	9.2	9.2	8.4	8.4	8.4	8.3
G126.0	9.5	9.5	9.6	9.6	9.6	9.6	8.9	8.9	8.8	8.9
G127.0	10.0	10.1	10.1	10.1	10.1	10.2	9.4	9.4	9.3	9.3
G128.0	10.6	10.6	10.6	10.6	10.7	10.7	9.9	9.8	9.8	9.8
G129.0	11.2	11.2	11.1	11.2	11.3	11.3	10.4	10.4	10.4	10.2
G130.0	11.6	11.6	11.8	11.8	11.8	11.8	10.8	10.8	10.8	10.8
G131.0	12.1	12.1	12.3	12.4	12.4	12.4	11.4	11.4	11.4	11.3
G132.0	12.7	12.7	12.7	12.8	12.8	13.0	12.0	11.9	11.9	11.9
G133.0	13.3	13.4	13.3	13.3	13.6	13.6	12.6	12.5	12.4	12.5
G134.0	13.9	13.9	14.0	14.0	14.1	14.1	13.2	13.1	13.1	13.0
G135.0	14.5	14.5	14.6	14.6	14.6	14.8	13.8	13.7	13.7	13.7
G136.0	15.1	15.2	15.2	15.2	15.3	15.5	14.4	14.3	14.3	14.1
G137.0	15.7	15.8	15.9	15.9	16.0	16.0	15.0	14.9	14.9	14.9
G138.0	16.3	16.4	16.5	16.5	16.6	16.6	15.6	15.6	15.5	15.5
G139.0	17.0	17.0	17.1	17.1	17.4	17.4	16.2	16.2	16.0	16.0
G140.0	17.5	17.6	17.8	17.8	18.0	18.0	16.9	16.9	16.6	16.6
G141.0	18.2	18.3	18.4	18.4	18.5	18.7	17.6	17.5	17.4	17.4
G142.0	18.9	18.9	19.0	19.0	19.3	19.4	18.1	18.1	18.0	18.0
G143.0	19.5	19.6	19.7	19.7	19.9	19.9	18.8	18.7	18.5	18.5
G144.0	20.1	20.2	20.3	20.5	20.5	20.6	19.4	19.3	19.3	19.1
G145.0	20.8	20.9	20.9	21.0	21.2	21.2	20.1	20.0	19.9	19.9
G146.0	21.4	21.5	21.6	21.8	21.6	21.9	20.7	20.7	20.6	20.5
G147.0	22.0	22.1	22.2	22.4	22.5	22.5	21.4	21.2	21.3	21.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	22.6	22.8	22.8	23.1	23.1	23.1	22.0	21.9	21.9	21.8
G149.0	23.3	23.3	23.5	23.7	23.7	23.8	22.6	22.5	22.5	22.4
G150.0	23.9	24.0	24.1	24.1	24.3	24.4	23.2	23.2	23.1	23.0
G151.0	24.5	24.6	24.7	24.7	25.0	25.0	23.8	23.8	23.7	23.7
G152.0	25.1	25.2	25.3	25.5	25.5	25.5	24.4	24.4	24.3	24.3
G153.0	25.7	25.8	25.9	26.0	26.0	26.2	25.0	25.0	25.0	24.7
G154.0	26.2	26.4	26.5	26.6	26.6	26.6	25.6	25.6	25.5	25.5
G155.0	26.9	27.0	27.1	27.1	27.4	27.2	26.2	26.2	26.0	26.0
G156.0	27.4	27.6	27.7	27.8	27.8	27.8	26.8	26.8	26.6	26.5
G157.0	28.1	28.2	28.3	28.3	28.5	28.3	27.4	27.4	27.2	27.1
G158.0	28.7	28.7	28.8	28.9	29.0	28.9	28.0	28.0	27.8	27.7
G159.0	29.1	29.3	29.5	29.5	29.5	29.4	28.5	28.4	28.3	28.2
G160.0	29.7	29.9	30.0	30.1	30.1	30.0	29.0	29.0	29.0	28.8
G161.0	30.3	30.4	30.4	30.6	30.7	30.4	29.5	29.6	29.5	29.4
G162.0	30.8	30.9	31.0	31.2	31.2	31.0	30.1	30.1	30.1	29.9
G163.0	31.3	31.5	31.5	31.6	31.8	31.5	30.6	30.7	30.7	30.4
G164.0	31.8	31.9	32.1	32.1	32.3	32.1	31.0	31.3	31.2	31.0
G165.0	32.3	32.3	32.6	32.6	32.8	32.6	31.6	31.8	31.6	31.5
G166.0	32.7	32.8	33.1	33.1	33.2	33.2	32.1	32.3	32.2	32.0
G167.0	33.2	33.3	33.5	33.3	33.7	33.5	32.8	32.9	32.7	32.5
G168.0	33.7	33.8	33.9	33.9	34.1	34.1	33.3	33.4	33.2	32.9
G169.0	34.0	34.1	34.4	34.4	34.5	34.5	33.8	33.9	33.8	33.4
G170.0	34.4	34.5	34.7	34.7	34.8	35.0	34.3	34.3	34.1	34.0
G171.0	34.8	34.8	35.0	35.1	35.2	35.3	34.8	34.7	34.5	34.3
G172.0	35.1	35.2	35.3	35.4	35.4	35.6	35.2	35.2	35.0	34.7
G173.0	35.3	35.4	35.6	35.7	35.7	35.9	35.6	35.6	35.3	35.0
G174.0	35.6	35.6	35.7	35.9	35.8	36.2	35.9	35.8	35.6	35.3
G175.0	35.8	35.8	35.9	35.9	36.0	36.2	36.3	36.2	35.8	35.6
G176.0	36.0	35.9	36.0	36.0	36.2	36.3	36.6	36.3	36.0	35.9
G177.0	36.0	36.0	36.0	36.0	36.3	36.4	36.8	36.5	36.2	36.0
G178.0	36.0	36.2	36.0	36.0	36.3	36.4	37.0	36.6	36.3	36.2
G179.0	36.2	36.2	36.0	36.2	36.3	36.4	37.0	36.6	36.3	36.3
G180.0	36.2	36.0	36.0	36.2	36.0	36.2	37.0	36.6	36.4	36.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	5830.9	5824.7	5821.5	5821.9	5817.1	5818.7	5815.3	5815.1	5813.2	5812.1
G1.0	5828.4	5822.2	5817.1	5818.2	5811.6	5814.7	5807.7	5813.0	5811.9	5812.2
G2.0	5813.2	5810.2	5807.5	5804.4	5804.0	5807.7	5796.2	5804.5	5804.9	5804.9
G3.0	5796.8	5793.1	5790.4	5788.7	5789.6	5791.7	5785.5	5789.4	5789.9	5792.5
G4.0	5774.2	5771.2	5771.0	5766.3	5767.5	5767.8	5769.7	5770.1	5770.3	5772.2
G5.0	5746.4	5742.1	5741.5	5737.4	5738.5	5739.0	5740.4	5745.3	5743.6	5745.8
G6.0	5709.3	5708.8	5705.1	5701.8	5705.5	5704.5	5700.2	5715.1	5713.1	5716.6
G7.0	5666.1	5665.3	5663.4	5662.2	5668.2	5663.4	5667.8	5672.6	5677.4	5680.8
G8.0	5619.2	5615.4	5614.6	5616.9	5618.0	5619.7	5625.8	5631.6	5630.4	5634.9
G9.0	5562.1	5564.2	5562.6	5562.7	5568.6	5568.5	5573.4	5579.3	5583.5	5589.7
G10.0	5499.1	5499.5	5500.3	5500.5	5507.8	5511.7	5515.8	5523.4	5530.5	5534.7
G11.0	5429.0	5429.9	5429.7	5437.2	5440.3	5449.6	5454.4	5461.0	5467.6	5472.7
G12.0	5353.2	5354.9	5355.9	5365.7	5369.6	5377.7	5384.6	5391.7	5397.3	5406.5
G13.0	5269.8	5275.8	5270.5	5285.3	5291.0	5300.5	5307.1	5312.2	5321.8	5331.0
G14.0	5181.6	5188.3	5186.8	5199.9	5205.0	5218.0	5223.7	5233.0	5239.0	5249.0
G15.0	5086.7	5095.1	5095.1	5110.6	5119.6	5127.7	5134.0	5142.8	5151.8	5158.9
G16.0	4988.1	4994.2	4999.5	5007.0	5022.4	5028.7	5036.5	5046.4	5056.4	5058.5
G17.0	4881.0	4892.6	4893.3	4909.4	4915.1	4920.9	4934.6	4943.3	4951.4	4956.1
G18.0	4769.1	4781.5	4784.3	4798.6	4804.5	4811.2	4820.9	4827.7	4835.2	4846.4
G19.0	4651.7	4662.9	4670.0	4681.1	4692.0	4695.5	4705.3	4714.2	4721.7	4725.5
G20.0	4533.1	4544.0	4550.3	4558.3	4568.3	4573.4	4581.2	4589.6	4597.6	4606.6
G21.0	4401.6	4413.4	4418.6	4430.6	4441.4	4445.7	4451.5	4465.1	4472.4	4478.0
G22.0	4272.2	4283.2	4287.1	4299.3	4309.3	4311.2	4321.6	4325.6	4334.3	4339.5
G23.0	4127.0	4146.6	4149.4	4164.0	4171.9	4179.6	4181.2	4190.0	4194.4	4200.5
G24.0	3982.5	3998.7	4008.3	4023.8	4029.5	4039.5	4038.4	4045.2	4044.4	4043.3
G25.0	3823.2	3847.9	3861.6	3882.9	3887.8	3888.2	3899.0	3898.4	3897.4	3893.3
G26.0	3660.9	3696.9	3711.5	3733.8	3739.0	3746.5	3748.7	3746.0	3737.0	3729.7
G27.0	3482.4	3528.1	3543.6	3577.7	3593.5	3598.3	3593.5	3588.4	3573.1	3558.2
G28.0	3304.1	3350.0	3380.8	3414.3	3438.7	3441.7	3433.4	3425.6	3404.0	3380.8
G29.0	3119.6	3170.3	3210.3	3255.8	3280.1	3282.2	3279.5	3256.9	3230.5	3197.1
G30.0	2928.4	2987.0	3035.9	3083.9	3115.8	3126.9	3113.5	3091.0	3051.0	3007.1
G31.0	2739.2	2805.3	2857.8	2922.0	2955.9	2964.2	2948.2	2917.4	2866.9	2815.6
G32.0	2568.0	2618.3	2682.3	2743.6	2790.5	2803.8	2781.9	2740.3	2679.3	2634.0
G33.0	2404.1	2450.4	2503.8	2578.1	2629.1	2641.6	2622.8	2566.3	2507.4	2465.7
G34.0	2255.0	2289.5	2337.9	2404.2	2455.2	2476.6	2452.4	2395.1	2342.5	2311.2
G35.0	2105.6	2144.0	2177.7	2236.3	2291.6	2313.0	2289.3	2229.8	2190.0	2159.5
G36.0	1969.8	2002.9	2034.0	2079.6	2129.8	2149.6	2127.8	2079.7	2046.5	2024.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	1839.6	1872.2	1893.9	1934.7	1977.4	1992.2	1970.9	1942.1	1917.9	1898.2
G38.0	1722.1	1746.7	1770.1	1798.9	1821.7	1834.8	1829.8	1806.3	1790.1	1776.4
G39.0	1607.8	1633.5	1648.5	1673.6	1682.0	1688.6	1695.7	1685.5	1673.9	1665.2
G40.0	1502.4	1523.8	1535.3	1551.1	1551.0	1546.3	1560.5	1570.7	1566.9	1557.7
G41.0	1397.8	1423.5	1433.0	1441.8	1432.4	1422.8	1448.0	1467.5	1467.4	1455.0
G42.0	1299.8	1325.4	1338.4	1336.2	1318.9	1308.5	1337.6	1365.6	1372.6	1357.2
G43.0	1200.9	1231.4	1248.1	1242.0	1216.3	1208.1	1240.7	1277.9	1280.3	1258.8
G44.0	1111.7	1141.6	1165.8	1159.0	1128.6	1122.1	1154.6	1190.6	1192.8	1167.8
G45.0	1026.4	1054.5	1081.3	1079.2	1047.2	1045.7	1073.6	1109.1	1108.7	1081.2
G46.0	948.0	977.5	1004.3	1003.9	979.1	978.5	1004.3	1032.0	1024.6	998.1
G47.0	872.9	900.6	927.6	934.0	919.7	918.9	937.1	958.3	948.0	920.0
G48.0	805.9	831.0	858.5	869.0	866.2	865.3	881.0	886.7	876.4	852.0
G49.0	747.9	766.4	789.8	806.5	815.9	818.0	825.4	818.5	808.7	783.3
G50.0	704.0	708.8	729.3	749.6	770.6	776.2	773.2	760.6	747.3	727.9
G51.0	664.3	659.4	672.4	696.3	725.7	735.6	723.4	702.0	687.1	680.9
G52.0	627.8	622.4	621.0	646.8	683.5	700.4	676.8	649.5	636.7	646.0
G53.0	592.9	589.7	574.9	600.7	643.0	665.4	633.3	602.7	595.8	614.0
G54.0	559.0	557.3	539.8	562.0	604.0	627.8	593.9	558.3	561.1	583.2
G55.0	528.8	527.2	510.8	522.8	565.5	589.5	555.7	519.9	531.0	553.5
G56.0	497.1	499.0	484.1	490.1	531.2	554.5	522.2	489.1	500.2	524.3
G57.0	469.3	470.8	459.0	462.7	498.9	517.2	489.6	464.4	472.7	493.2
G58.0	442.1	442.5	435.8	437.6	466.3	482.2	460.0	442.0	448.0	463.4
G59.0	416.7	414.6	410.8	415.9	433.6	448.6	433.4	421.0	421.8	437.3
G60.0	392.0	389.1	386.5	396.4	406.6	416.0	411.6	401.5	396.7	412.6
G61.0	370.4	365.8	364.0	377.5	381.7	385.7	391.5	383.9	372.6	387.6
G62.0	349.0	347.3	345.0	362.5	360.8	357.2	372.6	366.4	351.4	363.9
G63.0	328.9	329.2	331.1	346.9	341.7	330.7	352.7	347.0	332.5	341.4
G64.0	309.5	314.3	316.1	334.5	324.2	309.0	334.4	328.3	315.3	321.7
G65.0	291.8	301.8	301.8	319.3	309.0	290.4	317.6	312.8	299.2	302.9
G66.0	275.4	288.0	289.1	301.7	294.5	276.7	302.5	297.7	284.0	285.3
G67.0	260.3	272.5	276.0	286.4	277.7	263.8	283.5	284.0	270.2	270.8
G68.0	246.3	258.4	263.6	273.5	264.2	252.7	266.1	271.5	259.1	258.8
G69.0	234.9	245.2	252.8	260.9	249.5	242.6	250.7	260.4	249.1	248.4
G70.0	224.8	235.5	242.7	249.7	235.9	232.5	237.8	250.6	240.7	238.8
G71.0	215.3	226.9	233.7	236.5	222.0	223.0	224.5	239.5	233.3	228.4
G72.0	206.4	218.7	225.8	222.7	210.1	213.7	211.0	227.4	226.5	220.7
G73.0	199.9	213.3	215.1	208.9	199.9	204.4	198.1	212.9	214.8	209.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	193.0	204.9	200.7	195.6	190.5	194.0	188.3	198.0	201.4	201.8
G75.0	187.4	196.9	187.2	183.7	182.2	183.5	177.9	185.5	186.5	194.4
G76.0	186.1	188.0	174.3	173.4	172.7	172.4	168.0	169.8	165.4	174.7
G77.0	167.3	174.8	164.7	163.5	162.7	161.6	154.5	157.7	153.3	155.3
G78.0	158.1	163.4	154.4	153.8	152.7	147.7	145.1	147.0	142.5	146.3
G79.0	145.9	152.9	145.2	144.0	140.8	134.6	134.7	136.4	133.4	140.8
G80.0	135.3	135.3	134.3	131.3	125.8	123.2	124.0	123.6	125.5	133.1
G81.0	125.9	123.3	118.4	117.7	115.7	112.1	111.8	112.3	119.0	123.8
G82.0	115.2	108.2	105.2	107.9	102.4	100.4	102.9	103.9	114.6	116.5
G83.0	100.1	92.2	91.8	91.8	90.1	88.9	91.3	91.4	87.6	81.2
G84.0	80.0	76.2	76.0	77.3	76.6	76.0	75.8	75.8	74.6	70.0
G85.0	63.9	60.7	61.6	62.1	62.1	61.5	62.3	62.2	60.3	57.2
G86.0	46.0	47.1	47.7	48.6	48.6	48.0	48.0	48.0	47.0	45.5
G87.0	34.3	35.6	35.8	35.8	35.7	35.0	35.4	35.3	34.5	33.1
G88.0	24.4	25.9	25.7	25.5	24.9	24.3	24.6	24.1	24.1	23.9
G89.0	15.7	17.0	17.1	17.2	17.0	16.9	17.0	17.0	16.9	16.6
G90.0	6.7	7.7	7.8	8.6	8.9	9.4	9.6	10.0	10.0	9.9
G91.0	3.8	4.6	4.9	5.6	5.8	6.1	6.1	5.9	5.9	5.7
G92.0	3.3	3.6	3.5	3.8	4.0	4.0	4.3	4.2	4.2	4.0
G93.0	2.6	2.7	2.7	2.6	2.4	2.0	1.8	2.0	2.1	2.4
G94.0	2.0	1.9	1.9	1.8	1.9	1.9	1.8	1.9	1.8	1.8
G95.0	1.9	1.9	1.9	1.9	1.9	2.0	1.9	1.9	1.9	1.8
G96.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9	2.0	1.9	1.9
G97.0	2.1	2.1	2.1	2.0	2.1	2.1	2.0	2.0	2.0	2.0
G98.0	2.1	2.1	2.1	2.3	2.1	2.3	2.1	2.1	2.3	2.1
G99.0	2.4	2.3	2.3	2.4	2.3	2.3	2.1	2.3	2.3	2.3
G100.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.3
G101.0	2.5	2.5	2.5	2.5	2.5	2.6	2.5	2.5	2.4	2.4
G102.0	2.6	2.6	2.6	2.5	2.6	2.5	2.5	2.6	2.6	2.5
G103.0	2.7	2.7	2.6	2.7	2.7	2.7	2.6	2.6	2.7	2.6
G104.0	2.8	2.8	3.0	2.8	2.8	2.8	2.7	2.8	2.8	2.7
G105.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
G106.0	3.2	3.2	3.2	3.1	3.1	3.1	3.1	3.1	3.1	3.0
G107.0	3.3	3.3	3.2	3.3	3.2	3.3	3.2	3.2	3.2	3.2
G108.0	3.5	3.6	3.6	3.5	3.5	3.5	3.5	3.5	3.3	3.3
G109.0	3.7	3.6	3.7	3.6	3.6	3.6	3.6	3.6	3.6	3.5
G110.0	3.8	3.8	3.8	3.8	3.8	3.7	3.7	3.8	3.8	3.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	4.0	3.9	4.0	4.0	3.9	4.0	3.9	3.8	3.8	3.9
G112.0	4.3	4.2	4.3	4.2	4.3	4.2	4.2	4.2	4.0	4.0
G113.0	4.5	4.4	4.6	4.4	4.4	4.4	4.4	4.4	4.3	4.3
G114.0	4.8	4.6	4.6	4.6	4.6	4.6	4.6	4.5	4.5	4.5
G115.0	5.0	5.0	5.0	5.0	4.9	5.0	4.9	4.8	4.9	4.8
G116.0	5.2	5.2	5.1	5.2	5.2	5.1	5.1	5.1	5.0	5.0
G117.0	5.5	5.5	5.6	5.5	5.5	5.5	5.3	5.3	5.3	5.2
G118.0	5.7	5.8	5.8	5.7	5.8	5.7	5.7	5.7	5.6	5.6
G119.0	6.1	6.1	6.2	6.2	6.2	6.1	6.1	6.1	5.9	5.9
G120.0	6.4	6.4	6.4	6.4	6.5	6.4	6.4	6.4	6.2	6.3
G121.0	6.8	6.9	6.8	6.8	6.8	6.8	6.7	6.7	6.7	6.5
G122.0	7.1	7.1	7.3	7.1	7.1	7.1	7.0	7.0	7.0	6.9
G123.0	7.6	7.6	7.6	7.5	7.6	7.6	7.5	7.5	7.4	7.3
G124.0	8.0	8.1	8.1	8.0	8.0	8.1	7.8	7.8	7.7	7.7
G125.0	8.3	8.4	8.4	8.4	8.3	8.4	8.3	8.3	8.2	8.1
G126.0	8.9	8.8	8.9	8.9	8.9	8.8	8.7	8.8	8.7	8.7
G127.0	9.4	9.4	9.4	9.4	9.3	9.3	9.2	9.2	9.0	9.0
G128.0	9.9	9.9	9.9	9.9	9.8	9.8	9.8	9.6	9.6	9.5
G129.0	10.4	10.4	10.4	10.4	10.2	10.2	10.2	10.2	10.1	10.0
G130.0	10.9	10.8	10.9	10.8	10.8	10.8	10.7	10.7	10.6	10.5
G131.0	11.4	11.4	11.3	11.3	11.3	11.2	11.2	11.2	11.1	11.1
G132.0	12.0	11.9	11.9	11.9	11.9	11.8	11.6	11.8	11.6	11.5
G133.0	12.5	12.4	12.4	12.4	12.5	12.4	12.3	12.3	12.1	12.1
G134.0	13.1	13.1	13.1	13.0	13.0	13.0	12.8	12.8	12.7	12.6
G135.0	13.6	13.7	13.7	13.6	13.6	13.6	13.4	13.3	13.3	13.2
G136.0	14.3	14.1	14.3	14.1	14.1	14.0	13.9	13.9	13.8	13.8
G137.0	14.9	14.8	14.9	14.6	14.6	14.6	14.6	14.6	14.4	14.4
G138.0	15.3	15.3	15.3	15.2	15.3	15.2	15.1	15.1	15.0	15.0
G139.0	16.0	16.0	16.0	15.9	15.9	15.8	15.8	15.8	15.6	15.6
G140.0	16.6	16.8	16.5	16.5	16.5	16.4	16.4	16.3	16.3	16.2
G141.0	17.2	17.2	17.2	17.1	17.1	17.0	17.0	16.9	16.9	16.8
G142.0	18.0	17.8	17.8	17.7	17.7	17.7	17.6	17.5	17.5	17.4
G143.0	18.5	18.5	18.4	18.3	18.3	18.3	18.2	18.2	18.1	18.1
G144.0	19.3	19.1	19.1	18.9	18.9	18.9	18.8	18.8	18.7	18.7
G145.0	19.7	19.7	19.7	19.6	19.5	19.5	19.4	19.4	19.4	19.3
G146.0	20.5	20.3	20.3	20.2	20.1	20.1	20.0	19.9	19.9	20.0
G147.0	21.0	21.0	20.9	20.8	20.8	20.7	20.7	20.6	20.6	20.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	21.8	21.6	21.6	21.5	21.4	21.3	21.3	21.2	21.2	21.2
G149.0	22.4	22.2	22.2	22.1	22.0	22.0	21.9	21.9	21.9	21.9
G150.0	23.0	22.8	22.8	22.7	22.6	22.6	22.4	22.5	22.5	22.5
G151.0	23.5	23.4	23.4	23.2	23.2	23.2	23.1	23.1	23.1	23.1
G152.0	24.1	24.0	24.0	23.8	23.8	23.7	23.7	23.7	23.7	23.7
G153.0	24.7	24.6	24.6	24.5	24.4	24.3	24.3	24.3	24.1	24.1
G154.0	25.3	25.3	25.2	25.1	25.0	24.9	24.9	24.9	24.7	24.7
G155.0	25.9	25.8	25.8	25.7	25.6	25.5	25.5	25.5	25.5	25.5
G156.0	26.5	26.4	26.4	26.2	26.2	26.0	25.9	25.9	25.9	25.9
G157.0	27.1	27.0	27.0	26.8	26.6	26.6	26.5	26.6	26.8	26.5
G158.0	27.7	27.5	27.6	27.4	27.2	27.2	27.1	27.1	27.1	27.1
G159.0	28.3	28.1	28.1	28.0	27.8	27.8	27.7	27.7	27.7	27.7
G160.0	28.8	28.7	28.7	28.5	28.4	28.4	28.3	28.2	28.3	28.3
G161.0	29.4	29.3	29.1	29.0	28.9	28.9	28.8	28.9	28.9	28.8
G162.0	29.9	29.7	29.7	29.6	29.5	29.5	29.4	29.4	29.4	29.3
G163.0	30.4	30.3	30.2	30.1	30.0	30.0	30.0	30.0	29.9	29.9
G164.0	30.9	30.8	30.8	30.7	30.6	30.6	30.6	30.4	30.4	30.4
G165.0	31.4	31.4	31.3	31.2	31.0	31.2	31.0	31.0	30.9	30.9
G166.0	32.0	31.9	31.8	31.6	31.5	31.6	31.5	31.5	31.4	31.4
G167.0	32.5	32.3	31.9	32.1	32.1	32.1	32.0	32.0	32.0	31.9
G168.0	32.9	32.8	32.7	32.7	32.6	32.6	32.5	32.6	32.5	32.3
G169.0	33.4	33.3	33.2	33.2	33.1	33.1	33.1	32.9	32.9	32.9
G170.0	33.9	33.7	33.7	33.5	33.5	33.5	33.5	33.4	33.4	33.4
G171.0	34.4	34.1	34.1	34.0	34.0	34.0	33.9	33.9	33.9	33.9
G172.0	34.6	34.6	34.6	34.4	34.5	34.5	34.4	34.4	34.3	34.3
G173.0	35.1	35.0	34.8	34.8	34.8	34.8	34.7	34.7	34.7	34.7
G174.0	35.0	35.2	35.2	35.2	35.2	35.2	35.1	35.1	35.1	35.2
G175.0	35.7	35.6	35.6	35.4	35.4	35.4	35.3	35.6	35.4	35.4
G176.0	35.9	35.8	35.8	35.7	35.7	35.7	35.7	35.7	35.7	35.8
G177.0	36.0	36.0	35.9	35.9	35.9	35.9	35.9	35.9	36.0	35.9
G178.0	35.6	36.0	36.0	36.0	36.2	36.0	36.2	36.2	36.2	36.2
G179.0	36.2	36.2	36.2	36.2	36.3	36.2	36.3	36.3	36.2	36.3
G180.0	36.3	36.2	36.2	36.2	36.2	36.3	36.2	36.4	36.3	36.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	5811.4	5817.1	5810.5	5806.4	5808.9	5806.2	5803.9	5802.7	5801.8	5802.7
G1.0	5810.6	5813.8	5813.2	5808.3	5812.4	5809.0	5807.0	5807.4	5810.8	5808.9
G2.0	5802.5	5808.7	5809.3	5803.6	5808.7	5805.7	5806.9	5808.1	5811.2	5809.3
G3.0	5790.4	5796.2	5796.5	5794.2	5799.3	5797.4	5798.6	5798.8	5805.3	5803.6
G4.0	5769.9	5776.8	5777.5	5778.7	5782.0	5781.0	5783.3	5784.9	5790.4	5791.3
G5.0	5745.3	5750.9	5754.1	5754.8	5760.7	5759.6	5762.8	5765.4	5771.5	5775.5
G6.0	5715.5	5722.6	5724.7	5730.2	5734.5	5733.9	5738.0	5741.1	5745.6	5751.7
G7.0	5680.2	5688.3	5691.5	5698.7	5701.0	5705.0	5709.5	5714.3	5717.0	5725.4
G8.0	5636.5	5648.4	5652.6	5658.5	5662.8	5668.8	5673.3	5677.7	5682.0	5689.3
G9.0	5591.4	5603.3	5606.7	5613.2	5618.9	5624.7	5633.0	5640.2	5641.4	5648.4
G10.0	5537.8	5548.7	5554.5	5560.2	5567.1	5573.4	5582.0	5587.2	5593.3	5602.6
G11.0	5475.7	5488.6	5493.5	5502.9	5510.1	5516.7	5524.0	5531.4	5537.2	5548.6
G12.0	5409.7	5420.4	5426.7	5429.9	5444.3	5450.0	5463.7	5470.8	5478.3	5489.6
G13.0	5332.6	5346.7	5348.5	5359.6	5369.5	5378.8	5392.7	5399.0	5406.2	5422.5
G14.0	5251.4	5263.2	5270.1	5280.0	5290.8	5301.5	5312.8	5321.2	5334.6	5350.6
G15.0	5161.6	5177.3	5178.8	5189.7	5203.5	5211.5	5221.6	5236.4	5253.2	5266.3
G16.0	5063.6	5078.4	5084.9	5098.8	5110.4	5119.4	5131.7	5148.7	5163.8	5180.8
G17.0	4960.8	4974.7	4979.6	4993.7	5007.1	5017.5	5032.6	5048.9	5069.6	5084.9
G18.0	4850.5	4862.7	4869.1	4877.5	4895.0	4910.9	4926.3	4948.3	4966.5	4981.2
G19.0	4727.4	4746.1	4750.6	4764.1	4784.3	4791.5	4812.1	4831.6	4855.8	4877.8
G20.0	4607.6	4620.5	4626.5	4642.5	4654.8	4672.6	4692.5	4715.7	4733.8	4762.5
G21.0	4479.7	4491.1	4491.5	4509.3	4524.7	4540.1	4565.1	4584.7	4615.1	4640.4
G22.0	4336.0	4349.5	4353.9	4364.9	4381.4	4399.8	4425.4	4453.5	4483.3	4506.1
G23.0	4191.0	4202.9	4199.6	4220.4	4229.5	4248.9	4278.8	4311.2	4343.3	4372.5
G24.0	4040.0	4040.6	4043.2	4054.9	4075.3	4092.2	4126.8	4160.4	4196.6	4229.3
G25.0	3882.5	3882.2	3872.9	3886.6	3905.2	3922.8	3963.7	3999.5	4043.4	4083.3
G26.0	3711.1	3703.2	3696.6	3699.5	3723.0	3746.6	3788.6	3833.4	3878.6	3925.2
G27.0	3533.3	3521.6	3509.9	3518.6	3532.2	3558.7	3603.9	3649.1	3709.7	3764.3
G28.0	3350.7	3329.6	3307.6	3307.3	3325.9	3355.7	3405.3	3460.1	3523.6	3590.8
G29.0	3153.8	3126.5	3108.6	3114.8	3128.0	3148.5	3203.0	3262.5	3335.2	3412.1
G30.0	2959.9	2934.8	2916.3	2919.4	2937.7	2964.8	3007.9	3067.8	3136.1	3221.6
G31.0	2770.6	2756.3	2735.3	2746.8	2760.6	2777.9	2829.6	2877.6	2949.7	3031.2
G32.0	2597.3	2581.6	2573.2	2577.5	2593.3	2613.6	2655.3	2706.8	2768.2	2840.6
G33.0	2435.0	2431.1	2412.8	2420.5	2435.6	2455.5	2498.4	2537.8	2596.0	2665.6
G34.0	2282.7	2273.1	2269.9	2276.1	2291.7	2310.4	2347.1	2386.5	2439.3	2495.1
G35.0	2137.1	2135.6	2130.1	2134.0	2148.5	2167.4	2203.9	2237.0	2288.1	2334.1
G36.0	2005.8	2005.9	2000.0	2008.3	2021.7	2038.9	2071.7	2103.8	2145.6	2186.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	1883.3	1884.5	1883.0	1888.6	1903.9	1915.2	1949.0	1974.9	2014.8	2053.9
G38.0	1768.0	1767.2	1762.9	1762.8	1774.7	1794.3	1825.7	1856.3	1888.9	1919.4
G39.0	1652.9	1647.4	1643.7	1641.9	1657.5	1669.3	1706.0	1738.4	1774.5	1800.7
G40.0	1544.5	1534.1	1527.7	1526.3	1533.6	1552.5	1583.3	1621.0	1658.9	1685.7
G41.0	1438.3	1426.1	1411.7	1414.6	1421.1	1431.9	1473.1	1508.6	1548.9	1581.1
G42.0	1335.5	1319.5	1308.1	1302.4	1312.6	1327.8	1364.0	1398.7	1440.0	1474.1
G43.0	1236.1	1220.8	1206.1	1203.8	1211.7	1228.3	1260.1	1292.3	1332.9	1371.8
G44.0	1145.0	1129.6	1118.0	1117.5	1122.0	1137.9	1169.1	1201.4	1234.4	1277.1
G45.0	1055.3	1044.1	1031.4	1029.6	1035.7	1051.5	1080.9	1112.0	1145.1	1183.7
G46.0	974.2	963.6	954.0	952.3	957.7	972.1	1000.1	1032.6	1061.0	1097.5
G47.0	900.0	894.0	888.9	891.7	895.8	906.3	928.8	958.0	982.8	1013.6
G48.0	834.8	838.9	842.2	845.0	849.3	856.1	876.3	893.1	913.2	939.7
G49.0	780.4	801.6	802.6	800.0	801.8	810.6	831.8	845.0	847.7	870.3
G50.0	738.0	771.3	770.6	761.6	763.0	768.8	793.9	804.3	791.3	806.5
G51.0	697.3	727.8	737.7	730.3	726.6	736.6	759.5	759.9	744.1	745.2
G52.0	659.3	675.3	683.7	681.5	682.8	697.3	720.2	712.8	706.2	698.1
G53.0	624.6	627.9	630.6	625.2	623.0	636.7	661.5	668.8	667.9	660.6
G54.0	589.0	586.5	580.7	572.5	570.8	583.1	607.8	625.0	634.9	625.8
G55.0	554.3	546.8	534.4	523.7	522.3	535.3	561.2	579.0	598.8	593.2
G56.0	517.8	510.9	494.5	484.6	484.0	494.5	518.4	536.8	561.0	563.2
G57.0	487.8	473.3	455.6	449.0	448.5	458.1	477.2	499.0	524.0	532.5
G58.0	458.8	438.8	417.9	414.9	416.0	423.5	440.0	463.0	492.5	499.5
G59.0	432.4	406.6	387.7	384.6	386.0	390.6	405.0	429.9	461.3	467.2
G60.0	406.7	377.5	362.4	359.4	360.2	365.6	378.9	400.2	432.6	436.9
G61.0	380.3	350.7	339.5	338.3	339.2	344.6	354.5	373.6	405.2	409.0
G62.0	354.7	329.5	320.9	321.9	323.1	326.4	333.8	348.3	379.2	383.0
G63.0	331.7	311.5	306.2	307.0	309.1	312.2	317.6	328.0	354.5	358.1
G64.0	314.3	304.7	299.2	295.0	296.4	297.5	304.1	310.4	332.0	336.3
G65.0	299.0	309.9	323.9	339.9	345.2	345.5	332.1	319.5	314.9	316.0
G66.0	279.3	271.6	271.7	276.6	279.9	280.4	292.1	295.5	297.2	297.8
G67.0	263.6	257.8	259.8	263.3	266.4	266.5	268.4	268.6	279.3	281.0
G68.0	250.8	246.6	248.7	251.6	253.5	254.1	256.0	255.7	265.9	267.8
G69.0	239.6	236.5	239.0	240.9	242.4	244.0	245.4	245.2	252.0	256.5
G70.0	230.0	227.7	228.7	230.4	231.7	233.4	236.3	235.1	241.3	247.8
G71.0	220.9	219.1	222.4	223.7	224.4	226.4	229.8	228.1	231.5	239.1
G72.0	210.7	205.6	205.6	207.4	208.8	210.3	214.9	215.7	222.7	229.3
G73.0	201.3	193.6	193.1	193.8	195.5	197.4	200.7	203.4	213.6	221.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	186.1	172.3	170.4	171.4	171.1	173.3	179.0	190.9	204.5	211.2
G75.0	181.8	164.0	162.9	162.9	162.8	164.9	167.4	171.6	186.8	204.4
G76.0	165.7	157.1	154.2	155.1	155.4	156.5	159.2	165.1	184.3	195.7
G77.0	156.3	148.4	146.1	145.4	145.4	147.6	151.3	156.6	166.0	165.8
G78.0	149.4	138.7	131.9	131.3	132.8	137.2	140.8	148.3	158.6	156.0
G79.0	145.1	124.2	121.7	121.7	122.1	123.7	127.2	137.7	150.8	146.9
G80.0	136.8	116.5	110.4	108.5	108.6	110.5	114.9	127.2	145.7	138.1
G81.0	131.8	107.0	103.7	99.9	98.7	102.3	105.7	118.6	140.1	130.7
G82.0	119.8	94.1	83.7	82.1	86.5	86.2	89.8	107.6	136.6	121.1
G83.0	80.2	74.8	73.1	70.3	69.6	72.5	77.1	86.0	108.8	108.7
G84.0	68.1	65.6	64.1	61.6	61.0	63.6	68.6	73.1	81.2	82.1
G85.0	55.3	55.9	55.5	52.7	52.0	55.1	59.0	62.4	66.7	69.7
G86.0	44.5	44.8	43.8	42.3	42.1	44.1	49.3	51.0	53.2	56.1
G87.0	32.6	33.3	32.7	31.8	31.6	33.7	37.0	39.1	41.2	43.2
G88.0	23.1	23.2	22.5	21.8	22.1	23.3	25.6	27.7	29.0	30.9
G89.0	16.0	16.2	15.9	15.3	15.8	16.6	18.4	19.7	20.9	22.5
G90.0	9.6	9.8	9.4	9.3	9.4	10.4	11.9	12.8	14.0	15.5
G91.0	5.5	5.1	4.8	4.8	4.9	5.2	5.8	6.8	7.6	8.3
G92.0	4.3	4.0	3.8	3.8	3.8	3.9	3.9	4.2	4.6	5.0
G93.0	2.5	2.5	2.6	2.8	3.0	3.1	3.2	3.2	3.5	3.0
G94.0	1.8	1.8	1.9	1.9	2.0	2.0	1.9	2.0	2.0	2.0
G95.0	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.7	1.8	1.8
G96.0	1.9	2.0	1.9	1.9	1.9	1.8	1.8	1.9	1.9	1.8
G97.0	2.0	2.0	1.9	1.9	1.9	2.0	1.9	2.0	1.9	1.9
G98.0	2.1	2.0	2.1	2.0	1.9	2.0	2.0	2.0	2.0	2.0
G99.0	2.3	2.1	2.1	2.0	2.1	2.1	2.0	2.1	2.1	2.1
G100.0	2.4	2.3	2.3	2.4	2.3	2.1	2.1	2.3	2.3	2.3
G101.0	2.4	2.4	2.4	2.3	2.3	2.3	2.3	2.3	2.4	2.4
G102.0	2.5	2.5	2.5	2.5	2.4	2.4	2.4	2.5	2.4	2.4
G103.0	2.6	2.5	2.6	2.6	2.5	2.5	2.5	2.6	2.6	2.5
G104.0	2.7	2.7	2.7	2.7	2.7	2.7	2.6	2.6	2.7	2.7
G105.0	3.0	2.8	2.8	2.8	2.8	2.8	2.7	2.7	2.8	2.7
G106.0	3.1	3.0	3.0	3.0	3.0	3.0	2.8	3.0	3.0	2.8
G107.0	3.2	3.1	3.2	3.1	3.1	3.1	3.1	3.1	3.1	3.1
G108.0	3.3	3.3	3.2	3.2	3.2	3.2	3.1	3.2	3.2	3.2
G109.0	3.5	3.5	3.3	3.5	3.5	3.3	3.3	3.3	3.3	3.3
G110.0	3.7	3.7	3.6	3.6	3.6	3.6	3.6	3.5	3.6	3.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	3.9	3.8	3.8	3.8	3.7	3.7	3.7	3.7	3.7	3.7
G112.0	4.0	4.0	4.0	3.9	3.9	3.9	3.9	3.9	3.9	3.9
G113.0	4.3	4.2	4.2	4.2	4.0	4.0	4.0	4.0	4.0	4.2
G114.0	4.5	4.5	4.4	4.4	4.4	4.3	4.4	4.3	4.4	4.3
G115.0	4.8	4.8	4.6	4.6	4.6	4.6	4.5	4.5	4.5	4.5
G116.0	5.0	5.0	4.9	4.9	4.8	4.9	4.9	4.9	4.8	4.6
G117.0	5.2	5.2	5.1	5.1	5.1	5.1	5.1	5.1	5.0	5.0
G118.0	5.6	5.5	5.5	5.3	5.3	5.3	5.3	5.3	5.3	5.3
G119.0	5.9	5.7	5.7	5.7	5.7	5.7	5.7	5.6	5.6	5.6
G120.0	6.1	6.2	6.1	6.1	5.9	5.9	5.9	5.9	5.8	5.8
G121.0	6.5	6.4	6.4	6.4	6.3	6.4	6.2	6.3	6.2	6.2
G122.0	6.9	6.8	6.8	6.8	6.7	6.7	6.7	6.7	6.5	6.5
G123.0	7.3	7.3	7.1	7.1	7.0	7.0	7.0	7.0	7.0	6.9
G124.0	7.6	7.5	7.6	7.5	7.4	7.3	7.4	7.3	7.3	7.3
G125.0	8.1	8.0	8.0	7.8	7.8	7.8	7.7	7.7	7.7	7.7
G126.0	8.4	8.4	8.4	8.3	8.2	8.3	8.1	8.2	8.1	8.1
G127.0	8.9	8.9	8.8	8.8	8.8	8.7	8.6	8.7	8.6	8.6
G128.0	9.5	9.4	9.3	9.3	9.3	9.2	9.0	9.2	9.0	8.9
G129.0	10.0	9.9	9.9	9.6	9.8	9.5	9.5	9.5	9.4	9.4
G130.0	10.5	10.4	10.4	10.2	10.2	10.1	10.1	10.0	10.0	10.0
G131.0	10.9	10.8	10.8	10.7	10.7	10.7	10.7	10.6	10.5	10.5
G132.0	11.5	11.4	11.4	11.3	11.2	11.2	11.2	11.1	10.9	10.9
G133.0	12.0	12.0	11.9	11.9	11.8	11.6	11.6	11.5	11.5	11.5
G134.0	12.6	12.5	12.5	12.4	12.4	12.4	12.1	12.1	12.1	11.9
G135.0	13.2	13.2	13.1	13.0	13.0	12.8	12.8	12.6	12.6	12.6
G136.0	13.8	13.8	13.6	13.6	13.6	13.4	13.3	13.2	13.1	13.1
G137.0	14.4	14.3	14.3	14.1	14.1	14.0	13.8	13.9	13.7	13.7
G138.0	15.0	14.9	14.9	14.8	14.8	14.5	14.4	14.4	14.4	14.3
G139.0	15.6	15.5	15.5	15.3	15.2	15.2	15.0	15.0	15.0	14.9
G140.0	16.2	16.0	16.0	15.9	15.9	15.9	15.6	15.6	15.6	15.5
G141.0	16.8	16.6	16.6	16.5	16.5	16.4	16.2	16.2	16.0	16.0
G142.0	17.4	17.4	17.2	17.2	17.2	17.0	16.9	16.8	16.8	16.6
G143.0	18.1	18.0	18.0	17.8	17.8	17.7	17.5	17.5	17.4	17.4
G144.0	18.5	18.7	18.7	18.5	18.4	18.4	18.2	18.1	18.0	18.0
G145.0	19.3	19.3	19.3	19.1	19.1	19.0	18.8	18.8	18.5	18.5
G146.0	20.0	19.9	19.9	19.9	19.7	19.6	19.4	19.4	19.3	19.1
G147.0	20.6	20.6	20.5	20.5	20.3	20.2	20.0	20.0	19.9	19.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	21.2	21.2	21.0	21.0	20.9	20.8	20.8	20.7	20.5	20.3
G149.0	21.8	21.8	21.6	21.6	21.6	21.4	21.3	21.2	21.2	20.9
G150.0	22.5	22.4	22.4	22.4	22.2	22.1	22.0	21.9	21.8	21.6
G151.0	23.1	23.1	23.0	23.0	22.8	22.7	22.6	22.5	22.4	22.2
G152.0	23.7	23.5	23.5	23.5	23.4	23.3	23.2	23.1	23.0	22.8
G153.0	24.3	24.3	24.3	24.1	24.0	24.0	23.8	23.8	23.5	23.4
G154.0	24.9	24.9	24.7	24.7	24.6	24.6	24.4	24.4	24.3	24.0
G155.0	25.5	25.5	25.5	25.3	25.2	25.1	25.1	25.0	24.9	24.6
G156.0	26.0	25.9	25.9	25.9	25.8	25.7	25.7	25.5	25.5	25.2
G157.0	26.6	26.5	26.5	26.4	26.4	26.4	26.2	26.0	26.0	25.9
G158.0	27.1	27.1	27.2	27.1	27.0	26.9	26.9	26.8	26.6	26.5
G159.0	27.7	27.7	27.7	27.7	27.6	27.6	27.4	27.4	27.2	27.0
G160.0	28.3	28.3	28.3	28.2	28.2	28.1	28.1	27.8	27.8	27.6
G161.0	28.8	28.9	28.9	28.8	28.7	28.8	28.7	28.4	28.4	28.2
G162.0	29.4	29.4	29.4	29.3	29.3	29.4	29.1	29.1	28.9	28.8
G163.0	29.9	29.9	29.9	30.0	29.9	29.9	29.7	29.6	29.5	29.4
G164.0	30.4	30.4	30.4	30.3	30.3	30.3	30.3	30.2	30.1	30.0
G165.0	30.9	30.9	30.9	30.7	31.0	30.9	30.8	30.8	30.7	30.4
G166.0	31.5	31.4	31.5	31.5	31.5	31.6	31.4	31.3	31.2	30.9
G167.0	32.0	32.0	32.0	32.1	32.0	32.1	32.0	31.9	31.6	31.5
G168.0	32.5	32.5	32.5	32.6	32.6	32.6	32.5	32.5	32.1	32.1
G169.0	32.9	32.9	32.9	33.1	33.1	33.1	33.1	32.8	32.7	32.5
G170.0	33.4	33.4	33.4	33.5	33.7	33.5	33.4	33.4	33.2	33.1
G171.0	34.0	33.9	33.9	34.0	34.1	34.1	34.0	33.8	33.5	33.5
G172.0	34.4	34.4	34.4	34.5	34.6	34.6	34.4	34.3	34.0	34.0
G173.0	34.8	34.7	34.8	35.0	35.0	35.1	34.8	34.6	34.5	34.5
G174.0	35.2	35.1	35.1	35.3	35.3	35.3	35.2	35.1	35.0	34.8
G175.0	35.4	35.4	35.6	35.7	35.7	35.8	35.6	35.3	35.3	35.2
G176.0	35.7	35.8	35.9	36.0	36.0	36.2	35.8	35.7	35.6	35.4
G177.0	36.0	36.0	36.2	36.3	36.3	36.2	36.0	35.8	35.8	35.7
G178.0	36.2	36.3	36.3	36.4	36.5	36.4	36.2	36.0	36.0	35.9
G179.0	36.3	36.4	36.5	36.5	36.6	36.5	36.3	36.3	36.0	36.0
G180.0	36.4	36.4	36.5	36.6	36.6	36.6	36.3	36.3	36.3	36.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	5797.1	5798.9	5793.0	5797.1	5796.1	5791.0	5786.5	5788.9	5782.9	5776.8
G1.0	5807.0	5807.5	5800.6	5804.8	5805.2	5800.5	5796.8	5800.6	5794.3	5791.2
G2.0	5809.7	5810.7	5802.0	5808.7	5809.4	5805.6	5801.4	5805.6	5800.7	5798.1
G3.0	5806.0	5803.7	5796.2	5805.5	5805.1	5804.1	5800.8	5806.0	5801.5	5799.5
G4.0	5794.6	5793.5	5792.9	5796.8	5797.3	5795.7	5792.9	5800.0	5793.8	5790.2
G5.0	5777.2	5775.5	5775.7	5780.8	5781.2	5778.7	5779.2	5784.3	5779.6	5777.9
G6.0	5751.5	5752.7	5752.4	5760.7	5759.9	5757.4	5763.1	5765.4	5760.3	5764.1
G7.0	5723.4	5726.3	5722.9	5731.4	5734.9	5734.2	5739.6	5739.0	5735.3	5734.8
G8.0	5688.6	5690.7	5690.1	5700.3	5702.6	5700.6	5707.4	5704.5	5703.0	5704.0
G9.0	5649.5	5654.1	5653.5	5663.0	5669.4	5661.6	5670.3	5670.6	5667.6	5666.7
G10.0	5601.8	5608.9	5614.0	5620.1	5624.9	5618.6	5622.4	5624.9	5624.9	5624.1
G11.0	5553.7	5556.6	5562.4	5568.0	5572.7	5569.6	5574.8	5574.5	5574.5	5570.0
G12.0	5491.3	5499.6	5505.5	5512.7	5518.0	5515.9	5518.1	5520.5	5516.8	5514.3
G13.0	5429.8	5436.6	5446.3	5447.4	5455.4	5451.2	5455.6	5454.2	5456.0	5447.4
G14.0	5358.6	5365.6	5371.2	5378.1	5384.0	5380.7	5384.8	5383.3	5381.0	5375.9
G15.0	5279.2	5285.2	5297.7	5296.8	5308.6	5306.2	5307.7	5304.7	5305.0	5296.2
G16.0	5190.2	5200.9	5210.6	5214.1	5223.5	5223.1	5226.1	5223.1	5219.5	5215.6
G17.0	5098.2	5106.7	5123.7	5124.3	5132.1	5127.4	5134.5	5130.8	5129.9	5118.3
G18.0	4995.5	5006.3	5018.9	5027.0	5035.5	5035.3	5038.8	5034.7	5029.3	5022.8
G19.0	4890.0	4899.5	4921.0	4919.4	4935.1	4926.5	4934.6	4929.0	4926.0	4916.6
G20.0	4777.9	4788.6	4806.5	4812.4	4817.8	4818.8	4824.6	4822.1	4815.9	4807.8
G21.0	4655.9	4670.4	4689.9	4694.1	4707.2	4702.5	4708.3	4704.7	4704.6	4691.5
G22.0	4530.0	4543.7	4563.6	4565.6	4580.6	4581.3	4588.0	4583.3	4578.6	4571.7
G23.0	4397.7	4412.7	4438.0	4440.7	4451.7	4452.9	4460.0	4456.3	4447.5	4440.7
G24.0	4259.0	4275.4	4302.1	4303.6	4320.9	4319.3	4326.7	4319.9	4313.7	4303.4
G25.0	4115.4	4137.1	4169.0	4169.8	4182.5	4178.9	4189.8	4179.9	4171.5	4154.4
G26.0	3964.6	3992.2	4021.6	4033.9	4042.6	4043.1	4045.3	4032.5	4024.6	4002.9
G27.0	3808.4	3839.9	3875.0	3880.6	3900.8	3894.1	3893.6	3875.6	3864.0	3838.5
G28.0	3637.8	3679.4	3717.6	3732.3	3743.9	3740.1	3741.7	3713.2	3697.6	3668.6
G29.0	3469.6	3510.4	3564.6	3578.2	3593.8	3578.3	3573.6	3543.1	3520.4	3488.5
G30.0	3292.4	3352.5	3402.2	3423.2	3437.8	3420.1	3402.9	3372.4	3342.5	3310.9
G31.0	3114.9	3180.5	3242.0	3263.4	3275.4	3249.4	3228.9	3185.5	3162.6	3122.4
G32.0	2925.8	3008.0	3071.7	3105.5	3109.1	3088.0	3054.4	3013.8	2971.7	2944.6
G33.0	2742.5	2824.2	2908.1	2932.8	2946.4	2913.8	2877.3	2835.4	2804.1	2766.0
G34.0	2564.4	2651.7	2736.9	2771.8	2775.6	2745.9	2707.3	2658.2	2625.9	2599.5
G35.0	2398.3	2477.8	2568.9	2604.8	2611.9	2570.7	2534.0	2489.5	2471.2	2441.8
G36.0	2243.9	2309.4	2398.5	2440.6	2444.8	2406.1	2367.9	2329.8	2317.8	2296.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	2101.0	2155.1	2235.4	2275.7	2283.3	2245.7	2215.5	2186.9	2173.0	2157.3
G38.0	1964.3	2010.5	2074.1	2111.7	2118.4	2090.1	2071.8	2047.8	2035.3	2016.2
G39.0	1836.1	1869.6	1920.9	1949.8	1962.2	1938.5	1934.7	1912.8	1908.3	1893.0
G40.0	1712.9	1743.3	1776.7	1798.2	1816.0	1808.8	1804.1	1790.8	1784.8	1767.5
G41.0	1604.8	1623.4	1645.7	1648.1	1676.4	1679.0	1683.8	1669.5	1663.7	1645.9
G42.0	1499.6	1511.0	1517.5	1520.2	1546.6	1564.0	1573.9	1557.4	1547.5	1532.7
G43.0	1405.1	1407.4	1402.6	1393.6	1426.6	1453.0	1466.4	1449.9	1435.8	1420.2
G44.0	1311.0	1312.6	1297.9	1286.5	1318.1	1355.5	1366.5	1349.9	1332.6	1317.6
G45.0	1219.9	1224.9	1201.0	1186.9	1219.2	1261.3	1268.8	1252.7	1234.8	1221.0
G46.0	1136.6	1143.1	1119.5	1101.7	1132.2	1175.1	1183.3	1161.6	1144.6	1131.2
G47.0	1049.1	1060.4	1041.4	1026.8	1053.8	1088.1	1096.4	1073.4	1059.7	1043.1
G48.0	974.5	988.6	975.2	963.3	984.8	1012.5	1018.0	993.3	979.0	965.5
G49.0	900.5	915.3	913.1	904.0	921.4	939.2	942.7	918.0	901.7	896.4
G50.0	833.0	848.6	855.8	853.8	862.9	869.3	870.7	847.3	832.9	843.2
G51.0	767.8	784.4	805.0	807.2	808.8	806.6	801.8	779.5	775.8	797.5
G52.0	709.1	727.3	755.0	767.0	757.6	748.0	741.2	721.8	730.8	752.9
G53.0	653.6	675.1	708.2	727.0	712.0	694.7	682.8	677.7	688.2	706.0
G54.0	606.6	626.2	665.6	688.3	669.3	644.0	633.3	640.3	648.5	655.6
G55.0	566.3	580.0	623.6	650.5	628.5	597.3	590.3	603.9	608.9	610.1
G56.0	534.8	538.7	584.6	612.2	590.9	554.5	555.7	571.2	572.5	568.8
G57.0	504.9	501.6	548.9	575.1	554.3	517.3	523.6	540.1	537.0	525.9
G58.0	477.0	470.8	514.5	539.7	520.4	487.0	494.7	508.6	506.1	487.2
G59.0	451.9	447.4	480.9	506.0	486.6	462.8	468.3	479.1	473.9	451.5
G60.0	428.8	426.9	450.8	472.7	456.1	439.8	442.9	451.8	443.1	419.3
G61.0	403.4	406.1	422.2	440.6	429.5	416.5	415.5	426.2	411.5	392.1
G62.0	379.8	388.0	397.2	409.7	406.2	396.2	390.1	401.4	383.4	368.1
G63.0	357.6	371.3	376.4	380.7	385.3	377.8	368.5	379.2	358.2	342.4
G64.0	338.3	353.8	357.2	352.6	365.3	358.9	349.4	357.1	337.3	326.2
G65.0	321.3	336.3	338.9	328.9	347.0	342.1	332.4	337.0	320.7	312.5
G66.0	304.1	319.8	322.4	306.0	329.9	328.0	316.9	317.2	307.0	311.8
G67.0	287.7	302.5	306.3	288.4	315.7	314.9	301.8	299.8	291.7	285.0
G68.0	274.1	286.7	291.4	273.8	299.3	299.2	288.9	285.0	277.0	270.7
G69.0	262.3	273.9	275.5	261.7	280.5	286.2	276.5	272.0	263.2	259.4
G70.0	252.2	262.9	260.7	251.0	266.7	274.4	264.6	260.1	251.9	250.0
G71.0	242.7	253.1	247.2	241.6	253.9	262.7	254.3	249.7	241.3	240.6
G72.0	235.5	241.1	233.4	232.4	240.0	252.1	245.4	240.7	231.3	230.8
G73.0	227.6	230.5	220.6	223.7	226.5	239.6	238.4	232.6	221.8	218.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	218.0	218.0	210.7	214.9	215.4	229.6	233.6	226.8	214.1	207.5
G75.0	204.5	207.0	201.3	206.4	205.5	215.4	220.8	219.4	208.6	197.9
G76.0	190.1	194.4	191.8	197.2	196.2	203.7	208.4	210.4	199.4	187.4
G77.0	169.0	177.2	182.1	186.8	187.2	193.3	196.3	201.2	192.8	177.8
G78.0	157.8	161.5	166.1	174.0	177.8	182.9	184.9	192.8	182.3	167.7
G79.0	147.5	151.6	153.3	159.5	166.5	172.1	172.9	177.6	170.9	154.9
G80.0	139.4	141.8	142.8	145.7	155.7	160.1	161.9	163.6	159.1	142.5
G81.0	131.3	130.0	131.3	132.2	140.2	146.9	147.3	148.1	142.9	124.2
G82.0	124.5	120.5	120.9	121.2	123.8	123.4	128.8	134.9	132.5	111.8
G83.0	116.8	108.6	108.8	107.3	110.4	110.8	114.9	124.2	124.9	101.9
G84.0	94.9	94.3	94.1	93.7	97.3	99.2	102.5	108.3	112.7	89.9
G85.0	79.2	77.8	78.4	80.2	82.5	85.0	87.8	86.5	93.5	76.7
G86.0	63.7	63.9	65.4	65.9	68.0	69.1	69.0	69.6	75.6	65.4
G87.0	50.0	49.1	50.5	51.0	53.6	54.5	54.2	54.0	56.6	50.9
G88.0	34.0	35.7	37.0	37.3	39.6	40.2	40.7	40.9	40.5	37.2
G89.0	23.4	24.4	25.2	26.0	28.3	28.7	29.7	29.6	29.0	26.3
G90.0	16.0	16.6	17.2	17.6	18.5	19.0	19.6	19.9	19.3	17.7
G91.0	9.0	9.4	10.2	10.0	10.8	10.6	10.8	10.7	10.4	9.4
G92.0	5.2	5.2	5.3	5.5	5.2	5.0	4.6	4.3	3.8	3.5
G93.0	3.6	3.7	3.7	3.6	3.3	3.2	3.0	2.6	2.3	2.1
G94.0	1.9	1.9	1.8	1.9	2.3	2.4	2.4	2.3	2.1	2.1
G95.0	1.8	1.8	1.8	1.8	1.7	1.8	2.0	1.9	1.9	1.9
G96.0	1.9	1.9	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8
G97.0	2.0	1.9	1.9	1.9	1.8	1.9	1.9	1.9	1.8	1.8
G98.0	2.0	2.0	2.0	2.0	1.9	1.9	1.9	1.9	1.9	1.9
G99.0	2.1	2.1	2.1	2.1	2.0	2.0	2.0	2.0	2.0	2.0
G100.0	2.3	2.1	2.1	2.3	2.1	2.1	2.1	2.1	2.1	2.0
G101.0	2.4	2.3	2.3	2.4	2.3	2.3	2.3	2.1	2.1	2.1
G102.0	2.4	2.5	2.5	2.4	2.4	2.4	2.3	2.3	2.3	2.3
G103.0	2.5	2.6	2.5	2.5	2.5	2.4	2.4	2.4	2.4	2.4
G104.0	2.6	2.6	2.6	2.6	2.5	2.5	2.5	2.5	2.5	2.5
G105.0	2.7	2.8	2.7	2.8	2.6	2.7	2.6	2.6	2.6	2.6
G106.0	2.8	2.8	2.8	2.8	2.8	2.8	2.7	2.7	2.7	2.7
G107.0	3.1	3.1	3.0	3.0	3.0	3.0	2.8	3.0	2.8	2.8
G108.0	3.2	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.0
G109.0	3.3	3.3	3.3	3.3	3.2	3.2	3.2	3.2	3.2	3.1
G110.0	3.5	3.5	3.5	3.5	3.5	3.5	3.3	3.2	3.2	3.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	3.8	3.7	3.7	3.6	3.6	3.5	3.6	3.6	3.5	3.5
G112.0	3.8	3.8	3.8	3.8	3.7	3.7	3.7	3.7	3.7	3.6
G113.0	4.0	4.0	4.0	4.0	3.9	3.9	3.9	3.9	3.8	3.8
G114.0	4.3	4.3	4.3	4.3	4.2	4.2	4.2	4.0	4.0	4.0
G115.0	4.5	4.5	4.5	4.4	4.3	4.3	4.3	4.3	4.3	4.3
G116.0	4.8	4.8	4.8	4.8	4.6	4.6	4.6	4.5	4.5	4.5
G117.0	5.0	4.9	5.0	5.0	4.8	4.9	4.8	4.8	4.6	4.8
G118.0	5.2	5.3	5.2	5.2	5.0	5.1	5.0	5.0	5.0	5.0
G119.0	5.6	5.6	5.5	5.5	5.3	5.3	5.2	5.2	5.2	5.2
G120.0	5.8	5.8	5.8	5.8	5.7	5.7	5.6	5.6	5.5	5.5
G121.0	6.1	6.2	6.2	6.2	6.1	6.1	5.9	5.8	5.7	5.8
G122.0	6.5	6.4	6.4	6.5	6.3	6.3	6.2	6.2	6.1	6.1
G123.0	6.9	6.9	6.8	6.8	6.7	6.7	6.5	6.5	6.5	6.4
G124.0	7.3	7.3	7.1	7.1	7.0	7.0	6.9	6.9	6.8	6.8
G125.0	7.6	7.6	7.5	7.6	7.5	7.4	7.4	7.3	7.1	7.1
G126.0	8.1	8.1	8.1	8.0	7.8	7.8	7.7	7.6	7.5	7.5
G127.0	8.4	8.6	8.3	8.3	8.3	8.2	8.2	8.1	8.0	8.0
G128.0	8.9	8.9	8.8	8.8	8.7	8.8	8.6	8.6	8.4	8.4
G129.0	9.4	9.4	9.3	9.3	9.2	9.2	9.0	9.0	8.9	8.8
G130.0	9.9	9.9	9.8	9.8	9.8	9.6	9.5	9.5	9.3	9.3
G131.0	10.4	10.4	10.2	10.2	10.1	10.1	10.0	9.8	9.9	9.8
G132.0	10.9	10.8	10.7	10.7	10.6	10.6	10.5	10.5	10.4	10.4
G133.0	11.4	11.3	11.3	11.3	11.2	11.2	11.1	10.9	10.9	10.8
G134.0	12.0	11.9	11.8	11.8	11.6	11.6	11.6	11.5	11.4	11.4
G135.0	12.5	12.5	12.4	12.4	12.3	12.1	12.1	12.0	12.0	11.9
G136.0	13.0	13.0	12.7	13.0	12.7	12.8	12.7	12.6	12.5	12.5
G137.0	13.6	13.4	13.4	13.4	13.4	13.2	13.2	13.1	13.1	13.1
G138.0	14.1	14.0	14.0	14.0	13.9	13.9	13.8	13.7	13.7	13.7
G139.0	14.8	14.8	14.5	14.6	14.5	14.5	14.4	14.4	14.3	14.3
G140.0	15.5	15.3	15.2	15.1	15.1	15.1	15.0	15.0	14.9	14.8
G141.0	15.9	15.8	15.8	15.8	15.8	15.7	15.6	15.6	15.5	15.5
G142.0	16.5	16.5	16.4	16.4	16.3	16.3	16.2	16.2	16.0	16.2
G143.0	17.1	17.1	17.1	17.0	17.0	16.9	16.8	16.8	16.8	16.8
G144.0	17.7	17.7	17.7	17.6	17.6	17.5	17.4	17.4	17.2	17.4
G145.0	18.4	18.3	18.2	18.2	18.1	18.2	18.1	18.1	18.0	18.0
G146.0	19.0	19.0	18.9	18.9	18.7	18.8	18.7	18.7	18.7	18.5
G147.0	19.6	19.5	19.5	19.5	19.4	19.4	19.3	19.3	19.1	19.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	20.2	20.2	20.1	20.1	20.0	20.1	20.0	19.9	19.7	19.9
G149.0	20.9	20.8	20.7	20.7	20.6	20.6	20.6	20.5	20.5	20.5
G150.0	21.4	21.4	21.3	21.3	21.2	21.2	21.2	21.2	21.0	21.0
G151.0	22.1	22.0	21.9	21.9	21.8	21.9	21.8	21.8	21.8	21.8
G152.0	22.7	22.6	22.5	22.5	22.4	22.5	22.4	22.4	22.2	21.9
G153.0	23.3	23.2	23.2	23.1	23.0	23.1	23.0	23.0	22.8	23.0
G154.0	23.9	23.8	23.8	23.7	23.7	23.5	23.5	23.5	23.5	23.5
G155.0	24.5	24.5	24.4	24.3	24.1	24.1	24.1	24.3	24.1	24.1
G156.0	25.1	25.0	24.9	24.9	24.7	24.9	24.7	24.7	24.7	24.6
G157.0	25.7	25.6	25.6	25.5	25.3	25.3	25.3	25.3	25.2	25.2
G158.0	26.3	26.2	26.0	26.2	25.9	25.8	25.9	25.9	25.8	25.9
G159.0	27.0	26.8	26.8	26.6	26.6	26.5	26.5	26.5	26.4	26.5
G160.0	27.5	27.4	27.4	27.2	27.1	27.1	27.0	27.1	27.0	27.0
G161.0	28.1	28.0	27.8	27.8	27.7	27.7	27.7	27.7	27.6	27.6
G162.0	28.5	28.5	28.4	28.4	28.3	28.3	28.2	28.2	28.2	28.2
G163.0	29.1	29.1	29.0	29.0	28.8	28.8	28.8	28.8	28.7	28.7
G164.0	29.7	29.6	29.6	29.5	29.4	29.4	29.4	29.4	29.1	29.4
G165.0	30.3	30.2	30.2	30.1	30.0	30.1	29.9	29.9	29.9	30.0
G166.0	30.9	30.8	30.7	30.7	30.6	30.6	30.4	30.4	30.4	30.4
G167.0	31.4	31.3	31.3	31.2	31.2	31.0	31.0	30.9	30.9	30.9
G168.0	32.0	31.9	31.8	31.8	31.6	31.5	31.5	31.5	31.5	31.5
G169.0	32.5	32.5	32.3	32.2	32.2	32.1	32.0	32.0	32.0	32.0
G170.0	32.9	32.9	32.7	32.8	32.6	32.7	32.6	32.6	32.5	32.6
G171.0	33.4	33.4	33.3	33.2	33.2	33.2	33.1	33.1	33.1	32.9
G172.0	33.9	33.8	33.8	33.8	33.7	33.7	33.5	33.5	33.4	33.4
G173.0	34.4	34.3	34.1	34.3	34.1	34.1	34.1	34.0	34.0	33.9
G174.0	34.7	34.7	34.6	34.6	34.5	34.6	34.5	34.5	34.4	34.3
G175.0	35.1	35.1	35.0	35.0	35.0	35.0	34.8	34.8	34.7	34.7
G176.0	35.3	35.4	35.3	35.4	35.3	35.3	35.2	35.2	35.1	35.0
G177.0	35.7	35.7	35.7	35.7	35.6	35.6	35.4	35.6	35.4	35.4
G178.0	35.9	35.9	35.9	35.9	35.8	35.8	35.8	35.8	35.8	35.7
G179.0	36.0	36.0	36.2	36.0	36.0	36.0	36.0	36.0	35.9	35.9
G180.0	36.2	36.2	36.2	36.2	36.2	36.3	36.2	36.2	36.0	36.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G0.0	5776.4	5772.5	5854.9							
G1.0	5788.3	5787.0	5849.1							
G2.0	5798.6	5796.9	5838.0							
G3.0	5798.9	5798.7	5824.5							
G4.0	5795.0	5790.5	5802.6							
G5.0	5781.2	5776.8	5775.9							
G6.0	5763.2	5757.8	5740.9							
G7.0	5738.4	5733.8	5702.1							
G8.0	5706.9	5703.5	5654.0							
G9.0	5670.5	5670.8	5599.6							
G10.0	5626.7	5625.6	5540.6							
G11.0	5577.3	5574.4	5471.8							
G12.0	5520.8	5517.7	5392.0							
G13.0	5456.5	5451.1	5313.4							
G14.0	5378.6	5379.4	5222.3							
G15.0	5302.4	5304.2	5133.0							
G16.0	5217.4	5217.9	5033.1							
G17.0	5125.4	5126.2	4923.0							
G18.0	5027.2	5025.0	4807.0							
G19.0	4921.6	4920.8	4692.0							
G20.0	4810.6	4809.4	4560.0							
G21.0	4695.2	4694.5	4423.6							
G22.0	4566.1	4566.0	4280.0							
G23.0	4436.3	4437.0	4126.8							
G24.0	4291.8	4290.8	3960.9							
G25.0	4147.4	4149.9	3794.4							
G26.0	3990.0	3986.9	3614.6							
G27.0	3825.9	3818.2	3436.2							
G28.0	3654.7	3646.6	3247.2							
G29.0	3474.1	3466.1	3064.6							
G30.0	3286.3	3282.1	2888.0							
G31.0	3104.2	3097.3	2723.8							
G32.0	2922.9	2911.2	2567.7							
G33.0	2749.9	2742.5	2409.7							
G34.0	2585.1	2578.9	2267.2							
G35.0	2429.2	2426.4	2132.5							
G36.0	2284.2	2275.5	1992.0							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	2146.8	2141.3	1863.8						
G38.0	2013.1	2005.4	1734.2						
G39.0	1883.2	1873.5	1612.3						
G40.0	1754.0	1744.0	1497.8						
G41.0	1632.9	1616.3	1388.5						
G42.0	1509.7	1496.1	1283.6						
G43.0	1402.2	1388.0	1186.0						
G44.0	1301.0	1285.2	1095.4						
G45.0	1199.7	1182.5	1010.8						
G46.0	1106.4	1092.6	938.8						
G47.0	1020.1	1005.8	880.6						
G48.0	942.6	930.4	830.1						
G49.0	882.9	873.3	796.0						
G50.0	836.6	823.6	766.2						
G51.0	798.5	787.8	714.5						
G52.0	765.3	760.8	654.4						
G53.0	716.3	708.7	589.1						
G54.0	653.1	645.6	542.3						
G55.0	597.6	581.3	502.0						
G56.0	552.7	536.3	468.1						
G57.0	510.6	494.4	435.4						
G58.0	473.4	458.9	406.4						
G59.0	438.9	427.4	380.1						
G60.0	408.4	398.1	360.0						
G61.0	382.8	373.8	340.2						
G62.0	359.3	353.3	320.9						
G63.0	336.4	332.9	303.8						
G64.0	318.7	313.8	295.0						
G65.0	302.8	298.1	296.8						
G66.0	308.0	301.2	270.8						
G67.0	284.1	282.5	260.0						
G68.0	267.0	264.6	250.2						
G69.0	256.8	255.7	240.0						
G70.0	246.8	245.0	230.1						
G71.0	237.3	235.2	221.1						
G72.0	228.2	226.1	209.4						
G73.0	217.0	215.3	198.4						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	206.6	204.1	188.3						
G75.0	196.2	193.1	176.6						
G76.0	185.6	183.4	164.9						
G77.0	174.3	171.5	150.9						
G78.0	162.7	159.8	136.3						
G79.0	148.9	144.1	118.3						
G80.0	133.9	128.0	105.6						
G81.0	116.1	112.3	98.9						
G82.0	105.7	102.2	83.2						
G83.0	93.7	92.6	71.3						
G84.0	82.2	77.9	59.5						
G85.0	71.0	66.4	49.5						
G86.0	59.2	54.9	38.5						
G87.0	46.7	43.9	28.2						
G88.0	35.1	32.7	19.6						
G89.0	24.6	23.4	12.3						
G90.0	16.6	15.8	4.3						
G91.0	8.6	7.8	2.5						
G92.0	3.2	3.0	2.0						
G93.0	2.1	2.0	2.1						
G94.0	2.1	2.0	1.9						
G95.0	2.0	1.9	1.9						
G96.0	1.8	1.8	1.9						
G97.0	1.8	1.8	1.9						
G98.0	1.9	1.9	2.0						
G99.0	2.0	2.0	2.3						
G100.0	2.0	2.0	2.3						
G101.0	2.3	2.1	2.4						
G102.0	2.3	2.3	2.5						
G103.0	2.4	2.4	2.6						
G104.0	2.5	2.5	2.7						
G105.0	2.6	2.6	2.8						
G106.0	2.7	2.7	3.0						
G107.0	2.8	2.7	3.1						
G108.0	3.0	3.0	3.3						
G109.0	3.1	3.1	3.1						
G110.0	3.2	3.2	3.7						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	3.5	3.3	3.8							
G112.0	3.7	3.6	4.0							
G113.0	3.8	3.8	4.2							
G114.0	4.0	3.9	4.4							
G115.0	4.2	4.2	4.6							
G116.0	4.5	4.5	4.9							
G117.0	4.6	4.6	5.1							
G118.0	4.9	4.9	5.5							
G119.0	5.2	5.1	5.7							
G120.0	5.5	5.5	6.1							
G121.0	5.7	5.7	6.4							
G122.0	5.9	6.1	6.8							
G123.0	6.3	6.3	7.1							
G124.0	6.7	6.7	7.5							
G125.0	7.1	7.0	8.0							
G126.0	7.4	7.4	8.4							
G127.0	7.8	7.8	8.8							
G128.0	8.4	8.3	9.3							
G129.0	8.8	8.7	9.9							
G130.0	9.3	9.2	10.4							
G131.0	9.8	9.6	10.8							
G132.0	10.2	10.2	11.4							
G133.0	10.8	10.7	11.9							
G134.0	11.3	11.2	12.6							
G135.0	11.9	11.8	13.2							
G136.0	12.4	12.4	13.8							
G137.0	13.0	13.0	14.4							
G138.0	13.7	13.6	15.1							
G139.0	14.3	14.1	15.7							
G140.0	14.9	14.6	16.3							
G141.0	15.3	15.3	16.9							
G142.0	15.9	16.0	17.6							
G143.0	16.6	16.6	18.2							
G144.0	17.2	17.2	18.9							
G145.0	18.0	17.8	19.5							
G146.0	18.5	18.5	20.2							
G147.0	19.1	19.1	20.8							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	19.7	19.7	21.4							
G149.0	20.5	20.5	22.1							
G150.0	21.0	21.0	22.7							
G151.0	21.8	21.6	23.4							
G152.0	22.4	22.2	23.9							
G153.0	22.8	23.0	24.6							
G154.0	23.5	23.4	25.2							
G155.0	24.1	24.1	25.8							
G156.0	24.7	24.7	26.5							
G157.0	25.3	25.2	27.0							
G158.0	25.9	25.8	27.5							
G159.0	26.5	26.4	28.1							
G160.0	27.0	27.0	28.7							
G161.0	27.6	27.6	29.3							
G162.0	28.2	28.1	29.7							
G163.0	28.7	28.7	30.2							
G164.0	29.3	29.1	30.7							
G165.0	29.7	29.9	31.3							
G166.0	30.3	30.4	31.8							
G167.0	30.8	30.9	32.2							
G168.0	31.4	31.4	32.8							
G169.0	32.0	32.0	33.3							
G170.0	32.5	32.5	33.8							
G171.0	32.9	32.9	34.3							
G172.0	33.4	33.4	34.7							
G173.0	33.8	33.9	35.1							
G174.0	34.3	34.5	35.4							
G175.0	34.7	34.8	35.8							
G176.0	35.1	35.2	36.2							
G177.0	35.4	35.6	36.4							
G178.0	35.7	35.8	36.8							
G179.0	35.9	36.0	37.0							
G180.0	36.3	36.2	37.0							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector: