

Report No.:

Test Time: 2021-03-01 16:31

Luminaire Property

Luminaire Manufacturer:
Lamp Catalog: EG-2 Linza 60w
Luminous Width (mm): 205
Voltage: 226.2 V
Power: 58.96 W

Luminous Length (mm): 180
Luminous Height (mm): 105
Current: 0.266 A
Power Factor: 0.977


Photometric Results

CIE Class: Direct
Measurement Flux: 8946.9 lm
Downward Ratio: 99%
Horizontal Diffuse Angle(50%): H59.8
Vertical Diffuse Angle(50%): V60.3
Luminaire Efficacy Rating (LER): 152
Max. Intensity: 9022.97 cd


Total Rated Lamp Lumens: 8946.9 lm
Efficiency: 100%
Upward Ratio: 1%

Central Intensity: 9008.22 cd
Pos of Max. Intensity: H30 V0

Picture Of Luminaire





Luminous Intensity Distribution Curve

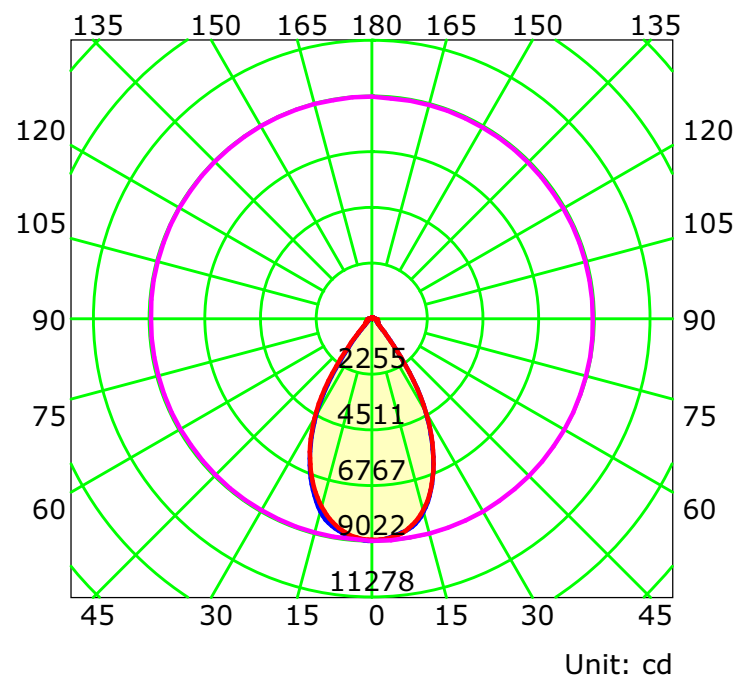

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:


Luminous Intensity Distribution Curve

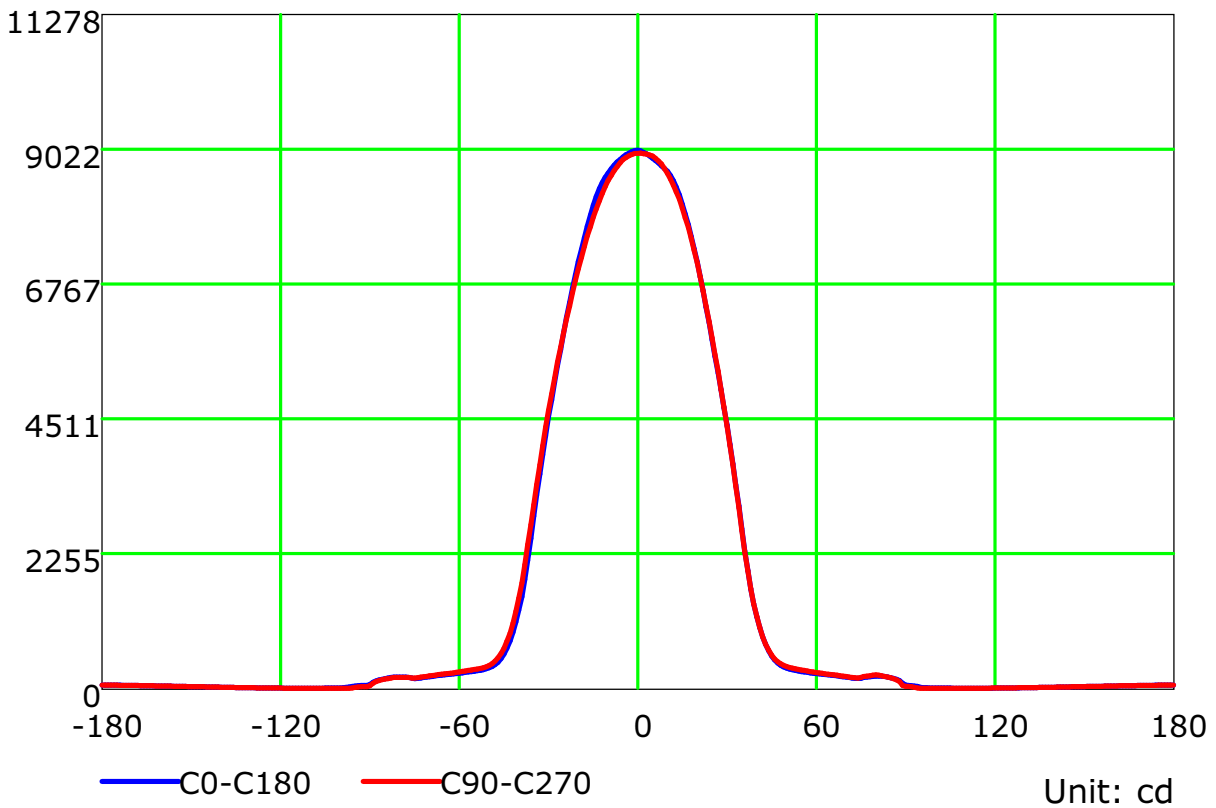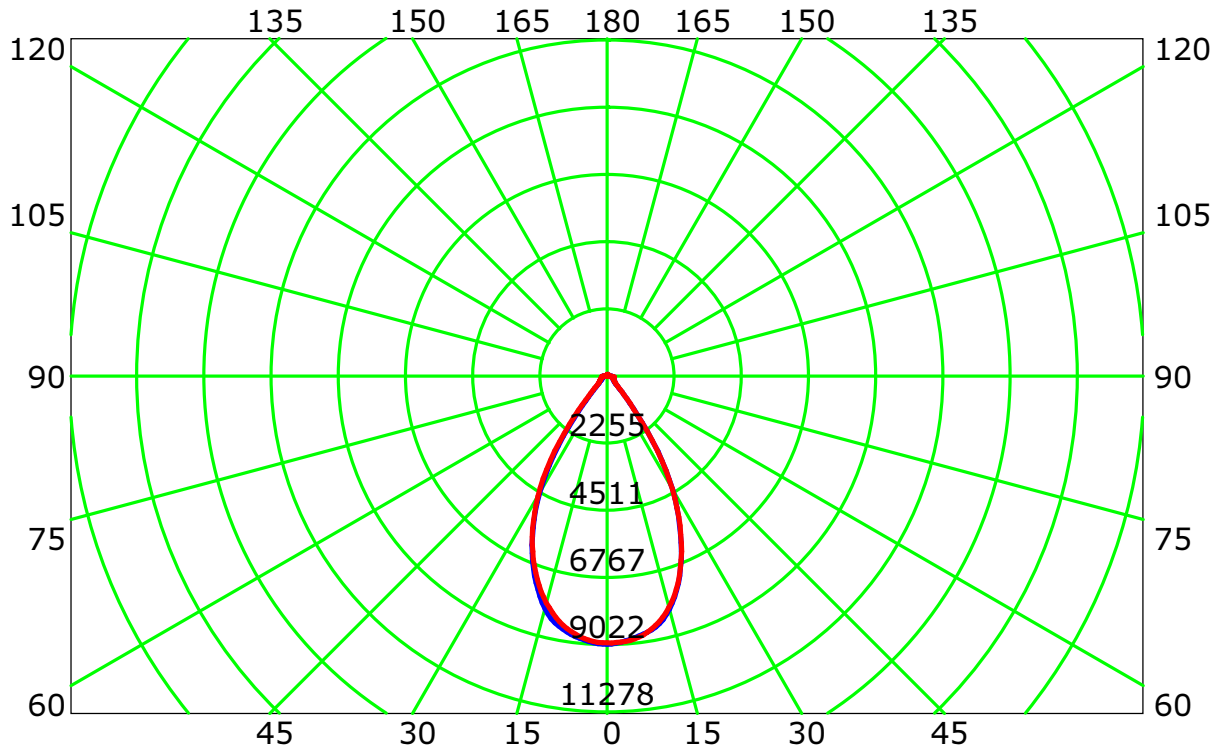

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

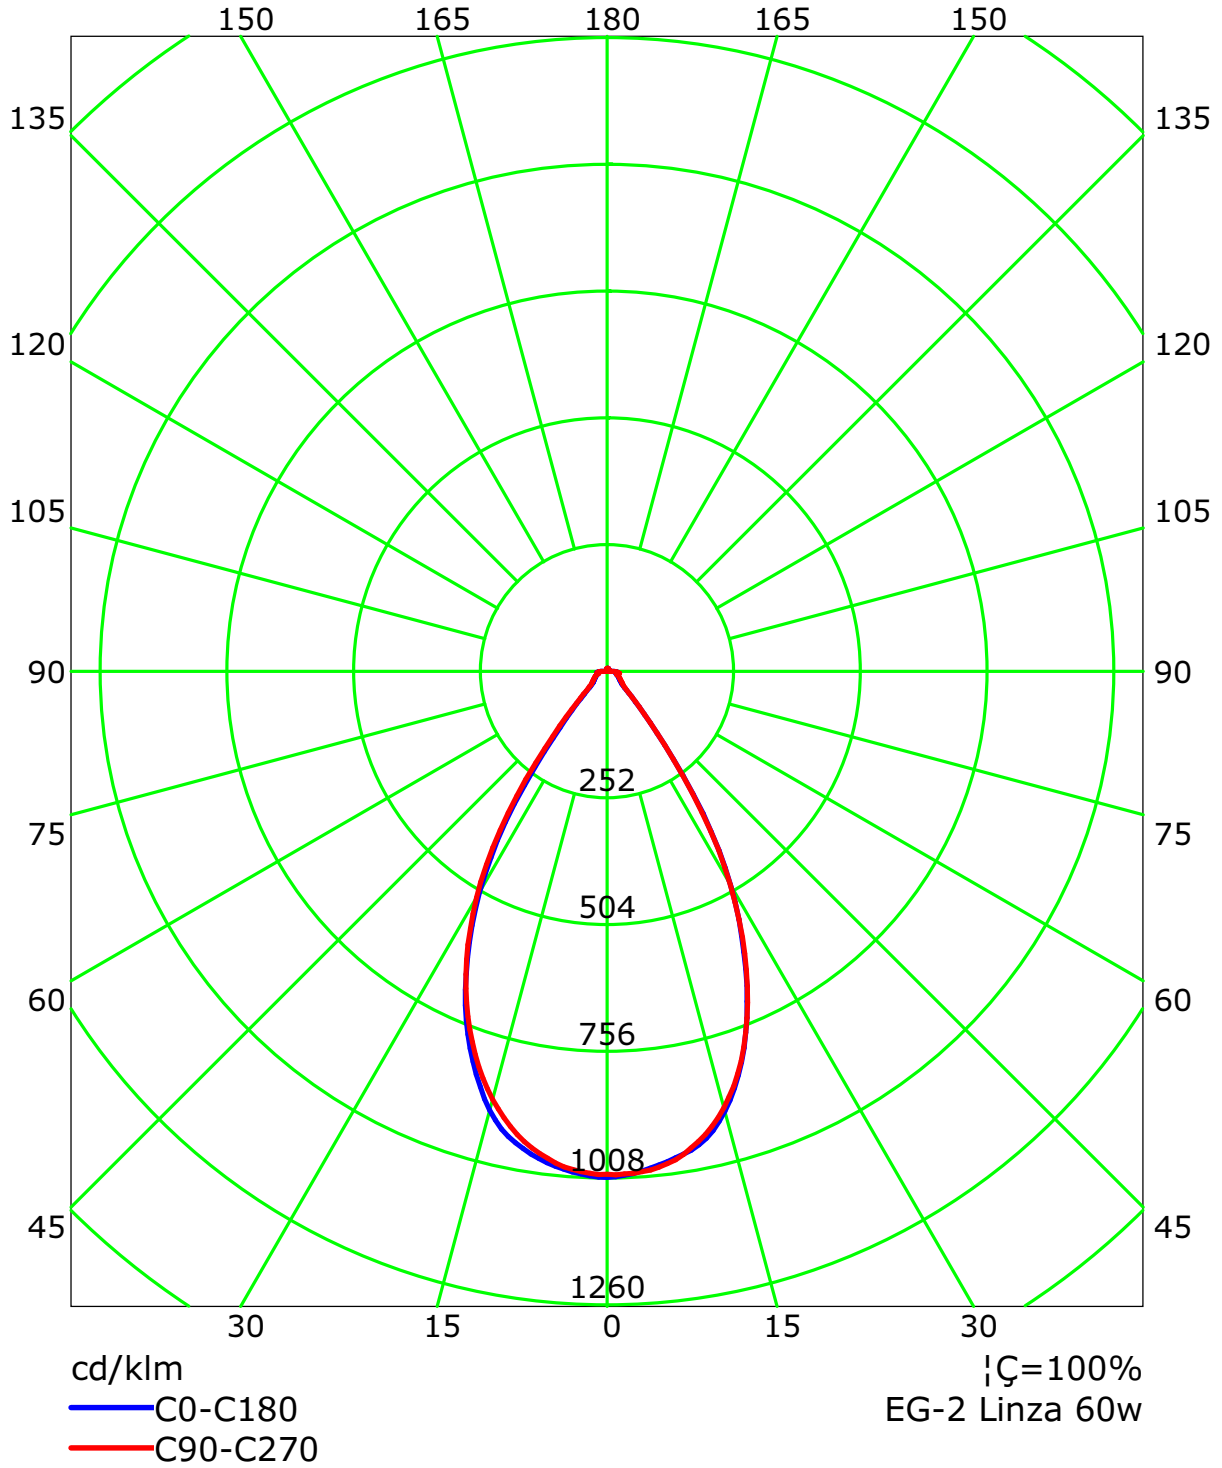


C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	110	110	110	106	106	106	101	101	101	99
1	112	108	105	103	109	106	103	101	102	100	98	98	96	94	94	93	91	89
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	88	86	84	82
3	99	92	86	82	97	91	85	81	88	83	80	85	81	78	83	79	77	75
4	94	85	79	75	92	84	78	74	82	77	73	80	75	72	78	74	71	69
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	64
6	84	74	68	63	82	74	67	63	72	66	62	70	65	62	69	65	61	60
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56
8	76	65	59	55	74	65	59	54	64	58	54	62	58	54	61	57	54	52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49
10	69	58	52	48	67	58	52	48	57	51	48	56	51	48	55	51	47	46


Spacing Criteria (0-180): 0.92
 Spacing Criteria (90-270): 0.92
 Spacing Criteria (Diagonal): 0.88

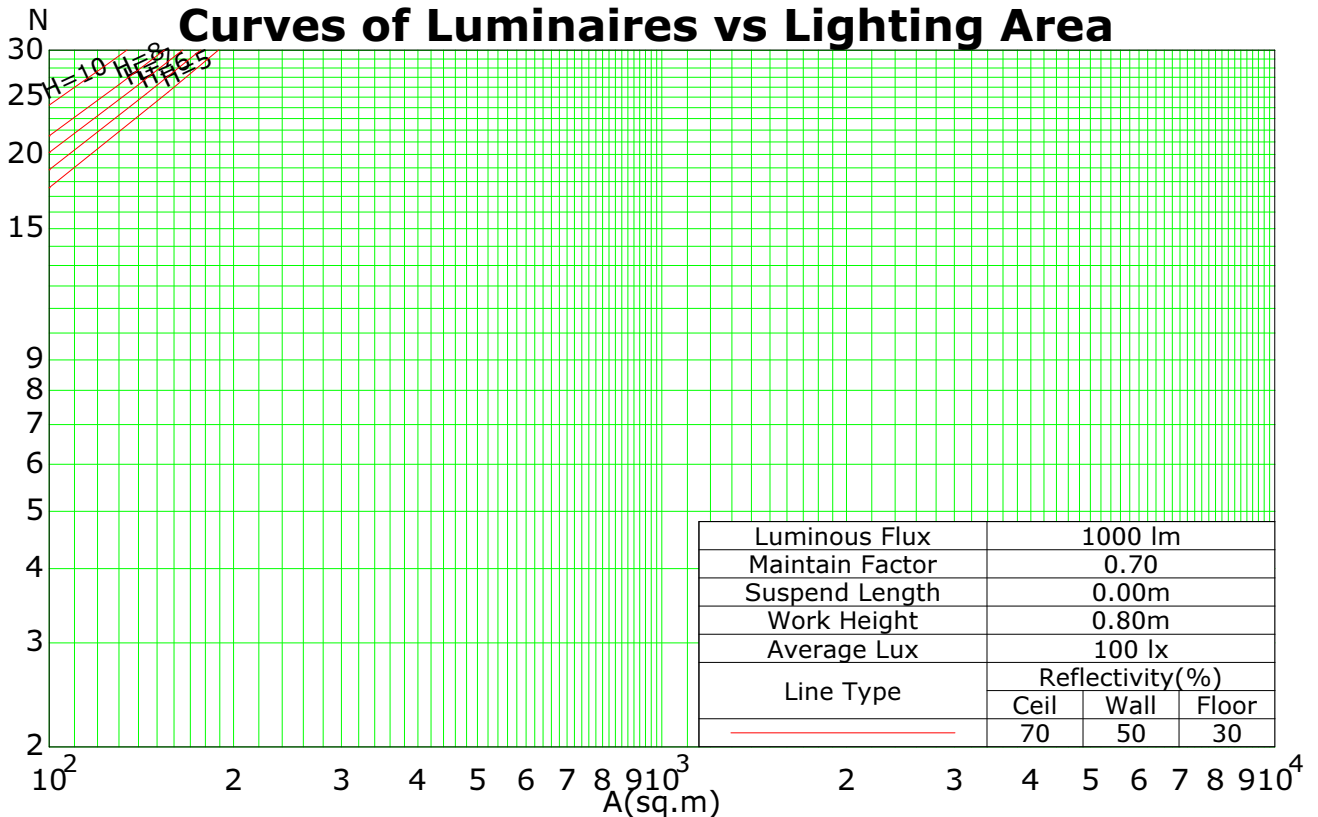

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

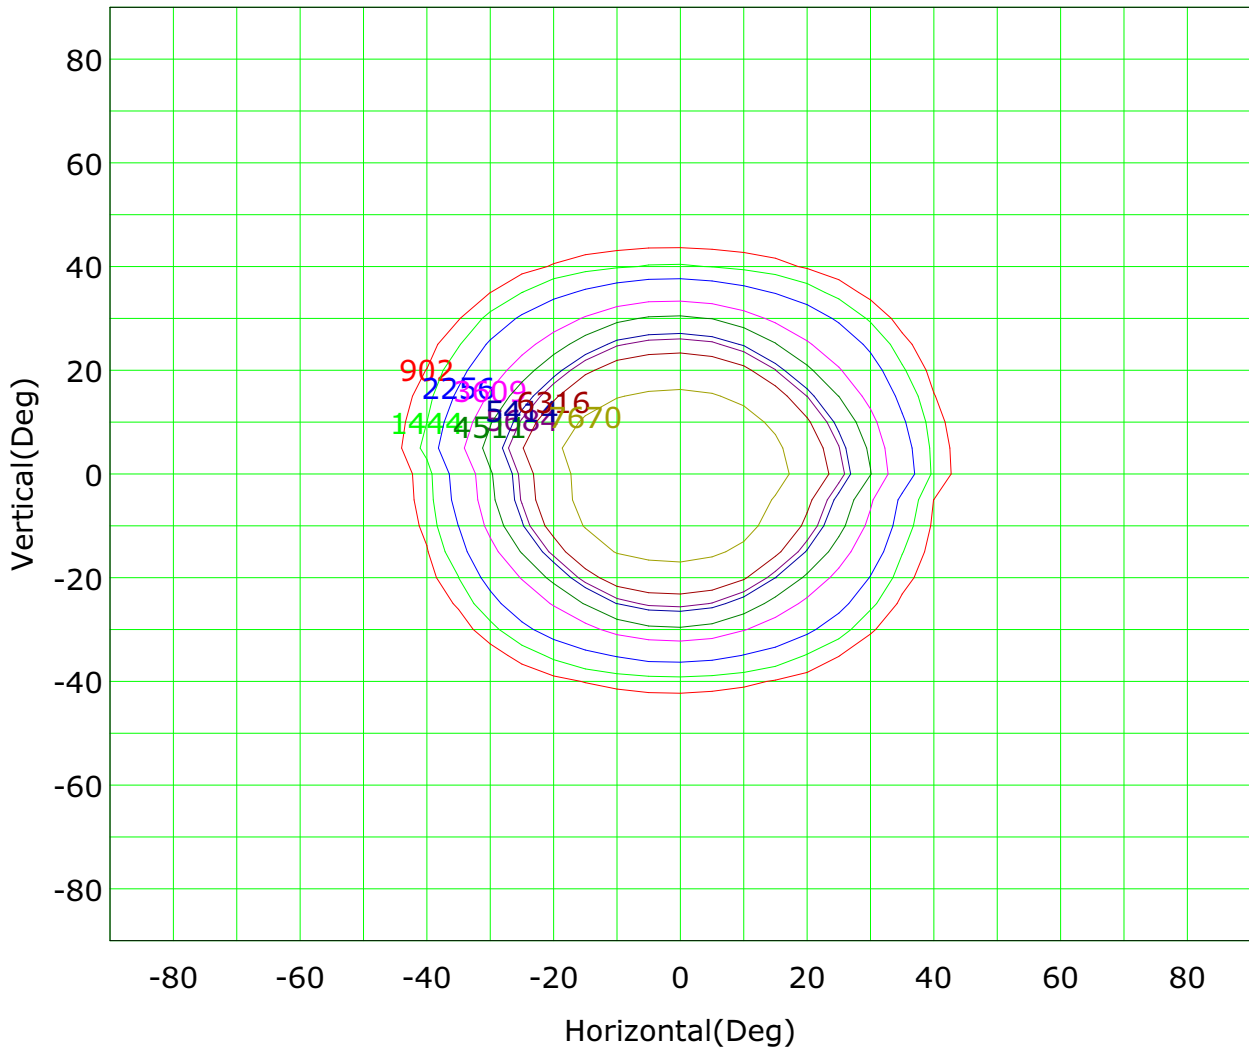

Imax (100%): 9023 cd

- | | |
|-----------------|-----------------|
| (10%): 902 cd | (16%): 1444 cd |
| (25%): 2256 cd | (40%): 3609 cd |
| (63%): 5684 cd | (100%): 9023 cd |
| (50%): 4511 cd | (60%): 5414 cd |
| (70%): 6316 cd | (85%): 7670 cd |

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Isocandela (sphere)

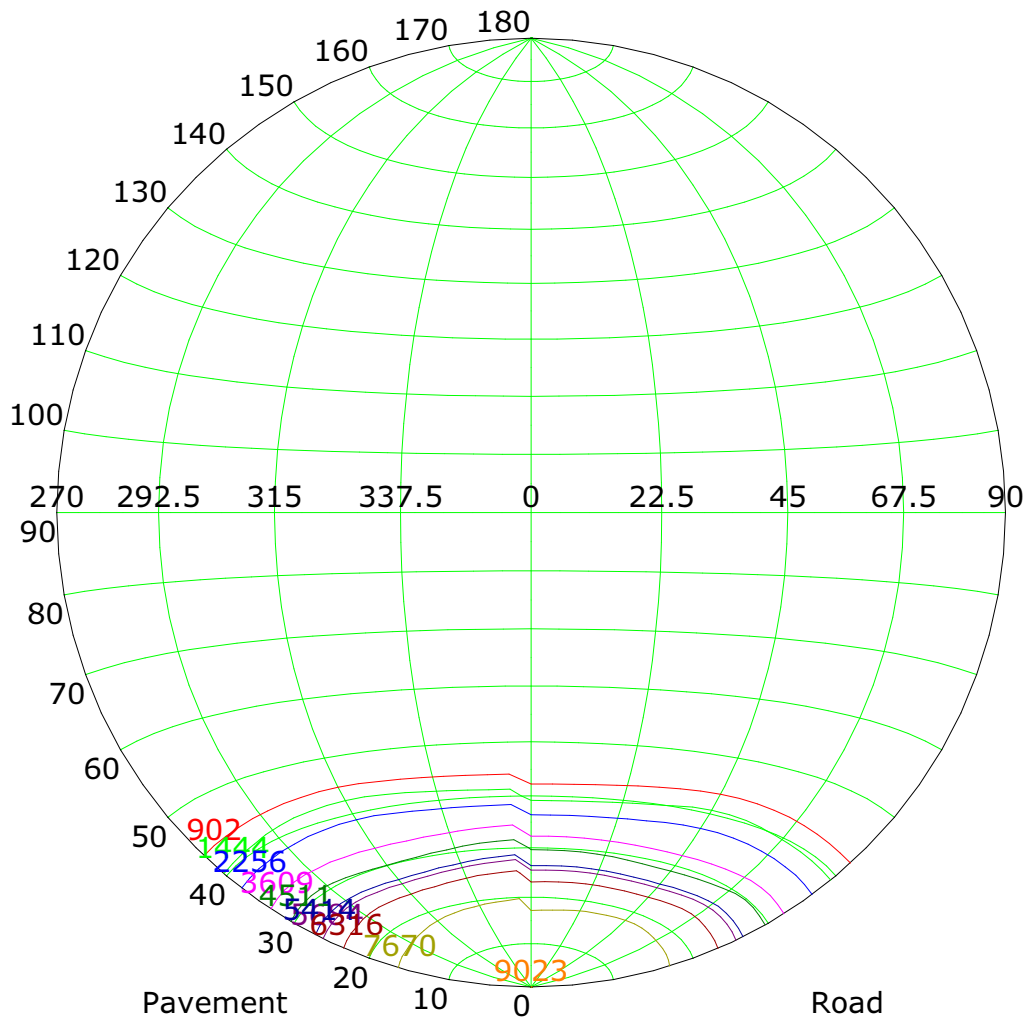

Imax (100%): 9023 cd

— (10%): 902 cd	— (16%): 1444 cd
— (25%): 2256 cd	— (40%): 3609 cd
— (63%): 5684 cd	— (100%): 9023 cd
— (50%): 4511 cd	— (60%): 5414 cd
— (70%): 6316 cd	— (85%): 7670 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

IsoLux Plot

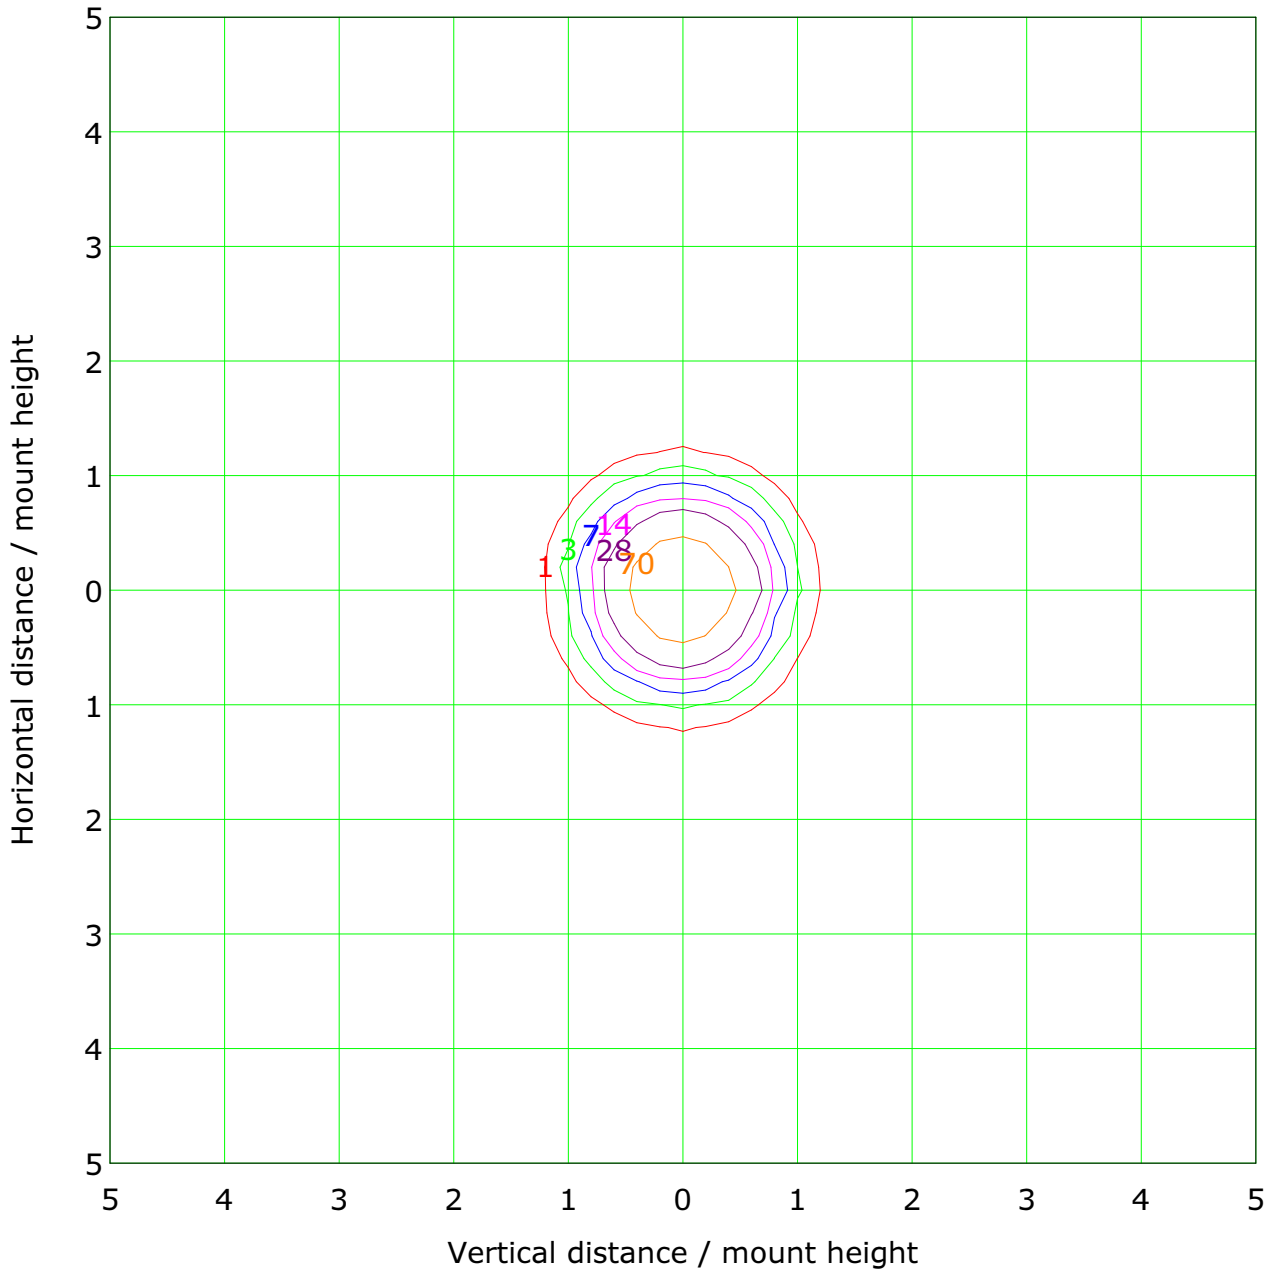

Mounting Height: 8.0m		Max Lux(100%): 141.0 lx	
— (1%):	1.4 lx	— (2%):	2.8 lx
— (5%):	7.0 lx	— (10%):	14.1 lx
— (20%):	28.2 lx	— (50%):	70.5 lx
— (100%):	141.0 lx	— (200%):	282.0 lx
— (300%):	423.0 lx	— (500%):	704.9 lx

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.100 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

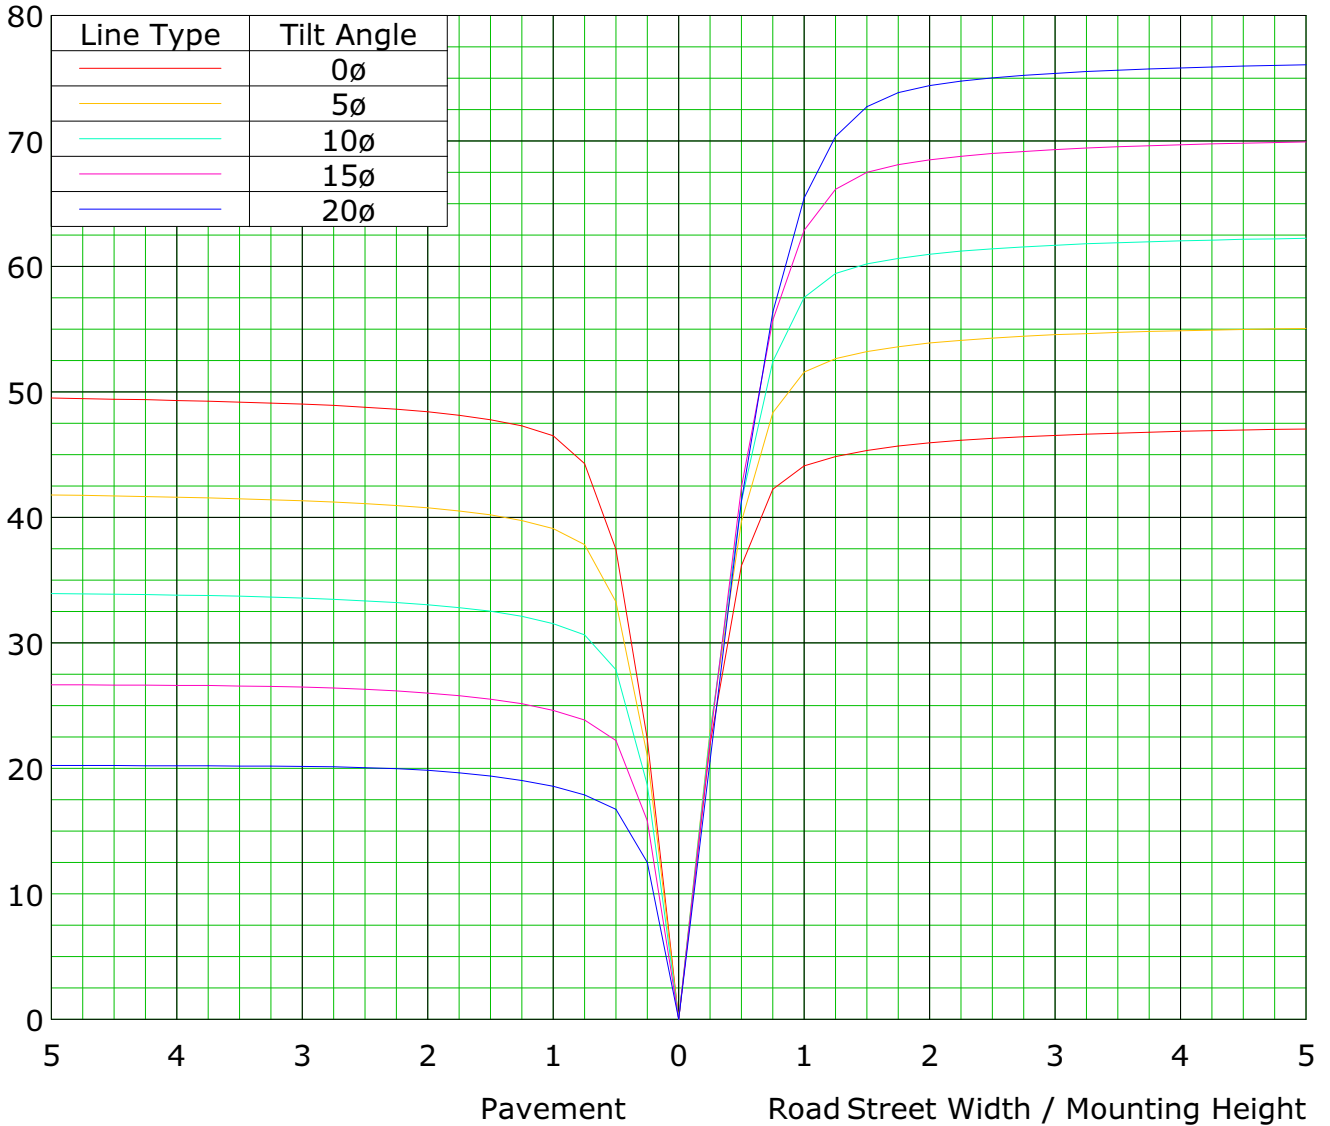

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

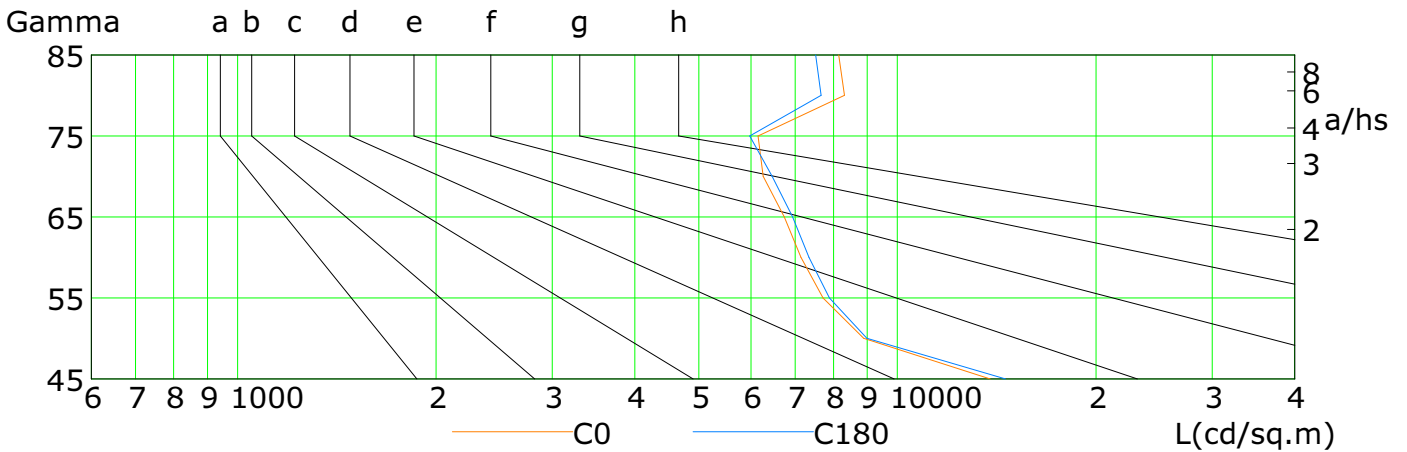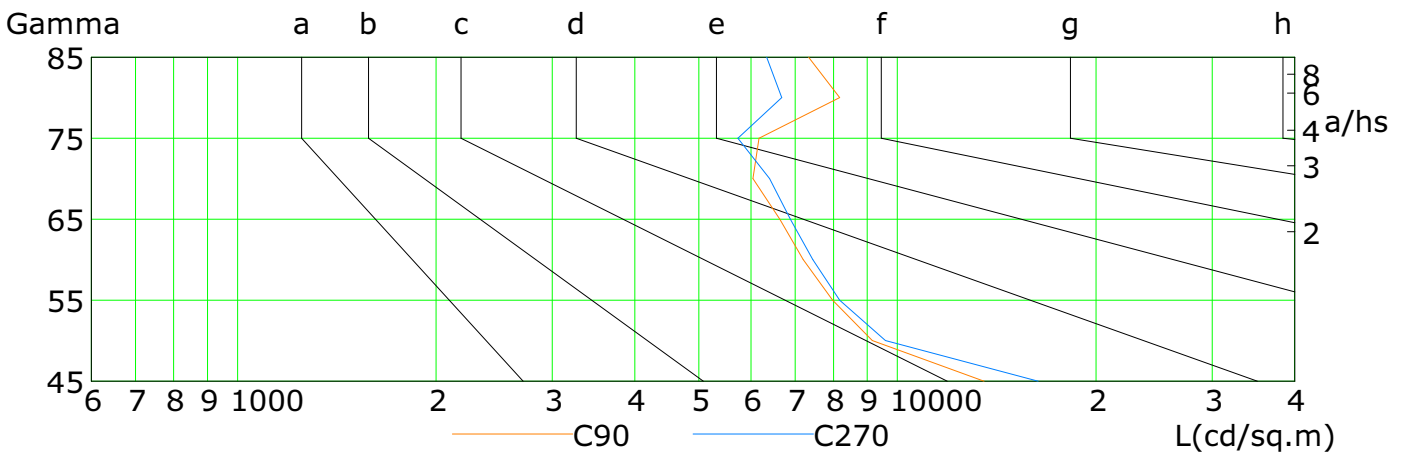

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	13822	8885	7710	7138	6738	6263	6150	8318	8146
C90	13529	9163	7976	7195	6633	6039	6169	8176	7340
C180	14582	8991	7892	7343	6934	6459	5970	7662	7520
C270	16339	9589	8172	7445	6884	6401	5730	6677	6337

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Illuminance at a Distance

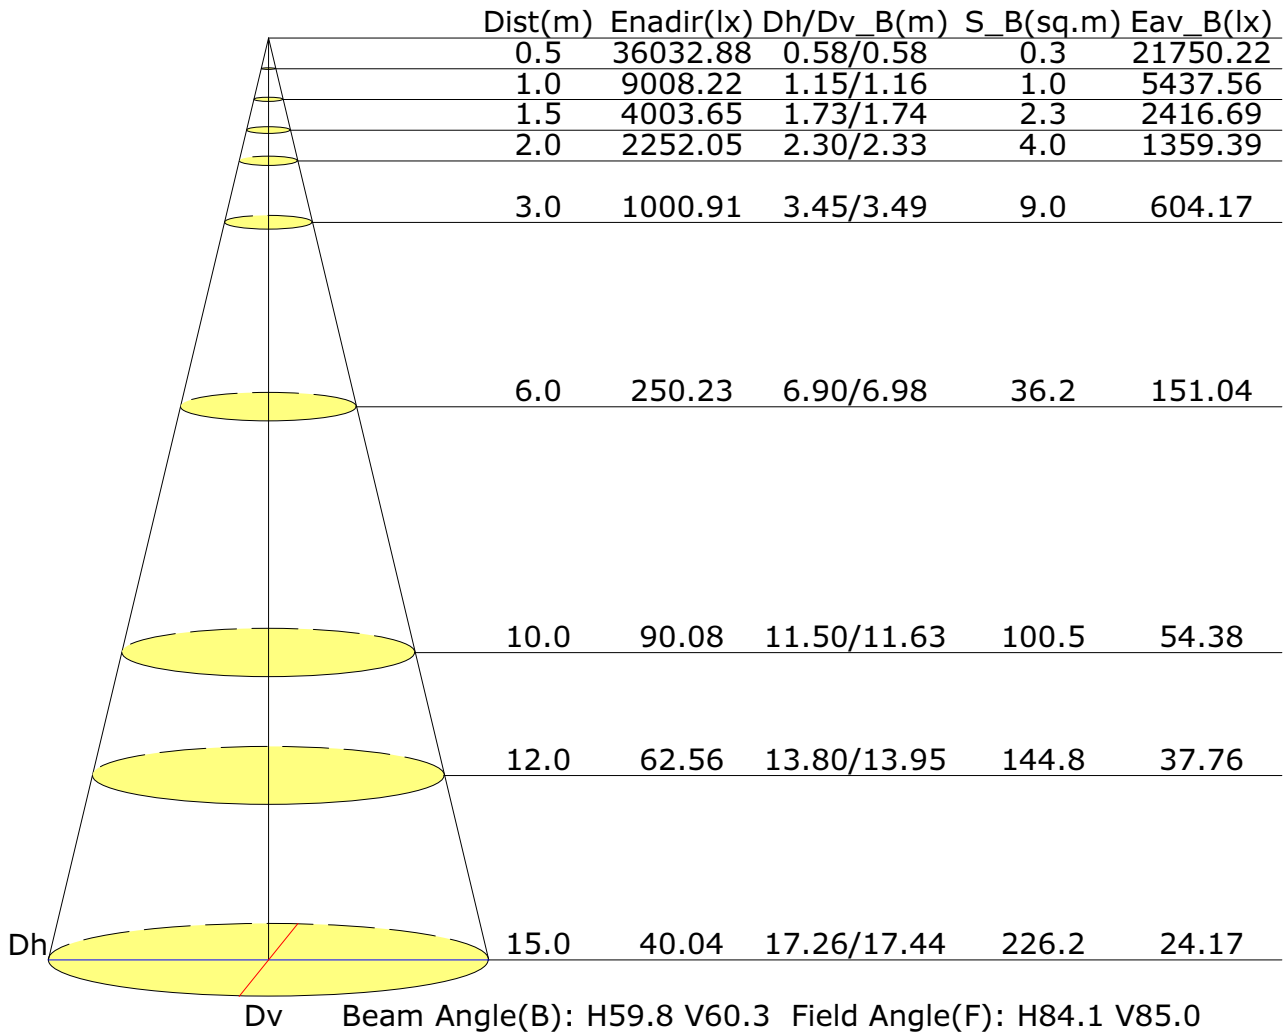

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Vertical IsoLux Plot

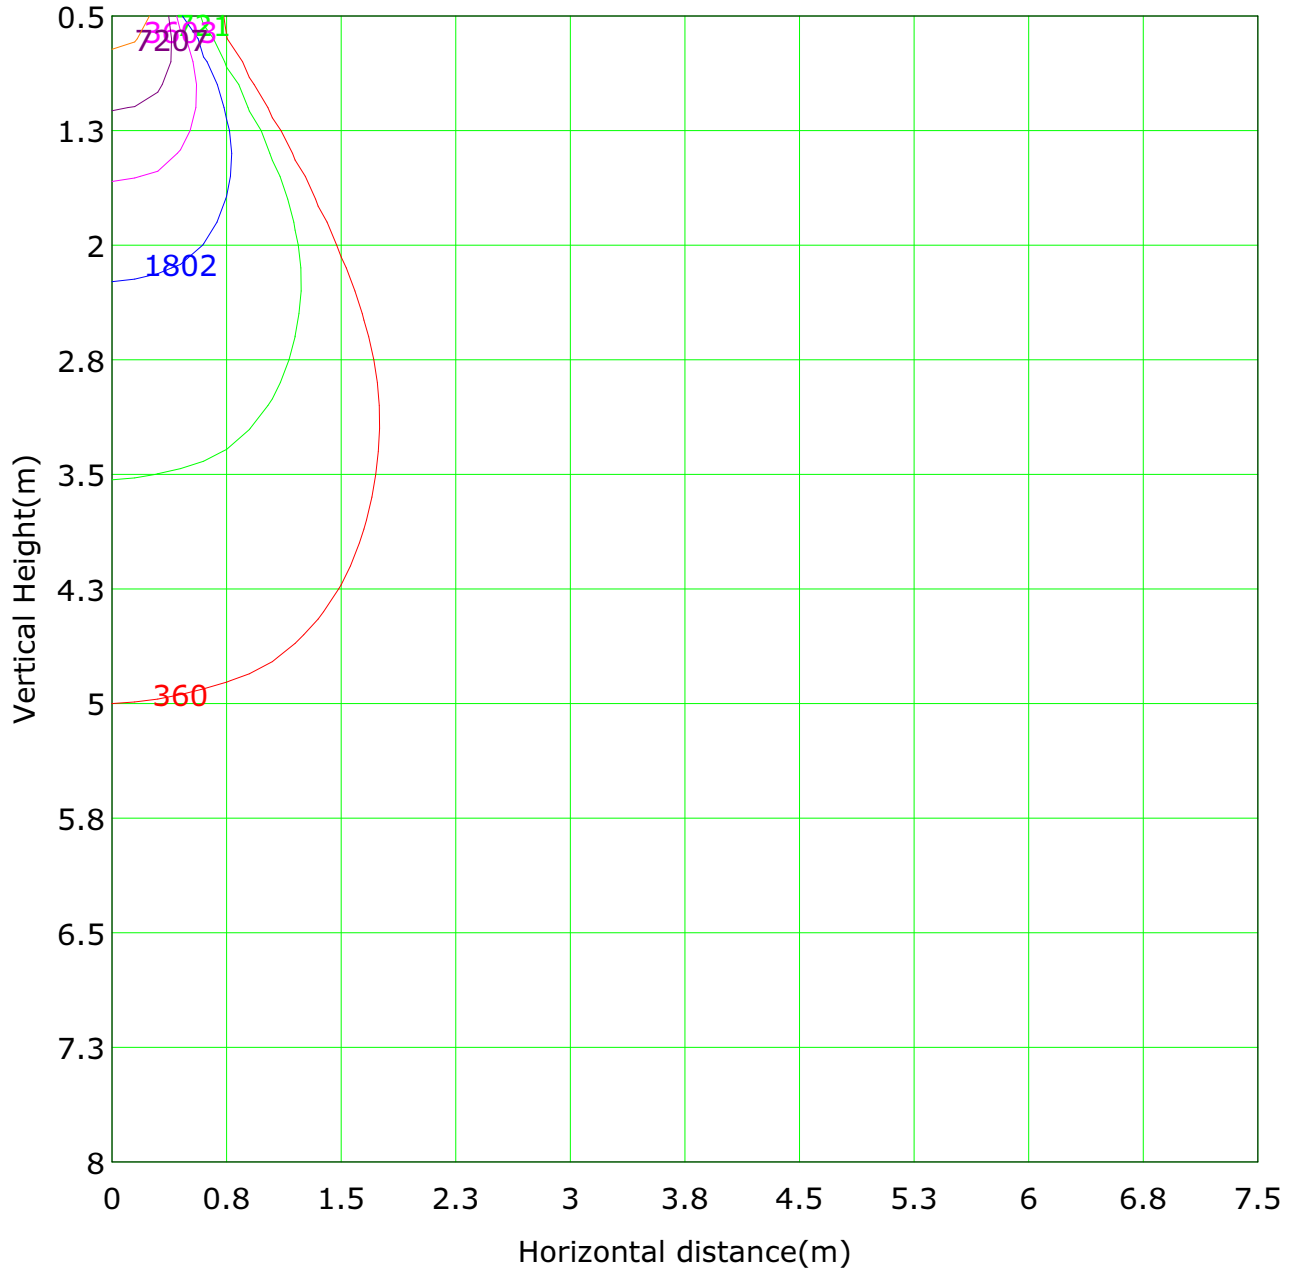


Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 36032.9 lx
— (1%): 360.3 lx — (2%): 720.7 lx
— (5%):1801.6 lx — (10%):3603.3 lx
— (20%):7206.6 lx — (50%):18016.4 lx
— (100%):36032.9 lx — (200%):72065.8 lx
— (300%):108098.6 lx — (500%):180164.4 lx

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

The Average Illuminance Effective Figure

Flux Out: 7646.60lm

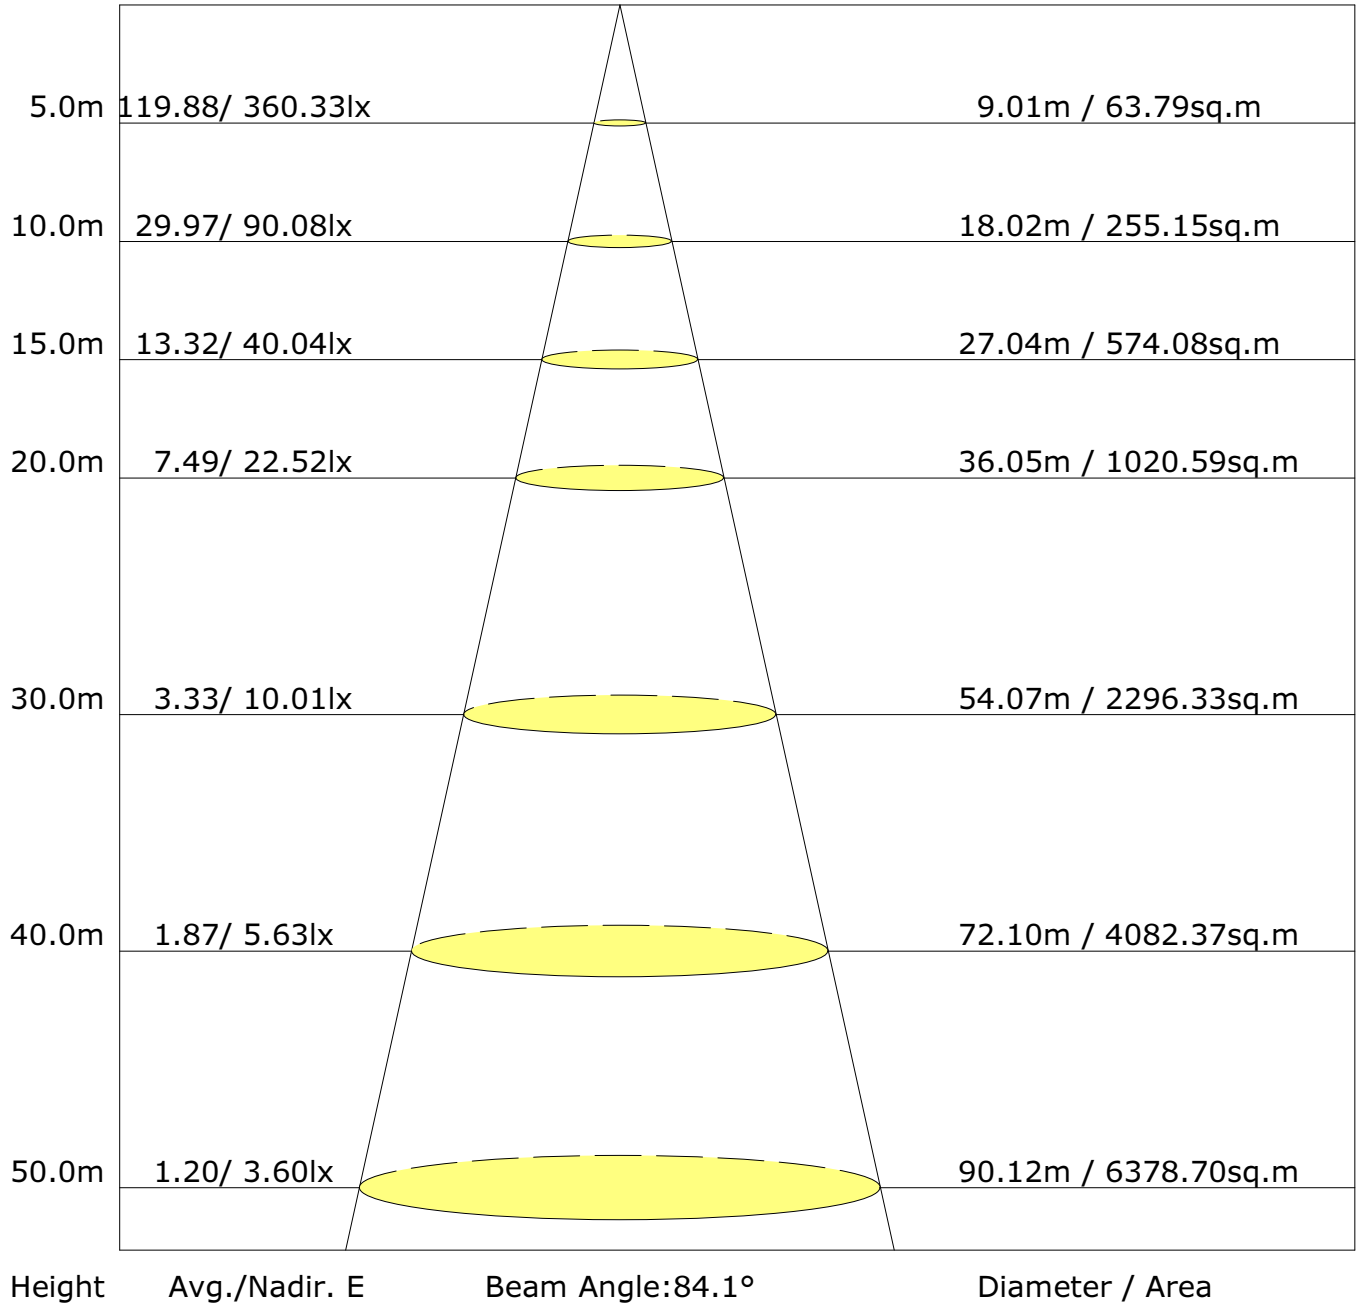

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	5.5	6.6	5.9	6.9	7.3	5.8	6.9	6.2	7.2	7.6
3H	7.5	8.5	7.9	8.9	9.3	7.8	8.8	8.2	9.1	9.5
4H	8.4	9.3	8.8	9.7	10.1	8.7	9.7	9.2	10.0	10.4
6H	9.8	10.7	10.3	11.1	11.5	10.4	11.3	10.9	11.7	12.1
8H	10.6	11.4	11.1	11.8	12.2	11.2	12.0	11.6	12.4	12.8
12H	11.3	12.0	11.7	12.4	12.9	11.8	12.5	12.2	12.9	13.4
X=4H Y=2H	6.1	7.0	6.5	7.3	7.8	6.3	7.2	6.7	7.5	8.0
3H	8.3	9.0	8.7	9.4	9.9	8.4	9.2	8.9	9.6	10.1
4H	9.3	10.0	9.7	10.4	10.9	9.6	10.3	10.0	10.7	11.2
6H	11.1	11.7	11.6	12.1	12.6	11.5	12.1	12.0	12.6	13.1
8H	12.0	12.5	12.4	13.0	13.5	12.4	12.9	12.9	13.4	13.9
12H	12.7	13.2	13.2	13.7	14.2	13.1	13.6	13.6	14.1	14.6
X=8H Y=4H	9.7	10.2	10.2	10.7	11.2	10.0	10.5	10.5	11.0	11.5
6H	11.7	12.1	12.2	12.7	13.2	12.1	12.5	12.6	13.0	13.6
8H	12.7	13.1	13.3	13.7	14.2	13.0	13.4	13.6	14.0	14.5
12H	13.6	14.0	14.2	14.5	15.1	13.9	14.2	14.4	14.7	15.3
X=12H Y=4H	9.8	10.3	10.3	10.8	11.3	10.1	10.6	10.6	11.1	11.6
6H	11.8	12.2	12.4	12.7	13.3	12.2	12.6	12.8	13.1	13.7
8H	12.9	13.3	13.5	13.8	14.4	13.2	13.6	13.7	14.1	14.7

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

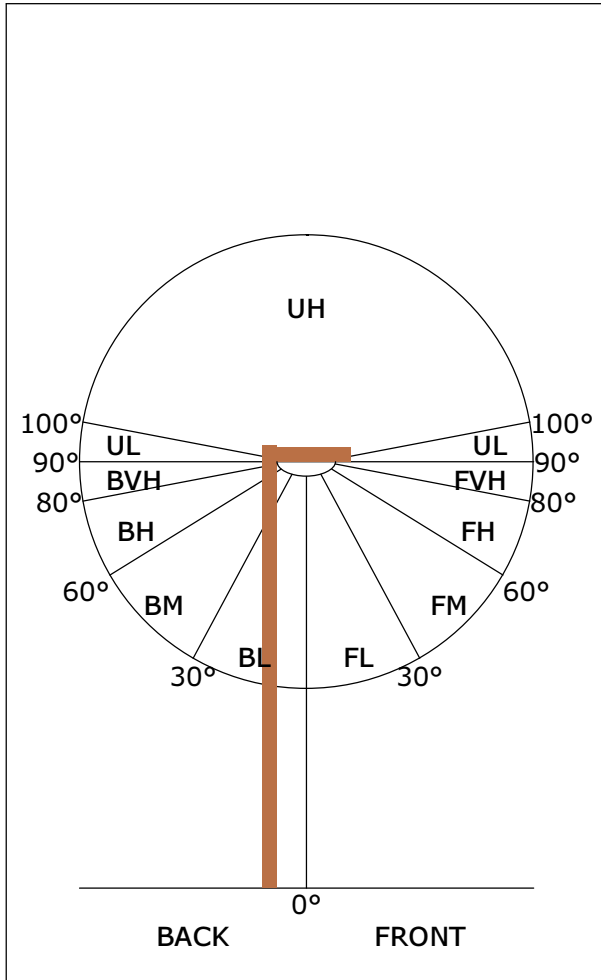


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	4287	47.9
FL (0°-30°)	2823	31.6
FM (30°-60°)	1178	13.2
FH (60°-80°)	206	2.3
FVH (80°-90°)	79	0.9
BACK LIGHT	4557	50.9
BL (0°-30°)	2892	32.3
BM (30°-60°)	1381	15.4
BH (60°-80°)	206	2.3
BVH (80°-90°)	78	0.9
UP LIGHT	103	1.2
UL (90°-100°)	24	0.3
UH (100°-180°)	79	0.9
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B4 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B4 U2 G1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

LCS Graph

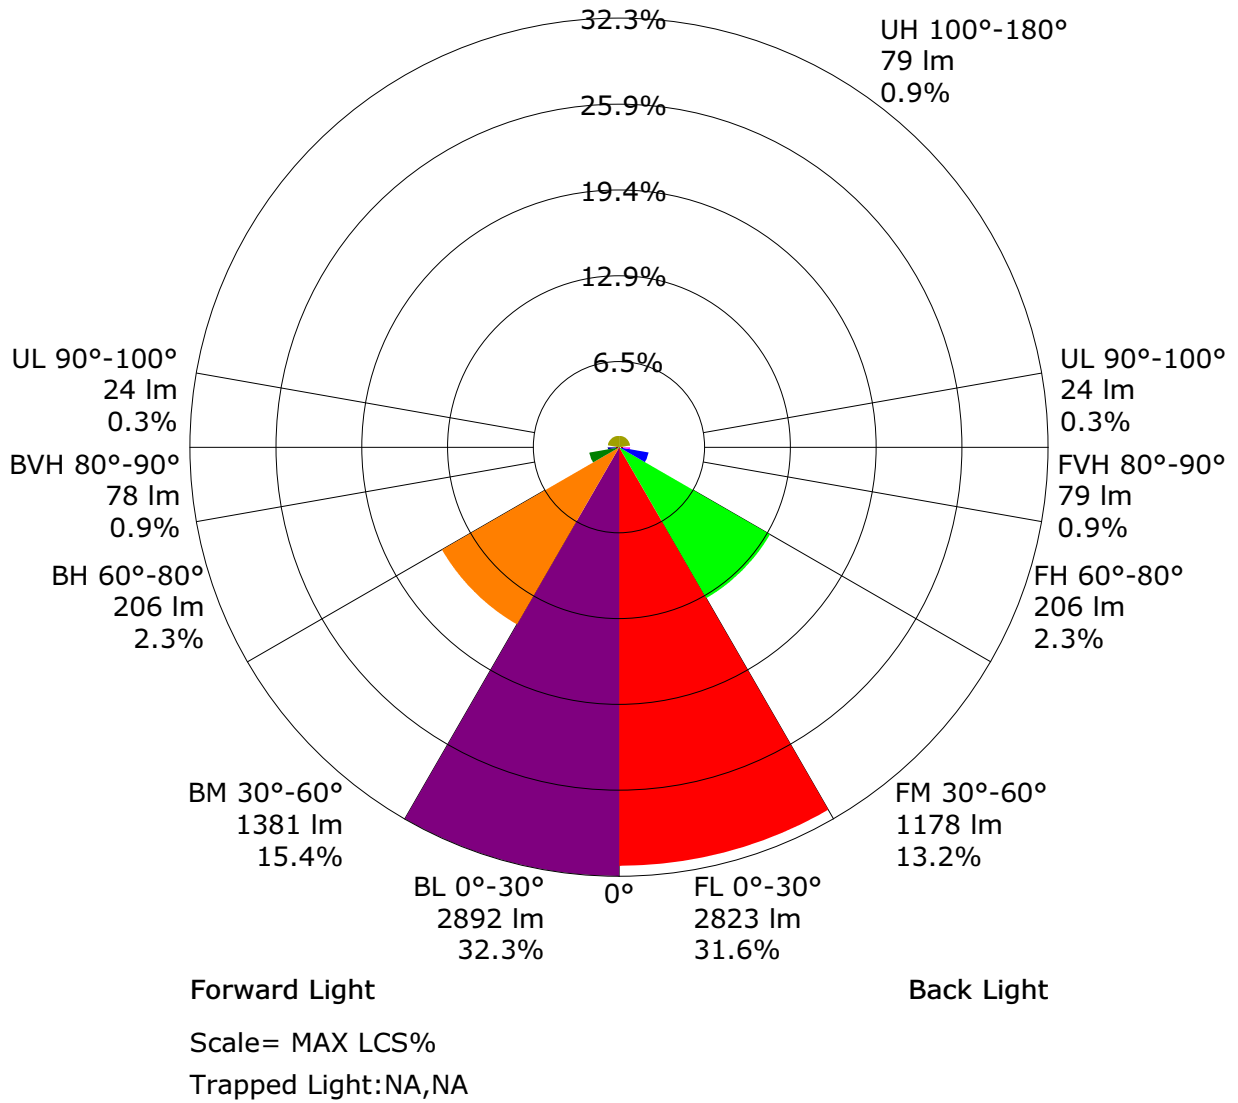

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	8980.5	8.6	8.6	0.10	0.10
1.0-2.0	8972.4	25.8	34.4	0.29	0.38
2.0-3.0	8956.4	42.8	77.2	0.48	0.86
3.0-4.0	8932.1	59.8	137.0	0.67	1.53
4.0-5.0	8900.6	76.6	213.6	0.86	2.39
5.0-6.0	8861.4	93.1	306.7	1.04	3.43
6.0-7.0	8814.2	109.4	416.1	1.22	4.65
7.0-8.0	8759.3	125.4	541.5	1.40	6.05
8.0-9.0	8696.8	141.0	682.5	1.58	7.63
9.0-10.0	8626.5	156.1	838.6	1.75	9.37
10.0-11.0	8546.8	170.8	1009.4	1.91	11.28
11.0-12.0	8456.1	184.9	1194.3	2.07	13.35
12.0-13.0	8353.9	198.3	1392.6	2.22	15.56
13.0-14.0	8237.9	210.9	1603.4	2.36	17.92
14.0-15.0	8106.6	222.6	1826.0	2.49	20.41
15.0-16.0	7959.8	233.3	2059.3	2.61	23.02
16.0-17.0	7798.1	242.9	2302.2	2.71	25.73
17.0-18.0	7621.8	251.3	2553.5	2.81	28.54
18.0-19.0	7430.5	258.6	2812.1	2.89	31.43
19.0-20.0	7224.2	264.4	3076.5	2.96	34.39
20.0-21.0	7001.4	268.9	3345.4	3.01	37.39
21.0-22.0	6763.4	271.8	3617.2	3.04	40.43
22.0-23.0	6510.7	273.2	3890.4	3.05	43.48
23.0-24.0	6242.9	273.0	4163.4	3.05	46.53
24.0-25.0	5964.1	271.2	4434.6	3.03	49.57
25.0-26.0	5676.4	268.0	4702.6	3.00	52.56
26.0-27.0	5380.3	263.3	4965.9	2.94	55.50
27.0-28.0	5079.8	257.2	5223.1	2.87	58.38
28.0-29.0	4779.1	250.1	5473.2	2.80	61.17
29.0-30.0	4479.5	241.9	5715.1	2.70	63.88
30.0-31.0	4180.6	232.7	5947.7	2.60	66.48
31.0-32.0	3881.7	222.4	6170.2	2.49	68.96
32.0-33.0	3581.8	211.0	6381.2	2.36	71.32
33.0-34.0	3280.9	198.6	6579.8	2.22	73.54
34.0-35.0	2979.4	185.1	6764.8	2.07	75.61
35.0-36.0	2678.7	170.6	6935.4	1.91	77.52

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	2384.8	155.6	7091.0	1.74	79.26
37.0-38.0	2100.1	140.2	7231.2	1.57	80.82
38.0-39.0	1828.9	124.9	7356.0	1.40	82.22
39.0-40.0	1576.5	110.0	7466.0	1.23	83.45
40.0-41.0	1346.0	95.9	7561.9	1.07	84.52
41.0-42.0	1139.9	82.8	7644.7	0.93	85.44
42.0-43.0	959.2	71.1	7715.7	0.79	86.24
43.0-44.0	806.6	60.9	7776.6	0.68	86.92
44.0-45.0	680.3	52.3	7828.9	0.58	87.50
45.0-46.0	579.4	45.3	7874.2	0.51	88.01
46.0-47.0	501.2	39.9	7914.1	0.45	88.46
47.0-48.0	441.7	35.7	7949.8	0.40	88.86
48.0-49.0	398.1	32.7	7982.5	0.37	89.22
49.0-50.0	366.3	30.5	8013.1	0.34	89.56
50.0-51.0	343.0	29.0	8042.1	0.32	89.89
51.0-52.0	325.9	28.0	8070.0	0.31	90.20
52.0-53.0	312.6	27.2	8097.2	0.30	90.50
53.0-54.0	301.6	26.6	8123.8	0.30	90.80
54.0-55.0	292.1	26.1	8149.9	0.29	91.09
55.0-56.0	283.6	25.6	8175.5	0.29	91.38
56.0-57.0	275.8	25.2	8200.8	0.28	91.66
57.0-58.0	268.5	24.8	8225.6	0.28	91.94
58.0-59.0	261.6	24.5	8250.1	0.27	92.21
59.0-60.0	255.0	24.1	8274.2	0.27	92.48
60.0-61.0	248.6	23.7	8297.9	0.27	92.75
61.0-62.0	242.4	23.4	8321.2	0.26	93.01
62.0-63.0	236.3	23.0	8344.2	0.26	93.26
63.0-64.0	230.4	22.6	8366.8	0.25	93.52
64.0-65.0	224.5	22.2	8389.1	0.25	93.76
65.0-66.0	218.8	21.8	8410.9	0.24	94.01
66.0-67.0	213.1	21.4	8432.3	0.24	94.25
67.0-68.0	207.1	21.0	8453.3	0.23	94.48
68.0-69.0	200.8	20.5	8473.8	0.23	94.71
69.0-70.0	194.5	20.0	8493.8	0.22	94.93
70.0-71.0	188.0	19.4	8513.2	0.22	95.15
71.0-72.0	181.4	18.9	8532.1	0.21	95.36

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	174.7	18.3	8550.3	0.20	95.57
73.0-74.0	168.9	17.8	8568.1	0.20	95.77
74.0-75.0	166.8	17.6	8585.7	0.20	95.96
75.0-76.0	171.1	18.2	8603.9	0.20	96.17
76.0-77.0	181.4	19.3	8623.2	0.22	96.38
77.0-78.0	192.0	20.6	8643.8	0.23	96.61
78.0-79.0	197.7	21.3	8665.0	0.24	96.85
79.0-80.0	197.6	21.3	8686.4	0.24	97.09
80.0-81.0	193.0	20.9	8707.2	0.23	97.32
81.0-82.0	185.9	20.2	8727.4	0.23	97.55
82.0-83.0	177.2	19.3	8746.7	0.22	97.76
83.0-84.0	167.2	18.2	8764.9	0.20	97.97
84.0-85.0	155.9	17.0	8781.9	0.19	98.16
85.0-86.0	143.5	15.7	8797.6	0.18	98.33
86.0-87.0	130.4	14.3	8811.8	0.16	98.49
87.0-88.0	116.2	12.7	8824.6	0.14	98.63
88.0-89.0	97.8	10.7	8835.3	0.12	98.75
89.0-90.0	75.9	8.3	8843.6	0.09	98.85
90.0-91.0	57.2	6.3	8849.9	0.07	98.92
91.0-92.0	44.3	4.9	8854.7	0.05	98.97
92.0-93.0	34.2	3.7	8858.5	0.04	99.01
93.0-94.0	25.3	2.8	8861.3	0.03	99.04
94.0-95.0	18.3	2.0	8863.3	0.02	99.06
95.0-96.0	12.9	1.4	8864.7	0.02	99.08
96.0-97.0	9.2	1.0	8865.7	0.01	99.09
97.0-98.0	7.1	0.8	8866.5	0.01	99.10
98.0-99.0	6.0	0.6	8867.1	0.01	99.11
99.0-100.0	5.5	0.6	8867.7	0.01	99.11
100.0-101.0	5.2	0.6	8868.3	0.01	99.12
101.0-102.0	4.8	0.5	8868.8	0.01	99.13
102.0-103.0	4.5	0.5	8869.3	0.01	99.13
103.0-104.0	4.1	0.4	8869.7	0.00	99.14
104.0-105.0	3.8	0.4	8870.1	0.00	99.14
105.0-106.0	3.5	0.4	8870.5	0.00	99.15
106.0-107.0	3.4	0.4	8870.8	0.00	99.15
107.0-108.0	3.4	0.4	8871.2	0.00	99.15

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	3.4	0.3	8871.5	0.00	99.16
109.0-110.0	3.4	0.4	8871.9	0.00	99.16
110.0-111.0	3.5	0.4	8872.2	0.00	99.16
111.0-112.0	3.6	0.4	8872.6	0.00	99.17
112.0-113.0	3.7	0.4	8873.0	0.00	99.17
113.0-114.0	3.9	0.4	8873.4	0.00	99.18
114.0-115.0	4.1	0.4	8873.8	0.00	99.18
115.0-116.0	4.3	0.4	8874.2	0.00	99.19
116.0-117.0	4.5	0.4	8874.6	0.00	99.19
117.0-118.0	4.8	0.5	8875.1	0.01	99.20
118.0-119.0	5.2	0.5	8875.6	0.01	99.20
119.0-120.0	5.5	0.5	8876.1	0.01	99.21
120.0-121.0	6.0	0.6	8876.7	0.01	99.21
121.0-122.0	6.5	0.6	8877.3	0.01	99.22
122.0-123.0	7.0	0.6	8877.9	0.01	99.23
123.0-124.0	7.5	0.7	8878.6	0.01	99.24
124.0-125.0	8.1	0.7	8879.4	0.01	99.24
125.0-126.0	8.7	0.8	8880.1	0.01	99.25
126.0-127.0	9.3	0.8	8881.0	0.01	99.26
127.0-128.0	10.0	0.9	8881.8	0.01	99.27
128.0-129.0	10.8	0.9	8882.8	0.01	99.28
129.0-130.0	11.5	1.0	8883.7	0.01	99.29
130.0-131.0	12.3	1.0	8884.8	0.01	99.31
131.0-132.0	13.1	1.1	8885.8	0.01	99.32
132.0-133.0	14.0	1.1	8887.0	0.01	99.33
133.0-134.0	14.9	1.2	8888.2	0.01	99.34
134.0-135.0	15.8	1.2	8889.4	0.01	99.36
135.0-136.0	16.7	1.3	8890.7	0.01	99.37
136.0-137.0	17.7	1.3	8892.0	0.01	99.39
137.0-138.0	18.6	1.4	8893.4	0.02	99.40
138.0-139.0	19.6	1.4	8894.8	0.02	99.42
139.0-140.0	20.6	1.5	8896.3	0.02	99.43
140.0-141.0	21.6	1.5	8897.8	0.02	99.45
141.0-142.0	22.6	1.5	8899.3	0.02	99.47
142.0-143.0	23.6	1.6	8900.9	0.02	99.49
143.0-144.0	24.6	1.6	8902.5	0.02	99.50

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	25.6	1.6	8904.1	0.02	99.52
145.0-146.0	26.6	1.7	8905.8	0.02	99.54
146.0-147.0	27.6	1.7	8907.5	0.02	99.56
147.0-148.0	28.6	1.7	8909.2	0.02	99.58
148.0-149.0	29.6	1.7	8910.9	0.02	99.60
149.0-150.0	30.6	1.7	8912.6	0.02	99.62
150.0-151.0	31.6	1.7	8914.3	0.02	99.63
151.0-152.0	32.6	1.7	8916.0	0.02	99.65
152.0-153.0	33.6	1.7	8917.7	0.02	99.67
153.0-154.0	34.5	1.7	8919.4	0.02	99.69
154.0-155.0	35.5	1.7	8921.0	0.02	99.71
155.0-156.0	36.5	1.7	8922.7	0.02	99.73
156.0-157.0	37.5	1.6	8924.3	0.02	99.75
157.0-158.0	38.5	1.6	8926.0	0.02	99.77
158.0-159.0	39.5	1.6	8927.5	0.02	99.78
159.0-160.0	40.5	1.6	8929.1	0.02	99.80
160.0-161.0	41.4	1.5	8930.6	0.02	99.82
161.0-162.0	42.4	1.5	8932.1	0.02	99.83
162.0-163.0	43.4	1.4	8933.5	0.02	99.85
163.0-164.0	44.4	1.4	8934.9	0.02	99.87
164.0-165.0	45.3	1.3	8936.2	0.01	99.88
165.0-166.0	46.3	1.3	8937.5	0.01	99.89
166.0-167.0	47.3	1.2	8938.7	0.01	99.91
167.0-168.0	48.2	1.1	8939.9	0.01	99.92
168.0-169.0	49.1	1.1	8940.9	0.01	99.93
169.0-170.0	49.9	1.0	8941.9	0.01	99.94
170.0-171.0	50.7	0.9	8942.8	0.01	99.95
171.0-172.0	51.5	0.8	8943.7	0.01	99.96
172.0-173.0	52.2	0.7	8944.4	0.01	99.97
173.0-174.0	52.9	0.7	8945.1	0.01	99.98
174.0-175.0	53.4	0.6	8945.6	0.01	99.99
175.0-176.0	53.9	0.5	8946.1	0.01	99.99
176.0-177.0	54.3	0.4	8946.5	0.00	99.99
177.0-178.0	54.6	0.3	8946.7	0.00	100.00
178.0-179.0	54.9	0.2	8946.9	0.00	100.00
179.0-180.0	55.0	0.1	8946.9	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	9008.2	9009.2	9002.8	9016.1	9016.5	9018.5	9023.0	9012.7	9013.5	9013.2
G1.0	8998.0	9001.6	9001.1	9013.0	9012.3	9015.6	9019.2	9017.5	9011.3	9012.5
G2.0	8973.7	8983.3	8982.8	8999.7	8997.8	9008.0	9007.0	9005.8	9004.9	9003.7
G3.0	8950.4	8950.2	8958.0	8972.5	8977.3	8979.2	8985.9	8990.9	8986.3	8985.6
G4.0	8915.2	8922.8	8925.5	8939.5	8940.7	8956.1	8956.8	8965.2	8963.5	8967.1
G5.0	8876.9	8886.7	8887.4	8905.5	8907.6	8924.7	8931.2	8930.5	8934.0	8935.2
G6.0	8835.5	8842.5	8847.2	8863.1	8868.6	8883.8	8892.6	8898.3	8893.1	8892.2
G7.0	8795.1	8795.8	8809.2	8822.0	8826.5	8837.7	8847.9	8847.0	8848.6	8854.8
G8.0	8749.2	8755.4	8764.4	8782.3	8786.8	8793.9	8804.4	8800.3	8797.5	8794.9
G9.0	8702.8	8714.5	8726.9	8739.9	8745.9	8750.2	8758.7	8746.6	8738.0	8736.6
G10.0	8654.5	8671.0	8683.6	8698.3	8699.0	8701.7	8700.0	8697.1	8683.3	8676.7
G11.0	8588.0	8607.0	8618.9	8637.7	8644.3	8650.3	8645.5	8628.9	8619.8	8611.7
G12.0	8498.8	8518.5	8530.2	8554.2	8564.7	8571.3	8579.9	8565.8	8551.3	8532.5
G13.0	8391.5	8406.0	8426.2	8448.6	8468.8	8483.3	8487.3	8495.2	8475.5	8451.9
G14.0	8257.4	8265.5	8293.5	8329.4	8358.7	8366.5	8381.5	8384.1	8379.1	8348.9
G15.0	8104.4	8121.3	8143.2	8179.8	8213.6	8228.1	8253.8	8262.6	8259.5	8240.7
G16.0	7944.8	7954.4	7974.1	8015.2	8050.9	8076.6	8101.1	8114.9	8106.1	8104.4
G17.0	7760.3	7783.6	7800.5	7838.3	7875.4	7903.9	7920.6	7932.7	7940.1	7946.3
G18.0	7563.1	7588.8	7606.6	7641.8	7678.2	7717.0	7719.6	7736.5	7755.0	7770.7
G19.0	7360.5	7375.7	7409.2	7438.2	7473.2	7495.6	7519.8	7524.8	7553.8	7568.8
G20.0	7136.9	7151.9	7176.6	7202.3	7250.3	7271.5	7268.2	7288.6	7318.4	7342.1
G21.0	6892.1	6916.4	6944.2	6965.9	7003.7	7008.9	7025.3	7026.5	7061.7	7081.5
G22.0	6655.3	6664.3	6693.3	6711.2	6749.2	6741.1	6759.9	6754.2	6769.9	6790.8
G23.0	6383.9	6398.2	6429.8	6437.9	6470.7	6465.5	6455.7	6452.1	6473.8	6491.4
G24.0	6123.9	6134.6	6158.2	6166.3	6178.2	6179.8	6139.4	6131.3	6141.3	6165.1
G25.0	5839.0	5856.4	5874.0	5888.9	5878.0	5864.0	5836.4	5813.8	5809.0	5815.9
G26.0	5559.8	5578.8	5583.8	5599.3	5585.0	5557.9	5498.9	5458.9	5453.0	5466.5
G27.0	5281.3	5293.6	5298.4	5287.2	5285.3	5228.0	5181.4	5121.0	5111.4	5110.3
G28.0	5002.0	5005.8	5002.8	4989.4	4966.1	4921.2	4851.0	4787.3	4763.7	4754.0
G29.0	4702.1	4710.9	4712.6	4691.4	4658.1	4597.0	4522.8	4459.3	4449.0	4436.2
G30.0	4406.5	4399.6	4404.8	4376.8	4346.3	4289.5	4209.8	4150.6	4121.8	4118.2
G31.0	4086.6	4092.3	4085.9	4063.5	4026.2	3971.9	3904.9	3856.8	3831.1	3836.6
G32.0	3764.6	3761.9	3755.8	3727.0	3708.6	3656.8	3607.3	3561.7	3555.0	3566.7
G33.0	3408.0	3417.1	3408.0	3387.8	3365.9	3348.1	3301.0	3292.2	3302.9	3308.8
G34.0	3057.0	3048.9	3049.6	3035.3	3038.4	3032.7	3015.4	3026.3	3050.1	3062.0
G35.0	2676.4	2680.9	2683.8	2691.2	2700.4	2721.1	2734.0	2782.3	2803.0	2818.4
G36.0	2309.0	2308.7	2318.5	2340.6	2376.0	2419.8	2459.8	2512.3	2552.0	2576.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	1972.2	1976.9	1991.2	2022.8	2064.9	2121.3	2190.0	2255.4	2307.3	2331.6
G38.0	1666.1	1678.9	1696.5	1718.9	1773.6	1847.1	1917.5	1985.5	2051.1	2076.6
G39.0	1416.8	1422.5	1429.4	1461.8	1512.9	1584.7	1648.5	1722.4	1795.0	1828.1
G40.0	1198.0	1199.0	1212.3	1239.4	1282.0	1337.6	1397.8	1472.0	1537.4	1561.9
G41.0	1021.3	1020.6	1034.8	1049.3	1087.9	1130.7	1178.3	1238.9	1296.9	1329.5
G42.0	865.7	862.7	872.9	886.0	916.4	946.8	984.7	1028.2	1083.6	1101.0
G43.0	742.8	734.5	741.3	754.4	773.5	794.4	817.5	853.1	895.5	916.6
G44.0	631.7	629.8	630.5	641.0	654.8	671.0	686.4	709.2	738.3	760.8
G45.0	545.4	540.8	544.7	550.4	559.4	571.3	583.4	600.8	624.1	637.4
G46.0	479.0	474.3	475.2	481.4	490.2	499.7	507.1	517.5	532.8	545.6
G47.0	428.1	423.6	422.4	427.4	434.3	441.4	447.1	457.1	467.8	475.9
G48.0	388.4	383.9	382.9	386.3	392.4	397.9	402.4	409.8	418.4	425.3
G49.0	361.3	356.5	355.3	358.0	362.2	366.5	370.1	375.5	382.0	388.6
G50.0	339.4	336.1	334.9	337.0	340.4	344.2	347.7	351.0	357.0	361.5
G51.0	324.2	319.9	318.9	320.6	323.9	327.0	330.1	334.4	338.5	342.7
G52.0	311.6	307.3	305.6	306.8	309.7	313.2	316.8	320.1	323.9	327.7
G53.0	300.6	296.1	294.5	295.2	297.8	300.9	304.0	307.5	310.6	313.5
G54.0	290.9	286.8	284.2	285.2	287.1	290.2	293.3	296.1	299.4	302.3
G55.0	282.5	278.8	275.9	276.4	278.3	280.9	283.5	286.6	289.5	291.8
G56.0	275.2	271.4	269.0	268.8	270.4	273.0	275.2	278.0	280.6	283.0
G57.0	268.3	264.5	262.3	262.1	263.5	265.4	267.6	270.0	272.8	274.9
G58.0	261.6	258.1	256.1	255.7	256.9	258.8	260.7	262.6	265.4	267.6
G59.0	255.2	252.1	250.0	249.7	250.7	252.4	253.8	255.9	258.5	260.7
G60.0	248.5	246.2	244.5	244.3	245.0	246.2	247.6	249.3	251.4	254.0
G61.0	242.4	240.2	238.6	238.6	239.3	240.2	241.2	243.1	245.0	246.9
G62.0	236.4	234.3	233.1	232.9	233.3	234.3	235.5	236.6	238.3	240.0
G63.0	230.9	228.8	227.6	227.1	227.4	228.3	229.3	230.7	232.1	233.3
G64.0	225.7	223.6	222.4	221.7	221.7	222.4	223.6	224.3	225.7	226.9
G65.0	220.5	218.6	217.1	216.2	216.0	216.4	217.6	218.3	219.5	220.0
G66.0	215.5	213.6	212.1	211.0	210.3	211.2	211.7	212.1	213.3	214.1
G67.0	210.0	208.1	206.9	205.5	204.5	205.3	205.7	206.2	206.9	207.9
G68.0	203.6	202.2	201.2	199.6	198.6	199.1	199.6	199.6	200.3	201.2
G69.0	196.9	196.0	195.0	193.6	192.6	192.6	192.6	192.9	193.6	194.3
G70.0	190.3	189.6	188.9	187.7	186.5	186.5	186.2	186.2	186.7	187.2
G71.0	184.1	182.7	182.7	181.2	179.8	180.3	179.6	179.1	179.3	179.6
G72.0	176.5	175.8	176.0	174.8	173.9	173.9	172.4	171.7	171.7	172.4
G73.0	169.1	168.9	169.3	168.4	167.7	167.0	164.8	164.1	164.6	165.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	166.3	166.3	166.3	164.6	162.7	160.8	158.4	157.7	158.2	159.4
G75.0	171.0	171.7	172.0	170.5	167.7	164.4	160.5	157.9	157.4	159.6
G76.0	182.2	184.1	186.0	185.3	184.3	181.5	177.7	174.6	172.0	173.4
G77.0	191.5	196.7	201.9	204.8	204.8	202.2	197.2	192.2	189.3	190.5
G78.0	197.4	205.5	216.9	221.2	221.9	215.3	206.2	199.8	194.8	193.6
G79.0	201.9	213.6	225.7	230.7	225.7	216.2	206.4	200.3	194.8	192.2
G80.0	208.1	216.4	227.4	226.9	220.2	211.7	201.4	195.3	189.3	185.8
G81.0	208.4	214.8	220.7	218.3	212.1	203.4	193.1	187.4	181.0	176.9
G82.0	206.0	209.5	213.6	209.8	203.1	195.0	184.1	178.6	172.0	166.5
G83.0	200.5	202.6	205.7	199.3	192.9	184.6	174.8	168.4	161.3	155.1
G84.0	190.0	194.1	195.5	187.4	180.5	172.7	164.6	158.2	149.1	143.9
G85.0	179.6	183.4	183.4	175.1	166.3	158.4	150.8	144.4	136.3	131.3
G86.0	168.9	173.1	172.0	162.9	152.5	144.1	135.6	128.4	121.1	117.5
G87.0	154.6	159.8	160.8	150.3	137.0	127.7	121.3	112.5	106.6	103.7
G88.0	131.5	142.5	145.3	134.1	119.4	111.3	105.4	98.0	92.3	87.5
G89.0	89.2	113.7	115.6	102.3	92.5	85.4	83.2	77.5	71.8	63.3
G90.0	54.2	84.2	87.5	75.4	63.0	58.3	62.5	56.6	51.1	39.5
G91.0	50.2	66.8	68.7	62.3	50.7	47.1	50.4	45.0	35.0	32.3
G92.0	46.4	52.8	56.6	50.9	41.2	39.2	38.3	33.5	25.7	24.5
G93.0	42.8	44.7	46.6	42.6	34.7	30.0	26.9	20.2	15.5	15.2
G94.0	34.7	32.6	33.3	30.0	24.7	19.3	17.8	12.4	9.3	8.6
G95.0	17.1	16.9	20.9	19.5	15.2	14.3	13.8	11.2	8.1	6.7
G96.0	14.8	14.8	17.4	16.2	13.1	12.4	11.6	9.0	6.7	5.9
G97.0	12.4	12.1	13.3	11.6	10.2	9.5	8.3	7.1	6.4	5.9
G98.0	9.5	9.5	9.3	8.1	8.1	7.8	7.6	7.1	6.2	5.7
G99.0	9.5	9.5	9.0	7.6	8.1	7.6	7.1	6.7	5.9	5.5
G100.0	10.0	9.8	9.3	7.6	7.8	7.4	6.7	6.2	5.5	5.0
G101.0	10.0	9.8	9.0	7.1	7.4	6.9	6.2	5.7	5.0	4.3
G102.0	9.0	8.8	8.3	6.4	7.1	6.4	5.5	4.8	4.0	3.6
G103.0	8.6	8.3	7.8	5.9	6.4	5.5	4.8	4.3	3.8	3.3
G104.0	7.1	6.9	6.4	5.2	5.2	4.5	4.0	3.8	3.3	3.1
G105.0	5.5	5.5	5.2	4.5	4.5	4.0	3.8	3.6	3.3	2.8
G106.0	5.0	4.8	4.8	4.0	4.0	3.8	3.6	3.3	3.1	2.8
G107.0	4.8	4.8	4.5	4.0	3.8	3.8	3.3	3.3	3.1	3.1
G108.0	4.5	4.5	4.3	3.8	3.8	3.6	3.3	3.3	3.1	3.1
G109.0	4.3	4.3	4.0	3.8	3.6	3.6	3.6	3.3	3.3	3.3
G110.0	4.0	4.0	4.0	3.8	3.6	3.6	3.6	3.6	3.3	3.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	4.3	4.0	4.0	3.8	3.8	3.6	3.6	3.6	3.3	3.1
G112.0	4.3	4.3	4.3	3.8	3.8	3.8	3.8	3.6	3.3	3.3
G113.0	4.5	4.5	4.3	4.0	4.0	4.0	4.0	3.6	3.6	3.3
G114.0	4.5	4.5	4.3	4.3	4.3	4.3	3.8	3.8	3.8	3.8
G115.0	4.8	4.8	4.5	4.5	4.3	4.0	4.0	4.0	4.0	4.0
G116.0	4.8	4.8	4.8	4.5	4.3	4.3	4.3	4.3	4.3	4.3
G117.0	4.8	4.8	4.8	4.5	4.5	4.5	4.5	4.5	4.5	4.5
G118.0	5.0	5.0	4.8	4.8	4.8	4.8	5.0	4.8	5.0	5.0
G119.0	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2	5.2
G120.0	5.7	5.7	5.7	5.5	5.7	5.7	5.7	5.7	5.7	5.7
G121.0	6.2	6.2	6.2	5.9	5.9	6.2	6.2	6.2	6.2	6.2
G122.0	6.7	6.7	6.7	6.7	6.4	6.4	6.7	6.7	6.7	6.7
G123.0	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
G124.0	7.6	7.8	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
G125.0	8.3	8.3	8.3	8.3	8.3	8.3	8.1	8.3	8.3	8.3
G126.0	9.0	9.0	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8
G127.0	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5
G128.0	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.5	10.2
G129.0	11.2	11.2	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G130.0	11.9	11.9	11.9	11.6	11.6	11.9	11.9	11.9	11.9	11.9
G131.0	12.8	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6
G132.0	13.6	13.6	13.3	13.3	13.3	13.6	13.3	13.6	13.6	13.3
G133.0	14.5	14.5	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3
G134.0	15.5	15.5	15.2	15.2	15.2	15.2	15.2	15.2	15.2	15.2
G135.0	16.2	16.4	16.2	16.2	16.2	16.2	16.2	16.2	16.2	16.2
G136.0	17.4	17.4	17.1	17.1	17.1	17.1	17.1	17.1	17.1	17.1
G137.0	18.3	18.3	18.1	18.1	18.1	18.1	18.1	18.1	18.1	18.1
G138.0	19.5	19.3	19.3	19.0	19.0	19.0	19.0	19.0	19.0	19.0
G139.0	20.5	20.2	20.2	20.2	20.0	20.0	20.0	20.0	20.0	20.0
G140.0	21.4	21.4	21.2	21.2	21.2	21.2	20.9	21.2	20.9	20.9
G141.0	22.6	22.4	22.4	22.1	22.1	22.1	22.1	22.1	21.9	21.9
G142.0	23.3	23.3	23.3	23.3	23.1	23.1	23.1	23.1	23.1	22.8
G143.0	24.5	24.5	24.3	24.3	24.3	24.0	24.0	24.0	23.8	23.8
G144.0	25.5	25.5	25.2	25.2	25.2	25.2	25.0	25.2	25.0	25.0
G145.0	26.6	26.4	26.4	26.2	26.2	26.2	25.9	25.9	25.9	25.9
G146.0	27.6	27.6	27.4	27.4	27.1	27.1	27.1	27.1	26.9	26.9
G147.0	28.5	28.5	28.3	28.3	28.3	28.3	28.1	28.1	28.1	27.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	29.7	29.5	29.3	29.3	29.3	29.3	29.0	29.0	29.0	29.0
G149.0	30.7	30.4	30.4	30.2	30.2	30.2	30.2	30.2	30.0	30.0
G150.0	31.6	31.4	31.4	31.2	31.2	31.2	31.2	31.2	31.2	30.9
G151.0	32.6	32.6	32.3	32.3	32.3	32.1	32.1	32.1	32.1	32.1
G152.0	33.5	33.5	33.3	33.3	33.3	33.1	33.1	33.3	33.1	33.1
G153.0	34.5	34.5	34.3	34.3	34.3	34.3	34.0	34.3	34.0	34.0
G154.0	35.4	35.4	35.2	35.2	35.2	35.2	35.2	35.0	35.0	35.4
G155.0	36.4	36.4	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2
G156.0	37.3	37.3	37.1	37.1	37.1	37.1	37.1	37.1	37.1	37.1
G157.0	38.3	38.3	38.3	38.3	38.0	38.0	38.0	38.0	38.0	38.0
G158.0	39.2	39.2	39.2	39.0	39.2	39.0	39.0	39.0	39.0	39.0
G159.0	40.4	40.2	40.2	40.2	40.2	40.2	40.0	40.2	40.2	40.0
G160.0	41.4	41.2	41.2	41.2	41.2	41.2	41.2	41.2	40.9	41.2
G161.0	42.3	42.3	42.1	42.1	42.1	42.1	41.9	42.1	42.1	42.1
G162.0	43.3	43.3	43.3	43.0	43.0	43.0	43.0	43.0	43.0	43.0
G163.0	44.2	44.2	44.2	44.2	44.0	44.0	44.0	44.0	44.0	44.0
G164.0	45.2	45.2	45.2	45.2	45.2	45.0	45.0	45.0	45.0	45.0
G165.0	46.1	46.1	46.1	46.1	45.9	45.9	45.9	45.9	46.1	45.9
G166.0	47.1	47.1	47.1	47.1	47.1	46.8	46.8	46.8	46.8	47.1
G167.0	48.0	48.0	48.0	48.0	48.0	47.8	47.8	47.8	47.8	47.8
G168.0	49.0	48.8	49.0	49.0	48.8	48.8	48.8	48.5	48.8	48.8
G169.0	50.0	49.7	50.0	49.7	49.7	49.5	49.5	49.5	49.5	49.7
G170.0	50.7	50.4	50.7	50.7	50.7	50.4	50.4	50.4	50.4	50.7
G171.0	51.6	51.4	51.4	51.4	51.4	51.1	51.1	51.4	51.1	51.4
G172.0	52.3	52.1	52.1	52.1	52.1	52.1	51.8	52.1	52.1	52.1
G173.0	53.0	52.8	52.8	52.6	52.8	52.6	52.6	52.8	52.6	52.8
G174.0	53.8	53.3	53.3	53.3	53.3	53.3	53.0	53.3	53.3	53.3
G175.0	54.2	53.8	53.8	53.8	53.8	53.8	53.8	52.8	53.8	53.8
G176.0	54.7	54.5	54.2	54.0	54.2	54.0	54.0	54.2	54.2	54.2
G177.0	55.2	54.7	54.7	54.5	54.5	54.5	54.5	54.5	54.5	54.5
G178.0	55.4	55.2	54.9	54.9	54.7	54.7	54.7	54.9	54.9	54.7
G179.0	55.9	55.4	55.2	54.9	54.9	54.9	54.9	54.9	55.2	54.9
G180.0	55.9	55.4	55.2	54.9	54.9	54.9	54.9	54.9	55.2	55.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	9004.2	9004.9	8999.4	9005.6	8994.2	8990.4	8985.6	8968.0	8954.0	8959.0
G1.0	9006.8	9008.2	9007.0	9006.8	8998.7	8996.8	8990.2	8972.5	8962.6	8958.0
G2.0	8999.7	9003.5	9002.5	9007.0	8993.2	8994.0	8987.5	8972.3	8953.0	8956.6
G3.0	8986.1	8990.6	8992.8	8995.9	8985.6	8981.3	8971.8	8960.2	8945.7	8944.5
G4.0	8967.3	8972.5	8973.0	8976.1	8973.3	8964.7	8954.5	8944.0	8929.5	8928.5
G5.0	8936.9	8947.1	8947.8	8952.6	8954.0	8942.6	8926.9	8917.1	8912.4	8892.2
G6.0	8899.1	8906.4	8910.7	8921.9	8918.6	8904.0	8889.5	8885.3	8873.8	8860.5
G7.0	8856.2	8864.1	8866.5	8875.5	8874.1	8863.6	8847.7	8843.6	8829.4	8819.6
G8.0	8805.6	8814.9	8816.8	8821.3	8823.2	8816.3	8807.3	8798.2	8778.2	8766.1
G9.0	8739.0	8748.7	8757.1	8763.5	8759.9	8760.6	8735.0	8726.1	8704.5	8695.9
G10.0	8677.6	8679.3	8684.3	8684.5	8677.9	8668.3	8659.1	8638.9	8617.9	8604.4
G11.0	8598.9	8595.1	8594.4	8593.4	8586.8	8577.7	8567.7	8553.0	8525.2	8514.7
G12.0	8511.6	8497.6	8489.3	8489.3	8475.2	8478.1	8469.8	8451.7	8427.2	8407.4
G13.0	8420.5	8396.7	8385.8	8379.1	8361.5	8363.0	8355.3	8329.2	8310.4	8298.3
G14.0	8323.0	8285.9	8270.7	8250.2	8240.7	8231.9	8231.2	8199.8	8188.1	8166.0
G15.0	8204.8	8167.5	8141.1	8118.2	8105.1	8102.8	8081.6	8062.3	8038.5	8019.3
G16.0	8079.2	8040.9	8002.4	7972.7	7952.9	7931.8	7922.5	7903.0	7878.2	7855.9
G17.0	7936.5	7904.4	7859.2	7813.3	7785.5	7767.6	7751.2	7730.3	7716.0	7692.5
G18.0	7774.3	7738.4	7696.3	7646.6	7610.9	7583.6	7566.7	7543.1	7530.0	7503.6
G19.0	7578.1	7554.8	7516.0	7459.6	7420.4	7399.0	7371.2	7357.9	7333.8	7313.4
G20.0	7361.2	7343.3	7315.3	7270.1	7226.6	7181.6	7167.6	7140.5	7116.7	7094.8
G21.0	7110.0	7109.8	7098.8	7057.5	7003.9	6959.0	6937.1	6912.9	6887.4	6871.7
G22.0	6835.3	6853.1	6856.5	6831.0	6778.9	6719.5	6701.4	6671.9	6651.0	6628.9
G23.0	6534.4	6567.3	6587.7	6578.4	6530.2	6478.1	6450.3	6417.7	6405.8	6386.0
G24.0	6206.2	6243.1	6288.0	6294.2	6266.6	6212.4	6191.5	6162.0	6138.9	6110.9
G25.0	5866.1	5911.5	5973.1	6001.2	5995.3	5947.2	5916.5	5898.0	5869.4	5847.1
G26.0	5518.9	5551.9	5613.0	5687.0	5701.8	5650.1	5642.3	5598.3	5593.1	5556.7
G27.0	5143.1	5202.3	5268.2	5344.0	5382.8	5361.2	5345.0	5316.7	5312.9	5273.9
G28.0	4801.3	4839.6	4912.6	4999.4	5067.0	5073.4	5057.0	5021.1	5004.2	4980.9
G29.0	4465.7	4498.8	4574.9	4656.5	4738.5	4764.9	4746.8	4720.2	4710.2	4679.5
G30.0	4153.4	4181.2	4248.3	4322.8	4416.5	4448.1	4433.1	4400.1	4387.9	4365.8
G31.0	3865.6	3885.6	3940.1	4016.2	4080.2	4115.6	4106.1	4083.5	4064.2	4043.8
G32.0	3597.6	3609.5	3636.6	3678.7	3751.0	3789.8	3783.1	3748.6	3746.2	3707.5
G33.0	3336.4	3346.7	3357.6	3373.1	3413.3	3438.5	3434.2	3399.9	3386.9	3358.1
G34.0	3083.1	3073.6	3082.4	3071.0	3089.3	3091.2	3089.8	3037.0	3024.1	2999.4
G35.0	2837.2	2824.4	2810.8	2785.4	2749.9	2720.9	2715.2	2669.5	2645.5	2641.0
G36.0	2583.4	2562.3	2536.6	2484.7	2424.8	2364.4	2344.4	2310.6	2290.9	2276.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	2332.3	2306.6	2267.6	2203.6	2123.2	2049.7	2020.5	1978.1	1962.4	1954.8
G38.0	2072.1	2036.9	1986.0	1908.4	1825.9	1751.9	1712.0	1677.5	1667.3	1650.1
G39.0	1822.1	1780.2	1726.5	1645.2	1569.5	1500.5	1459.9	1429.9	1414.9	1405.6
G40.0	1561.2	1526.0	1470.1	1405.9	1335.2	1276.3	1239.2	1213.2	1204.4	1190.2
G41.0	1327.4	1288.2	1243.0	1183.0	1132.4	1080.8	1050.1	1029.1	1023.2	1008.5
G42.0	1106.2	1078.6	1041.5	989.7	951.4	913.8	886.0	874.3	864.8	851.7
G43.0	920.2	899.3	874.1	833.6	802.5	769.9	751.8	742.3	743.5	726.8
G44.0	765.4	748.3	727.6	702.8	677.4	657.2	644.1	636.7	641.7	624.6
G45.0	638.6	631.9	617.9	598.4	580.1	567.7	556.3	555.1	558.9	543.2
G46.0	546.6	542.8	532.0	519.0	505.2	495.2	487.8	490.0	497.8	480.2
G47.0	477.4	473.3	465.7	455.5	446.2	439.5	436.0	440.7	449.0	431.7
G48.0	425.7	422.2	417.4	409.6	402.2	398.1	395.8	402.4	413.4	396.0
G49.0	388.4	385.8	381.3	375.5	371.0	367.9	367.7	376.3	387.7	370.3
G50.0	362.0	359.6	356.8	351.8	348.0	347.0	347.5	356.8	368.4	351.3
G51.0	343.2	340.8	337.7	333.7	331.1	330.6	332.5	341.5	352.7	336.3
G52.0	327.3	324.6	323.0	319.7	317.8	318.0	320.1	329.2	340.4	324.4
G53.0	314.0	311.6	310.4	308.2	306.8	306.6	309.0	318.5	329.2	313.5
G54.0	302.3	300.6	299.7	298.0	297.1	297.3	299.4	308.7	319.2	304.4
G55.0	292.1	290.6	290.2	288.5	288.5	288.7	290.9	299.2	309.4	295.9
G56.0	283.5	282.3	281.8	280.4	279.7	280.6	282.8	291.1	301.1	287.8
G57.0	275.7	274.5	274.0	272.8	272.1	273.0	275.4	283.0	291.6	279.7
G58.0	268.3	266.9	266.4	265.2	265.0	265.9	268.3	275.2	283.0	272.6
G59.0	260.9	259.5	258.8	258.1	258.5	259.3	261.6	268.0	274.7	265.2
G60.0	254.0	252.6	251.9	251.6	252.1	253.3	255.4	261.4	266.9	258.8
G61.0	247.1	245.7	245.2	244.7	245.9	247.1	249.3	254.7	259.3	251.9
G62.0	240.2	239.3	238.6	238.6	240.0	241.4	243.3	247.8	251.9	245.7
G63.0	233.6	232.9	232.1	232.4	234.3	235.5	237.6	241.4	245.2	239.5
G64.0	226.9	226.4	225.9	226.4	228.6	229.8	231.7	235.5	239.0	233.6
G65.0	220.2	219.8	219.8	220.2	222.4	224.3	225.9	229.5	232.9	227.9
G66.0	213.8	213.3	213.6	214.3	216.7	218.8	220.2	223.6	227.1	221.9
G67.0	207.6	206.9	207.4	207.9	210.7	212.6	214.5	216.9	220.5	215.7
G68.0	201.2	200.5	201.0	201.7	204.3	206.7	208.1	210.5	212.9	208.6
G69.0	194.8	193.8	194.3	195.5	198.4	200.7	201.9	203.4	205.7	201.9
G70.0	187.7	187.7	187.7	189.1	191.9	194.8	195.7	196.7	198.4	195.3
G71.0	180.8	181.2	181.2	182.9	185.5	188.6	189.3	190.0	191.9	188.6
G72.0	173.4	174.6	175.1	176.5	179.1	182.4	183.1	183.1	184.8	181.9
G73.0	167.0	167.9	168.6	169.6	172.4	176.5	177.4	176.7	177.4	175.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	161.7	163.9	164.6	165.8	169.8	175.5	176.9	175.8	175.8	173.4
G75.0	162.7	166.3	168.9	173.4	178.4	186.0	188.1	187.4	187.2	183.9
G76.0	177.4	183.1	187.2	192.4	199.1	206.0	205.7	203.4	201.7	200.0
G77.0	195.3	200.5	203.8	211.4	219.8	224.1	222.4	214.5	206.7	210.7
G78.0	196.7	201.4	206.2	214.3	226.2	237.4	236.4	223.3	212.6	220.7
G79.0	195.3	198.6	202.9	209.8	220.5	235.5	241.2	230.5	221.4	225.7
G80.0	188.1	191.7	195.7	202.6	211.4	225.2	236.2	231.4	225.7	224.8
G81.0	180.3	183.6	187.4	193.8	203.8	217.9	226.7	226.2	223.1	218.8
G82.0	172.2	175.8	179.6	185.3	195.3	209.5	217.1	216.2	214.3	210.5
G83.0	160.5	165.8	170.3	175.5	186.2	198.8	206.7	206.4	202.6	201.2
G84.0	148.6	155.1	158.9	163.6	175.3	186.5	195.3	196.2	192.4	190.3
G85.0	135.1	142.5	145.1	148.9	160.5	171.3	181.9	184.1	181.0	177.9
G86.0	121.5	128.9	130.6	134.4	147.9	159.1	170.1	172.2	165.5	163.9
G87.0	107.5	112.3	115.6	120.6	133.7	146.3	156.0	149.4	143.7	142.2
G88.0	93.9	98.0	98.9	102.5	117.5	129.6	137.2	122.0	113.0	116.3
G89.0	74.9	77.3	75.9	70.9	84.7	93.7	98.2	86.3	48.8	81.6
G90.0	54.0	55.9	56.1	39.7	54.5	65.2	65.9	64.0	36.2	60.9
G91.0	40.2	44.7	43.8	32.3	41.4	50.7	55.4	42.8	33.1	41.2
G92.0	29.5	33.1	33.1	27.1	27.6	36.6	40.0	32.8	30.2	31.2
G93.0	16.2	18.5	17.1	12.8	13.8	17.6	18.3	18.1	20.5	15.7
G94.0	9.8	10.2	8.1	8.3	9.3	6.9	5.7	5.2	6.4	3.8
G95.0	6.2	5.9	5.0	4.3	3.3	2.4	1.9	1.9	1.9	1.9
G96.0	5.7	5.9	4.8	4.0	3.1	2.1	1.9	1.9	1.9	1.9
G97.0	5.7	5.5	4.3	3.6	2.6	2.1	1.9	2.1	1.9	1.9
G98.0	5.5	5.0	4.0	3.1	2.4	2.1	2.1	2.1	2.1	2.1
G99.0	5.0	4.3	3.3	2.8	2.1	2.1	2.1	2.1	2.1	2.1
G100.0	4.3	3.6	3.1	2.6	2.1	2.1	2.1	2.1	2.1	2.1
G101.0	3.6	3.3	2.8	2.4	2.1	2.1	2.1	2.1	2.1	2.1
G102.0	3.3	3.1	2.6	2.4	2.1	2.1	2.4	2.4	2.4	2.4
G103.0	3.1	2.8	2.6	2.4	2.4	2.4	2.4	2.4	2.6	2.4
G104.0	3.1	2.8	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
G105.0	2.8	2.6	2.4	2.6	2.6	2.4	2.4	2.4	2.4	2.4
G106.0	2.8	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
G107.0	3.1	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
G108.0	2.8	2.6	2.6	2.8	2.8	2.6	2.8	2.8	2.8	2.8
G109.0	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
G110.0	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	3.1	3.1	3.1	3.1	3.1	3.3	3.3	3.1	3.3	3.3
G112.0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.6
G113.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
G114.0	3.8	3.8	3.8	3.8	3.8	3.8	4.0	4.0	3.8	3.8
G115.0	4.0	4.0	4.0	4.0	4.0	4.3	4.0	4.3	4.3	4.3
G116.0	4.3	4.3	4.3	4.5	4.5	4.5	4.5	4.5	4.5	4.5
G117.0	4.5	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	5.0
G118.0	5.0	5.0	5.0	5.0	5.0	5.2	5.2	5.2	5.2	5.2
G119.0	5.2	5.5	5.5	5.5	5.5	5.5	5.7	5.7	5.5	5.7
G120.0	5.7	5.7	5.9	5.9	5.9	5.9	5.9	5.9	6.2	6.2
G121.0	6.2	6.2	6.4	6.4	6.4	6.4	6.4	6.4	6.7	6.7
G122.0	6.7	6.7	6.9	6.9	6.9	6.9	6.7	7.1	7.1	7.1
G123.0	7.1	7.1	7.4	7.4	7.4	7.4	7.4	7.6	7.6	7.6
G124.0	7.6	7.8	7.8	7.8	8.1	8.1	8.1	8.1	8.1	8.3
G125.0	8.3	8.3	8.6	8.6	8.6	8.6	8.8	8.8	8.8	8.8
G126.0	9.0	9.0	9.0	9.3	9.3	9.3	9.3	9.5	9.5	9.5
G127.0	9.5	9.8	9.8	9.8	10.0	10.0	10.0	10.0	10.2	10.2
G128.0	10.5	10.5	10.5	10.5	10.7	10.7	10.7	10.7	10.9	10.9
G129.0	11.2	11.2	11.2	11.2	11.4	11.4	11.4	11.4	11.6	11.6
G130.0	11.9	11.9	12.1	12.1	12.1	12.1	12.4	12.4	12.4	12.4
G131.0	12.6	12.6	12.6	12.8	12.8	12.8	13.1	13.1	13.1	13.1
G132.0	13.6	13.6	13.6	13.6	13.8	13.8	13.8	14.0	14.0	14.0
G133.0	14.3	14.3	14.3	14.5	14.5	14.5	14.8	14.8	15.0	15.0
G134.0	15.2	15.2	15.2	15.5	15.5	15.5	15.7	15.7	15.7	15.9
G135.0	16.2	16.2	16.2	16.4	16.4	16.4	16.4	16.6	16.6	16.6
G136.0	17.1	17.1	17.1	17.1	17.1	17.4	17.4	17.6	17.6	17.6
G137.0	18.1	18.1	18.1	18.1	18.3	18.3	18.3	18.5	18.5	18.5
G138.0	19.0	19.0	19.0	19.0	19.3	19.3	19.3	19.5	19.5	19.5
G139.0	19.7	20.0	20.0	20.0	20.0	20.2	20.2	20.5	20.5	20.5
G140.0	20.7	20.9	20.9	20.9	20.9	21.2	21.2	21.4	21.4	21.4
G141.0	21.9	21.9	21.9	22.1	22.1	22.1	22.1	22.4	22.4	22.6
G142.0	22.8	22.8	22.8	23.1	23.1	23.1	23.1	23.3	23.3	23.5
G143.0	23.8	24.0	23.8	24.0	24.0	24.0	24.3	24.3	24.3	24.5
G144.0	24.7	25.0	25.0	25.0	25.0	25.2	25.2	25.2	25.5	25.5
G145.0	25.7	25.9	25.9	25.9	26.2	26.2	26.2	26.2	26.4	26.4
G146.0	26.9	26.9	26.9	26.9	27.1	27.1	27.1	27.4	27.4	27.4
G147.0	27.8	27.8	27.8	28.1	28.1	28.1	28.1	28.3	28.3	28.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	29.0	29.0	29.0	29.0	29.0	29.0	29.3	29.3	29.3	29.5
G149.0	30.0	30.0	30.0	30.0	30.0	30.2	30.2	30.2	30.2	30.4
G150.0	30.9	30.9	30.9	31.2	31.2	30.9	31.2	31.2	31.4	31.4
G151.0	31.9	32.1	31.9	32.1	32.1	32.1	32.1	32.3	32.3	32.3
G152.0	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.3	33.3	33.3
G153.0	34.0	34.0	34.0	34.0	34.0	34.3	34.0	34.3	34.3	34.3
G154.0	35.2	35.0	35.0	35.0	35.0	35.0	35.2	35.2	35.2	35.2
G155.0	36.2	36.2	35.9	36.2	36.2	36.2	36.2	36.2	36.4	36.4
G156.0	37.1	37.1	37.1	37.1	37.1	37.1	37.1	37.3	37.3	37.3
G157.0	38.0	38.0	38.0	38.3	38.3	38.3	38.3	38.3	38.3	38.3
G158.0	39.0	39.2	39.2	39.2	39.2	39.2	39.2	39.2	39.2	39.2
G159.0	40.2	40.2	40.2	40.4	40.4	40.4	40.4	40.4	40.2	40.4
G160.0	41.2	41.2	41.2	41.4	41.4	41.4	41.4	41.4	41.4	41.4
G161.0	42.1	42.3	42.3	42.3	42.6	42.6	42.6	42.3	42.3	42.3
G162.0	43.0	43.0	43.3	43.5	43.5	43.5	43.5	42.8	43.3	43.3
G163.0	44.0	44.0	44.2	44.5	44.5	44.7	44.5	44.5	44.2	44.5
G164.0	45.0	45.0	45.2	45.4	45.7	45.7	45.7	45.4	45.2	45.4
G165.0	45.9	45.9	46.1	46.4	46.6	46.6	46.6	46.4	46.4	46.4
G166.0	46.8	47.1	47.1	47.3	47.6	47.6	47.6	47.3	47.3	47.1
G167.0	47.8	48.0	48.0	48.3	48.5	48.5	48.5	48.3	48.0	48.3
G168.0	48.8	48.8	49.0	49.0	49.2	49.2	49.5	49.2	49.0	49.0
G169.0	49.7	49.7	49.7	50.0	50.2	50.2	50.4	50.2	50.0	50.0
G170.0	50.4	50.4	50.7	50.9	50.9	51.1	51.1	51.1	50.7	50.7
G171.0	51.4	51.4	51.4	51.6	51.6	51.8	51.8	51.8	51.6	51.4
G172.0	52.1	52.1	52.1	52.3	52.3	52.6	52.6	52.6	52.3	52.1
G173.0	52.8	52.6	52.8	52.8	52.8	53.3	53.3	53.3	53.0	52.8
G174.0	53.3	53.3	53.3	53.5	53.5	53.8	53.8	54.0	53.5	53.5
G175.0	53.8	53.8	53.8	53.8	54.0	54.0	54.2	54.5	54.2	54.0
G176.0	54.0	54.0	54.2	54.2	54.2	54.5	54.7	54.7	54.5	54.5
G177.0	54.5	54.5	54.5	54.7	54.7	54.7	54.9	54.9	54.9	54.7
G178.0	54.7	54.7	54.7	54.9	54.7	54.9	55.2	55.2	55.2	54.9
G179.0	54.9	54.9	54.9	54.9	54.9	54.9	55.2	55.4	55.4	55.2
G180.0	55.2	54.9	54.9	54.9	55.2	54.9	55.2	55.4	55.4	55.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	8961.8	8955.9	8958.8	8958.3	8959.9	8950.4	8952.8	8953.5	8961.8	8963.8
G1.0	8950.4	8948.5	8952.8	8945.9	8946.9	8930.7	8932.6	8932.3	8944.5	8944.5
G2.0	8948.5	8940.4	8939.5	8931.6	8932.8	8918.3	8913.3	8917.1	8920.2	8917.4
G3.0	8936.2	8929.7	8924.7	8917.8	8910.7	8889.3	8888.3	8889.3	8887.6	8886.2
G4.0	8910.5	8903.6	8894.8	8888.6	8881.9	8867.9	8869.1	8860.8	8853.2	8849.1
G5.0	8886.5	8871.0	8869.1	8852.4	8846.0	8834.1	8820.1	8818.9	8815.3	8813.4
G6.0	8844.1	8832.7	8823.7	8805.8	8796.1	8783.9	8782.0	8775.1	8769.2	8765.6
G7.0	8804.2	8788.0	8774.7	8757.1	8750.2	8734.5	8731.6	8722.3	8717.3	8711.2
G8.0	8750.2	8738.5	8723.8	8704.3	8688.1	8674.8	8667.4	8662.4	8655.0	8650.3
G9.0	8675.0	8662.2	8655.0	8637.2	8626.0	8606.0	8601.5	8590.1	8582.7	8578.7
G10.0	8588.0	8579.6	8560.6	8551.6	8542.5	8534.9	8521.4	8513.0	8504.5	8495.4
G11.0	8491.9	8477.1	8460.7	8460.7	8448.3	8446.2	8429.8	8426.7	8413.2	8402.4
G12.0	8389.1	8375.8	8362.5	8356.3	8341.6	8331.6	8318.5	8318.7	8308.3	8299.2
G13.0	8271.9	8257.8	8251.7	8241.9	8227.4	8206.0	8201.9	8198.6	8188.6	8181.5
G14.0	8138.9	8133.5	8120.8	8113.9	8088.5	8080.6	8069.9	8067.6	8040.9	8036.6
G15.0	7996.0	7992.6	7982.4	7973.4	7954.1	7942.9	7922.2	7905.8	7882.8	7867.1
G16.0	7835.0	7830.7	7820.2	7823.8	7791.0	7783.3	7753.1	7739.8	7698.0	7672.5
G17.0	7668.5	7666.1	7652.5	7653.5	7625.7	7600.9	7568.3	7540.0	7492.7	7456.8
G18.0	7481.5	7480.8	7467.0	7465.1	7434.4	7421.6	7377.1	7323.8	7267.7	7238.2
G19.0	7289.6	7287.9	7260.8	7257.7	7224.9	7199.4	7142.1	7083.6	7036.5	7006.3
G20.0	7082.0	7083.4	7049.1	7040.8	6988.5	6957.6	6878.4	6832.5	6783.0	6761.3
G21.0	6849.8	6842.0	6809.9	6806.8	6740.4	6676.0	6600.3	6550.4	6518.3	6498.3
G22.0	6607.0	6606.3	6560.1	6536.6	6446.7	6392.9	6298.7	6256.4	6229.5	6216.5
G23.0	6359.6	6330.6	6285.9	6243.8	6165.5	6076.1	5993.8	5950.3	5914.4	5918.4
G24.0	6089.4	6063.5	6000.0	5940.8	5826.6	5741.2	5664.7	5640.2	5601.4	5622.3
G25.0	5813.5	5770.3	5697.7	5616.1	5507.2	5405.9	5334.3	5313.1	5301.0	5303.1
G26.0	5520.0	5476.0	5378.3	5297.9	5159.0	5072.9	5018.2	4989.4	4975.2	4996.1
G27.0	5234.9	5166.6	5073.4	4961.8	4823.4	4741.8	4686.9	4659.3	4650.0	4669.3
G28.0	4932.3	4863.1	4747.5	4637.0	4501.4	4435.3	4377.9	4363.9	4345.1	4367.2
G29.0	4632.9	4549.9	4437.4	4314.0	4210.5	4140.1	4078.7	4047.3	4040.4	4059.0
G30.0	4306.8	4245.0	4115.4	4009.5	3920.3	3865.1	3803.6	3774.1	3753.1	3766.2
G31.0	4000.0	3926.5	3802.4	3720.8	3648.7	3609.5	3548.4	3507.9	3481.0	3481.3
G32.0	3655.1	3600.4	3502.9	3453.9	3387.3	3357.4	3296.5	3260.8	3222.0	3205.9
G33.0	3324.3	3269.1	3200.9	3178.0	3135.0	3103.6	3050.3	3016.8	2972.5	2940.7
G34.0	2965.9	2945.4	2907.8	2906.9	2871.0	2862.4	2808.9	2780.1	2728.0	2686.9
G35.0	2625.3	2618.1	2609.6	2628.6	2622.2	2598.4	2573.2	2542.0	2484.5	2430.5
G36.0	2273.3	2294.4	2315.9	2351.1	2345.6	2343.7	2315.4	2294.0	2238.8	2166.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	1952.0	1978.1	2020.2	2070.2	2083.5	2091.8	2072.8	2054.0	1994.3	1913.2
G38.0	1660.8	1691.5	1732.9	1799.5	1809.0	1830.4	1817.8	1799.0	1735.8	1654.2
G39.0	1412.3	1446.1	1487.5	1526.9	1557.6	1575.5	1575.7	1555.2	1491.7	1419.0
G40.0	1190.9	1216.1	1249.4	1291.5	1312.2	1336.7	1332.4	1318.3	1254.8	1184.0
G41.0	1009.4	1029.6	1054.8	1090.0	1101.0	1120.7	1114.5	1099.5	1048.6	987.3
G42.0	851.0	864.5	881.4	907.6	920.2	938.3	929.0	911.4	861.2	814.6
G43.0	723.5	731.6	742.3	757.5	771.6	778.7	771.6	753.5	712.6	676.7
G44.0	620.0	624.3	628.1	642.4	644.3	647.9	636.9	623.9	594.4	564.9
G45.0	537.5	539.7	542.5	549.2	550.4	551.8	539.0	529.7	505.2	485.2
G46.0	474.0	474.7	475.4	479.5	478.3	476.6	468.5	457.8	441.7	427.4
G47.0	426.0	426.9	425.5	427.2	427.2	424.3	415.8	410.0	395.3	386.7
G48.0	389.8	389.8	390.1	391.3	389.1	387.0	381.5	376.3	364.4	356.0
G49.0	364.1	363.9	361.8	364.1	362.5	361.3	356.0	351.5	341.5	335.6
G50.0	344.9	343.9	342.7	344.2	342.5	341.5	337.3	333.5	325.6	320.6
G51.0	329.9	328.7	326.8	328.2	327.5	326.3	323.0	319.7	313.2	308.7
G52.0	317.8	316.1	314.7	315.9	314.9	313.5	311.1	308.0	302.8	298.3
G53.0	307.0	305.9	303.3	304.7	304.0	303.5	300.9	298.3	293.3	289.2
G54.0	297.5	295.9	294.2	294.5	294.5	293.0	291.6	289.5	284.9	281.1
G55.0	289.2	287.5	285.6	285.9	285.2	284.9	283.3	281.6	277.3	273.8
G56.0	281.6	279.5	277.8	277.8	277.8	276.6	275.4	273.8	270.2	266.9
G57.0	274.0	272.3	270.4	270.2	269.7	269.2	268.3	266.9	263.3	260.4
G58.0	267.1	265.7	263.5	263.0	262.6	262.1	261.1	259.5	256.9	253.8
G59.0	260.7	259.5	256.9	256.1	255.2	254.7	254.5	253.1	250.2	247.1
G60.0	254.7	252.8	250.4	249.3	248.3	247.8	247.4	246.2	243.8	240.9
G61.0	248.3	246.6	244.3	242.8	241.4	241.2	240.7	239.5	237.4	235.0
G62.0	242.1	240.2	237.8	235.9	234.8	234.3	234.0	232.6	230.5	228.8
G63.0	236.2	234.3	231.7	229.8	228.1	227.9	227.1	225.9	224.5	222.6
G64.0	230.5	228.3	225.5	223.1	221.9	220.9	220.5	219.8	218.3	216.9
G65.0	224.5	222.6	219.1	216.9	215.0	214.5	214.1	213.8	211.9	210.7
G66.0	218.6	216.4	213.1	210.7	208.8	208.1	207.9	207.6	206.0	204.8
G67.0	212.4	210.7	206.9	204.3	202.2	201.4	201.4	201.4	199.6	198.8
G68.0	206.2	204.3	200.7	197.9	195.3	195.0	195.0	194.6	193.1	192.2
G69.0	200.0	198.1	194.1	191.5	189.1	188.6	188.1	187.7	186.2	185.8
G70.0	193.6	191.9	187.9	184.6	182.7	182.2	181.2	180.1	179.1	179.1
G71.0	187.2	185.8	181.0	178.1	176.0	175.3	173.6	172.7	171.5	171.7
G72.0	181.0	179.3	174.8	171.5	169.8	168.4	166.7	165.3	164.1	163.6
G73.0	174.8	173.1	167.9	165.1	163.4	162.2	159.6	158.4	157.0	156.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	173.1	169.6	163.4	159.8	158.4	157.7	155.3	153.4	152.0	152.9
G75.0	182.4	176.9	170.1	164.6	163.4	161.5	160.1	157.2	157.7	161.3
G76.0	199.8	195.0	188.9	183.4	181.5	177.9	175.3	172.2	174.8	179.3
G77.0	217.9	214.1	206.2	198.1	192.6	188.6	184.1	181.2	183.1	188.4
G78.0	228.8	222.9	210.3	199.3	192.9	188.4	183.9	180.8	183.6	190.0
G79.0	229.8	221.4	205.3	194.6	188.4	184.6	180.1	177.4	180.3	187.4
G80.0	223.3	212.6	197.6	186.5	179.3	175.8	171.3	168.9	173.4	179.6
G81.0	215.3	206.2	191.7	180.5	173.1	168.9	163.9	159.1	165.5	172.0
G82.0	207.4	198.4	183.6	172.9	165.3	159.8	153.9	149.6	157.0	163.2
G83.0	197.6	187.7	173.6	162.4	155.8	149.4	142.2	139.1	145.8	152.9
G84.0	186.0	174.8	160.8	148.9	142.7	137.5	129.4	127.7	133.4	141.0
G85.0	172.0	160.5	147.2	133.2	130.1	125.1	117.0	114.6	118.4	125.3
G86.0	160.8	148.6	134.1	119.9	115.1	110.8	104.4	101.3	104.4	110.1
G87.0	146.5	134.6	120.1	105.8	101.1	98.0	92.5	87.5	91.6	97.5
G88.0	126.8	116.5	102.3	85.9	85.4	85.6	80.9	72.1	78.5	83.5
G89.0	86.3	82.1	70.4	53.3	64.2	67.3	60.4	47.1	59.2	61.4
G90.0	62.3	61.8	50.0	36.6	51.8	52.8	48.0	37.8	45.7	51.1
G91.0	49.5	45.0	36.6	30.7	40.0	40.2	36.6	32.3	32.6	40.9
G92.0	34.5	29.0	22.4	24.0	28.3	29.7	26.4	23.5	23.1	29.3
G93.0	13.6	12.8	10.2	9.5	12.6	17.4	17.6	17.6	18.1	23.1
G94.0	3.1	4.3	4.0	4.5	5.2	8.1	10.5	12.6	14.0	18.1
G95.0	1.9	2.4	3.1	3.8	5.0	5.9	6.4	7.1	9.3	12.6
G96.0	1.9	2.1	2.8	3.3	4.3	5.5	5.9	6.4	6.9	8.1
G97.0	2.1	2.1	2.6	3.1	3.8	4.8	5.5	5.9	6.7	7.4
G98.0	2.1	2.1	2.4	2.8	3.3	4.0	4.8	5.2	6.2	6.9
G99.0	2.1	1.9	2.1	2.6	3.1	3.8	4.3	4.8	5.5	6.2
G100.0	2.1	2.1	2.1	2.4	2.8	3.3	3.8	4.0	4.8	5.5
G101.0	2.1	2.1	2.1	2.4	2.8	3.1	3.3	3.8	4.3	4.8
G102.0	2.4	2.4	2.1	2.1	2.6	2.8	3.1	3.6	4.0	4.3
G103.0	2.4	2.4	2.4	2.4	2.6	2.8	3.1	3.3	3.6	4.0
G104.0	2.4	2.4	2.4	2.4	2.6	2.8	2.8	3.1	3.6	3.8
G105.0	2.4	2.4	2.4	2.4	2.6	2.8	2.8	3.1	3.3	3.6
G106.0	2.6	2.6	2.6	2.6	2.6	2.8	2.8	3.1	3.3	3.3
G107.0	2.8	2.6	2.6	2.6	2.8	2.8	3.1	3.1	3.3	3.3
G108.0	2.8	2.8	2.8	2.8	2.8	2.8	2.8	3.3	3.3	3.6
G109.0	2.8	2.8	2.8	2.8	2.8	2.8	3.1	3.3	3.6	3.6
G110.0	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.6	3.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.6	3.8
G112.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.8
G113.0	3.8	3.8	3.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8
G114.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
G115.0	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
G116.0	4.5	4.5	4.5	4.8	4.5	4.8	4.8	4.8	4.8	4.8
G117.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
G118.0	5.2	5.2	5.2	5.2	5.5	5.5	5.5	5.5	5.5	5.5
G119.0	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.9	5.9	5.9
G120.0	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.4	6.2
G121.0	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.9	6.7	6.9
G122.0	7.1	7.1	7.1	7.1	7.4	7.4	7.4	7.1	7.4	7.4
G123.0	7.8	7.6	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8
G124.0	8.3	8.3	8.3	8.3	8.6	8.3	8.6	8.6	8.6	8.6
G125.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0
G126.0	9.5	9.5	9.5	9.8	9.8	9.8	9.8	9.8	9.8	9.8
G127.0	10.2	10.2	10.2	10.2	10.5	10.5	10.5	10.5	10.5	10.7
G128.0	10.9	11.2	10.9	11.2	11.2	11.2	11.2	11.2	11.2	11.4
G129.0	11.6	11.9	11.6	11.9	11.9	11.9	12.1	12.1	12.1	12.1
G130.0	12.4	12.6	12.6	12.6	12.8	12.8	12.8	12.8	13.1	12.8
G131.0	13.3	13.3	13.3	13.3	13.6	13.6	13.6	13.8	13.8	13.8
G132.0	14.0	14.0	14.3	14.3	14.3	14.3	14.5	14.5	14.8	14.8
G133.0	15.0	15.0	15.2	15.2	15.2	15.2	15.5	15.5	15.7	15.7
G134.0	15.9	15.9	15.9	15.9	16.2	16.2	16.4	16.4	16.4	16.6
G135.0	16.9	16.9	16.9	16.9	17.1	17.1	17.4	17.4	17.4	17.6
G136.0	17.8	17.6	17.8	17.8	18.1	18.1	18.3	18.3	18.5	18.5
G137.0	18.8	18.8	18.8	18.8	19.0	19.0	19.0	19.3	19.5	19.5
G138.0	19.7	19.7	19.7	19.7	20.0	20.0	20.2	20.2	20.5	20.5
G139.0	20.7	20.7	20.7	20.7	20.9	20.9	21.2	21.2	21.4	21.4
G140.0	21.6	21.6	21.6	21.6	21.9	21.9	22.1	22.1	22.4	22.6
G141.0	22.6	22.6	22.6	22.8	22.8	22.8	23.1	23.1	23.3	23.5
G142.0	23.5	23.5	23.5	23.8	23.8	24.0	24.0	24.3	24.5	24.5
G143.0	24.5	24.5	24.5	24.7	24.7	25.0	25.2	25.2	25.5	25.5
G144.0	25.5	25.5	25.7	25.7	25.9	25.9	26.2	26.2	26.4	26.6
G145.0	26.4	26.4	26.6	26.6	26.9	26.9	27.1	27.4	27.4	27.6
G146.0	27.6	27.6	27.6	27.6	27.8	27.8	28.1	28.3	28.5	28.5
G147.0	28.5	28.5	28.5	28.8	29.0	29.0	29.5	29.3	29.5	29.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	29.5	29.5	29.5	29.7	30.0	30.0	30.2	30.2	30.4	30.4
G149.0	30.4	30.4	30.4	30.7	30.9	30.9	31.2	31.4	31.4	31.6
G150.0	31.4	31.4	31.6	31.6	31.9	31.9	32.1	32.3	32.3	32.6
G151.0	32.3	32.3	32.6	32.6	32.8	33.1	33.3	33.3	33.5	33.5
G152.0	33.3	33.5	33.5	33.8	34.0	34.0	34.3	34.3	34.5	34.5
G153.0	34.5	34.5	34.5	34.7	35.0	35.0	35.2	35.4	35.4	35.4
G154.0	35.4	35.4	35.4	35.7	35.9	35.9	36.2	36.4	36.4	36.6
G155.0	36.4	36.4	36.4	36.6	36.9	36.9	37.1	37.3	37.6	37.6
G156.0	37.3	37.3	37.6	37.6	37.8	37.8	38.0	38.3	38.5	38.5
G157.0	38.5	38.5	38.5	38.5	39.0	38.8	39.2	39.2	39.5	39.5
G158.0	39.5	39.5	39.5	39.7	39.7	39.7	40.0	40.2	40.4	40.4
G159.0	40.4	40.4	40.4	40.7	40.7	40.7	40.9	41.2	41.4	41.4
G160.0	41.4	41.4	41.6	41.6	41.6	41.9	41.9	42.1	42.3	42.3
G161.0	42.3	42.6	42.3	42.6	42.8	42.8	43.0	43.0	43.3	43.5
G162.0	43.5	43.5	43.5	43.5	43.8	43.8	44.0	44.0	44.2	44.5
G163.0	44.5	44.5	44.5	44.5	44.7	44.7	45.0	45.0	45.0	45.2
G164.0	45.4	45.7	45.4	45.7	45.4	45.7	45.7	45.9	46.1	46.1
G165.0	46.4	46.4	46.6	46.4	46.4	46.6	46.8	46.8	46.8	47.1
G166.0	47.3	47.3	47.3	47.3	47.3	47.6	47.6	47.8	48.0	48.0
G167.0	48.3	48.3	48.3	48.3	48.3	48.3	48.5	48.8	48.8	48.8
G168.0	49.2	49.2	49.2	49.2	49.2	49.2	49.5	49.5	49.7	49.7
G169.0	50.0	50.0	50.0	50.0	50.2	50.2	50.2	50.0	50.4	50.4
G170.0	50.9	50.9	50.7	50.7	50.9	50.9	50.9	51.1	51.4	51.4
G171.0	51.6	51.4	51.6	51.6	51.6	51.6	51.6	51.8	52.1	52.1
G172.0	52.3	52.3	52.3	52.1	52.3	52.3	52.3	52.6	52.6	52.8
G173.0	53.0	52.8	52.8	52.8	52.8	52.8	53.0	53.3	53.3	53.3
G174.0	53.5	53.3	53.3	53.3	53.3	53.3	53.5	53.5	53.8	53.8
G175.0	53.8	53.8	53.8	53.8	53.8	53.8	54.0	54.0	54.2	54.2
G176.0	54.2	54.2	54.0	54.0	54.0	54.2	54.2	54.5	54.5	54.5
G177.0	54.5	54.5	54.2	54.2	54.5	54.5	54.5	54.7	54.7	54.7
G178.0	54.7	54.7	54.5	54.5	54.5	54.7	54.7	54.7	54.9	54.9
G179.0	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.9	54.9	54.9
G180.0	54.9	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.9	54.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	8960.9	8964.9	8969.0	8965.7	8967.8	8966.1	9008.2	9009.2	9002.8	9016.1
G1.0	8938.8	8942.8	8942.1	8938.3	8939.0	8937.3	9002.5	9007.0	9007.0	9009.4
G2.0	8909.5	8912.4	8914.5	8904.3	8911.7	8906.4	8987.5	8991.3	8985.6	8991.1
G3.0	8885.0	8881.9	8869.8	8874.3	8874.8	8864.6	8961.1	8962.8	8961.4	8967.8
G4.0	8844.8	8846.5	8835.5	8831.8	8834.8	8826.5	8933.3	8923.5	8923.8	8928.5
G5.0	8806.8	8804.6	8790.1	8791.8	8785.8	8776.8	8894.8	8888.3	8885.5	8891.2
G6.0	8754.2	8752.3	8740.4	8735.2	8733.3	8722.1	8856.0	8848.9	8847.7	8850.1
G7.0	8697.8	8696.7	8680.7	8674.8	8675.5	8658.6	8811.5	8805.3	8799.9	8803.4
G8.0	8635.0	8633.4	8613.9	8605.8	8603.7	8588.4	8757.3	8747.3	8742.8	8742.8
G9.0	8559.9	8564.2	8541.6	8532.3	8519.5	8512.3	8697.6	8690.0	8681.0	8675.3
G10.0	8480.7	8472.4	8457.2	8441.9	8429.8	8414.6	8625.5	8624.6	8611.7	8609.6
G11.0	8392.2	8375.8	8353.9	8342.8	8316.6	8298.7	8553.2	8540.2	8533.7	8522.1
G12.0	8278.0	8261.4	8234.5	8205.5	8185.8	8160.6	8467.4	8448.6	8437.6	8431.0
G13.0	8143.2	8123.2	8088.3	8062.8	8035.2	8006.4	8365.3	8342.5	8325.9	8320.4
G14.0	7990.3	7969.1	7925.8	7894.2	7862.8	7833.8	8231.7	8213.1	8194.1	8191.5
G15.0	7821.2	7781.7	7747.7	7711.0	7677.7	7652.1	8086.4	8061.1	8047.6	8046.4
G16.0	7623.8	7592.1	7549.1	7510.8	7492.5	7458.5	7921.8	7893.2	7876.8	7873.7
G17.0	7418.3	7387.8	7352.4	7322.4	7294.3	7271.0	7734.1	7709.9	7701.3	7678.7
G18.0	7193.5	7189.0	7148.8	7121.9	7097.2	7070.1	7541.5	7520.3	7495.3	7466.1
G19.0	6974.0	6973.7	6931.6	6903.3	6877.2	6852.7	7348.1	7320.3	7303.9	7266.5
G20.0	6727.1	6732.6	6692.8	6675.2	6646.7	6623.6	7144.3	7113.8	7093.1	7054.8
G21.0	6462.9	6455.7	6450.0	6427.2	6402.9	6376.3	6922.6	6904.3	6871.7	6828.6
G22.0	6190.3	6187.4	6182.2	6163.2	6149.9	6115.1	6702.4	6669.1	6630.0	6583.0
G23.0	5909.6	5915.1	5911.3	5901.3	5880.4	5857.3	6459.3	6419.3	6386.0	6345.4
G24.0	5614.0	5619.9	5623.0	5621.6	5613.3	5592.1	6209.8	6164.8	6120.8	6078.5
G25.0	5311.0	5338.8	5336.9	5352.1	5344.8	5324.8	5942.5	5905.4	5849.2	5812.1
G26.0	4995.9	5046.3	5033.7	5067.4	5072.0	5049.4	5671.8	5629.9	5585.7	5535.8
G27.0	4687.6	4731.6	4750.9	4771.8	4779.4	4775.1	5402.8	5359.5	5309.6	5258.2
G28.0	4384.1	4443.1	4450.5	4475.2	4498.0	4479.5	5126.9	5075.0	5028.9	4965.2
G29.0	4077.3	4130.8	4154.8	4172.4	4197.6	4177.9	4831.7	4801.1	4753.0	4688.1
G30.0	3777.6	3815.4	3836.9	3855.9	3882.8	3859.0	4550.4	4507.1	4456.9	4392.9
G31.0	3481.8	3501.7	3519.3	3534.3	3547.9	3536.5	4232.9	4196.7	4155.3	4099.0
G32.0	3187.3	3204.2	3193.3	3198.3	3209.7	3191.8	3911.5	3876.8	3831.9	3779.8
G33.0	2908.6	2889.8	2867.6	2859.3	2852.7	2831.7	3589.5	3561.7	3517.2	3469.6
G34.0	2628.6	2591.3	2532.5	2510.9	2508.0	2471.6	3241.3	3221.3	3174.0	3127.9
G35.0	2359.1	2290.6	2228.1	2175.3	2161.0	2133.2	2883.4	2858.9	2816.0	2806.1
G36.0	2074.7	1996.7	1917.2	1861.1	1831.6	1799.5	2509.0	2491.9	2467.8	2469.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	1813.5	1732.9	1648.9	1601.6	1564.3	1529.8	2145.1	2144.6	2141.5	2163.6
G38.0	1555.5	1476.0	1403.7	1356.9	1320.3	1294.8	1824.7	1824.0	1832.3	1853.3
G39.0	1327.2	1250.6	1191.6	1150.2	1124.8	1104.3	1536.9	1554.5	1558.6	1590.4
G40.0	1110.0	1053.4	1002.3	969.9	951.8	933.3	1311.0	1314.3	1319.5	1341.4
G41.0	922.3	883.8	846.0	820.1	808.7	794.6	1112.9	1114.3	1121.2	1143.8
G42.0	768.0	739.2	710.0	691.2	682.4	671.9	941.4	941.4	946.4	963.7
G43.0	644.3	621.5	602.9	589.1	579.9	575.3	794.4	791.8	798.0	807.0
G44.0	542.8	526.8	513.5	504.7	498.5	497.1	674.8	674.8	670.5	682.4
G45.0	469.3	456.6	448.1	441.7	439.3	439.5	575.3	572.0	572.0	577.5
G46.0	416.0	408.4	401.7	395.0	393.1	396.0	499.2	493.8	493.3	496.1
G47.0	377.2	370.8	365.8	363.7	361.5	364.6	437.9	433.6	432.9	434.5
G48.0	349.9	344.2	340.4	338.7	338.5	341.5	396.7	390.8	388.9	389.1
G49.0	330.1	326.3	323.0	322.3	322.8	325.8	364.6	359.1	356.5	357.7
G50.0	316.3	313.2	310.9	310.1	310.6	314.0	343.4	338.0	334.6	334.2
G51.0	304.7	302.5	300.2	299.7	300.4	303.5	328.2	322.0	318.5	318.0
G52.0	295.2	292.5	290.9	290.4	291.4	294.7	315.9	310.4	306.8	306.1
G53.0	286.1	283.7	282.1	281.8	283.3	286.6	305.4	300.9	296.8	296.1
G54.0	278.3	276.1	274.7	274.7	276.1	279.5	297.3	291.8	288.3	287.1
G55.0	270.9	269.2	267.8	267.8	269.7	272.8	289.2	284.2	280.4	279.2
G56.0	264.2	262.8	261.1	261.9	263.3	266.9	282.1	277.1	273.8	272.1
G57.0	257.6	256.4	255.4	255.9	257.3	260.7	275.4	270.2	267.1	265.4
G58.0	251.4	250.2	249.7	250.4	251.6	254.7	268.8	264.0	260.9	259.3
G59.0	245.2	244.5	243.8	244.7	246.2	248.8	262.3	257.8	255.0	253.3
G60.0	239.3	238.6	238.6	239.5	240.5	243.1	255.7	252.1	249.3	247.6
G61.0	233.3	232.9	232.9	233.8	235.0	237.4	249.5	246.4	243.6	241.9
G62.0	227.6	227.1	226.9	228.1	229.5	231.9	243.3	240.5	238.1	236.2
G63.0	221.7	221.4	221.2	222.6	224.5	226.7	237.6	235.0	232.4	230.5
G64.0	216.2	216.0	216.0	217.6	219.3	221.9	231.9	229.8	226.9	225.0
G65.0	210.3	210.0	210.5	212.1	214.5	216.4	226.9	224.3	221.9	219.5
G66.0	204.5	204.5	205.0	206.9	208.8	210.7	221.7	219.5	216.7	214.5
G67.0	198.6	198.6	198.8	200.5	202.9	204.1	216.2	213.8	211.4	208.8
G68.0	191.9	192.2	192.6	194.6	196.5	197.6	210.0	207.9	205.3	203.4
G69.0	185.5	185.8	186.2	188.4	190.8	191.5	202.9	201.2	199.3	196.7
G70.0	179.1	179.8	180.1	182.2	184.3	184.6	196.2	195.0	193.1	190.8
G71.0	171.7	172.9	173.1	175.1	177.2	177.2	189.8	188.6	186.9	184.6
G72.0	164.1	166.0	167.0	169.3	170.8	170.8	182.2	181.2	180.1	177.9
G73.0	157.4	160.8	162.2	164.8	166.7	166.3	174.8	174.1	173.4	170.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	156.0	160.5	163.9	168.1	170.1	168.9	168.4	168.1	167.7	165.3
G75.0	168.9	174.6	179.8	181.9	182.4	181.5	166.0	165.8	165.3	162.2
G76.0	186.9	194.6	198.1	197.2	194.8	190.8	172.4	172.7	171.5	168.1
G77.0	196.2	205.5	210.5	210.3	204.5	195.3	184.8	186.7	186.9	185.0
G78.0	197.4	205.3	211.2	214.8	210.5	198.1	189.8	195.0	199.1	198.6
G79.0	193.1	200.3	205.0	208.8	210.0	198.6	191.2	199.1	206.0	205.5
G80.0	185.0	192.4	197.9	201.0	203.1	196.7	191.7	199.1	205.3	202.9
G81.0	177.7	184.6	190.0	194.6	196.2	190.5	191.0	195.7	199.6	195.3
G82.0	167.9	176.2	180.8	184.6	189.1	184.3	189.3	189.8	192.6	187.7
G83.0	156.7	163.9	167.2	173.1	179.3	176.0	183.9	183.6	185.5	179.3
G84.0	144.1	149.8	154.4	161.3	166.5	163.9	176.5	176.7	175.8	166.7
G85.0	128.9	134.6	139.9	147.9	154.4	153.6	165.8	166.3	164.1	154.8
G86.0	114.4	119.4	126.3	137.5	145.6	142.0	152.0	153.6	151.0	141.0
G87.0	101.3	107.5	113.7	126.1	134.6	126.5	140.1	143.4	141.8	130.8
G88.0	87.5	94.9	95.4	110.1	118.4	109.4	126.8	129.6	130.6	120.1
G89.0	65.9	70.9	64.7	83.0	87.8	82.3	103.5	114.9	117.5	105.1
G90.0	53.8	52.6	55.9	71.8	70.9	69.0	68.5	90.4	92.8	79.4
G91.0	45.0	44.2	49.2	58.0	59.9	55.7	53.0	72.3	72.5	65.9
G92.0	35.0	37.6	41.4	49.5	52.8	49.5	50.7	57.3	58.8	56.1
G93.0	28.3	31.2	35.4	40.7	43.3	44.2	48.5	50.7	52.3	47.1
G94.0	22.6	27.1	30.4	35.2	38.0	38.3	45.9	45.0	43.0	39.2
G95.0	17.1	21.4	24.7	28.8	31.2	31.9	40.7	39.7	37.1	33.5
G96.0	10.5	14.8	17.8	20.5	22.8	22.8	34.5	33.5	31.2	27.6
G97.0	8.1	10.0	10.9	12.1	13.1	13.3	26.4	26.2	24.0	20.9
G98.0	7.4	9.0	10.2	10.5	10.2	10.5	16.4	17.4	15.7	12.8
G99.0	6.9	8.3	9.5	9.5	9.8	9.8	10.9	12.4	12.1	10.5
G100.0	5.9	7.4	9.0	9.0	9.5	9.5	10.2	11.4	11.4	9.5
G101.0	5.2	6.4	7.6	8.1	8.6	8.6	9.8	11.2	11.2	9.0
G102.0	4.8	5.5	6.4	6.7	7.1	7.4	9.0	10.0	10.0	8.1
G103.0	4.3	5.0	5.7	5.9	6.2	6.4	7.8	8.3	8.1	6.7
G104.0	4.0	4.5	5.0	5.2	5.5	5.7	6.7	7.1	6.9	5.9
G105.0	3.8	4.3	4.5	4.8	5.0	5.2	5.9	6.2	5.9	5.2
G106.0	3.6	4.0	4.3	4.5	4.8	4.8	5.2	5.5	5.2	4.8
G107.0	3.6	3.8	4.0	4.3	4.5	4.5	5.0	5.0	5.0	4.5
G108.0	3.6	3.8	3.8	4.0	4.3	4.5	4.8	4.8	4.8	4.3
G109.0	3.6	3.8	3.8	4.0	4.3	4.3	4.5	4.5	4.5	4.0
G110.0	3.8	3.8	4.0	4.3	4.3	4.3	4.3	4.5	4.3	4.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	3.8	4.0	4.0	4.3	4.3	4.5	4.3	4.3	4.3	4.0
G112.0	4.0	4.0	4.3	4.3	4.5	4.5	4.3	4.3	4.3	4.3
G113.0	3.6	4.3	4.3	4.5	4.5	4.5	4.5	4.5	4.3	4.3
G114.0	4.0	4.3	4.5	4.8	4.8	4.8	4.5	4.5	4.5	4.3
G115.0	4.3	4.5	4.5	4.8	4.8	5.0	4.5	4.5	4.5	4.5
G116.0	4.8	4.8	4.8	4.8	5.0	5.0	4.8	4.8	4.8	4.5
G117.0	5.0	5.0	5.0	5.2	5.0	5.2	5.0	4.8	4.8	4.8
G118.0	5.5	5.5	5.5	5.5	5.5	5.5	5.0	5.0	5.0	5.0
G119.0	5.9	5.9	5.7	5.7	5.9	5.9	5.2	5.2	5.2	5.2
G120.0	6.4	6.4	6.2	6.4	6.4	6.4	5.5	5.5	5.5	5.5
G121.0	6.9	6.9	6.4	6.9	6.9	6.9	5.9	5.9	5.9	5.9
G122.0	7.4	7.4	7.4	7.4	7.4	7.4	6.4	6.7	6.4	6.7
G123.0	7.8	8.1	7.8	7.8	8.1	8.1	7.1	6.9	6.9	7.1
G124.0	8.6	8.6	8.6	8.8	8.6	8.8	7.6	7.6	7.6	7.6
G125.0	9.0	9.3	9.3	9.3	9.3	9.3	8.3	8.1	8.1	8.1
G126.0	10.0	10.0	10.0	10.0	10.0	10.0	8.8	8.8	8.8	8.8
G127.0	10.7	10.7	10.7	10.7	10.7	10.7	9.5	9.5	9.5	9.5
G128.0	11.4	11.4	11.4	11.4	11.6	11.6	10.2	10.2	10.2	10.2
G129.0	12.1	12.4	12.4	12.4	12.4	12.4	10.9	10.9	10.9	10.9
G130.0	13.1	13.1	13.1	13.1	13.1	13.1	11.6	11.6	11.6	11.6
G131.0	13.8	14.0	14.0	14.0	14.0	14.0	12.6	12.4	12.6	12.6
G132.0	14.8	14.8	14.8	14.3	15.0	15.0	13.3	13.3	13.3	13.6
G133.0	15.7	15.7	15.9	15.9	15.9	15.9	14.3	14.3	14.3	14.3
G134.0	16.6	16.6	16.9	16.9	16.9	16.9	15.2	15.2	15.2	15.2
G135.0	17.6	17.6	17.8	17.8	17.8	18.1	15.9	15.9	16.2	16.2
G136.0	18.8	18.8	18.8	18.8	19.0	19.0	17.1	16.9	17.1	17.1
G137.0	19.7	19.7	19.7	20.0	20.0	20.0	18.1	18.1	18.1	18.1
G138.0	20.7	20.7	20.9	20.9	20.9	21.2	19.0	19.0	19.0	19.0
G139.0	21.6	21.6	21.9	22.1	21.9	22.1	20.0	20.0	20.0	20.2
G140.0	22.8	22.8	23.1	23.1	23.1	23.1	21.2	21.2	21.2	21.2
G141.0	23.5	23.8	24.0	24.3	24.0	24.3	22.1	22.1	22.1	22.1
G142.0	24.7	24.7	25.0	25.2	25.2	25.2	23.1	23.1	23.1	23.3
G143.0	25.9	25.7	26.2	26.2	26.2	26.4	24.3	24.3	24.3	24.3
G144.0	26.9	26.9	27.1	27.1	27.1	27.4	25.2	25.2	25.2	25.2
G145.0	27.8	27.8	28.1	28.1	28.3	28.3	26.2	26.2	26.2	26.2
G146.0	28.8	28.8	29.0	29.3	29.3	29.5	27.1	27.1	27.1	27.4
G147.0	29.7	30.0	30.0	30.2	30.2	30.4	28.3	28.3	28.3	28.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	30.7	30.9	31.2	31.2	31.2	31.4	29.3	29.3	29.3	29.3
G149.0	31.9	31.9	31.9	32.1	32.1	32.3	30.2	30.2	30.2	30.2
G150.0	32.8	32.8	33.1	33.1	33.1	33.3	31.2	31.2	31.2	31.2
G151.0	33.8	33.8	34.0	34.0	34.3	34.3	32.1	32.1	32.1	32.1
G152.0	34.7	34.7	35.0	35.2	35.2	35.2	33.1	32.8	33.1	33.1
G153.0	35.7	35.9	35.9	35.9	36.2	36.2	34.0	33.8	34.0	34.0
G154.0	36.9	36.9	37.1	37.1	37.1	37.1	35.0	35.0	35.0	35.0
G155.0	37.8	37.8	38.0	38.0	38.0	38.0	35.7	35.9	35.9	35.9
G156.0	38.8	38.8	39.0	39.0	39.0	39.0	36.6	36.9	36.9	36.9
G157.0	39.7	40.0	40.0	40.2	40.2	40.0	37.6	37.8	37.8	37.8
G158.0	40.7	40.9	40.9	41.2	41.2	40.9	38.5	38.8	38.8	38.8
G159.0	41.6	41.9	42.1	42.1	42.1	42.1	39.5	39.7	40.0	39.7
G160.0	42.6	42.8	43.0	43.3	43.0	43.0	40.7	40.7	40.7	40.7
G161.0	43.8	44.0	44.0	44.2	44.2	44.0	41.6	41.9	41.9	41.9
G162.0	44.7	44.7	45.0	45.2	45.2	45.0	42.6	42.8	42.8	42.1
G163.0	45.7	45.7	45.9	46.1	46.1	46.1	43.5	43.8	43.8	43.8
G164.0	46.4	46.6	46.8	47.1	47.1	47.1	44.5	44.7	44.7	44.7
G165.0	47.3	47.6	47.8	48.0	48.0	48.0	45.4	45.9	45.7	45.7
G166.0	48.3	48.5	48.8	49.0	49.0	48.8	46.6	46.8	46.8	46.6
G167.0	49.0	49.5	49.7	49.7	50.0	50.0	47.6	47.8	47.6	47.6
G168.0	50.0	50.2	50.4	50.7	50.7	50.7	48.5	48.8	48.8	48.5
G169.0	50.7	50.9	51.1	51.4	51.6	51.6	49.5	49.7	49.5	49.5
G170.0	51.4	51.6	51.8	52.1	52.3	52.3	50.4	50.7	50.4	50.2
G171.0	52.1	52.3	52.6	52.8	52.8	53.3	51.4	51.4	51.1	51.1
G172.0	52.8	53.0	53.0	53.5	53.5	53.8	52.1	52.1	51.8	51.8
G173.0	53.3	53.5	53.8	54.0	54.0	54.5	53.0	52.8	52.6	52.6
G174.0	53.8	54.0	54.0	54.2	54.5	54.9	53.8	53.5	53.3	53.0
G175.0	54.2	54.2	54.5	54.7	54.9	55.2	54.5	54.2	53.8	53.8
G176.0	54.5	54.5	54.7	54.9	54.9	55.4	54.9	54.7	54.2	54.2
G177.0	54.7	54.7	54.7	55.2	55.2	55.7	55.4	54.9	54.7	54.7
G178.0	54.9	54.9	54.9	55.2	55.4	55.7	55.7	55.2	54.9	54.9
G179.0	54.9	54.9	54.9	55.2	55.4	55.4	55.9	55.4	54.9	54.9
G180.0	54.9	54.9	54.9	54.9	55.2	55.4	55.9	55.4	55.2	55.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	9016.5	9018.5	9023.0	9012.7	9013.5	9013.2	9004.2	9004.9	8999.4	9005.6
G1.0	9012.5	9014.2	9018.2	9004.4	9007.5	8998.5	8993.7	8996.8	8993.0	8990.2
G2.0	8988.5	8994.9	8997.3	8989.4	8982.1	8984.4	8971.8	8972.1	8975.6	8977.8
G3.0	8964.9	8961.4	8970.9	8960.7	8952.8	8961.4	8948.3	8952.3	8946.6	8953.0
G4.0	8932.3	8930.7	8932.1	8923.5	8919.5	8923.1	8909.0	8912.8	8908.6	8913.3
G5.0	8887.6	8884.5	8881.7	8881.0	8872.7	8876.9	8867.7	8862.4	8865.3	8872.2
G6.0	8839.1	8837.5	8829.8	8836.5	8819.6	8823.0	8817.2	8816.3	8818.7	8820.3
G7.0	8796.5	8791.8	8782.8	8773.0	8770.6	8762.1	8754.9	8753.5	8752.3	8754.2
G8.0	8731.1	8730.2	8719.5	8714.0	8711.9	8694.8	8681.7	8675.7	8670.5	8668.6
G9.0	8666.7	8663.1	8650.0	8640.5	8628.9	8616.0	8597.7	8592.2	8586.8	8586.5
G10.0	8598.7	8587.7	8566.8	8552.0	8537.5	8521.4	8508.5	8508.5	8505.0	8501.2
G11.0	8502.6	8494.0	8477.1	8460.2	8440.5	8427.7	8413.9	8412.0	8416.0	8405.8
G12.0	8410.3	8389.8	8374.1	8354.2	8339.7	8331.8	8309.7	8304.9	8303.3	8293.3
G13.0	8304.9	8277.6	8261.4	8242.8	8233.6	8219.5	8201.7	8193.4	8182.0	8177.2
G14.0	8162.0	8145.8	8138.0	8125.1	8114.4	8090.9	8072.8	8070.7	8056.4	8044.0
G15.0	8015.7	8001.2	7996.7	7995.5	7974.3	7959.6	7936.3	7923.4	7913.2	7904.4
G16.0	7846.1	7828.1	7833.5	7833.0	7821.6	7808.5	7785.5	7773.6	7763.1	7751.5
G17.0	7644.7	7638.3	7645.6	7662.5	7649.2	7636.6	7621.6	7611.1	7599.7	7583.8
G18.0	7453.0	7441.1	7441.6	7450.6	7444.2	7439.9	7437.3	7422.1	7413.0	7413.5
G19.0	7232.0	7213.7	7223.2	7230.1	7223.9	7220.9	7218.2	7235.8	7227.3	7229.2
G20.0	7019.9	7009.2	6985.9	6985.1	6982.3	6978.7	7000.9	7017.5	7025.3	7021.1
G21.0	6791.5	6759.0	6749.2	6734.2	6716.1	6737.1	6746.6	6784.4	6795.1	6811.5
G22.0	6556.1	6518.7	6500.4	6473.5	6458.3	6464.8	6492.8	6535.1	6562.0	6596.0
G23.0	6296.6	6254.3	6235.5	6202.4	6187.7	6188.1	6209.3	6263.3	6316.1	6360.6
G24.0	6033.1	5983.1	5954.8	5917.2	5883.0	5879.7	5913.4	5983.6	6032.8	6103.5
G25.0	5746.2	5692.7	5661.6	5631.4	5605.7	5594.7	5615.4	5692.3	5758.1	5835.2
G26.0	5478.7	5405.2	5368.1	5323.1	5297.2	5301.7	5324.3	5387.3	5464.9	5549.5
G27.0	5177.8	5111.2	5065.5	5022.7	4998.7	5000.6	5013.2	5084.1	5164.5	5257.2
G28.0	4887.4	4806.5	4751.6	4718.8	4690.2	4702.4	4723.5	4784.4	4856.5	4955.6
G29.0	4592.0	4519.9	4470.2	4428.6	4402.4	4411.2	4424.1	4495.4	4554.4	4668.1
G30.0	4306.1	4232.6	4180.0	4147.2	4117.0	4125.1	4151.3	4205.5	4275.9	4362.5
G31.0	4011.2	3933.6	3905.4	3867.3	3850.2	3871.8	3885.8	3939.8	3988.6	4064.5
G32.0	3706.0	3641.8	3619.5	3600.2	3593.1	3610.7	3634.2	3671.6	3712.0	3776.7
G33.0	3400.2	3352.8	3345.9	3348.3	3357.1	3370.4	3388.0	3424.0	3452.7	3483.9
G34.0	3086.7	3068.9	3077.4	3092.6	3106.4	3125.9	3140.9	3176.4	3193.7	3208.2
G35.0	2776.8	2778.5	2821.0	2848.1	2875.7	2891.0	2903.8	2928.3	2935.0	2930.2
G36.0	2474.7	2499.0	2553.9	2606.7	2634.1	2662.6	2669.3	2688.3	2682.1	2657.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	2173.9	2227.9	2302.8	2362.9	2405.3	2430.5	2427.2	2437.4	2430.0	2393.2
G38.0	1894.6	1954.1	2041.4	2114.4	2156.7	2183.4	2182.2	2187.2	2163.6	2130.3
G39.0	1627.6	1689.2	1776.0	1858.0	1923.2	1951.7	1934.4	1938.2	1909.4	1868.0
G40.0	1384.5	1440.8	1534.6	1610.9	1656.1	1702.5	1692.9	1685.8	1658.0	1601.9
G41.0	1170.2	1217.5	1297.2	1366.6	1425.6	1460.3	1452.5	1444.4	1410.6	1369.5
G42.0	984.0	1018.0	1078.4	1144.5	1191.8	1223.4	1224.9	1216.3	1190.2	1151.9
G43.0	825.3	852.7	899.5	949.5	984.4	1020.6	1016.5	1010.8	989.4	960.2
G44.0	692.6	711.1	747.5	783.5	818.7	843.4	845.0	846.0	826.7	807.0
G45.0	584.6	599.4	620.8	647.9	671.9	692.8	699.0	700.2	691.2	678.3
G46.0	502.3	510.6	525.2	545.8	561.8	581.0	583.7	589.8	584.6	576.5
G47.0	437.9	442.4	453.3	467.4	478.5	493.0	496.9	503.5	502.3	497.1
G48.0	391.3	396.2	403.1	413.8	421.9	431.2	436.2	440.0	441.7	436.9
G49.0	358.7	362.2	366.5	373.4	380.1	387.7	390.1	393.9	395.0	391.7
G50.0	334.9	337.7	340.8	346.1	351.3	357.7	359.4	361.3	362.0	358.4
G51.0	318.5	319.4	322.8	326.6	331.1	335.4	336.3	337.5	338.2	336.3
G52.0	306.3	306.6	309.4	312.5	316.6	320.4	321.1	321.8	322.5	320.6
G53.0	295.9	297.1	298.7	301.6	305.1	309.0	309.2	309.9	310.1	309.0
G54.0	287.1	287.5	289.5	292.3	295.4	298.5	299.2	299.7	299.9	299.4
G55.0	278.8	279.5	280.6	283.3	286.4	289.5	289.7	290.2	290.4	290.2
G56.0	271.4	272.1	273.3	275.7	278.5	281.1	281.4	281.8	282.3	281.8
G57.0	264.7	265.2	266.1	267.8	270.9	273.5	273.8	274.0	274.2	274.5
G58.0	258.1	258.1	259.3	261.6	264.0	266.4	266.4	266.6	266.9	267.3
G59.0	251.9	251.9	252.6	254.5	256.9	259.3	259.5	259.3	259.7	260.4
G60.0	246.2	245.9	246.4	248.1	250.7	252.6	252.8	252.6	253.1	253.8
G61.0	240.5	239.7	240.5	242.1	244.0	245.7	245.9	245.7	246.4	247.4
G62.0	234.8	234.0	234.8	236.2	237.6	239.3	239.5	239.5	240.0	241.4
G63.0	229.3	228.6	228.8	230.0	231.4	232.9	233.3	233.3	233.8	235.7
G64.0	223.3	222.6	223.1	224.3	225.7	226.7	227.1	227.6	228.3	230.0
G65.0	217.9	217.4	217.4	218.3	219.8	220.5	221.2	221.7	222.4	224.3
G66.0	212.4	211.4	211.9	212.6	214.3	215.3	215.3	215.7	216.9	219.1
G67.0	206.9	206.4	206.0	206.7	208.4	209.3	209.3	209.8	211.2	213.1
G68.0	200.7	200.0	200.3	201.0	202.2	203.4	203.6	204.1	205.5	207.6
G69.0	194.6	193.6	193.8	194.8	196.0	197.2	197.6	197.6	199.3	201.4
G70.0	188.1	187.4	187.4	188.4	189.3	190.8	191.2	191.9	193.4	195.5
G71.0	182.2	181.2	181.2	181.7	182.4	183.4	184.6	185.8	186.5	189.6
G72.0	175.3	175.1	174.3	174.8	175.5	176.7	177.4	179.6	180.5	183.1
G73.0	168.6	167.9	167.2	167.4	168.1	169.3	170.8	172.9	174.3	176.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	162.9	160.8	158.9	159.8	161.0	162.4	163.9	166.3	167.7	169.8
G75.0	158.9	156.0	153.4	152.9	153.9	156.0	158.4	160.3	161.0	163.2
G76.0	163.9	158.9	153.4	150.8	151.3	153.9	157.7	160.3	161.5	163.4
G77.0	181.0	176.2	170.5	166.0	164.6	166.7	170.1	172.0	173.6	174.3
G78.0	196.2	191.0	182.7	177.7	175.3	175.8	179.6	180.3	180.5	183.9
G79.0	199.8	192.4	185.0	179.8	177.2	176.2	178.6	181.0	180.8	184.6
G80.0	194.3	187.4	181.9	177.9	174.1	172.7	174.1	176.7	176.5	179.3
G81.0	187.7	180.5	173.1	169.1	164.4	162.7	164.8	166.7	167.4	170.1
G82.0	180.3	172.0	164.6	160.3	154.8	150.3	156.5	157.4	158.4	161.7
G83.0	172.0	164.4	156.0	152.2	144.9	139.1	147.0	148.2	149.8	153.2
G84.0	159.6	152.7	146.5	141.8	133.4	128.2	134.4	138.7	141.0	144.4
G85.0	147.0	140.3	135.3	131.1	121.5	116.8	120.8	128.2	130.3	133.2
G86.0	132.2	125.6	121.3	118.4	109.6	106.1	108.2	116.1	116.5	118.2
G87.0	119.4	112.3	108.7	104.4	95.8	93.9	96.6	102.3	103.9	107.3
G88.0	107.7	100.6	97.5	91.1	84.0	80.9	85.4	90.9	91.8	94.4
G89.0	93.2	88.0	83.7	78.5	73.0	66.6	74.2	78.7	77.3	77.5
G90.0	69.2	64.4	65.6	61.1	54.5	45.7	57.3	61.4	59.5	49.5
G91.0	52.8	47.8	52.6	47.8	41.9	35.0	43.8	48.0	45.9	33.8
G92.0	45.4	41.2	42.3	39.5	31.4	30.7	33.1	37.3	36.4	28.5
G93.0	38.8	34.7	33.8	29.3	24.7	25.0	26.6	30.2	29.0	23.3
G94.0	33.3	28.8	25.5	20.2	17.6	18.3	19.7	21.2	18.8	17.6
G95.0	28.8	24.3	20.5	16.2	12.6	11.4	9.8	9.0	10.5	12.4
G96.0	22.8	18.3	15.0	11.6	8.6	7.1	6.4	5.9	4.8	4.3
G97.0	16.6	12.6	10.0	7.8	6.7	6.7	6.2	5.7	4.3	3.6
G98.0	10.2	8.3	7.4	6.9	6.4	6.2	5.5	5.0	3.8	3.3
G99.0	8.8	7.6	7.1	6.4	5.9	5.5	5.0	4.5	3.6	3.1
G100.0	8.3	7.4	6.7	5.9	5.2	4.8	4.3	4.0	3.3	2.8
G101.0	7.8	6.7	5.9	5.2	4.8	4.3	4.0	3.8	2.8	2.6
G102.0	6.9	5.7	5.2	4.8	4.3	4.0	3.8	3.3	2.6	2.4
G103.0	5.9	5.2	4.5	4.3	3.8	3.6	3.3	3.1	2.6	2.4
G104.0	5.2	4.5	4.3	4.0	3.6	3.3	3.1	2.8	2.6	2.4
G105.0	4.8	4.3	4.0	3.8	3.3	3.1	3.1	2.8	2.6	2.4
G106.0	4.5	4.0	3.8	3.6	3.3	3.1	3.1	2.8	2.6	2.6
G107.0	4.0	3.8	3.6	3.3	3.3	3.1	3.1	2.6	2.6	2.6
G108.0	4.0	3.8	3.6	3.6	3.3	3.3	2.8	2.6	2.8	2.8
G109.0	3.8	3.6	3.6	3.6	3.3	3.3	2.8	2.8	2.8	2.8
G110.0	3.8	3.8	3.6	3.6	3.6	3.1	3.1	3.1	3.1	3.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	4.0	3.8	3.8	3.8	3.6	3.1	3.3	3.1	3.1	3.1
G112.0	4.0	4.0	3.8	3.8	3.6	3.3	3.6	3.3	3.3	3.3
G113.0	4.3	4.0	4.0	3.8	3.6	3.6	3.6	3.6	3.6	3.6
G114.0	4.3	4.0	4.0	3.8	3.8	3.8	3.8	3.8	3.8	3.8
G115.0	4.3	4.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
G116.0	4.5	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
G117.0	4.8	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.8
G118.0	4.8	5.0	4.8	5.0	5.0	5.0	5.0	5.0	5.0	5.0
G119.0	5.2	5.2	5.2	5.2	5.2	5.2	5.5	5.2	5.2	5.2
G120.0	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7
G121.0	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
G122.0	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
G123.0	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
G124.0	7.6	7.6	7.6	7.6	7.8	7.8	7.8	7.8	7.8	7.8
G125.0	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3
G126.0	9.0	9.0	8.8	9.0	9.0	9.0	9.0	9.0	9.0	9.0
G127.0	9.5	9.5	9.5	9.8	9.5	9.8	9.8	9.8	9.8	9.8
G128.0	10.2	10.2	10.2	10.5	10.5	10.5	10.5	10.5	10.5	10.5
G129.0	10.9	10.9	10.9	10.9	11.2	11.2	11.2	11.2	11.2	11.2
G130.0	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9
G131.0	12.6	12.6	12.6	12.6	12.8	12.6	12.8	12.6	12.8	12.8
G132.0	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6
G133.0	14.5	14.3	14.3	14.5	14.5	14.5	14.5	14.5	14.5	14.5
G134.0	15.2	15.2	15.5	15.5	15.5	15.5	15.5	15.2	15.2	15.2
G135.0	16.2	16.4	16.2	16.2	16.4	16.2	16.4	16.4	16.2	16.2
G136.0	17.1	17.4	17.4	17.1	17.4	17.1	17.1	17.1	17.1	17.1
G137.0	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.1	18.1	18.1
G138.0	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.0	19.0	19.0
G139.0	20.2	20.2	20.2	20.2	20.2	20.2	20.2	20.0	20.0	20.0
G140.0	21.2	21.4	21.2	21.2	21.2	21.2	21.2	21.2	20.9	21.2
G141.0	22.4	22.4	22.4	22.1	22.1	22.1	22.1	22.1	21.9	22.1
G142.0	23.3	23.3	23.3	23.3	23.3	23.1	23.1	23.1	23.1	23.1
G143.0	24.3	24.3	24.3	24.3	24.3	24.3	24.0	24.3	24.0	24.0
G144.0	25.5	25.5	25.2	25.2	25.2	25.2	25.2	25.2	25.2	25.0
G145.0	26.4	26.4	26.2	26.2	26.2	26.2	26.2	26.2	26.2	26.2
G146.0	27.4	27.4	27.4	27.1	27.1	27.1	27.1	27.1	27.1	27.1
G147.0	28.3	28.3	28.3	28.3	28.3	28.1	28.3	28.3	28.1	28.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	29.3	29.3	29.3	29.0	29.3	29.3	29.3	29.3	29.0	29.0
G149.0	30.4	30.4	30.2	30.2	30.2	30.2	30.2	30.2	30.0	30.0
G150.0	31.4	31.2	31.2	31.2	31.2	31.2	31.2	31.2	30.9	31.2
G151.0	32.1	32.3	32.1	32.1	32.1	32.1	32.1	32.1	31.9	32.1
G152.0	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.1
G153.0	34.0	34.0	34.0	34.3	34.0	34.0	34.0	34.0	34.0	34.0
G154.0	35.2	35.2	35.2	35.0	35.0	35.0	35.0	35.0	35.0	35.0
G155.0	36.2	36.2	36.2	35.9	35.9	35.7	36.2	35.9	35.9	35.9
G156.0	37.1	37.1	36.9	36.9	37.1	36.9	37.1	36.9	36.9	36.9
G157.0	38.0	38.0	37.8	38.0	37.8	37.8	37.8	37.8	37.8	37.8
G158.0	39.0	39.0	39.0	39.0	39.0	38.8	39.0	38.8	38.8	38.8
G159.0	40.0	40.0	40.0	40.0	40.0	39.7	39.7	39.7	39.7	39.7
G160.0	40.9	40.9	40.7	40.9	40.7	40.9	40.7	40.7	40.7	40.7
G161.0	41.9	41.9	41.6	41.9	41.6	41.6	41.9	41.6	41.6	41.6
G162.0	42.8	42.8	42.8	42.6	42.6	42.6	42.6	42.6	42.6	42.6
G163.0	43.8	43.8	43.8	43.5	43.5	43.5	43.5	43.5	43.5	43.5
G164.0	44.7	44.7	44.5	44.7	44.5	44.7	44.5	44.5	44.5	44.5
G165.0	45.7	45.7	45.7	45.7	45.4	45.4	45.4	45.4	45.4	45.4
G166.0	46.6	46.6	46.4	46.4	46.4	46.4	46.4	46.4	46.4	46.4
G167.0	47.6	47.3	47.6	47.3	47.3	47.3	47.3	47.3	47.3	47.3
G168.0	48.5	48.5	48.5	48.3	48.3	48.3	48.3	48.3	48.3	48.3
G169.0	49.2	49.5	49.2	49.2	49.2	49.2	49.2	49.2	49.2	49.2
G170.0	50.2	50.2	50.0	50.2	50.0	50.0	50.0	50.0	50.0	50.2
G171.0	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.9
G172.0	51.8	51.8	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.8
G173.0	52.6	52.3	52.3	52.3	52.3	52.3	52.3	52.3	52.3	52.3
G174.0	53.3	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0
G175.0	53.8	53.8	53.5	53.5	53.5	53.5	53.5	53.5	53.8	53.5
G176.0	54.2	54.2	54.0	54.0	54.2	54.2	54.2	54.0	54.0	54.0
G177.0	54.7	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5
G178.0	54.9	54.7	54.7	54.7	54.9	54.7	54.7	54.7	54.7	54.7
G179.0	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.5	54.9	54.5
G180.0	54.9	54.9	54.9	55.2	55.2	55.2	54.9	54.9	54.9	54.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	8994.2	8990.4	8985.6	8968.0	8954.0	8959.0	8961.8	8955.9	8958.8	8958.3
G1.0	8985.4	8984.2	8972.8	8968.3	8956.8	8953.0	8952.3	8957.6	8954.5	8952.6
G2.0	8969.7	8968.0	8958.5	8955.4	8942.6	8942.6	8943.3	8940.9	8950.4	8947.3
G3.0	8938.5	8944.3	8933.8	8926.9	8918.8	8922.1	8919.8	8924.5	8929.3	8934.7
G4.0	8904.8	8906.9	8901.4	8889.5	8887.6	8889.3	8892.2	8892.6	8898.8	8899.8
G5.0	8865.3	8864.3	8865.3	8855.3	8852.0	8863.8	8858.4	8866.5	8874.3	8879.3
G6.0	8808.0	8814.2	8811.8	8803.7	8802.5	8807.0	8810.6	8816.8	8824.8	8837.9
G7.0	8740.4	8744.0	8738.5	8736.6	8730.0	8737.3	8754.2	8746.8	8766.1	8775.8
G8.0	8664.8	8669.3	8654.3	8657.2	8664.8	8669.1	8675.7	8674.1	8696.9	8705.0
G9.0	8588.7	8586.8	8592.5	8589.4	8588.9	8600.1	8606.5	8612.0	8622.9	8627.9
G10.0	8499.5	8499.7	8503.0	8506.4	8498.3	8515.7	8524.7	8526.8	8549.9	8555.6
G11.0	8402.9	8399.8	8394.1	8407.0	8397.0	8417.9	8423.4	8430.0	8448.1	8461.4
G12.0	8292.1	8290.4	8284.5	8288.0	8284.5	8301.1	8310.9	8321.8	8342.8	8358.4
G13.0	8161.8	8165.3	8158.4	8164.1	8160.6	8183.4	8190.8	8201.7	8228.3	8238.1
G14.0	8023.8	8030.2	8024.0	8025.2	8025.5	8050.2	8055.4	8070.9	8093.0	8110.9
G15.0	7878.5	7886.6	7866.8	7885.4	7889.0	7903.9	7916.8	7923.7	7951.3	7969.1
G16.0	7733.4	7724.4	7722.7	7721.7	7729.4	7750.0	7766.5	7767.9	7803.8	7818.8
G17.0	7573.3	7567.1	7558.6	7566.0	7571.0	7595.0	7600.4	7620.7	7649.0	7665.9
G18.0	7386.1	7387.8	7390.4	7389.5	7398.8	7416.8	7432.0	7453.9	7475.1	7510.1
G19.0	7201.4	7206.3	7195.9	7209.4	7216.1	7234.4	7243.0	7268.2	7302.7	7339.3
G20.0	7013.2	7007.0	7006.3	7018.2	7021.8	7039.6	7053.6	7078.4	7115.5	7160.4
G21.0	6806.3	6820.3	6798.9	6822.7	6830.3	6848.6	6868.4	6882.9	6929.7	6971.4
G22.0	6593.4	6602.2	6598.7	6616.7	6624.3	6644.1	6659.8	6678.6	6729.5	6770.1
G23.0	6363.4	6383.6	6381.8	6393.2	6401.0	6426.0	6447.4	6463.8	6525.4	6559.4
G24.0	6124.4	6146.0	6157.0	6166.3	6182.4	6211.5	6219.8	6241.0	6293.0	6324.4
G25.0	5867.3	5901.5	5918.2	5932.2	5952.7	5973.4	5998.1	6006.0	6061.6	6085.6
G26.0	5611.6	5652.0	5675.1	5693.0	5710.1	5737.4	5745.8	5777.4	5830.2	5824.3
G27.0	5332.9	5394.5	5407.5	5443.5	5464.9	5488.9	5509.1	5531.5	5571.2	5551.7
G28.0	5050.5	5113.3	5145.9	5173.8	5190.4	5224.9	5247.0	5273.4	5296.5	5263.9
G29.0	4749.9	4846.5	4879.1	4907.9	4934.5	4962.1	4988.5	4995.6	5015.8	4975.2
G30.0	4448.8	4550.4	4590.1	4637.2	4651.7	4687.6	4713.1	4736.4	4735.9	4678.3
G31.0	4157.9	4253.8	4293.0	4352.3	4377.5	4398.9	4434.8	4445.7	4441.0	4381.0
G32.0	3849.7	3937.5	3993.4	4034.7	4062.6	4096.8	4119.2	4149.4	4143.0	4083.3
G33.0	3537.2	3620.6	3674.9	3721.7	3741.9	3781.9	3806.6	3824.2	3828.8	3776.4
G34.0	3233.7	3292.9	3332.6	3384.0	3410.6	3453.4	3480.1	3501.7	3502.7	3478.9
G35.0	2921.4	2960.9	3009.2	3054.4	3075.3	3117.1	3154.3	3156.1	3178.3	3163.1
G36.0	2637.7	2650.3	2673.1	2702.1	2740.9	2772.3	2808.4	2825.8	2872.2	2884.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	2348.9	2334.4	2327.3	2371.8	2407.7	2438.3	2480.4	2501.6	2559.9	2594.8
G38.0	2068.0	2042.6	2026.2	2039.0	2070.4	2106.6	2141.5	2186.0	2249.5	2307.3
G39.0	1800.2	1762.2	1729.1	1751.7	1765.0	1800.0	1835.7	1877.0	1967.2	2038.3
G40.0	1547.9	1505.5	1479.4	1483.9	1506.3	1529.1	1560.5	1596.6	1687.5	1767.2
G41.0	1314.3	1286.5	1254.1	1266.3	1286.2	1297.7	1328.3	1360.0	1436.6	1511.7
G42.0	1113.3	1081.0	1063.2	1075.8	1090.5	1098.8	1124.0	1154.2	1214.9	1278.4
G43.0	933.5	917.8	902.4	911.4	925.4	933.8	953.3	977.0	1025.6	1073.6
G44.0	784.4	778.5	766.3	778.0	792.0	796.5	810.1	827.9	866.2	899.3
G45.0	661.2	658.6	652.6	661.0	675.0	678.3	684.3	697.1	725.7	753.7
G46.0	568.2	564.4	562.7	571.5	587.0	582.7	587.9	596.7	617.2	636.7
G47.0	491.6	490.0	489.7	497.6	511.6	508.0	508.0	512.8	529.0	542.3
G48.0	433.1	433.8	433.4	443.1	456.2	451.2	448.3	454.0	462.8	474.3
G49.0	390.3	391.0	392.2	401.5	416.7	407.7	404.1	407.9	413.8	421.2
G50.0	358.2	359.1	360.6	370.8	385.5	376.3	371.8	373.2	377.5	382.2
G51.0	335.4	336.8	338.5	349.1	363.7	353.0	347.0	348.0	350.3	354.1
G52.0	320.1	321.6	323.7	334.4	348.0	337.3	331.1	331.1	332.3	334.6
G53.0	308.2	309.9	312.0	322.8	336.3	325.1	318.0	317.5	318.0	320.4
G54.0	298.7	300.4	303.0	313.5	325.8	315.4	307.8	307.0	307.0	309.0
G55.0	289.7	291.8	294.9	304.4	317.0	306.1	299.0	297.8	297.3	298.5
G56.0	282.1	284.2	286.8	296.8	308.2	298.3	291.1	289.7	288.5	289.7
G57.0	274.9	277.1	279.7	289.2	300.4	290.6	283.5	281.8	280.6	280.9
G58.0	268.0	270.4	273.0	282.1	292.5	283.5	276.6	274.7	273.3	273.0
G59.0	261.6	264.0	267.1	274.5	284.2	276.4	270.0	268.0	266.1	266.1
G60.0	255.0	258.1	260.7	267.6	276.1	269.2	263.5	261.4	260.0	258.5
G61.0	249.3	252.1	255.0	261.1	268.5	262.3	257.3	255.0	253.3	252.4
G62.0	243.6	246.4	249.0	254.5	261.1	255.7	251.4	249.3	247.1	245.7
G63.0	237.8	241.2	243.6	248.8	254.0	249.5	245.7	243.6	241.4	239.7
G64.0	232.4	235.5	238.1	242.8	247.8	243.6	240.0	237.8	235.7	233.6
G65.0	226.9	230.2	232.9	237.1	241.6	237.6	234.5	232.4	230.2	228.1
G66.0	221.9	225.0	227.6	232.1	236.2	232.4	229.3	226.9	224.8	221.9
G67.0	216.4	219.8	222.4	226.9	230.9	226.9	223.8	221.7	219.1	215.7
G68.0	210.7	214.1	216.4	220.7	224.8	220.9	217.9	215.7	213.1	209.3
G69.0	205.0	208.4	210.7	214.3	217.4	214.5	211.9	210.3	206.9	203.4
G70.0	199.1	203.1	204.5	207.6	210.3	207.9	206.0	204.3	201.0	197.2
G71.0	192.9	196.9	198.6	201.0	203.4	200.7	199.6	198.4	194.3	190.8
G72.0	186.5	191.0	192.4	194.1	196.5	194.1	193.1	191.7	187.7	183.6
G73.0	180.1	184.8	186.0	186.9	188.9	186.9	186.5	185.5	180.5	177.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	173.1	178.1	179.1	179.8	180.8	179.3	179.8	178.4	173.6	170.3
G75.0	167.2	173.1	174.6	173.6	173.9	172.9	174.1	172.0	166.0	162.4
G76.0	168.4	175.3	177.7	175.3	174.6	172.4	173.1	168.9	161.3	157.0
G77.0	178.6	185.3	188.4	186.9	185.8	183.9	182.9	177.2	168.1	163.6
G78.0	189.8	195.7	197.6	191.9	184.6	191.2	194.6	190.5	182.9	178.6
G79.0	192.2	203.4	204.5	191.2	182.4	193.1	204.8	201.9	193.4	187.4
G80.0	186.2	198.6	206.2	191.7	184.3	193.4	207.9	203.8	193.6	187.2
G81.0	176.5	187.9	196.2	190.5	185.5	191.2	200.7	195.5	184.8	178.6
G82.0	168.6	179.6	186.7	184.1	182.4	184.3	191.7	185.5	176.2	168.9
G83.0	160.5	171.5	177.4	175.1	172.4	174.6	180.3	176.7	167.4	160.5
G84.0	151.5	161.3	167.7	166.5	163.9	165.5	170.8	166.7	158.6	151.7
G85.0	142.2	151.5	158.2	158.4	156.3	157.2	160.3	156.0	148.9	142.2
G86.0	128.0	137.0	145.1	147.7	146.0	147.0	146.5	140.8	135.1	127.0
G87.0	117.7	126.5	134.6	135.8	132.9	135.8	137.2	132.2	124.4	114.6
G88.0	105.1	114.6	122.0	116.3	113.9	118.4	126.3	120.1	113.0	103.5
G89.0	90.1	100.1	105.4	93.0	88.5	97.8	113.0	105.8	98.5	87.5
G90.0	61.4	69.0	72.5	66.4	43.0	71.6	81.3	77.5	72.5	60.4
G91.0	45.0	54.2	53.8	51.4	32.1	52.6	56.4	55.7	48.8	36.6
G92.0	34.3	41.6	45.0	36.2	29.7	37.6	45.4	42.8	36.2	30.2
G93.0	22.4	30.9	33.8	29.3	27.8	29.7	34.5	30.9	25.5	25.9
G94.0	18.8	20.0	22.4	24.3	24.5	23.5	21.9	20.7	19.3	18.5
G95.0	13.3	15.0	16.9	18.8	19.5	18.3	16.9	15.5	14.8	13.1
G96.0	4.8	5.9	6.7	8.6	9.3	8.6	7.6	6.4	6.2	5.2
G97.0	2.6	2.1	2.1	2.1	2.1	2.1	2.1	2.4	3.3	3.8
G98.0	2.6	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.8	3.8
G99.0	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.4	3.1
G100.0	2.4	2.1	2.1	2.4	2.1	2.1	2.1	2.1	2.1	2.6
G101.0	2.4	2.1	2.4	2.4	2.4	2.1	2.4	2.4	2.1	2.6
G102.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.6
G103.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
G104.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
G105.0	2.6	2.4	2.6	2.6	2.6	2.6	2.4	2.4	2.4	2.4
G106.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.4	2.6
G107.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
G108.0	2.8	2.8	2.8	2.8	2.8	2.6	2.6	2.8	2.6	2.6
G109.0	3.1	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
G110.0	3.1	3.1	3.1	3.1	3.1	2.8	2.8	2.8	2.8	2.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
G112.0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
G113.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.3	3.3	3.6
G114.0	3.8	3.8	3.8	3.6	3.8	3.8	3.8	3.6	3.6	3.6
G115.0	4.0	4.0	4.0	4.0	4.0	4.0	3.8	3.8	3.8	3.8
G116.0	4.3	4.0	4.3	4.3	4.3	4.3	4.0	4.3	4.0	4.0
G117.0	4.8	4.5	4.5	4.5	4.5	4.5	4.5	5.0	4.3	4.3
G118.0	5.0	5.0	5.0	4.8	5.0	4.8	4.8	4.8	4.8	4.8
G119.0	5.5	5.2	5.5	5.2	5.2	5.2	5.2	5.2	5.0	5.2
G120.0	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.5	5.5
G121.0	6.2	6.2	6.2	6.2	6.2	6.2	5.9	5.9	5.9	5.9
G122.0	6.7	6.7	6.7	6.7	6.7	6.4	6.7	6.4	6.4	6.4
G123.0	7.4	7.1	7.1	7.1	7.1	7.1	6.9	6.9	6.9	6.9
G124.0	7.8	7.6	7.8	7.6	7.6	7.6	7.6	7.6	7.4	7.4
G125.0	8.3	8.3	8.3	8.3	8.3	8.1	8.1	8.1	7.8	7.8
G126.0	9.0	9.0	9.0	9.0	8.8	8.8	8.8	8.8	8.6	8.6
G127.0	9.8	9.5	9.8	9.5	9.5	9.5	9.3	9.3	9.3	9.3
G128.0	10.5	10.5	10.5	10.2	10.2	10.2	10.2	10.0	10.0	10.0
G129.0	11.2	11.2	11.2	10.9	10.9	10.9	10.7	10.7	10.7	10.5
G130.0	11.9	11.9	11.9	11.9	11.9	11.6	11.6	11.4	11.4	11.4
G131.0	12.6	12.6	12.6	12.6	12.6	12.4	12.4	12.4	12.1	12.1
G132.0	13.6	13.6	13.6	13.3	13.3	13.3	13.1	13.1	12.8	12.8
G133.0	14.5	14.3	14.3	14.3	14.3	14.0	14.0	14.0	13.8	13.8
G134.0	15.2	15.2	15.2	15.2	15.0	15.0	15.0	14.8	14.8	14.8
G135.0	16.2	16.2	16.2	15.9	15.9	15.9	15.7	15.7	15.5	15.5
G136.0	17.1	17.1	16.9	16.9	16.9	16.9	16.6	16.6	16.4	16.4
G137.0	18.1	18.1	18.1	17.8	17.8	17.8	17.6	17.4	17.4	17.4
G138.0	19.0	19.0	18.8	18.8	18.8	18.5	18.5	18.5	18.3	18.1
G139.0	20.0	20.0	20.0	19.7	19.7	19.7	19.5	19.5	19.3	19.3
G140.0	20.9	20.9	20.9	20.9	20.9	20.7	20.5	20.5	20.5	20.2
G141.0	22.1	21.9	21.9	21.9	21.9	21.6	21.6	21.4	21.4	21.2
G142.0	23.1	22.8	22.8	22.8	22.8	22.6	22.6	22.4	22.4	22.1
G143.0	24.0	24.0	24.0	24.0	23.8	23.8	23.5	23.5	23.3	23.3
G144.0	25.0	25.0	25.0	24.7	24.7	24.7	24.5	24.5	24.3	24.3
G145.0	26.2	25.9	25.9	25.9	25.9	25.7	25.5	25.5	25.2	25.2
G146.0	27.1	27.1	26.9	26.9	26.9	26.6	26.6	26.4	26.2	26.2
G147.0	28.1	28.1	27.8	27.8	27.8	27.6	27.6	27.6	27.4	27.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	29.0	28.8	29.0	28.8	28.8	28.8	28.5	28.5	28.3	28.3
G149.0	30.0	30.0	30.0	29.7	30.0	29.7	29.5	29.5	29.3	29.3
G150.0	31.2	30.9	30.9	30.9	30.7	30.7	30.4	30.4	30.2	30.2
G151.0	31.9	31.9	31.9	31.9	31.9	31.6	31.4	31.4	31.2	31.2
G152.0	32.8	32.8	32.8	32.8	32.8	32.6	32.6	32.3	32.1	32.1
G153.0	34.0	33.8	33.8	33.8	33.8	33.5	33.5	33.3	33.3	33.1
G154.0	35.0	34.7	34.7	34.7	34.7	34.5	34.5	34.3	34.3	34.0
G155.0	35.9	35.7	35.7	35.7	35.7	35.4	35.4	35.2	35.2	35.0
G156.0	36.9	36.6	36.6	36.6	36.6	36.4	36.4	36.2	36.2	36.2
G157.0	37.8	37.8	37.6	37.6	37.6	37.6	37.3	37.3	37.1	37.1
G158.0	38.8	38.8	38.5	38.5	38.5	38.5	38.5	38.3	38.0	38.0
G159.0	39.7	39.7	39.7	39.7	39.5	39.5	39.5	39.2	39.2	39.0
G160.0	40.7	40.7	40.7	40.7	40.7	40.4	40.4	40.4	40.2	40.2
G161.0	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.4	41.2	40.9
G162.0	42.6	42.6	42.6	42.6	42.6	42.6	42.6	42.3	42.1	41.9
G163.0	43.8	43.5	43.8	43.5	43.5	43.5	43.5	43.3	43.0	43.0
G164.0	44.2	44.5	44.7	44.7	44.7	44.7	44.5	44.5	44.0	44.0
G165.0	45.4	45.4	45.4	45.7	45.7	45.7	45.7	45.4	45.0	45.0
G166.0	46.6	46.4	46.6	46.6	46.6	46.6	46.6	46.4	45.9	45.9
G167.0	47.3	47.6	47.3	47.6	47.6	47.6	47.6	47.1	46.8	46.6
G168.0	48.3	48.3	48.3	48.5	48.5	48.5	48.3	48.3	47.8	47.6
G169.0	49.2	49.2	49.2	49.5	49.5	49.5	49.5	49.0	48.8	48.5
G170.0	50.2	50.0	50.2	50.2	50.4	50.2	50.2	50.0	49.5	49.5
G171.0	50.9	50.9	50.9	51.1	51.4	51.1	50.9	50.7	50.4	50.2
G172.0	51.6	51.6	51.6	51.8	52.1	52.1	51.8	51.4	51.1	51.1
G173.0	52.3	52.3	52.3	52.6	52.6	52.6	52.6	52.1	51.8	51.8
G174.0	53.0	53.0	53.0	53.3	53.3	53.3	53.0	52.8	52.6	52.3
G175.0	53.5	53.5	53.5	53.8	54.0	54.0	53.8	53.3	53.0	53.0
G176.0	54.0	54.0	54.0	54.5	54.5	54.2	54.0	53.8	53.5	53.5
G177.0	54.5	54.5	54.5	54.7	54.9	54.7	54.5	54.2	54.0	54.0
G178.0	54.7	54.7	54.9	55.2	55.2	54.9	54.7	54.5	54.2	54.2
G179.0	54.9	54.9	55.2	55.4	55.4	55.2	54.9	54.7	54.5	54.5
G180.0	54.9	55.2	55.4	55.7	55.4	55.2	54.9	54.7	54.7	54.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	8959.9	8950.4	8952.8	8953.5	8961.8	8963.8	8960.9	8964.9	8969.0	8965.7
G1.0	8962.3	8954.2	8955.9	8958.8	8970.2	8973.7	8978.7	8978.0	8984.9	8991.1
G2.0	8956.8	8953.8	8953.8	8952.6	8970.7	8974.0	8981.1	8980.4	8992.0	8988.5
G3.0	8938.8	8940.2	8947.8	8948.3	8961.1	8968.5	8978.0	8974.9	8984.7	8984.9
G4.0	8909.0	8913.8	8921.7	8927.8	8942.1	8947.3	8956.4	8959.5	8973.3	8969.5
G5.0	8876.5	8881.2	8884.8	8889.8	8903.3	8912.8	8921.4	8928.3	8949.7	8948.0
G6.0	8843.9	8840.3	8849.6	8851.7	8868.4	8876.5	8885.3	8893.8	8901.2	8906.2
G7.0	8782.5	8789.2	8798.9	8811.0	8820.8	8828.9	8836.7	8846.7	8863.4	8866.5
G8.0	8709.0	8724.5	8730.0	8745.9	8767.3	8775.4	8786.3	8800.1	8812.7	8821.3
G9.0	8632.4	8644.6	8658.8	8670.5	8700.5	8715.7	8730.4	8741.8	8763.0	8771.3
G10.0	8554.2	8561.3	8578.7	8590.1	8620.3	8651.0	8668.1	8687.1	8705.9	8723.3
G11.0	8469.0	8480.0	8495.0	8508.3	8549.0	8572.0	8607.0	8631.3	8659.1	8671.9
G12.0	8364.6	8388.9	8402.7	8429.3	8466.7	8498.3	8538.0	8569.4	8601.5	8622.9
G13.0	8259.0	8288.8	8307.8	8335.6	8388.9	8419.6	8467.1	8505.2	8539.2	8567.3
G14.0	8136.1	8172.5	8201.5	8237.6	8294.9	8340.8	8388.7	8422.0	8464.8	8485.0
G15.0	8003.8	8040.7	8091.1	8135.6	8203.4	8244.0	8291.6	8312.3	8362.7	8380.1
G16.0	7866.4	7913.0	7969.3	8025.7	8087.3	8132.5	8169.8	8184.8	8233.3	8254.7
G17.0	7714.4	7773.4	7841.1	7887.8	7958.2	7983.1	8024.8	8044.3	8078.7	8104.4
G18.0	7560.5	7624.0	7689.9	7735.5	7784.8	7820.5	7855.6	7879.7	7910.4	7934.9
G19.0	7401.4	7449.4	7524.6	7554.3	7605.4	7632.3	7681.3	7692.5	7727.9	7759.1
G20.0	7225.4	7276.3	7328.4	7355.9	7401.1	7429.7	7470.4	7497.9	7530.5	7552.2
G21.0	7048.9	7069.4	7125.5	7133.3	7182.6	7205.1	7253.2	7274.4	7306.7	7337.6
G22.0	6827.9	6854.3	6885.5	6887.4	6935.9	6963.7	7011.3	7037.5	7076.7	7106.5
G23.0	6591.5	6607.2	6639.1	6632.2	6681.9	6696.9	6746.4	6777.8	6833.4	6865.8
G24.0	6359.1	6354.4	6367.2	6359.6	6389.1	6414.3	6460.2	6499.5	6568.2	6612.5
G25.0	6103.7	6081.6	6085.6	6064.9	6097.8	6110.6	6182.9	6219.8	6303.3	6348.5
G26.0	5825.2	5784.3	5783.1	5763.6	5791.9	5812.8	5881.6	5929.4	6017.4	6080.9
G27.0	5529.6	5491.8	5479.4	5440.1	5475.8	5498.9	5575.0	5625.9	5723.9	5797.6
G28.0	5238.5	5176.1	5158.8	5139.0	5157.3	5187.8	5260.1	5327.4	5417.1	5488.6
G29.0	4947.6	4874.3	4855.3	4825.5	4845.3	4872.2	4956.4	5014.9	5125.5	5199.7
G30.0	4640.8	4578.7	4553.2	4526.8	4538.2	4572.0	4651.5	4713.1	4817.9	4906.4
G31.0	4340.6	4274.7	4262.8	4221.2	4252.8	4272.3	4347.5	4418.1	4514.7	4611.7
G32.0	4045.2	3994.8	3979.3	3950.3	3966.5	3981.2	4049.2	4116.8	4210.3	4304.2
G33.0	3754.6	3719.1	3714.4	3682.5	3697.2	3711.0	3763.8	3817.4	3902.5	3991.4
G34.0	3472.7	3452.7	3448.9	3436.8	3440.8	3452.0	3483.4	3518.1	3592.8	3653.0
G35.0	3199.9	3187.3	3205.1	3188.7	3199.0	3184.4	3213.7	3222.0	3287.4	3341.4
G36.0	2924.7	2940.4	2962.1	2952.8	2957.6	2938.5	2947.6	2944.0	2967.8	2996.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	2654.3	2685.7	2721.4	2711.9	2723.8	2695.0	2676.9	2651.7	2665.5	2667.9
G38.0	2392.0	2431.0	2466.6	2471.4	2478.8	2451.7	2416.0	2368.7	2343.0	2338.0
G39.0	2127.0	2172.7	2219.1	2220.5	2233.6	2196.2	2151.0	2089.0	2057.3	2010.9
G40.0	1856.8	1908.9	1960.8	1978.6	1985.3	1939.8	1886.3	1819.5	1771.4	1732.0
G41.0	1604.2	1654.2	1709.1	1726.3	1733.9	1686.1	1631.8	1551.4	1510.5	1469.4
G42.0	1357.4	1418.7	1462.3	1490.1	1487.5	1440.6	1380.2	1310.5	1273.9	1242.5
G43.0	1138.8	1191.8	1234.2	1253.7	1251.5	1205.8	1153.5	1105.3	1067.4	1038.9
G44.0	954.2	992.0	1035.1	1044.4	1041.5	1002.3	966.1	925.4	898.1	877.4
G45.0	791.3	816.5	851.0	859.8	851.7	820.3	794.6	768.2	753.7	743.5
G46.0	663.6	687.6	706.4	708.0	703.3	680.2	664.3	646.7	635.8	629.6
G47.0	562.7	574.2	589.6	587.7	582.7	567.5	557.3	544.2	541.3	535.9
G48.0	488.5	494.5	502.1	501.4	496.1	484.7	480.2	470.9	468.1	463.8
G49.0	430.0	434.3	440.0	438.3	434.3	425.0	420.5	415.5	413.4	410.8
G50.0	389.6	392.4	394.8	394.6	389.8	382.0	377.9	373.6	371.0	370.8
G51.0	359.4	360.3	363.0	361.0	357.0	350.3	347.0	343.2	342.3	341.5
G52.0	339.2	339.9	340.8	338.9	334.6	329.2	326.1	323.5	322.3	322.3
G53.0	323.5	323.7	323.7	322.3	317.8	313.0	310.1	307.8	307.3	307.3
G54.0	311.6	311.1	310.9	309.4	305.4	300.6	298.3	296.1	295.6	295.4
G55.0	300.4	300.2	300.2	298.5	294.7	289.9	287.8	286.1	285.2	285.4
G56.0	291.1	290.6	290.6	288.5	285.4	280.6	278.5	276.6	276.4	276.9
G57.0	282.1	281.4	281.6	279.5	276.4	272.1	270.0	268.3	268.0	268.3
G58.0	274.0	273.3	273.0	271.4	268.3	264.2	262.3	260.7	260.9	261.1
G59.0	266.1	265.2	265.2	263.3	260.9	257.1	255.2	254.0	254.3	254.5
G60.0	259.0	258.3	258.1	256.4	253.5	250.0	248.5	247.4	248.1	249.0
G61.0	251.9	251.4	250.9	249.3	246.9	243.6	242.4	241.6	242.4	243.3
G62.0	245.2	244.5	244.3	242.6	240.5	237.6	236.4	235.7	236.6	238.1
G63.0	238.8	237.8	237.6	235.9	234.0	231.7	230.7	230.7	231.2	232.4
G64.0	232.4	231.7	231.4	229.5	227.9	225.7	225.2	224.5	225.7	227.1
G65.0	226.4	225.7	225.0	223.3	221.9	220.2	219.5	219.3	220.2	221.9
G66.0	220.5	219.1	218.6	217.4	216.2	214.5	213.8	213.8	215.0	216.4
G67.0	214.1	212.6	212.1	211.4	210.3	208.6	208.6	208.8	209.8	211.2
G68.0	208.1	206.4	206.2	205.5	204.3	202.6	202.9	203.1	204.1	206.2
G69.0	201.4	200.0	200.3	199.3	198.1	196.9	196.9	197.2	198.1	200.5
G70.0	195.0	194.3	194.1	192.9	191.7	190.5	191.0	191.0	192.2	195.0
G71.0	188.6	188.1	187.7	186.2	185.0	184.1	184.8	185.0	186.2	188.9
G72.0	182.2	181.5	180.5	178.9	177.9	177.4	178.4	178.9	180.1	182.7
G73.0	175.8	174.8	173.4	171.5	170.5	170.5	171.5	172.4	173.6	176.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	169.3	167.9	166.3	163.9	163.2	162.9	164.6	166.3	167.4	169.8
G75.0	162.2	161.5	159.6	157.2	156.3	156.3	157.9	160.5	162.0	164.8
G76.0	156.0	155.6	153.9	151.7	151.0	151.7	155.1	159.6	162.9	166.7
G77.0	161.7	160.3	157.7	155.1	155.3	157.9	163.6	170.8	175.3	178.1
G78.0	175.8	174.1	171.3	169.1	169.8	174.3	180.3	189.1	192.6	194.6
G79.0	183.6	181.0	177.7	175.5	176.9	181.5	189.6	200.3	206.7	209.1
G80.0	183.1	180.3	177.4	175.3	177.9	183.6	191.0	201.4	210.7	217.1
G81.0	175.8	174.1	172.2	171.0	174.6	181.2	188.1	198.4	208.1	216.0
G82.0	167.2	164.8	162.4	161.3	166.5	173.6	181.5	190.8	200.7	209.3
G83.0	156.7	154.8	152.2	149.1	157.4	164.8	172.7	182.4	191.9	201.9
G84.0	148.6	145.3	142.0	137.9	146.5	155.6	163.4	172.9	183.6	193.4
G85.0	138.9	135.1	130.6	128.4	135.8	145.3	152.0	161.7	171.0	182.2
G86.0	127.5	124.4	119.6	117.0	124.6	133.2	139.1	147.2	157.9	170.3
G87.0	114.4	112.0	107.5	105.1	110.4	119.2	124.9	133.4	144.4	157.4
G88.0	101.3	99.2	95.4	92.5	96.3	103.2	111.1	119.6	130.3	146.0
G89.0	87.8	87.1	83.2	78.7	83.2	90.1	96.6	103.9	114.9	132.5
G90.0	70.9	71.8	67.6	59.5	68.3	72.3	77.8	86.6	91.3	111.6
G91.0	52.3	52.8	49.0	36.4	51.1	51.6	56.6	61.6	59.9	81.8
G92.0	41.6	41.9	36.4	29.7	35.9	42.8	45.9	47.6	51.1	67.8
G93.0	33.1	31.6	28.1	23.8	25.9	33.5	38.8	39.2	41.4	52.8
G94.0	22.1	22.4	19.7	18.3	17.6	21.4	27.8	32.1	35.7	44.2
G95.0	11.9	12.1	9.3	8.6	8.8	12.6	18.5	21.6	26.9	33.5
G96.0	5.2	5.9	5.7	6.2	7.6	10.5	12.8	13.3	14.5	20.0
G97.0	4.8	5.7	5.7	5.5	6.2	8.8	10.7	11.4	12.6	15.5
G98.0	4.8	5.7	5.7	5.7	5.9	6.4	7.4	8.6	9.8	11.4
G99.0	4.5	5.2	5.2	5.5	5.9	6.4	6.9	7.1	7.6	8.3
G100.0	3.6	4.8	5.0	5.2	5.7	6.4	6.7	7.4	7.8	8.6
G101.0	3.3	3.6	4.3	5.0	5.5	5.9	6.4	7.1	8.3	9.0
G102.0	2.8	3.3	3.6	4.0	5.0	5.7	6.2	6.9	8.1	8.8
G103.0	2.6	2.8	3.3	3.6	4.0	5.0	5.7	6.7	7.6	8.6
G104.0	2.6	2.8	3.1	3.3	3.8	4.0	4.5	5.5	7.1	8.1
G105.0	2.6	2.8	2.8	3.1	3.6	3.8	4.0	4.5	5.2	5.9
G106.0	2.6	2.8	2.8	3.1	3.3	3.6	3.8	4.3	4.5	4.8
G107.0	2.6	2.6	3.1	3.1	3.3	3.6	3.8	4.0	4.3	4.5
G108.0	2.6	2.6	3.1	3.1	3.3	3.3	3.6	3.8	4.0	4.5
G109.0	2.8	2.8	3.1	3.1	3.3	3.3	3.6	3.6	4.0	4.3
G110.0	2.8	2.8	2.8	3.3	3.3	3.6	3.6	3.6	3.8	4.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	3.1	3.1	3.1	3.3	3.6	3.6	3.6	3.6	3.8	3.8
G112.0	3.3	3.3	3.1	3.3	3.6	3.6	3.6	3.8	3.8	4.0
G113.0	3.3	3.3	3.3	3.3	3.3	3.6	3.6	3.8	4.0	4.0
G114.0	3.6	3.6	3.6	3.6	3.6	3.6	3.8	4.0	4.0	4.0
G115.0	3.8	3.8	3.8	3.8	3.8	3.8	3.8	4.0	4.3	4.3
G116.0	4.0	4.0	4.0	4.0	4.0	3.8	4.0	4.0	4.3	4.3
G117.0	4.3	4.3	4.3	4.3	4.3	4.3	4.0	4.3	4.3	4.8
G118.0	4.8	4.8	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
G119.0	5.0	5.0	5.0	5.0	5.0	4.8	4.8	4.8	4.8	4.8
G120.0	5.5	5.2	5.2	5.2	5.5	5.2	4.5	5.0	5.0	5.0
G121.0	5.9	5.7	5.7	5.7	5.7	5.5	5.5	5.5	5.5	5.5
G122.0	6.4	6.2	6.2	6.2	5.9	5.9	5.9	5.9	5.9	5.9
G123.0	6.9	6.7	6.7	6.7	6.7	6.4	6.4	6.4	6.2	6.4
G124.0	7.4	7.1	7.1	7.1	7.1	6.9	6.9	6.9	6.9	6.9
G125.0	7.8	7.8	7.6	7.6	7.6	7.6	7.4	7.4	7.4	7.4
G126.0	8.3	8.3	8.3	8.3	8.3	8.1	8.1	8.1	7.8	8.1
G127.0	9.0	9.0	8.8	8.8	8.8	8.8	8.6	8.8	8.6	8.6
G128.0	9.8	9.8	9.5	9.5	9.5	9.3	9.3	9.3	9.3	9.0
G129.0	10.5	10.5	10.5	10.2	10.2	10.0	10.0	10.0	10.0	9.8
G130.0	11.2	11.2	10.9	10.9	10.9	10.7	10.7	10.7	10.7	10.5
G131.0	12.1	11.9	11.9	11.9	11.6	11.6	11.6	11.4	11.4	11.2
G132.0	12.8	12.8	12.6	12.6	12.6	12.4	12.4	12.4	12.1	12.1
G133.0	13.6	13.6	13.6	13.3	13.3	13.3	13.1	13.1	12.8	12.8
G134.0	14.5	14.5	14.3	14.3	14.3	14.0	14.0	14.0	13.8	13.8
G135.0	15.5	15.2	15.2	15.2	15.2	15.0	15.0	15.0	14.8	14.8
G136.0	16.4	16.2	16.2	16.2	15.9	15.9	15.7	15.7	15.7	15.5
G137.0	17.1	17.1	17.1	17.1	17.1	16.9	16.6	16.6	16.6	16.4
G138.0	18.3	18.1	18.1	18.1	17.8	17.8	17.6	17.6	17.4	17.4
G139.0	19.0	19.0	19.0	19.0	18.8	18.8	18.5	18.5	18.5	18.3
G140.0	20.2	20.0	20.0	20.0	19.7	19.7	19.5	19.5	19.5	19.5
G141.0	21.2	20.9	20.9	20.9	20.7	20.7	20.7	20.7	20.5	20.5
G142.0	22.1	21.9	21.9	21.9	21.6	21.6	21.6	21.6	21.4	21.4
G143.0	23.1	23.1	22.8	22.8	22.8	22.6	22.6	22.6	22.4	22.4
G144.0	24.0	23.8	23.8	23.8	23.8	23.5	23.5	23.5	23.5	23.3
G145.0	25.0	25.0	25.0	24.7	24.7	24.7	24.7	24.5	24.5	24.5
G146.0	26.2	25.9	25.9	25.9	25.9	25.7	25.7	25.5	25.5	25.5
G147.0	27.1	26.9	26.9	26.9	26.9	26.6	26.6	26.6	26.6	26.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	28.1	27.8	27.8	27.8	27.8	27.8	27.6	27.6	27.4	27.4
G149.0	29.0	29.0	28.8	29.0	28.8	28.8	28.5	28.5	28.5	28.3
G150.0	30.0	30.0	29.7	29.7	29.7	29.7	29.5	29.5	29.0	29.5
G151.0	31.2	30.9	30.9	30.9	30.7	30.7	30.4	30.7	30.4	30.4
G152.0	32.1	31.9	31.9	31.9	31.9	31.6	31.4	31.4	31.2	31.4
G153.0	33.1	32.8	32.8	32.8	32.8	32.6	32.6	32.3	32.3	32.3
G154.0	34.0	33.8	33.8	33.8	33.8	33.5	33.5	33.3	33.3	33.3
G155.0	35.0	35.0	34.7	34.7	34.7	34.5	34.5	34.5	34.3	34.3
G156.0	35.9	35.9	35.7	35.9	35.7	35.4	35.4	35.2	35.2	35.0
G157.0	37.1	36.9	36.9	36.9	36.6	36.4	36.4	36.4	36.2	36.2
G158.0	38.0	37.8	37.6	37.8	37.6	37.6	37.3	37.3	37.1	37.1
G159.0	38.8	38.8	38.5	38.8	38.5	38.5	38.3	38.3	38.0	38.0
G160.0	40.0	39.7	39.5	39.7	39.5	39.2	39.2	39.2	39.0	39.0
G161.0	40.9	40.7	40.4	40.4	40.4	40.4	40.2	40.2	40.2	40.0
G162.0	41.6	41.6	41.6	41.6	41.4	41.4	41.2	41.2	40.9	40.9
G163.0	42.8	42.6	42.6	42.3	42.3	42.3	42.1	42.1	41.9	41.9
G164.0	43.8	43.5	43.5	43.5	43.3	43.3	43.0	43.0	43.0	43.0
G165.0	44.7	44.5	44.2	44.5	44.2	44.2	44.0	44.0	44.0	44.0
G166.0	45.7	45.4	45.2	45.4	45.4	45.2	45.2	45.2	45.0	45.0
G167.0	46.6	46.4	46.4	46.4	46.4	46.1	46.1	45.9	45.9	45.9
G168.0	47.6	47.3	47.3	47.3	47.3	47.1	47.1	47.1	47.1	46.8
G169.0	48.5	48.3	48.0	48.0	48.0	48.0	47.8	48.0	48.0	47.8
G170.0	49.2	49.2	49.0	49.0	49.0	49.0	48.8	49.0	48.8	48.8
G171.0	50.2	50.0	50.0	50.0	50.0	50.0	49.7	49.7	49.7	49.7
G172.0	50.9	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
G173.0	51.6	51.6	51.4	51.6	51.6	51.4	51.4	51.4	51.4	51.4
G174.0	52.3	52.3	52.1	52.3	52.1	52.3	52.1	52.1	52.1	52.1
G175.0	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8
G176.0	53.5	53.3	53.3	53.5	53.5	53.5	53.3	53.5	53.3	53.3
G177.0	53.8	53.8	53.8	54.0	54.0	54.0	53.8	54.0	54.0	54.0
G178.0	54.2	54.2	54.2	54.2	54.5	54.2	54.2	54.5	54.2	54.5
G179.0	54.5	54.5	54.5	54.7	54.7	54.7	54.7	54.7	54.7	54.7
G180.0	54.7	54.7	54.7	54.9	54.7	54.9	54.9	54.9	54.9	54.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	8967.8	8966.1	9008.2						
G1.0	8987.3	8988.0	8998.0						
G2.0	8994.9	8997.5	8973.7						
G3.0	8990.2	9001.3	8950.4						
G4.0	8975.9	8980.2	8915.2						
G5.0	8950.9	8955.7	8876.9						
G6.0	8915.9	8923.5	8835.5						
G7.0	8877.2	8886.2	8795.1						
G8.0	8832.5	8848.4	8749.2						
G9.0	8783.9	8802.0	8702.8						
G10.0	8739.5	8755.2	8654.5						
G11.0	8691.7	8712.1	8588.0						
G12.0	8645.3	8671.2	8498.8						
G13.0	8588.2	8610.8	8391.5						
G14.0	8500.9	8533.3	8257.4						
G15.0	8404.1	8432.2	8104.4						
G16.0	8272.8	8304.9	7944.8						
G17.0	8126.8	8161.0	7760.3						
G18.0	7961.0	7997.6	7563.1						
G19.0	7784.8	7824.3	7360.5						
G20.0	7584.5	7629.0	7136.9						
G21.0	7372.6	7419.2	6892.1						
G22.0	7142.6	7188.0	6655.3						
G23.0	6908.1	6948.0	6383.9						
G24.0	6654.1	6705.0	6123.9						
G25.0	6389.8	6456.9	5839.0						
G26.0	6120.6	6177.4	5559.8						
G27.0	5842.1	5902.3	5281.3						
G28.0	5555.0	5611.6	5002.0						
G29.0	5259.1	5336.0	4702.1						
G30.0	4974.7	5046.3	4406.5						
G31.0	4672.6	4741.6	4086.6						
G32.0	4375.6	4443.3	3764.6						
G33.0	4043.3	4130.8	3408.0						
G34.0	3735.8	3795.7	3057.0						
G35.0	3384.9	3447.3	2676.4						
G36.0	3040.8	3083.4	2309.0						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	2678.8	2710.7	1972.2						
G38.0	2339.6	2354.6	1666.1						
G39.0	1996.4	2003.8	1416.8						
G40.0	1704.8	1702.7	1198.0						
G41.0	1438.5	1441.3	1021.3						
G42.0	1219.2	1216.6	865.7						
G43.0	1025.1	1020.8	742.8						
G44.0	868.6	869.5	631.7						
G45.0	731.4	735.4	545.4						
G46.0	623.1	626.0	479.0						
G47.0	534.0	537.5	428.1						
G48.0	463.8	470.0	388.4						
G49.0	410.5	417.6	361.3						
G50.0	371.8	378.6	339.4						
G51.0	343.4	350.8	324.2						
G52.0	324.2	331.3	311.6						
G53.0	309.2	316.1	300.6						
G54.0	297.3	303.7	290.9						
G55.0	287.3	293.0	282.5						
G56.0	278.5	284.0	275.2						
G57.0	270.7	276.1	268.3						
G58.0	263.5	269.0	261.6						
G59.0	256.9	262.1	255.2						
G60.0	250.7	255.9	248.5						
G61.0	245.0	249.7	242.4						
G62.0	239.5	243.6	236.4						
G63.0	233.8	237.6	230.9						
G64.0	228.3	231.9	225.7						
G65.0	223.1	226.7	220.5						
G66.0	218.3	221.4	215.5						
G67.0	213.1	216.4	210.0						
G68.0	208.1	211.2	203.6						
G69.0	202.9	205.5	196.9						
G70.0	196.7	199.3	190.3						
G71.0	190.8	192.9	184.1						
G72.0	184.3	186.2	176.5						
G73.0	177.7	179.3	169.1						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G74.0	171.5	172.2	166.3							
G75.0	166.5	166.7	171.0							
G76.0	168.6	167.9	182.2							
G77.0	178.6	176.9	191.5							
G78.0	193.8	189.6	197.4							
G79.0	207.4	198.6	201.9							
G80.0	216.2	205.5	208.1							
G81.0	219.1	210.5	208.4							
G82.0	216.7	211.4	206.0							
G83.0	209.3	208.4	200.5							
G84.0	201.4	201.4	190.0							
G85.0	192.9	195.0	179.6							
G86.0	181.0	185.0	168.9							
G87.0	169.1	173.9	154.6							
G88.0	157.7	161.7	131.5							
G89.0	144.6	144.9	89.2							
G90.0	124.4	119.2	54.2							
G91.0	90.6	87.3	50.2							
G92.0	72.5	70.4	46.4							
G93.0	58.5	54.0	42.8							
G94.0	50.2	46.6	34.7							
G95.0	37.3	38.3	17.1							
G96.0	23.1	22.1	14.8							
G97.0	19.3	17.1	12.4							
G98.0	15.2	13.3	9.5							
G99.0	10.5	10.5	9.5							
G100.0	9.8	9.3	10.0							
G101.0	10.5	9.8	10.0							
G102.0	10.2	10.0	9.0							
G103.0	9.5	9.5	8.6							
G104.0	8.8	8.8	7.1							
G105.0	7.1	7.6	5.5							
G106.0	5.7	5.7	5.0							
G107.0	5.0	5.2	4.8							
G108.0	4.8	4.8	4.5							
G109.0	4.5	4.5	4.3							
G110.0	4.3	4.3	4.0							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	4.0	4.0	4.3							
G112.0	4.0	4.0	4.3							
G113.0	4.3	4.3	4.5							
G114.0	4.3	4.3	4.5							
G115.0	4.3	4.5	4.8							
G116.0	4.5	4.5	4.8							
G117.0	4.3	4.5	4.8							
G118.0	4.5	4.5	5.0							
G119.0	4.8	4.8	5.2							
G120.0	5.0	5.0	5.7							
G121.0	5.2	5.5	6.2							
G122.0	5.7	5.7	6.7							
G123.0	6.2	6.2	7.1							
G124.0	6.9	6.7	7.6							
G125.0	7.4	7.4	8.3							
G126.0	7.8	7.8	9.0							
G127.0	8.6	8.3	9.5							
G128.0	9.0	9.0	10.2							
G129.0	9.8	9.8	11.2							
G130.0	10.5	10.5	11.9							
G131.0	11.2	11.2	12.8							
G132.0	12.1	11.9	13.6							
G133.0	12.8	12.8	14.5							
G134.0	13.8	13.6	15.5							
G135.0	14.8	14.5	16.2							
G136.0	15.5	15.5	17.4							
G137.0	16.4	16.4	18.3							
G138.0	17.4	17.4	19.5							
G139.0	18.3	18.3	20.5							
G140.0	19.3	19.3	21.4							
G141.0	20.5	20.2	22.6							
G142.0	21.4	21.4	23.3							
G143.0	22.4	22.4	24.5							
G144.0	23.5	23.3	25.5							
G145.0	24.3	24.3	26.6							
G146.0	25.5	25.5	27.6							
G147.0	26.4	26.4	28.5							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G148.0	27.4	27.4	29.7						
G149.0	28.3	28.3	30.7						
G150.0	29.5	29.3	31.6						
G151.0	30.2	30.2	32.6						
G152.0	31.2	31.2	33.5						
G153.0	32.3	32.1	34.5						
G154.0	33.1	33.1	35.4						
G155.0	34.3	34.0	36.4						
G156.0	35.2	35.0	37.3						
G157.0	36.2	35.9	38.3						
G158.0	37.1	36.9	39.2						
G159.0	37.8	37.8	40.4						
G160.0	39.0	39.0	41.4						
G161.0	40.0	40.0	42.3						
G162.0	40.9	40.9	43.3						
G163.0	41.9	41.9	44.2						
G164.0	43.0	43.0	45.2						
G165.0	44.0	44.0	46.1						
G166.0	45.0	45.0	47.1						
G167.0	45.9	46.1	48.0						
G168.0	46.8	47.1	49.0						
G169.0	47.8	48.0	50.0						
G170.0	48.8	49.0	50.7						
G171.0	49.7	49.7	51.6						
G172.0	50.7	50.7	52.3						
G173.0	51.4	51.6	53.0						
G174.0	52.1	52.3	53.8						
G175.0	52.8	53.0	54.2						
G176.0	53.5	53.8	54.7						
G177.0	54.0	54.2	55.2						
G178.0	54.7	54.7	55.4						
G179.0	54.9	55.2	55.9						
G180.0	55.2	55.4	55.9						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector: