

Report No.:

Test Time: 2021-03-23 12:49

Luminaire Property

Luminaire Manufacturer:
Lamp Catalog: EG 2-100w
Luminous Width (mm): 185
Voltage: 226.4 V
Power: 96.63 W

Luminous Length (mm): 360
Luminous Height (mm): 135
Current: 0.435 A
Power Factor: 0.979


Photometric Results

CIE Class: Direct
Measurement Flux: 13782.1 lm
Downward Ratio: 98%
Horizontal Diffuse Angle(50%): H113
Vertical Diffuse Angle(50%): V110.6
Luminaire Efficacy Rating (LER): 143
Max. Intensity: 4816.65 cd


Total Rated Lamp Lumens: 13782.1 lm
Efficiency: 100%
Upward Ratio: 2%

Central Intensity: 4812.47 cd
Pos of Max. Intensity: H180 V1

Picture Of Luminaire





Luminous Intensity Distribution Curve

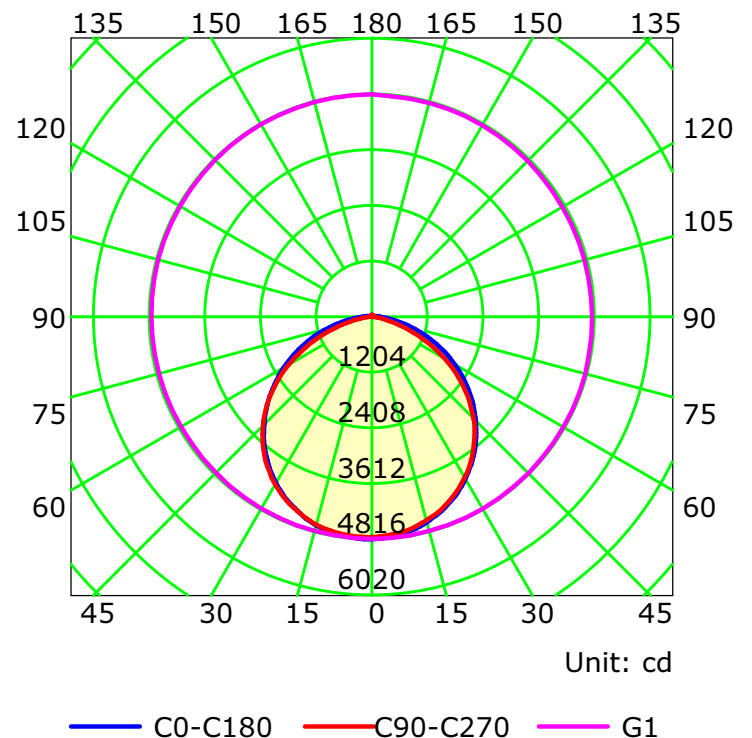

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:


Luminous Intensity Distribution Curve

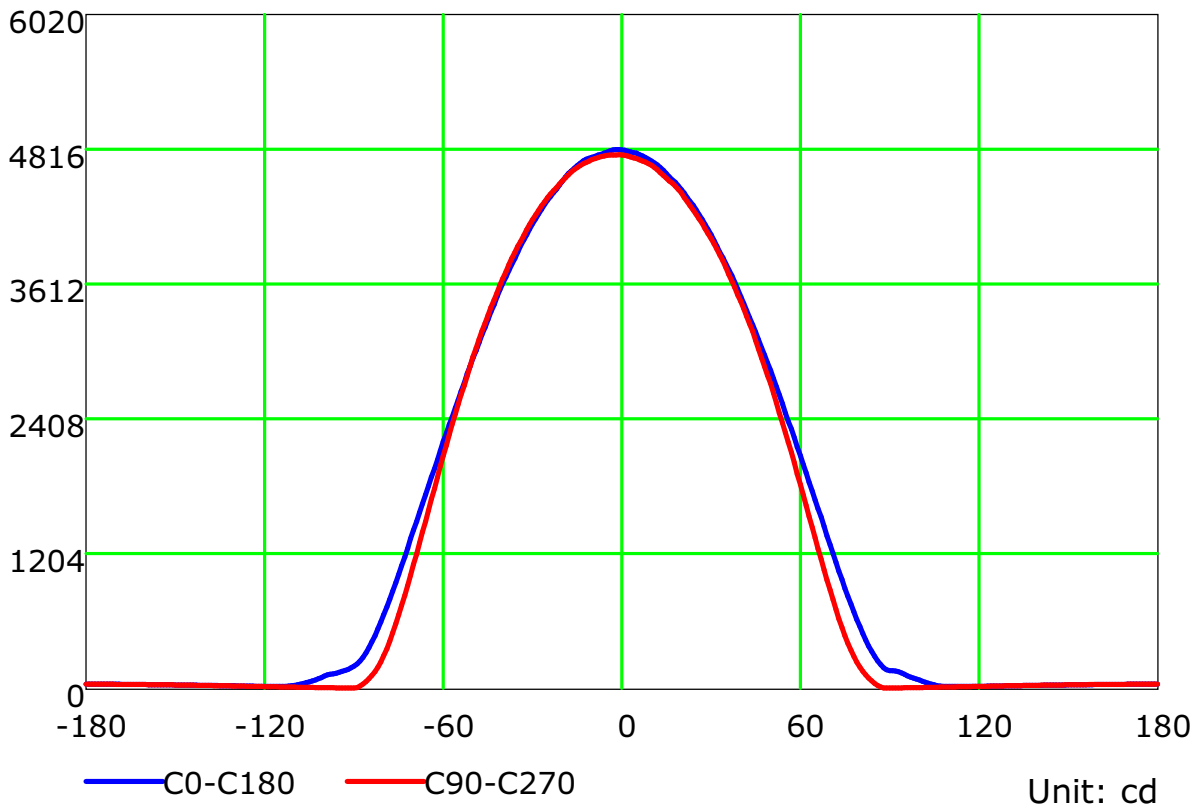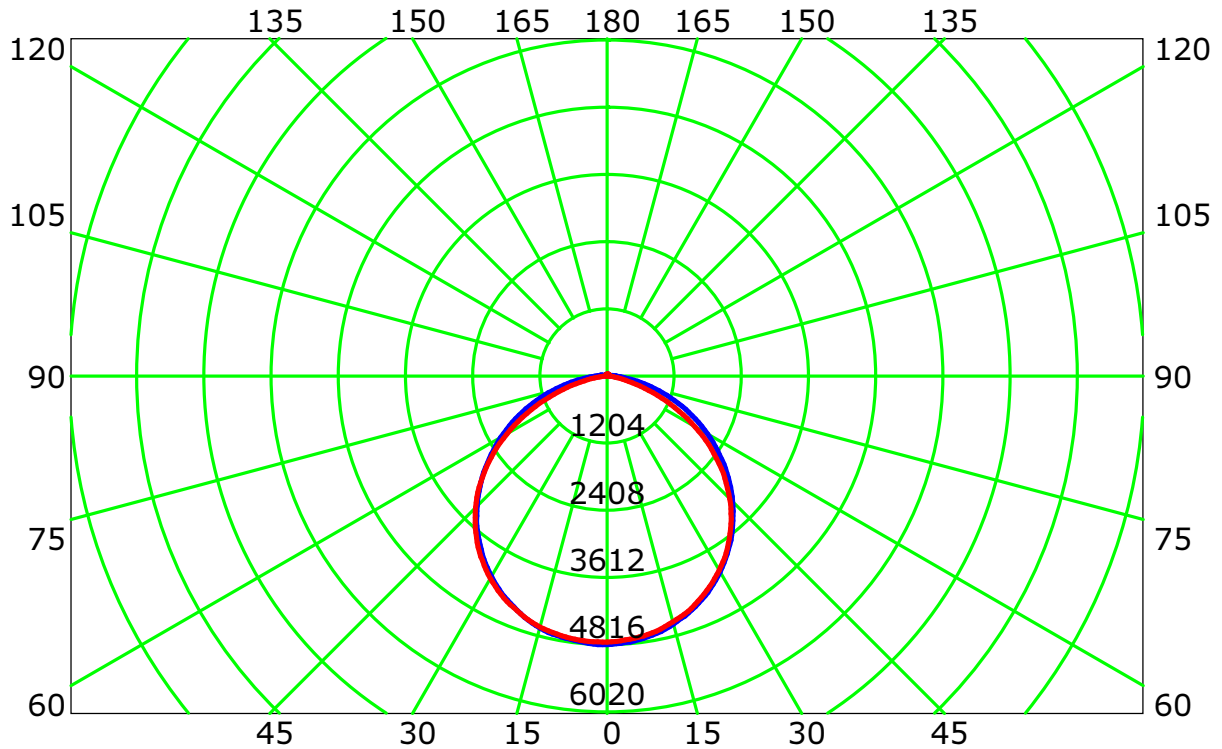

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

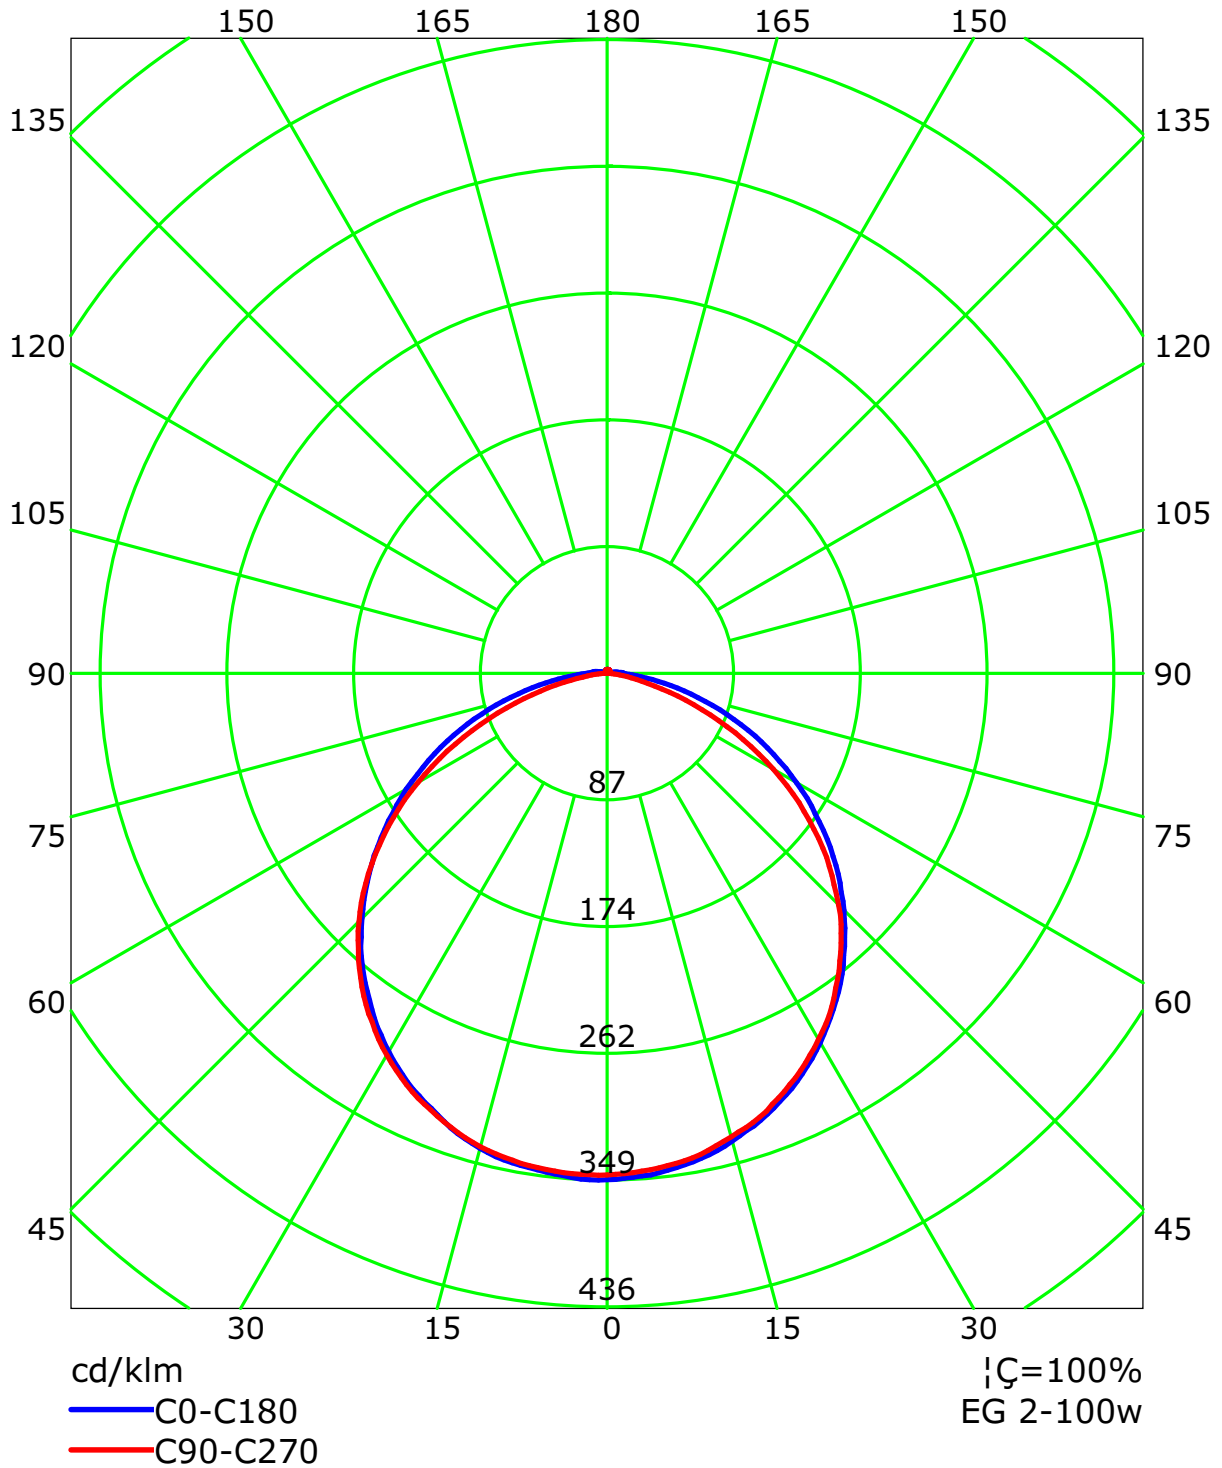

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:


Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	98
1	108	104	99	96	106	101	97	94	97	94	91	93	90	88	89	87	85	82
2	99	90	84	78	96	88	82	77	85	79	75	81	77	73	78	74	71	69
3	90	79	71	65	87	78	70	64	75	68	63	72	66	62	69	64	60	58
4	82	70	62	55	80	69	61	54	66	59	54	64	58	53	61	56	52	50
5	76	63	54	47	74	62	53	47	59	52	46	57	51	46	55	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	44	40	37
7	65	51	43	36	63	50	42	36	49	41	36	47	40	35	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24

Spacing Criteria (0-180): 1.27
 Spacing Criteria (90-270): 1.28
 Spacing Criteria (Diagonal): 1.37


Curves of Luminaires vs Lighting Area

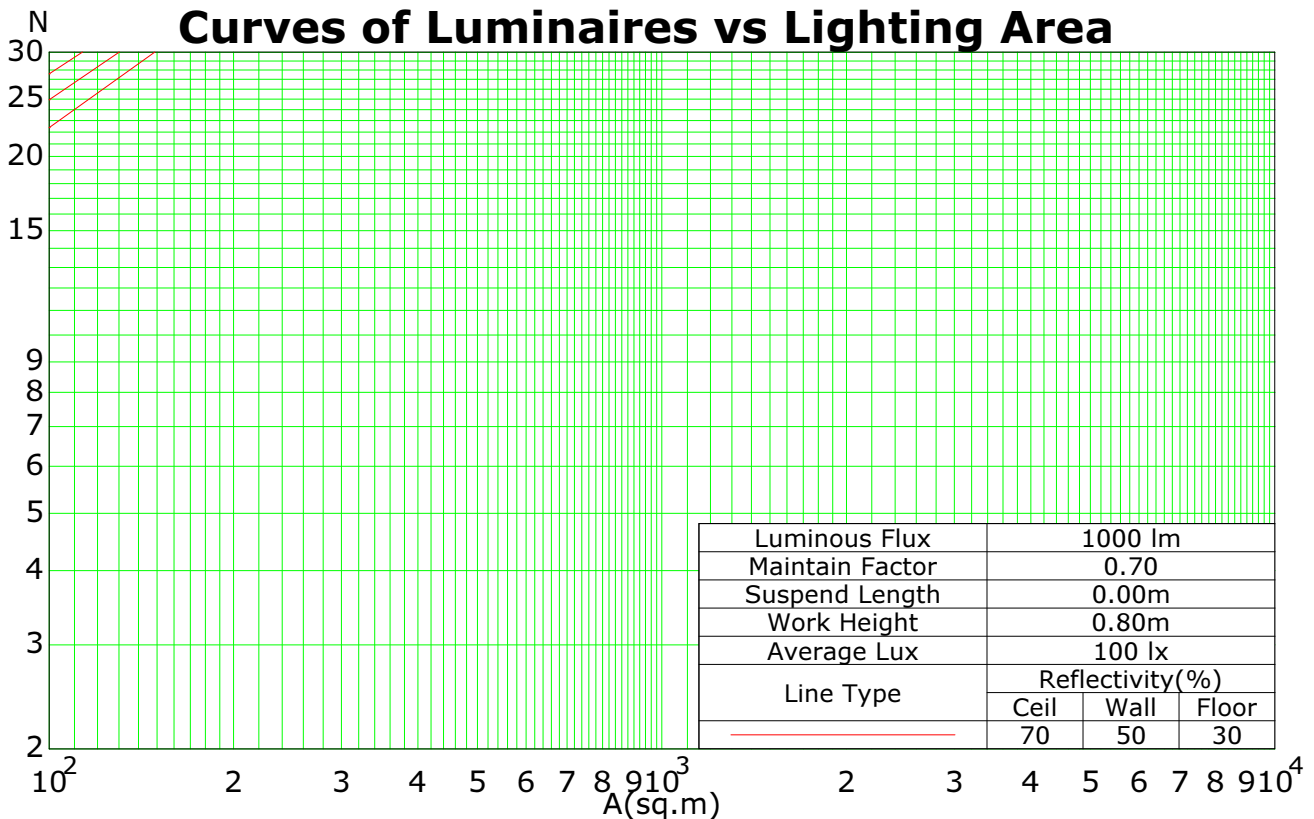

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

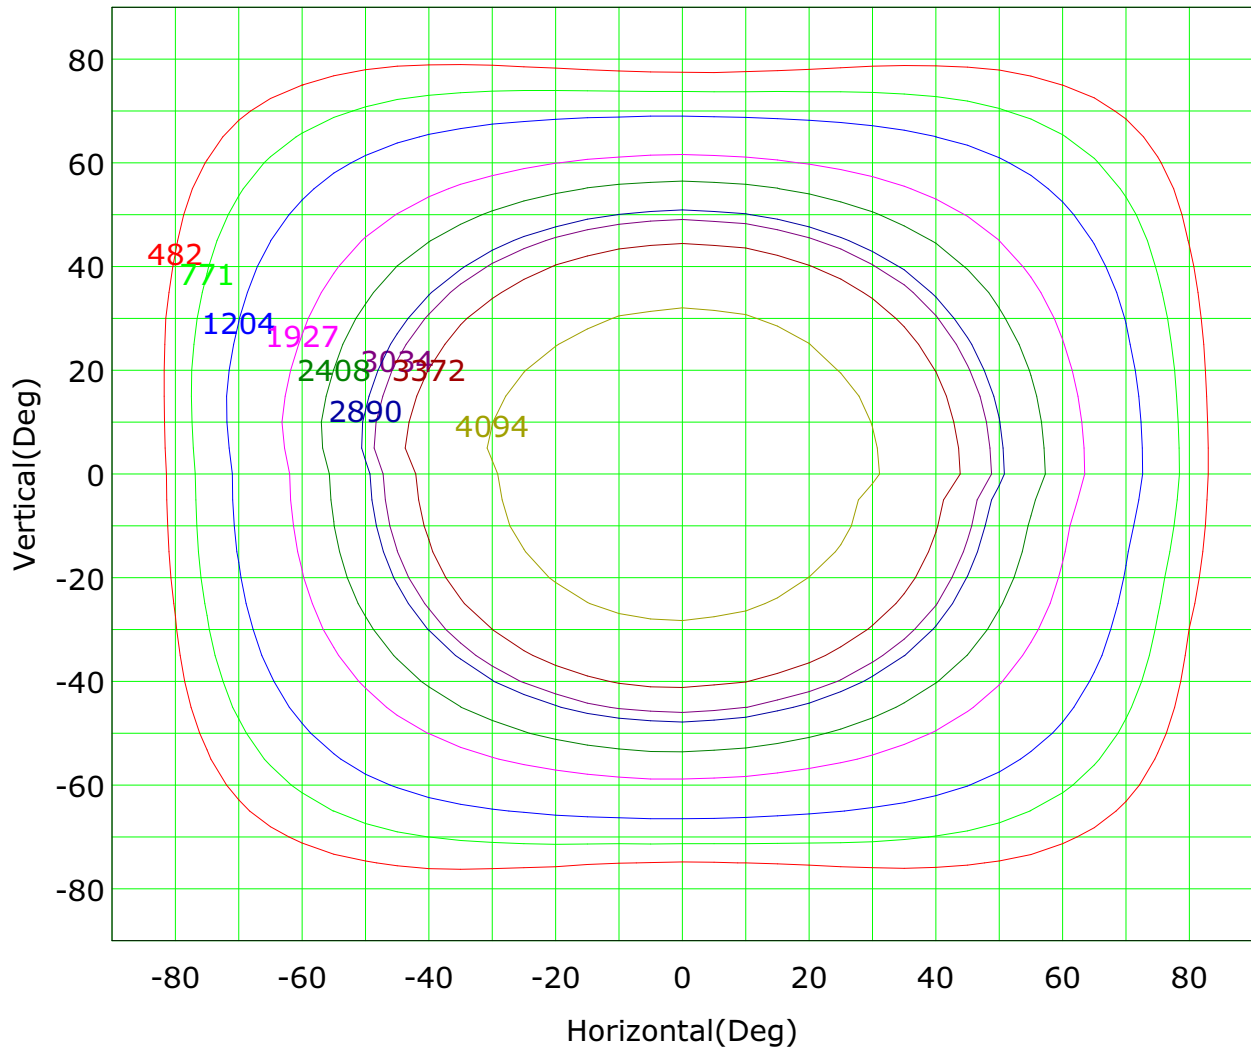

Imax (100%): 4817 cd

(10%): 482 cd	(16%): 771 cd
(25%): 1204 cd	(40%): 1927 cd
(63%): 3034 cd	(100%): 4817 cd
(50%): 2408 cd	(60%): 2890 cd
(70%): 3372 cd	(85%): 4094 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Isocandela (sphere)

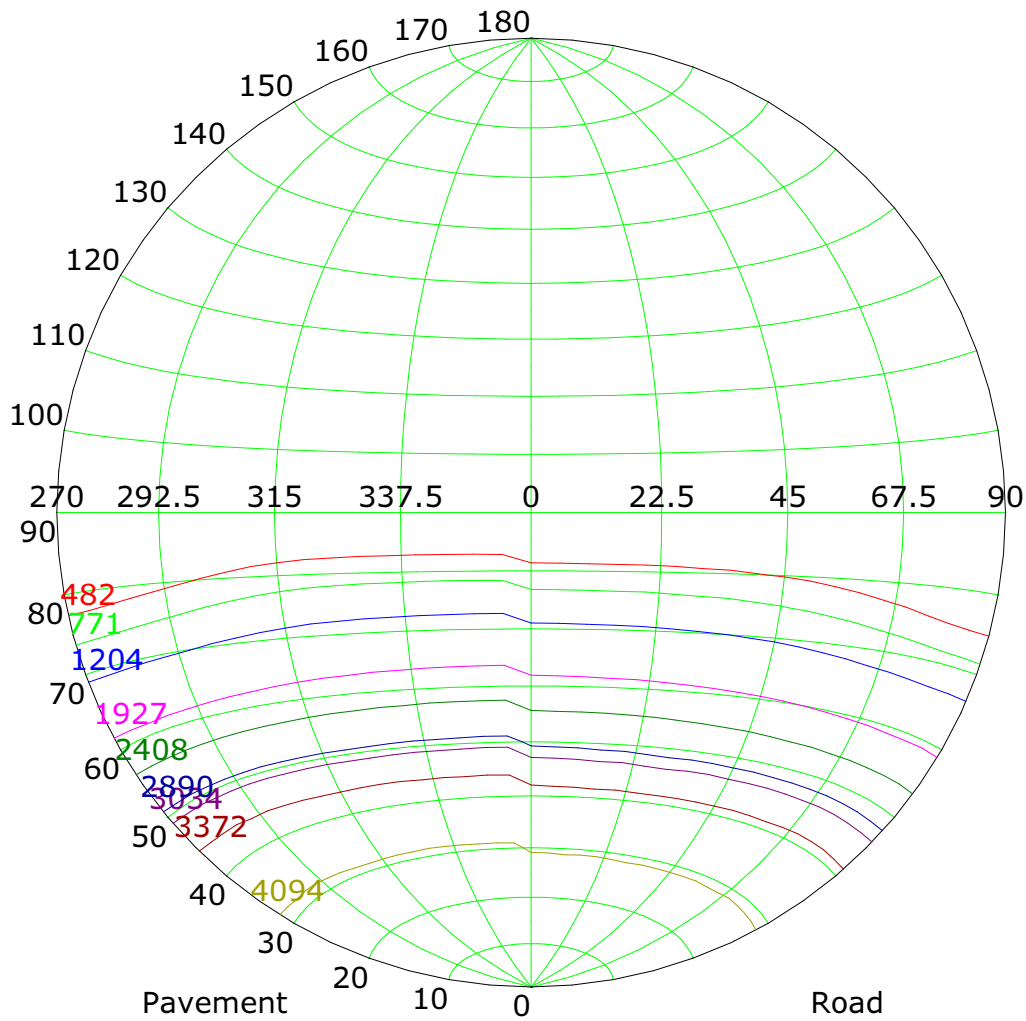

Imax (100%): 4817 cd

(10%): 482 cd	(16%): 771 cd
(25%): 1204 cd	(40%): 1927 cd
(63%): 3034 cd	(100%): 4817 cd
(50%): 2408 cd	(60%): 2890 cd
(70%): 3372 cd	(85%): 4094 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

IsoLux Plot

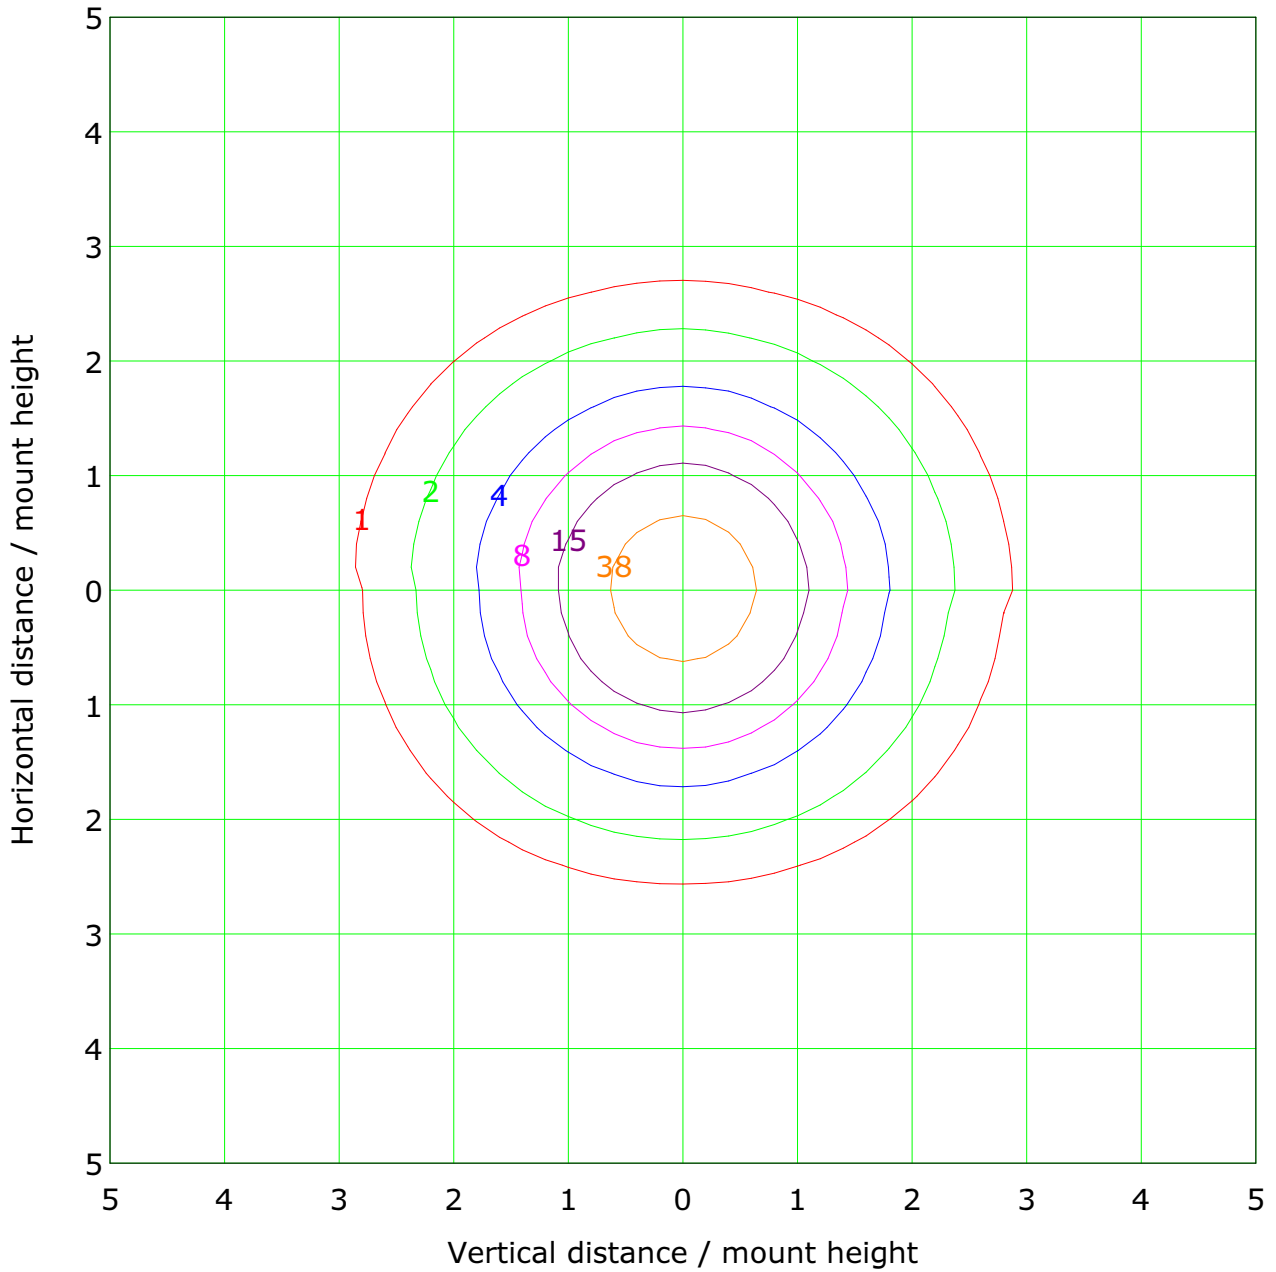

Mounting Height: 8.0m		Max Lux(100%): 75.2 lx
— (1%):	0.8 lx	— (2%): 1.5 lx
— (5%):	3.8 lx	— (10%): 7.5 lx
— (20%):	15.0 lx	— (50%): 37.6 lx
— (100%):	75.2 lx	— (200%): 150.5 lx
— (300%):	225.7 lx	— (500%): 376.1 lx

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.100 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

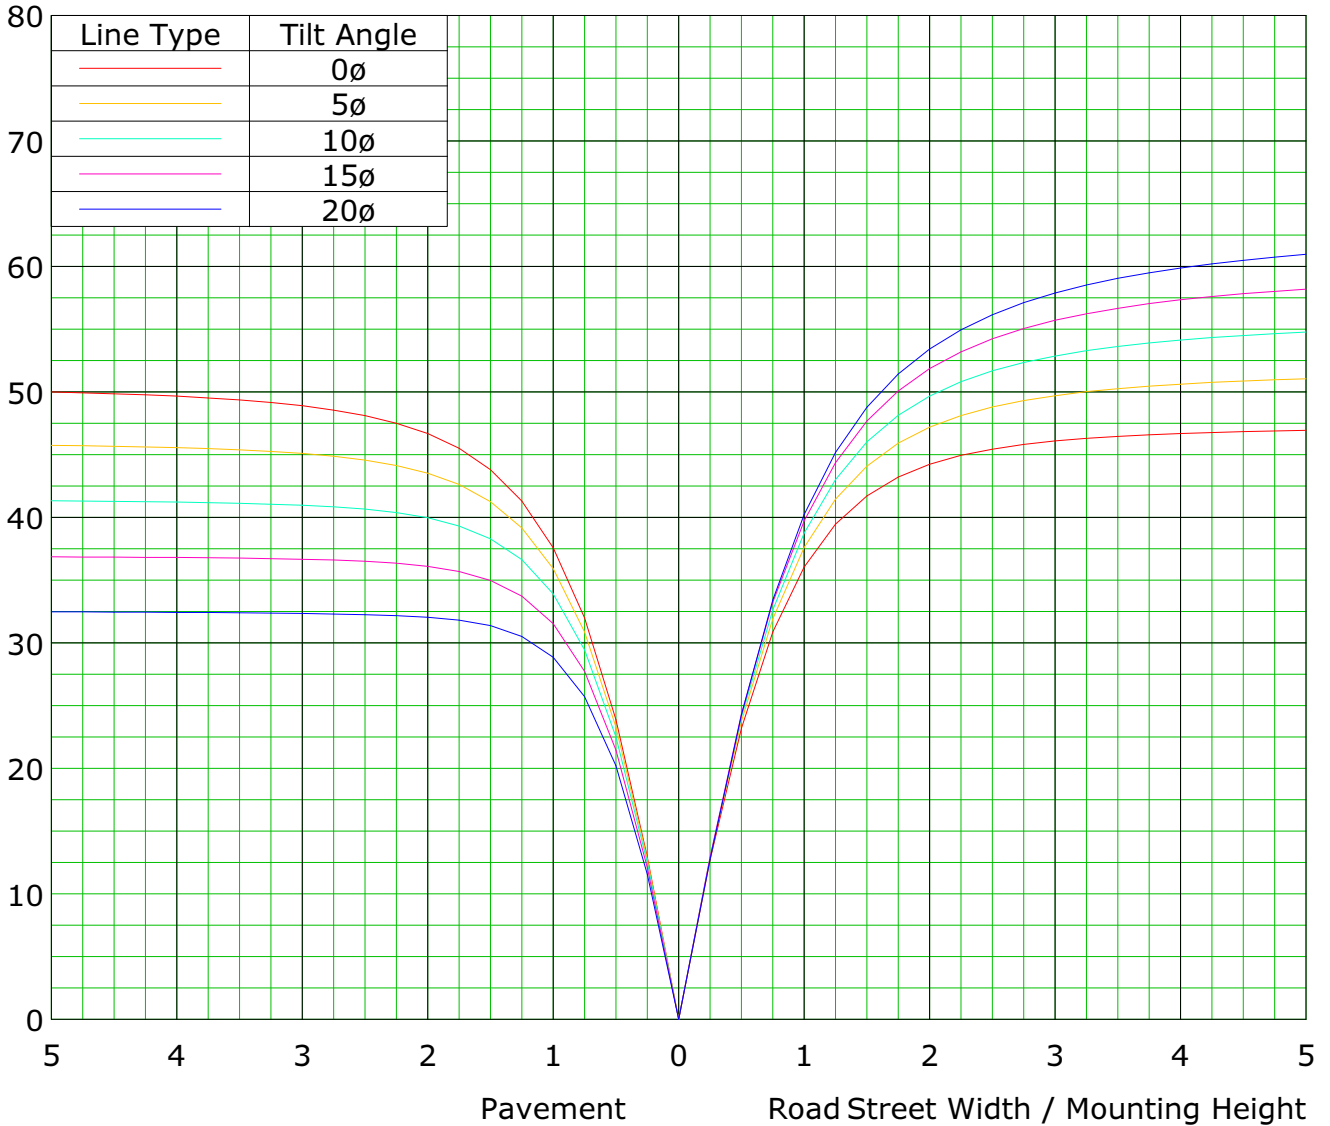

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

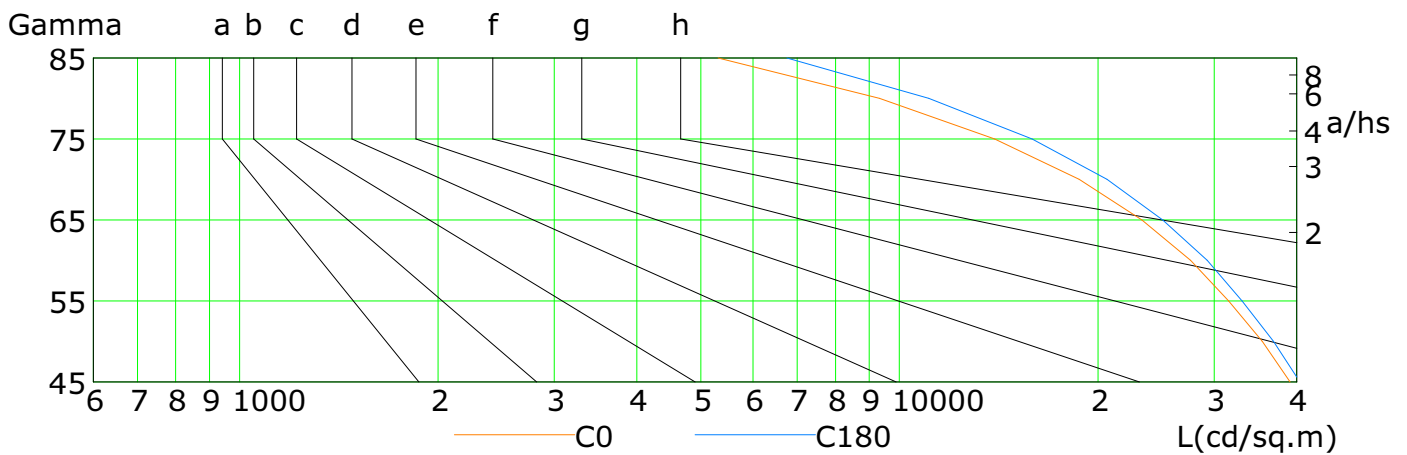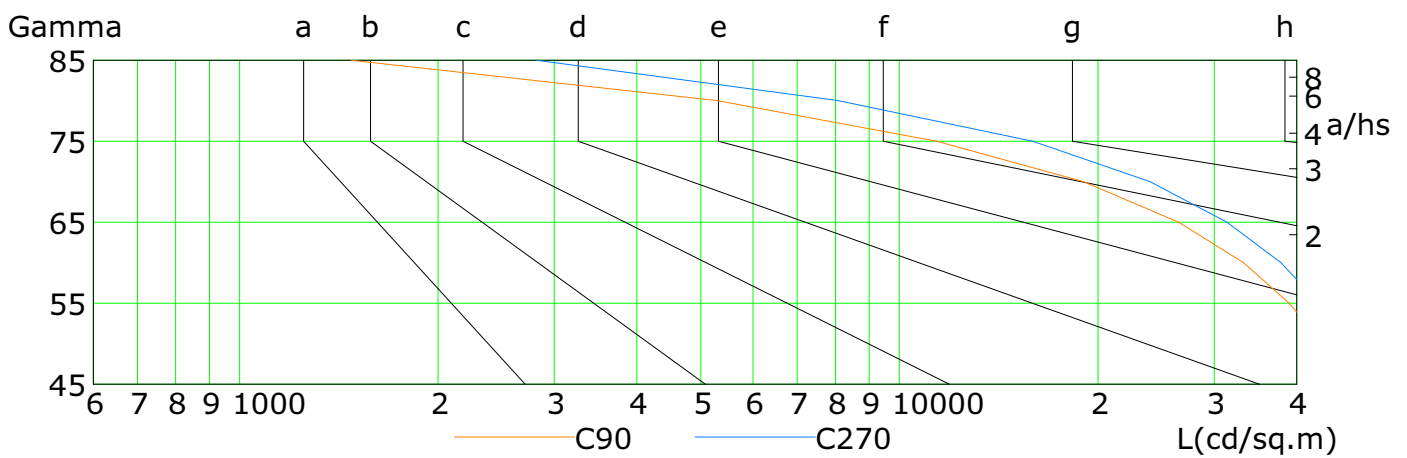

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	39091	35489	31549	27607	23319	18731	13943	9331	5314
C90	48049	43990	38965	33200	26495	19008	11388	5295	1477
C180	40474	36893	33067	29264	25066	20645	15885	11080	6751
C270	51501	47853	43314	37837	31371	23965	15931	8074	2821

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m


Humidity: 40

Inspector:

Illuminance at a Distance

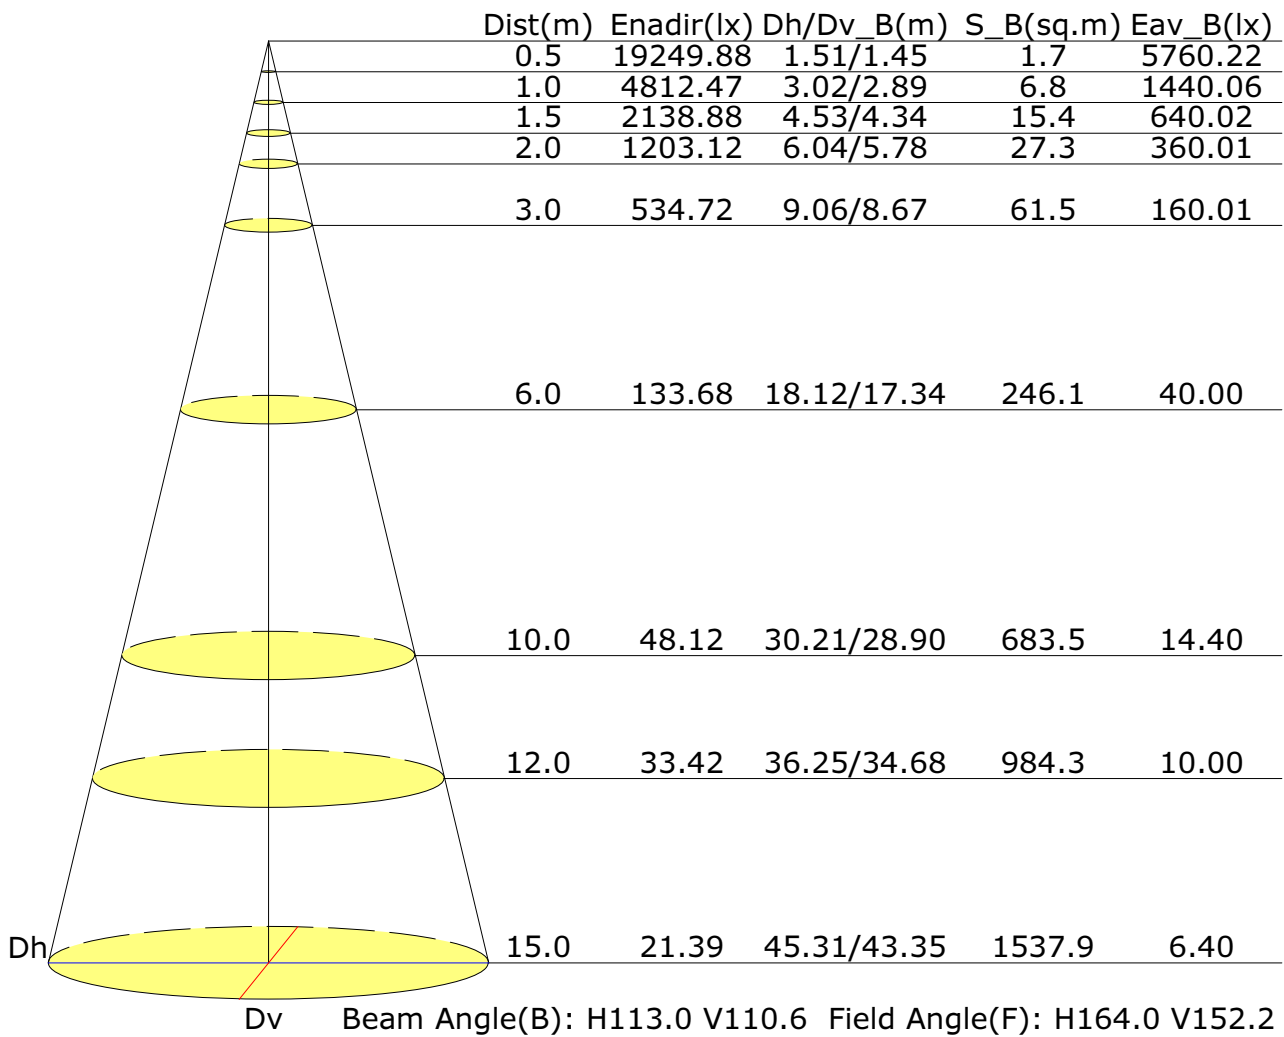

Vertical IsoLux Plot

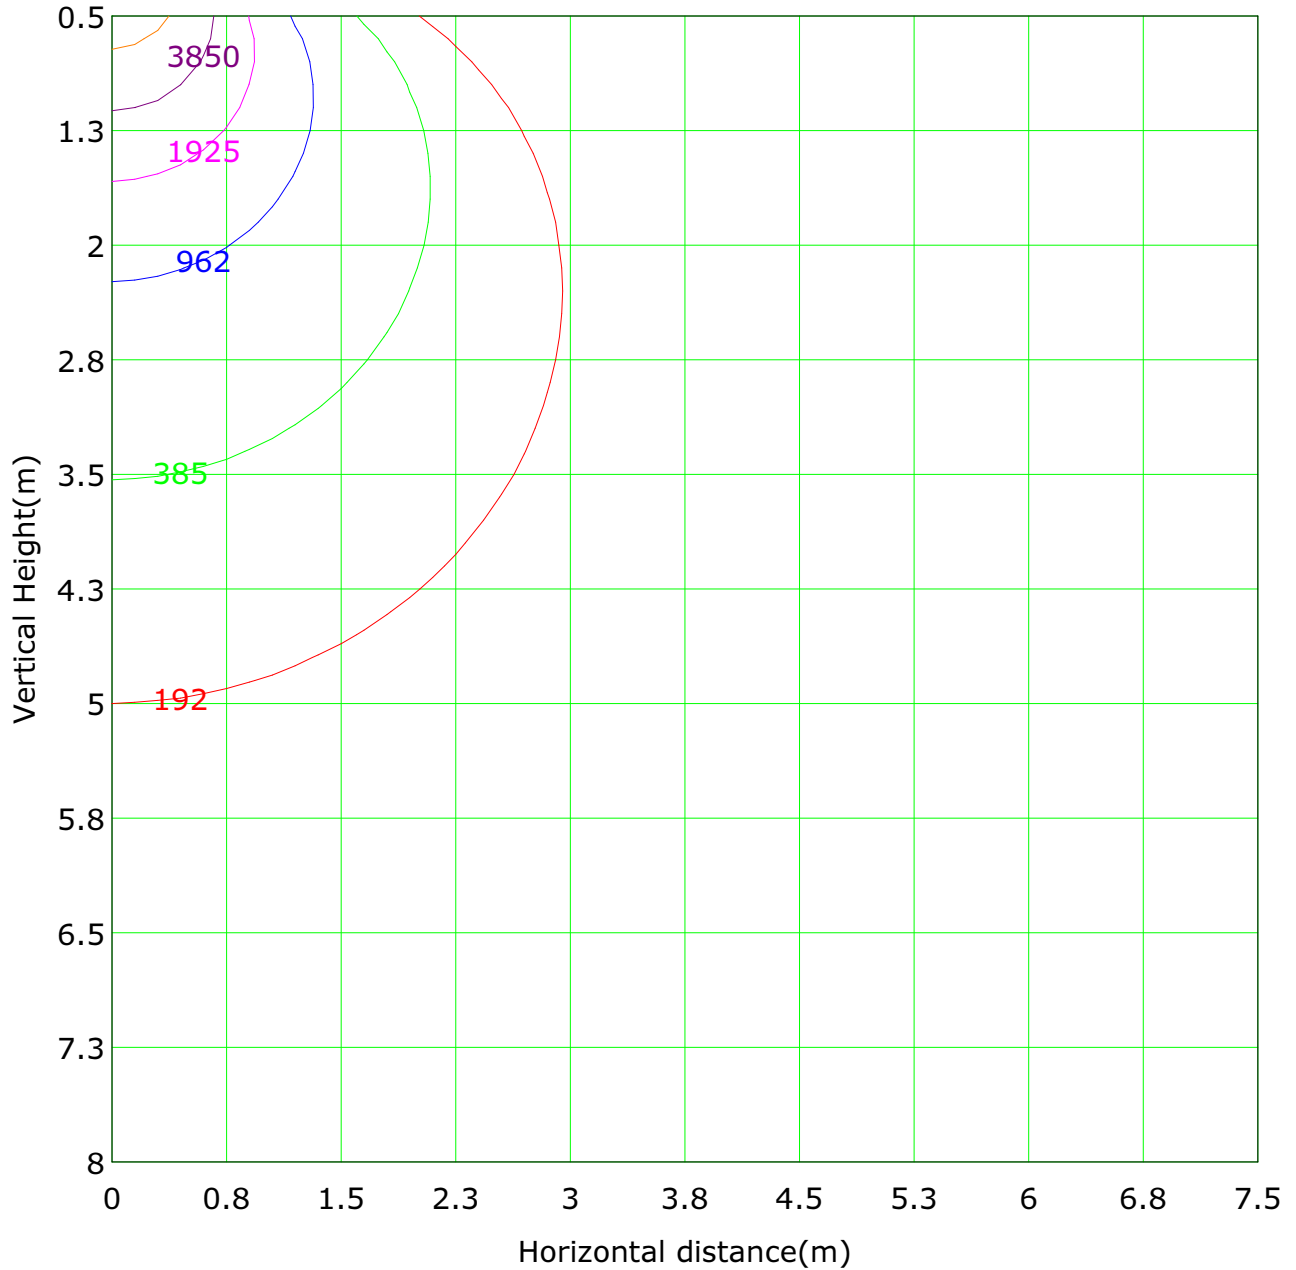

Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 19249.9 lx


— (1%): 192.5 lx	— (2%): 385.0 lx
— (5%): 962.5 lx	— (10%):1925.0 lx
— (20%):3850.0 lx	— (50%):9624.9 lx
— (100%):19249.9 lx	— (200%):38499.8 lx
— (300%):57749.6 lx	— (500%):96249.4 lx

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

The Average Illuminance Effective Figure

Flux Out: 13369.78lm

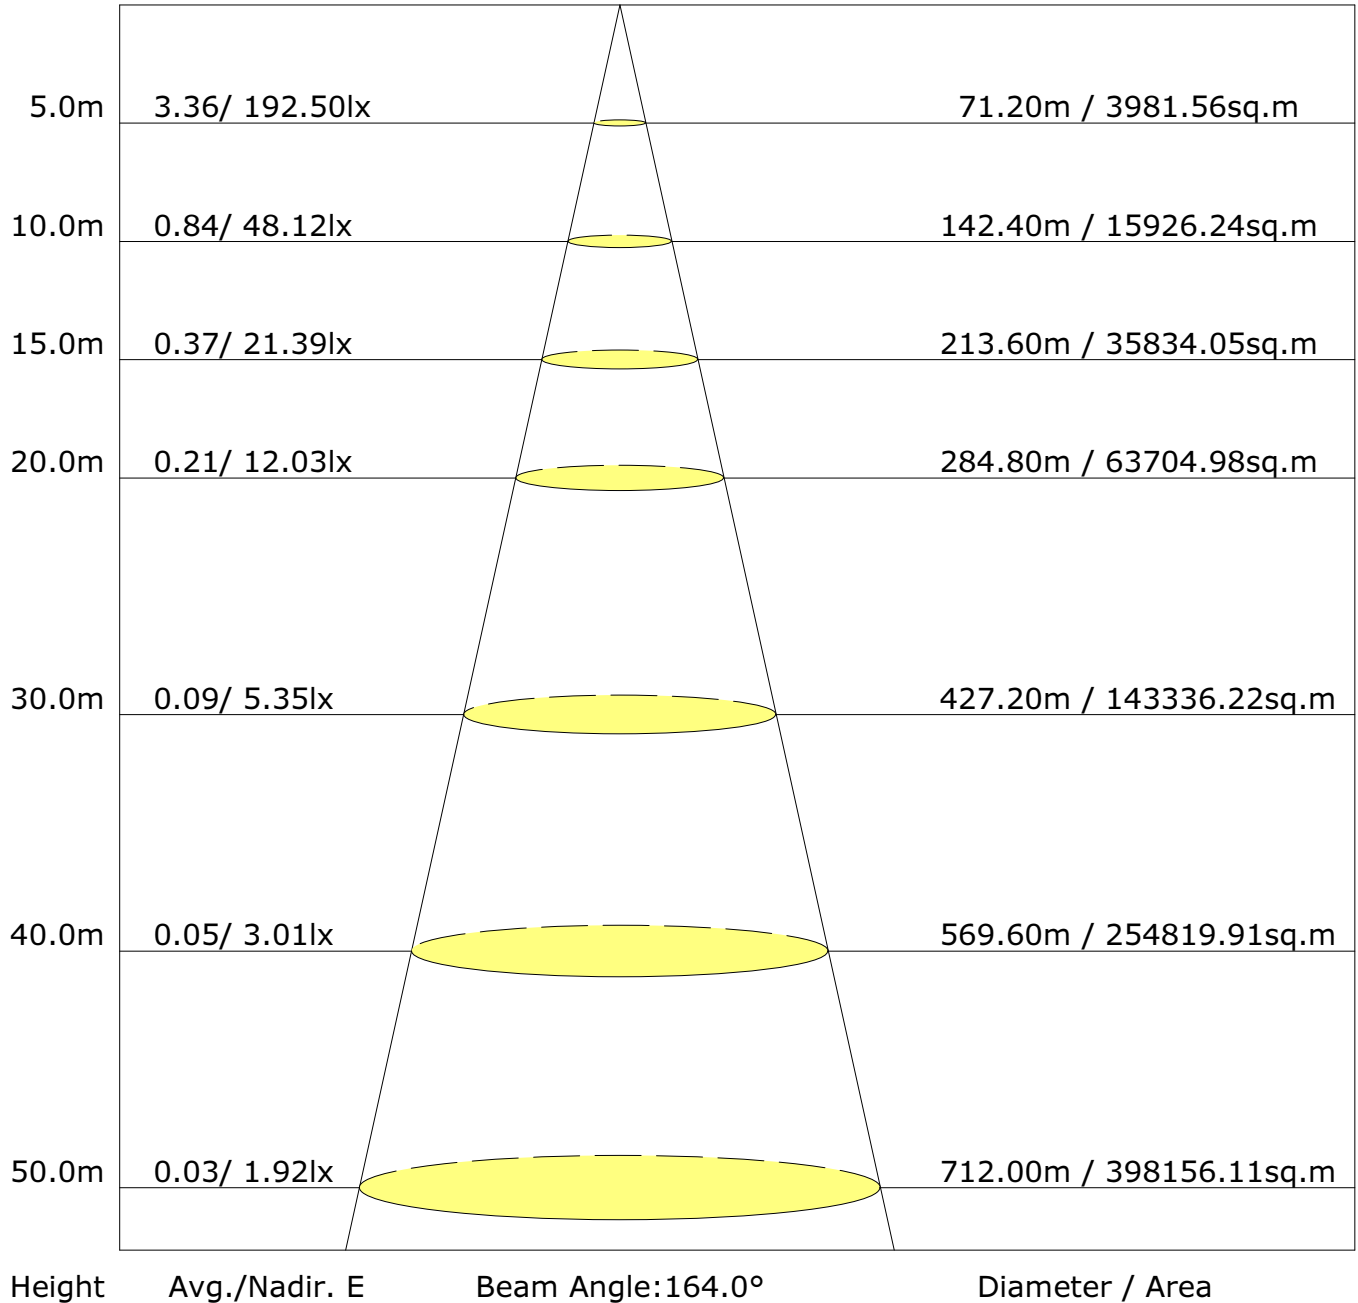

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

UGR Table


Reflectance:											
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
X=2H Y=2H	15.3	16.9	15.7	17.2	17.6	13.9	15.5	14.3	15.8	16.2	
3H	16.9	18.3	17.3	18.7	19.1	14.9	16.3	15.3	16.7	17.1	
4H	17.4	18.8	17.9	19.2	19.6	15.0	16.4	15.5	16.8	17.2	
6H	17.8	19.1	18.2	19.4	19.9	15.1	16.3	15.5	16.7	17.1	
8H	17.9	19.1	18.3	19.5	20.0	15.0	16.2	15.5	16.7	17.1	
12H	18.0	19.1	18.4	19.5	20.0	15.0	16.2	15.5	16.6	17.0	
X=4H Y=2H	15.7	17.0	16.1	17.4	17.8	14.4	15.8	14.9	16.2	16.6	
3H	17.4	18.6	17.9	19.0	19.4	15.6	16.7	16.0	17.1	17.6	
4H	18.1	19.1	18.5	19.6	20.0	15.8	16.8	16.3	17.3	17.8	
6H	18.6	19.5	19.0	19.9	20.4	15.9	16.8	16.4	17.3	17.8	
8H	18.7	19.5	19.2	20.0	20.5	15.9	16.7	16.4	17.2	17.7	
12H	18.8	19.5	19.3	20.0	20.6	15.9	16.6	16.4	17.1	17.6	
X=8H Y=4H	18.2	19.0	18.7	19.5	20.0	16.1	16.9	16.5	17.4	17.9	
6H	18.7	19.4	19.3	20.0	20.5	16.2	16.9	16.7	17.4	17.9	
8H	18.9	19.6	19.5	20.1	20.6	16.2	16.8	16.7	17.4	17.9	
12H	19.1	19.6	19.6	20.2	20.7	16.2	16.7	16.7	17.3	17.9	
X=12H Y=4H	18.2	18.9	18.7	19.4	20.0	16.1	16.8	16.6	17.3	17.8	
6H	18.7	19.4	19.3	19.9	20.4	16.2	16.9	16.8	17.4	17.9	
8H	19.0	19.5	19.5	20.0	20.6	16.3	16.8	16.8	17.3	17.9	

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

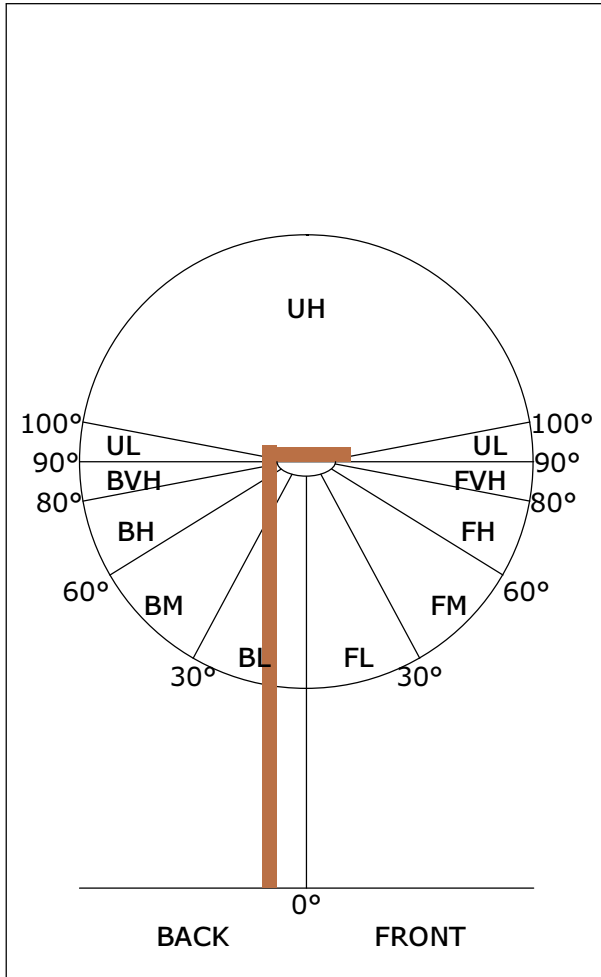


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	6552	47.5
FL (0°-30°)	1850	13.4
FM (30°-60°)	3433	24.9
FH (60°-80°)	1146	8.3
FVH (80°-90°)	123	0.9
BACK LIGHT	7008	50.9
BL (0°-30°)	1891	13.7
BM (30°-60°)	3644	26.4
BH (60°-80°)	1316	9.6
BVH (80°-90°)	158	1.1
UP LIGHT	222	1.6
UL (90°-100°)	90	0.7
UH (100°-180°)	132	1.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U5 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U5 G1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

LCS Graph

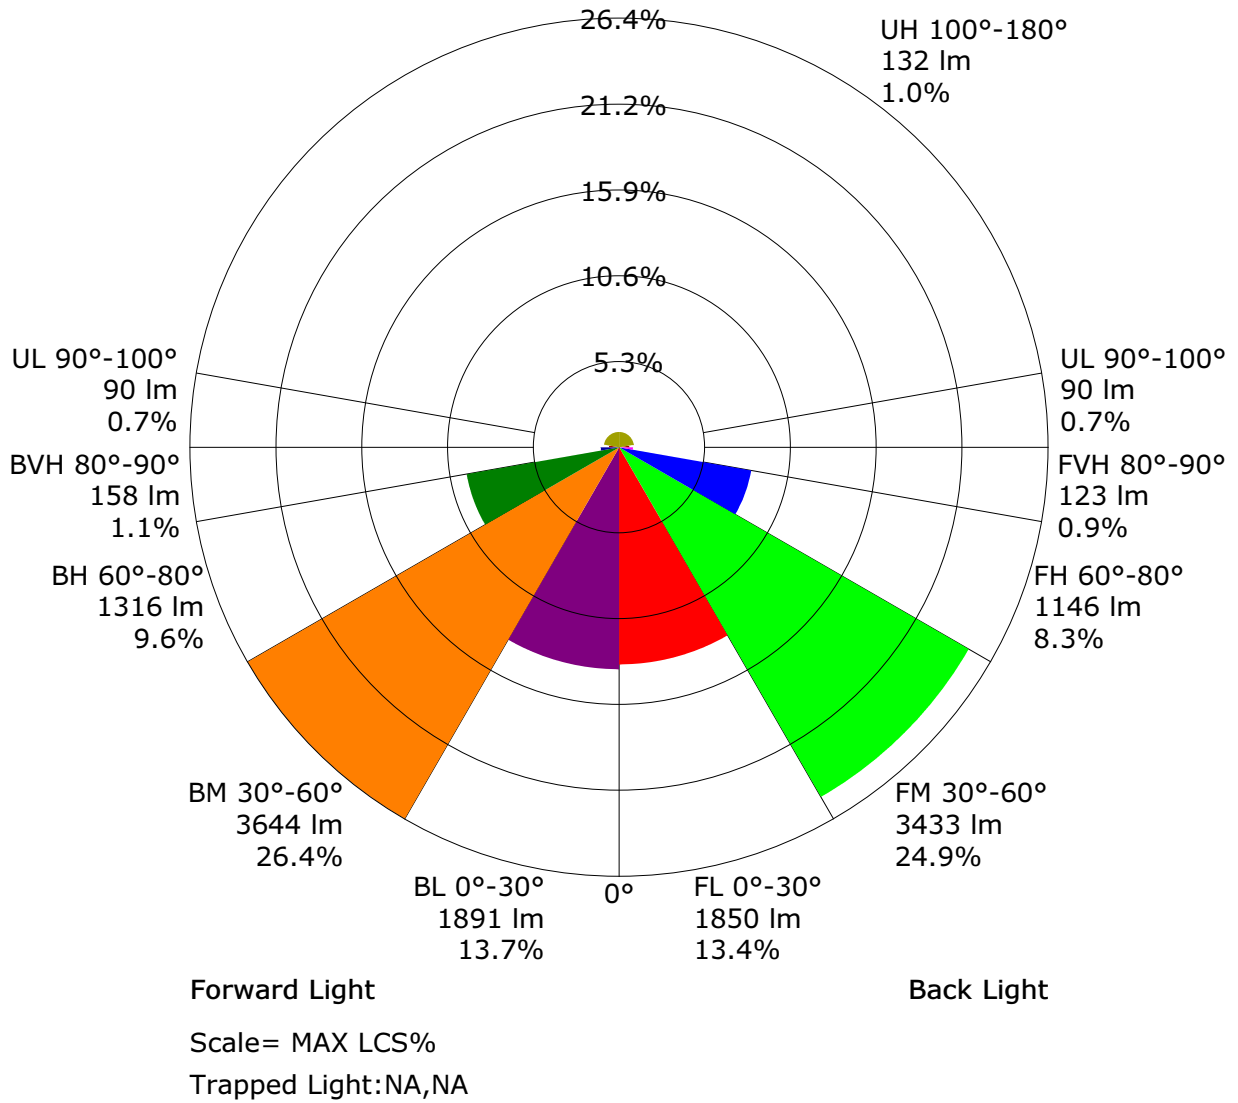

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	4786.1	4.6	4.6	0.03	0.03
1.0-2.0	4782.8	13.7	18.3	0.10	0.13
2.0-3.0	4777.5	22.9	41.2	0.17	0.30
3.0-4.0	4771.6	31.9	73.1	0.23	0.53
4.0-5.0	4764.5	41.0	114.1	0.30	0.83
5.0-6.0	4756.0	50.0	164.1	0.36	1.19
6.0-7.0	4746.7	58.9	223.0	0.43	1.62
7.0-8.0	4736.3	67.8	290.8	0.49	2.11
8.0-9.0	4725.1	76.6	367.4	0.56	2.67
9.0-10.0	4713.0	85.3	452.7	0.62	3.28
10.0-11.0	4699.2	93.9	546.6	0.68	3.97
11.0-12.0	4683.2	102.4	649.0	0.74	4.71
12.0-13.0	4665.3	110.7	759.7	0.80	5.51
13.0-14.0	4646.2	118.9	878.7	0.86	6.38
14.0-15.0	4625.6	127.0	1005.7	0.92	7.30
15.0-16.0	4603.4	134.9	1140.6	0.98	8.28
16.0-17.0	4579.3	142.6	1283.2	1.03	9.31
17.0-18.0	4553.6	150.2	1433.4	1.09	10.40
18.0-19.0	4526.1	157.5	1590.8	1.14	11.54
19.0-20.0	4496.3	164.6	1755.4	1.19	12.74
20.0-21.0	4464.6	171.5	1926.9	1.24	13.98
21.0-22.0	4431.6	178.1	2105.0	1.29	15.27
22.0-23.0	4397.9	184.6	2289.6	1.34	16.61
23.0-24.0	4363.2	190.8	2480.3	1.38	18.00
24.0-25.0	4326.7	196.8	2677.1	1.43	19.42
25.0-26.0	4288.2	202.4	2879.6	1.47	20.89
26.0-27.0	4248.0	207.9	3087.4	1.51	22.40
27.0-28.0	4206.0	213.0	3300.4	1.55	23.95
28.0-29.0	4162.5	217.8	3518.2	1.58	25.53
29.0-30.0	4117.5	222.3	3740.5	1.61	27.14
30.0-31.0	4071.2	226.6	3967.1	1.64	28.78
31.0-32.0	4022.7	230.5	4197.6	1.67	30.46
32.0-33.0	3972.3	234.1	4431.7	1.70	32.16
33.0-34.0	3921.0	237.3	4669.0	1.72	33.88
34.0-35.0	3867.9	240.2	4909.2	1.74	35.62
35.0-36.0	3812.8	242.8	5152.0	1.76	37.38

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	3756.7	245.0	5397.1	1.78	39.16
37.0-38.0	3699.5	247.0	5644.1	1.79	40.95
38.0-39.0	3640.6	248.5	5892.6	1.80	42.76
39.0-40.0	3579.6	249.7	6142.3	1.81	44.57
40.0-41.0	3516.8	250.5	6392.7	1.82	46.38
41.0-42.0	3452.7	250.9	6643.6	1.82	48.20
42.0-43.0	3386.8	250.9	6894.5	1.82	50.03
43.0-44.0	3319.6	250.6	7145.1	1.82	51.84
44.0-45.0	3251.4	249.9	7395.0	1.81	53.66
45.0-46.0	3182.2	248.9	7643.9	1.81	55.46
46.0-47.0	3111.6	247.5	7891.4	1.80	57.26
47.0-48.0	3039.3	245.7	8137.2	1.78	59.04
48.0-49.0	2965.2	243.5	8380.7	1.77	60.81
49.0-50.0	2890.4	241.0	8621.7	1.75	62.56
50.0-51.0	2814.6	238.2	8859.9	1.73	64.29
51.0-52.0	2737.7	235.0	9094.8	1.70	65.99
52.0-53.0	2659.6	231.4	9326.2	1.68	67.67
53.0-54.0	2579.8	227.4	9553.6	1.65	69.32
54.0-55.0	2498.8	223.1	9776.7	1.62	70.94
55.0-56.0	2417.0	218.4	9995.2	1.58	72.52
56.0-57.0	2334.9	213.5	10208.7	1.55	74.07
57.0-58.0	2252.3	208.3	10417.0	1.51	75.58
58.0-59.0	2168.5	202.8	10619.7	1.47	77.05
59.0-60.0	2084.7	197.0	10816.7	1.43	78.48
60.0-61.0	2000.3	190.9	11007.6	1.39	79.87
61.0-62.0	1914.8	184.5	11192.2	1.34	81.21
62.0-63.0	1829.4	177.9	11370.1	1.29	82.50
63.0-64.0	1744.3	171.2	11541.3	1.24	83.74
64.0-65.0	1659.8	164.3	11705.6	1.19	84.93
65.0-66.0	1575.2	157.2	11862.8	1.14	86.07
66.0-67.0	1490.6	149.9	12012.7	1.09	87.16
67.0-68.0	1406.3	142.5	12155.2	1.03	88.20
68.0-69.0	1322.6	134.9	12290.1	0.98	89.17
69.0-70.0	1239.7	127.3	12417.4	0.92	90.10
70.0-71.0	1158.0	119.7	12537.1	0.87	90.97
71.0-72.0	1077.1	112.0	12649.1	0.81	91.78

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	997.5	104.3	12753.5	0.76	92.54
73.0-74.0	919.5	96.7	12850.1	0.70	93.24
74.0-75.0	843.7	89.2	12939.3	0.65	93.88
75.0-76.0	770.7	81.8	13021.1	0.59	94.48
76.0-77.0	699.8	74.6	13095.7	0.54	95.02
77.0-78.0	631.2	67.6	13163.3	0.49	95.51
78.0-79.0	566.2	60.8	13224.2	0.44	95.95
79.0-80.0	504.7	54.4	13278.6	0.39	96.35
80.0-81.0	446.9	48.3	13326.9	0.35	96.70
81.0-82.0	393.2	42.6	13369.6	0.31	97.01
82.0-83.0	343.8	37.4	13406.9	0.27	97.28
83.0-84.0	298.5	32.5	13439.5	0.24	97.51
84.0-85.0	258.0	28.2	13467.6	0.20	97.72
85.0-86.0	221.7	24.2	13491.9	0.18	97.89
86.0-87.0	189.9	20.8	13512.7	0.15	98.05
87.0-88.0	163.3	17.9	13530.6	0.13	98.17
88.0-89.0	142.1	15.6	13546.1	0.11	98.29
89.0-90.0	126.2	13.8	13560.0	0.10	98.39
90.0-91.0	114.7	12.6	13572.5	0.09	98.48
91.0-92.0	106.3	11.7	13584.2	0.08	98.56
92.0-93.0	99.1	10.9	13595.1	0.08	98.64
93.0-94.0	92.3	10.1	13605.2	0.07	98.72
94.0-95.0	85.3	9.3	13614.5	0.07	98.78
95.0-96.0	78.3	8.5	13623.0	0.06	98.85
96.0-97.0	71.7	7.8	13630.8	0.06	98.90
97.0-98.0	65.5	7.1	13638.0	0.05	98.95
98.0-99.0	59.2	6.4	13644.4	0.05	99.00
99.0-100.0	52.9	5.7	13650.1	0.04	99.04
100.0-101.0	46.7	5.0	13655.1	0.04	99.08
101.0-102.0	41.0	4.4	13659.5	0.03	99.11
102.0-103.0	35.9	3.8	13663.4	0.03	99.14
103.0-104.0	31.4	3.4	13666.7	0.02	99.16
104.0-105.0	27.5	2.9	13669.7	0.02	99.18
105.0-106.0	24.2	2.6	13672.2	0.02	99.20
106.0-107.0	21.5	2.3	13674.5	0.02	99.22
107.0-108.0	19.5	2.0	13676.5	0.01	99.23

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	18.1	1.9	13678.4	0.01	99.25
109.0-110.0	17.1	1.8	13680.2	0.01	99.26
110.0-111.0	16.4	1.7	13681.8	0.01	99.27
111.0-112.0	16.0	1.6	13683.5	0.01	99.28
112.0-113.0	15.9	1.6	13685.1	0.01	99.30
113.0-114.0	15.9	1.6	13686.7	0.01	99.31
114.0-115.0	16.1	1.6	13688.3	0.01	99.32
115.0-116.0	16.3	1.6	13689.9	0.01	99.33
116.0-117.0	16.5	1.6	13691.5	0.01	99.34
117.0-118.0	16.9	1.6	13693.2	0.01	99.35
118.0-119.0	17.3	1.7	13694.8	0.01	99.37
119.0-120.0	17.8	1.7	13696.5	0.01	99.38
120.0-121.0	18.3	1.7	13698.3	0.01	99.39
121.0-122.0	18.8	1.8	13700.0	0.01	99.40
122.0-123.0	19.3	1.8	13701.8	0.01	99.42
123.0-124.0	19.8	1.8	13703.6	0.01	99.43
124.0-125.0	20.3	1.8	13705.5	0.01	99.44
125.0-126.0	20.8	1.9	13707.3	0.01	99.46
126.0-127.0	21.3	1.9	13709.2	0.01	99.47
127.0-128.0	21.8	1.9	13711.1	0.01	99.48
128.0-129.0	22.3	1.9	13713.0	0.01	99.50
129.0-130.0	22.8	1.9	13714.9	0.01	99.51
130.0-131.0	23.3	1.9	13716.9	0.01	99.53
131.0-132.0	23.8	2.0	13718.8	0.01	99.54
132.0-133.0	24.2	2.0	13720.8	0.01	99.56
133.0-134.0	24.7	2.0	13722.8	0.01	99.57
134.0-135.0	25.2	2.0	13724.7	0.01	99.58
135.0-136.0	25.6	2.0	13726.7	0.01	99.60
136.0-137.0	26.1	2.0	13728.7	0.01	99.61
137.0-138.0	26.5	2.0	13730.6	0.01	99.63
138.0-139.0	26.9	2.0	13732.6	0.01	99.64
139.0-140.0	27.4	1.9	13734.5	0.01	99.65
140.0-141.0	27.8	1.9	13736.5	0.01	99.67
141.0-142.0	28.2	1.9	13738.4	0.01	99.68
142.0-143.0	28.6	1.9	13740.3	0.01	99.70
143.0-144.0	29.0	1.9	13742.2	0.01	99.71

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	29.4	1.9	13744.1	0.01	99.72
145.0-146.0	29.8	1.9	13745.9	0.01	99.74
146.0-147.0	30.2	1.8	13747.7	0.01	99.75
147.0-148.0	30.5	1.8	13749.5	0.01	99.76
148.0-149.0	30.9	1.8	13751.3	0.01	99.78
149.0-150.0	31.3	1.7	13753.1	0.01	99.79
150.0-151.0	31.6	1.7	13754.8	0.01	99.80
151.0-152.0	32.0	1.7	13756.4	0.01	99.81
152.0-153.0	32.3	1.6	13758.1	0.01	99.83
153.0-154.0	32.7	1.6	13759.7	0.01	99.84
154.0-155.0	33.0	1.6	13761.2	0.01	99.85
155.0-156.0	33.3	1.5	13762.7	0.01	99.86
156.0-157.0	33.6	1.5	13764.2	0.01	99.87
157.0-158.0	33.9	1.4	13765.6	0.01	99.88
158.0-159.0	34.2	1.4	13767.0	0.01	99.89
159.0-160.0	34.5	1.3	13768.3	0.01	99.90
160.0-161.0	34.8	1.3	13769.6	0.01	99.91
161.0-162.0	35.1	1.2	13770.8	0.01	99.92
162.0-163.0	35.4	1.2	13772.0	0.01	99.93
163.0-164.0	35.6	1.1	13773.1	0.01	99.93
164.0-165.0	35.9	1.1	13774.2	0.01	99.94
165.0-166.0	36.1	1.0	13775.2	0.01	99.95
166.0-167.0	36.4	0.9	13776.1	0.01	99.96
167.0-168.0	36.6	0.9	13777.0	0.01	99.96
168.0-169.0	36.8	0.8	13777.8	0.01	99.97
169.0-170.0	37.0	0.7	13778.5	0.01	99.97
170.0-171.0	37.3	0.7	13779.2	0.00	99.98
171.0-172.0	37.5	0.6	13779.8	0.00	99.98
172.0-173.0	37.6	0.5	13780.3	0.00	99.99
173.0-174.0	37.8	0.5	13780.8	0.00	99.99
174.0-175.0	37.9	0.4	13781.2	0.00	99.99
175.0-176.0	38.0	0.3	13781.5	0.00	100.00
176.0-177.0	38.1	0.3	13781.8	0.00	100.00
177.0-178.0	38.2	0.2	13782.0	0.00	100.00
178.0-179.0	38.3	0.1	13782.1	0.00	100.00
179.0-180.0	38.3	0.0	13782.1	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	4812.5	4807.4	4807.0	4805.2	4806.3	4803.3	4803.7	4802.7	4799.4	4795.4
G1.0	4808.5	4801.9	4801.9	4798.3	4798.3	4798.6	4798.3	4794.6	4789.4	4787.9
G2.0	4800.6	4790.7	4792.4	4788.1	4788.2	4787.7	4791.1	4785.0	4785.2	4780.1
G3.0	4795.7	4786.0	4783.6	4781.9	4783.9	4783.9	4784.8	4778.6	4776.2	4770.3
G4.0	4786.5	4778.3	4774.4	4773.1	4774.5	4772.5	4770.7	4764.9	4766.7	4763.0
G5.0	4783.3	4773.2	4768.6	4766.2	4764.9	4761.6	4766.5	4759.0	4758.3	4751.0
G6.0	4770.3	4760.9	4756.9	4755.0	4755.3	4754.7	4757.3	4746.7	4745.0	4741.7
G7.0	4757.5	4748.9	4746.4	4742.3	4745.2	4747.9	4742.7	4733.9	4736.1	4729.5
G8.0	4742.7	4731.4	4730.1	4726.4	4728.4	4729.7	4730.3	4725.3	4721.5	4718.9
G9.0	4728.2	4715.2	4715.0	4712.7	4714.0	4715.4	4715.2	4710.2	4712.1	4705.2
G10.0	4712.5	4699.3	4697.7	4695.3	4703.5	4700.9	4696.9	4696.5	4699.4	4692.6
G11.0	4695.8	4688.6	4686.5	4682.9	4682.6	4678.3	4681.4	4682.5	4683.2	4679.8
G12.0	4678.1	4668.1	4668.9	4664.1	4663.1	4659.5	4660.5	4661.3	4662.6	4656.8
G13.0	4654.1	4647.4	4644.8	4641.2	4639.8	4635.4	4640.0	4640.6	4641.4	4639.2
G14.0	4629.2	4620.1	4620.9	4615.9	4612.6	4610.5	4613.9	4617.1	4621.0	4612.3
G15.0	4601.6	4594.3	4592.8	4589.1	4590.5	4584.9	4590.0	4593.2	4597.1	4594.9
G16.0	4573.0	4570.2	4563.5	4559.9	4560.5	4558.6	4565.2	4566.7	4572.0	4569.3
G17.0	4543.8	4544.1	4542.3	4535.0	4533.1	4529.7	4535.7	4542.6	4546.0	4545.9
G18.0	4522.3	4518.5	4511.5	4502.8	4504.4	4504.8	4506.0	4514.7	4517.2	4512.1
G19.0	4490.9	4486.2	4477.1	4473.8	4475.6	4470.0	4478.2	4479.0	4481.8	4473.4
G20.0	4458.9	4451.8	4440.6	4438.0	4446.1	4444.4	4445.7	4449.3	4441.7	4439.9
G21.0	4425.4	4420.9	4410.0	4408.6	4407.5	4406.4	4407.7	4409.1	4402.8	4409.6
G22.0	4387.6	4382.2	4378.6	4375.3	4375.7	4373.2	4372.2	4375.4	4369.1	4375.3
G23.0	4351.7	4348.1	4343.1	4334.4	4339.9	4335.8	4336.0	4338.0	4340.4	4337.5
G24.0	4317.5	4312.9	4306.5	4297.0	4307.2	4299.0	4297.2	4300.8	4302.4	4296.2
G25.0	4277.1	4276.0	4268.8	4262.5	4265.8	4259.7	4254.1	4257.8	4255.9	4261.4
G26.0	4235.4	4234.8	4225.7	4220.3	4225.4	4216.9	4209.5	4215.0	4213.4	4214.2
G27.0	4190.5	4188.9	4182.3	4179.7	4181.5	4173.4	4169.2	4170.2	4172.0	4170.4
G28.0	4147.2	4143.3	4135.8	4136.4	4137.7	4129.9	4125.1	4128.6	4128.1	4127.6
G29.0	4101.9	4096.7	4088.1	4098.6	4091.9	4084.6	4078.0	4086.3	4086.9	4080.0
G30.0	4053.5	4050.7	4040.1	4049.8	4046.9	4036.9	4031.6	4037.5	4032.6	4028.7
G31.0	4002.3	3991.6	3989.9	4000.6	4000.5	3987.9	3985.0	3988.2	3981.6	3982.6
G32.0	3950.4	3937.2	3930.3	3942.0	3946.7	3936.5	3935.9	3933.8	3927.2	3926.6
G33.0	3898.1	3883.9	3882.8	3886.9	3888.2	3881.4	3883.8	3878.2	3876.0	3875.1
G34.0	3849.0	3834.4	3834.1	3833.6	3834.7	3825.6	3830.9	3832.1	3822.9	3821.5
G35.0	3793.9	3783.0	3783.2	3782.5	3772.4	3770.9	3769.2	3778.0	3771.9	3772.3
G36.0	3742.3	3732.9	3728.6	3729.6	3714.1	3709.4	3708.4	3711.5	3720.6	3711.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	3687.4	3673.9	3671.1	3673.3	3661.2	3652.1	3648.6	3647.5	3661.0	3660.9
G38.0	3629.6	3616.5	3612.2	3611.7	3606.7	3595.9	3593.1	3593.5	3598.5	3597.3
G39.0	3568.6	3555.0	3552.4	3550.4	3548.1	3541.6	3536.2	3534.4	3533.3	3538.9
G40.0	3500.5	3488.6	3485.3	3479.7	3484.4	3477.6	3476.2	3470.9	3465.9	3467.7
G41.0	3440.1	3428.7	3419.8	3413.7	3417.5	3416.2	3412.3	3409.6	3398.9	3394.5
G42.0	3375.7	3367.9	3358.1	3349.6	3352.6	3349.8	3345.6	3347.0	3334.3	3328.7
G43.0	3313.0	3306.0	3294.2	3289.0	3288.4	3279.1	3274.7	3282.9	3274.2	3262.2
G44.0	3247.7	3238.1	3229.2	3221.0	3225.8	3209.4	3199.0	3208.1	3207.2	3199.8
G45.0	3184.3	3175.1	3169.6	3154.0	3159.6	3139.6	3128.2	3139.4	3143.7	3131.3
G46.0	3117.0	3103.0	3105.0	3090.6	3091.8	3074.0	3065.8	3065.4	3072.6	3065.3
G47.0	3042.8	3034.6	3035.4	3024.4	3023.3	3009.4	2998.7	2995.4	2996.0	2993.2
G48.0	2979.6	2970.4	2968.4	2948.9	2950.2	2942.9	2927.6	2925.0	2913.6	2918.2
G49.0	2909.3	2900.6	2895.1	2879.5	2878.5	2866.7	2859.3	2853.1	2840.3	2836.3
G50.0	2840.5	2831.6	2823.8	2810.4	2809.0	2790.7	2777.3	2779.9	2769.5	2756.6
G51.0	2765.9	2757.2	2748.6	2740.4	2736.8	2721.9	2703.1	2706.9	2693.7	2679.2
G52.0	2694.5	2681.3	2673.0	2667.9	2661.0	2648.2	2635.3	2628.1	2618.9	2605.3
G53.0	2622.9	2607.2	2604.4	2593.9	2581.6	2574.5	2558.4	2552.8	2538.1	2527.9
G54.0	2543.5	2531.8	2519.7	2519.9	2511.7	2497.7	2485.6	2476.8	2458.2	2453.6
G55.0	2461.2	2450.0	2444.9	2439.8	2433.9	2424.4	2404.8	2396.5	2382.4	2373.4
G56.0	2387.4	2378.2	2364.4	2359.5	2351.1	2345.4	2329.5	2323.5	2302.2	2290.4
G57.0	2317.6	2310.5	2296.7	2287.0	2274.8	2263.5	2255.4	2241.6	2226.8	2205.7
G58.0	2241.4	2233.4	2219.3	2213.2	2202.8	2186.7	2175.3	2165.4	2148.4	2128.1
G59.0	2158.5	2155.2	2136.6	2132.8	2126.1	2112.5	2089.7	2083.0	2066.2	2046.5
G60.0	2081.2	2073.9	2064.5	2053.5	2046.3	2035.4	2017.1	2002.6	1985.3	1965.6
G61.0	2001.4	1991.3	1983.6	1974.2	1971.9	1949.6	1932.8	1927.0	1899.8	1881.1
G62.0	1926.2	1919.0	1906.5	1898.0	1883.2	1870.9	1854.6	1845.8	1819.5	1801.8
G63.0	1842.2	1832.9	1828.1	1818.7	1808.1	1787.3	1773.9	1769.7	1741.7	1715.2
G64.0	1764.1	1758.2	1750.2	1739.9	1727.6	1713.1	1696.3	1686.9	1662.8	1631.9
G65.0	1683.4	1673.9	1661.8	1658.3	1652.9	1631.8	1617.1	1602.6	1578.4	1551.8
G66.0	1605.6	1596.0	1588.9	1581.8	1570.3	1553.5	1537.8	1525.8	1495.2	1473.9
G67.0	1532.4	1521.1	1511.9	1503.0	1492.0	1470.9	1460.1	1447.1	1417.4	1394.2
G68.0	1447.9	1440.3	1427.4	1423.1	1415.2	1393.5	1382.3	1368.7	1335.8	1308.5
G69.0	1363.9	1359.4	1353.7	1347.7	1329.7	1318.3	1302.5	1288.5	1259.4	1230.3
G70.0	1282.1	1280.9	1269.9	1265.8	1256.0	1243.9	1222.7	1208.1	1178.7	1154.5
G71.0	1206.8	1200.3	1192.8	1182.9	1173.9	1160.3	1147.7	1134.4	1101.0	1074.7
G72.0	1129.2	1125.8	1114.8	1106.1	1099.3	1084.4	1070.2	1057.1	1026.4	1000.0
G73.0	1048.1	1043.3	1035.2	1024.7	1024.7	1007.3	994.5	981.6	954.2	926.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	974.2	969.2	958.9	951.7	945.1	932.3	919.3	906.8	876.2	852.4
G75.0	894.9	891.0	885.1	876.7	875.8	858.4	843.5	833.3	805.7	779.5
G76.0	824.5	822.8	816.0	813.2	803.8	789.2	778.0	761.3	739.2	714.2
G77.0	754.8	753.4	747.4	739.5	737.1	719.0	707.0	695.6	669.2	648.1
G78.0	685.5	684.0	680.0	670.8	667.5	655.5	640.6	630.0	606.6	584.4
G79.0	617.2	616.8	611.4	606.1	603.0	591.8	577.1	568.8	546.0	524.7
G80.0	554.5	553.2	547.4	542.2	539.4	530.6	518.0	509.8	487.7	469.9
G81.0	491.3	488.8	488.2	483.5	480.0	472.0	460.6	451.7	434.9	415.1
G82.0	433.9	433.1	433.0	428.8	426.1	416.8	408.9	400.9	386.0	367.5
G83.0	379.5	380.1	378.3	377.8	374.5	367.5	358.4	350.9	336.5	321.3
G84.0	330.0	330.4	330.2	329.5	326.6	320.7	313.2	306.7	294.3	278.9
G85.0	288.1	286.4	286.6	285.0	283.3	278.8	272.5	267.2	255.1	241.2
G86.0	246.3	246.8	246.9	247.0	244.6	241.3	234.8	230.2	219.8	207.0
G87.0	212.0	212.8	213.3	212.8	211.0	207.6	203.0	199.1	189.9	177.9
G88.0	185.3	185.5	186.5	186.5	185.8	182.5	179.3	175.5	166.3	155.6
G89.0	166.1	167.6	168.3	169.0	168.5	166.5	163.9	159.9	151.3	139.5
G90.0	160.1	161.1	162.6	163.5	163.2	161.6	159.1	154.7	145.0	131.2
G91.0	157.8	159.0	160.8	161.9	161.4	159.4	156.5	150.9	139.4	123.0
G92.0	155.4	156.6	158.4	159.5	158.9	156.3	152.3	145.1	130.5	112.4
G93.0	150.6	151.4	153.2	153.2	151.7	147.7	142.1	133.4	117.8	100.3
G94.0	139.5	140.0	141.4	141.2	139.6	135.2	129.5	120.7	105.5	88.7
G95.0	126.7	127.2	128.1	128.1	125.6	121.3	115.3	107.0	94.1	80.0
G96.0	112.1	112.6	113.7	113.6	112.1	108.1	103.5	96.9	85.9	72.4
G97.0	101.4	101.8	102.8	103.0	101.6	98.5	95.1	89.7	78.3	63.7
G98.0	92.0	92.4	93.5	93.6	93.1	90.9	87.6	81.1	68.1	54.5
G99.0	83.4	83.7	84.8	85.3	84.6	81.9	77.3	70.4	58.3	45.9
G100.0	74.6	74.7	75.8	76.1	74.9	71.5	66.7	60.2	48.9	38.3
G101.0	64.9	65.2	66.2	66.0	64.4	61.0	56.3	50.1	40.9	32.1
G102.0	55.7	56.0	56.5	56.3	54.8	51.6	46.8	41.6	33.9	27.1
G103.0	47.7	47.5	47.8	47.3	45.9	42.9	38.7	34.3	28.8	23.3
G104.0	39.6	39.6	39.8	39.1	37.9	35.1	32.0	29.4	25.1	20.3
G105.0	32.2	32.0	32.2	31.6	30.8	29.3	28.1	25.8	22.0	18.0
G106.0	25.5	25.6	26.2	26.2	26.6	26.3	25.1	23.1	19.5	16.2
G107.0	21.5	21.8	23.4	24.3	24.5	23.8	22.6	20.6	17.7	15.0
G108.0	19.6	20.1	22.1	22.6	22.7	21.9	20.6	18.8	16.3	14.0
G109.0	18.9	19.5	21.0	21.4	21.0	20.2	19.0	17.4	15.3	13.7
G110.0	18.5	19.1	20.1	20.2	19.9	19.0	17.7	16.4	14.8	13.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	18.5	19.0	19.4	19.3	18.8	18.1	16.9	15.7	14.4	14.0
G112.0	18.7	18.8	18.7	18.5	18.1	17.2	16.3	15.2	14.8	14.5
G113.0	18.4	18.3	18.2	18.0	17.5	16.8	15.9	15.2	15.1	15.0
G114.0	18.2	18.0	17.8	17.5	17.0	16.5	15.8	15.7	15.6	15.6
G115.0	18.0	17.7	17.6	17.2	16.8	16.4	16.3	16.2	16.0	15.9
G116.0	17.7	17.6	17.5	17.1	16.9	16.8	16.8	16.6	16.5	16.5
G117.0	17.7	17.6	17.5	17.4	17.4	17.4	17.2	17.1	17.1	17.0
G118.0	18.0	18.0	18.0	17.8	17.8	17.8	17.7	17.6	17.5	17.5
G119.0	18.4	18.4	18.4	18.3	18.2	18.3	18.3	18.1	18.1	18.0
G120.0	18.9	18.9	18.9	18.9	18.5	18.8	18.8	18.7	18.5	18.5
G121.0	19.5	19.4	19.4	19.4	19.3	19.3	19.3	19.1	19.0	19.0
G122.0	20.0	19.9	19.9	19.9	19.7	19.7	19.7	19.6	19.5	19.5
G123.0	20.5	20.3	20.3	20.3	20.3	20.3	20.2	20.1	20.1	20.0
G124.0	20.9	20.9	20.8	20.8	20.7	20.8	20.7	20.6	20.6	20.6
G125.0	21.4	21.4	21.4	21.3	21.2	21.3	21.3	21.0	21.0	21.0
G126.0	21.9	21.9	21.8	21.8	21.6	21.8	21.8	21.6	21.6	21.5
G127.0	22.4	22.4	22.4	22.2	22.2	22.2	22.2	22.1	22.0	22.0
G128.0	22.8	22.8	22.7	22.7	22.7	22.6	22.6	22.6	22.6	22.6
G129.0	23.4	23.3	23.3	23.2	23.2	23.2	23.2	23.1	23.1	23.1
G130.0	23.8	23.8	23.7	23.8	23.7	23.7	23.7	23.5	23.5	23.5
G131.0	24.3	24.3	24.1	24.1	24.0	24.0	24.1	24.0	24.0	24.0
G132.0	24.7	24.6	24.7	24.6	24.5	24.6	24.6	24.5	24.5	24.5
G133.0	25.2	25.1	25.1	25.1	25.0	25.0	25.0	25.0	25.0	25.0
G134.0	25.7	25.5	25.6	25.6	25.5	25.5	25.5	25.5	25.5	25.5
G135.0	26.0	25.9	26.0	25.9	25.9	25.9	25.9	25.9	25.9	25.9
G136.0	26.5	26.4	26.4	26.4	26.3	26.3	26.4	26.3	26.3	26.4
G137.0	26.9	26.8	26.8	26.8	26.8	26.6	26.8	26.8	26.8	26.8
G138.0	27.4	27.2	27.2	27.2	27.1	27.1	27.2	27.1	27.1	27.1
G139.0	27.7	27.7	27.6	27.6	27.6	27.5	27.6	27.6	27.6	27.7
G140.0	28.2	28.1	28.1	28.0	27.8	28.0	28.1	28.0	28.1	28.1
G141.0	28.5	28.4	28.4	28.3	28.3	28.4	28.4	28.4	28.4	28.4
G142.0	28.9	28.8	28.8	28.8	28.8	28.7	28.8	28.8	28.8	28.9
G143.0	29.4	29.3	29.3	29.1	29.1	29.1	29.3	29.3	29.3	29.4
G144.0	29.9	29.6	29.5	29.5	29.5	29.5	29.6	29.5	29.6	29.6
G145.0	30.0	30.0	30.0	29.9	29.9	29.9	30.0	29.9	30.0	30.1
G146.0	30.2	30.3	30.2	30.2	30.2	30.2	30.3	30.3	30.3	30.4
G147.0	30.7	30.7	30.7	30.6	30.4	30.6	30.7	30.7	30.7	30.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	30.9	31.0	31.0	30.9	31.0	31.0	31.0	31.0	31.0	31.2
G149.0	31.3	31.4	31.3	31.3	31.3	31.3	31.4	31.4	31.4	31.5
G150.0	31.8	31.6	31.8	31.6	31.6	31.6	31.8	31.8	31.8	31.9
G151.0	32.0	32.0	32.0	32.0	32.0	32.0	32.1	32.1	32.1	32.2
G152.0	32.3	32.3	32.3	32.3	32.0	32.3	32.5	32.3	32.5	32.6
G153.0	32.7	32.7	32.7	32.7	32.7	32.7	32.7	32.8	32.8	32.9
G154.0	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.2
G155.0	33.4	33.3	33.3	33.4	33.4	33.4	33.4	33.4	33.4	33.5
G156.0	33.7	33.7	33.7	33.8	33.7	33.8	33.8	33.7	33.8	33.8
G157.0	34.0	33.9	34.0	34.1	34.0	34.0	34.1	34.0	34.0	34.1
G158.0	34.3	34.3	34.3	34.4	34.4	34.4	34.4	34.4	34.4	34.4
G159.0	34.6	34.6	34.6	34.6	34.6	34.6	34.7	34.6	34.6	34.7
G160.0	34.8	34.8	34.8	35.0	35.0	35.0	35.0	35.0	34.8	35.0
G161.0	35.1	35.1	35.1	35.2	35.2	35.2	35.2	35.1	35.1	35.2
G162.0	35.4	35.3	35.4	35.4	35.4	35.4	35.4	35.4	35.4	35.4
G163.0	35.7	35.6	35.7	35.7	35.7	35.7	35.7	35.7	35.7	35.8
G164.0	35.9	35.8	35.9	36.0	35.9	35.8	35.9	35.9	35.9	36.0
G165.0	36.2	36.0	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.3
G166.0	36.3	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.5
G167.0	36.6	36.6	36.6	36.6	36.6	36.5	36.6	36.5	36.6	36.8
G168.0	36.9	36.8	36.9	36.9	36.9	36.8	36.8	36.8	36.8	36.9
G169.0	37.1	37.0	37.1	37.0	37.0	37.0	37.0	37.0	37.0	37.1
G170.0	37.5	37.2	37.3	37.2	37.2	37.1	37.2	37.2	37.2	37.3
G171.0	37.6	37.5	37.5	37.5	37.3	37.5	37.3	37.5	37.5	37.6
G172.0	37.8	37.6	37.7	37.7	37.7	37.6	37.6	37.6	37.6	37.6
G173.0	38.0	37.8	37.8	37.7	37.8	37.7	37.7	37.7	37.7	37.8
G174.0	38.2	37.9	37.9	37.9	37.9	37.8	37.9	37.8	37.9	37.9
G175.0	38.3	38.0	38.2	38.0	38.0	37.9	37.9	37.9	37.9	37.9
G176.0	38.5	38.2	38.2	38.2	38.2	38.0	38.0	38.0	38.0	38.0
G177.0	38.7	38.4	38.3	38.3	38.2	38.2	38.2	38.2	38.0	38.0
G178.0	38.8	38.4	38.4	38.4	38.4	38.3	38.3	38.3	38.3	38.3
G179.0	38.9	38.7	38.4	38.4	38.4	38.4	38.3	38.3	38.3	38.3
G180.0	39.0	38.5	38.4	38.4	38.4	38.4	38.4	38.3	38.3	38.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	4791.3	4794.5	4791.3	4791.9	4788.0	4785.8	4776.4	4774.1	4766.8	4763.7
G1.0	4785.1	4784.8	4784.3	4783.6	4781.9	4782.9	4770.4	4767.0	4762.4	4759.1
G2.0	4776.7	4779.5	4778.6	4779.1	4775.5	4776.2	4765.5	4763.6	4756.9	4752.8
G3.0	4766.9	4770.1	4770.5	4770.3	4768.8	4768.6	4761.0	4757.2	4750.3	4744.7
G4.0	4762.4	4763.4	4763.4	4763.1	4763.1	4762.2	4753.1	4748.0	4741.7	4737.4
G5.0	4752.1	4753.4	4754.3	4754.3	4754.3	4751.1	4745.0	4739.0	4734.6	4731.3
G6.0	4740.6	4739.0	4742.8	4744.1	4746.0	4743.4	4738.9	4729.9	4724.1	4722.1
G7.0	4727.2	4727.2	4726.3	4730.1	4733.3	4733.0	4727.1	4721.5	4713.5	4711.8
G8.0	4715.4	4712.9	4713.8	4715.7	4719.1	4720.1	4716.7	4709.3	4703.8	4699.7
G9.0	4701.0	4700.5	4700.2	4699.6	4703.7	4705.0	4703.4	4698.4	4689.9	4687.4
G10.0	4688.7	4688.8	4684.8	4683.1	4688.8	4686.2	4690.3	4683.1	4675.0	4672.6
G11.0	4677.3	4671.8	4669.0	4667.0	4666.9	4666.1	4667.3	4663.5	4656.2	4655.6
G12.0	4656.1	4654.2	4649.8	4643.4	4645.3	4643.0	4641.4	4637.7	4634.0	4631.5
G13.0	4630.8	4633.0	4629.0	4624.3	4620.5	4619.0	4614.8	4619.8	4608.0	4609.0
G14.0	4610.1	4607.6	4609.4	4603.4	4600.2	4595.6	4589.7	4590.9	4583.8	4584.5
G15.0	4585.9	4583.8	4585.0	4579.9	4575.6	4567.7	4566.7	4564.3	4560.4	4561.0
G16.0	4559.6	4556.9	4555.1	4553.8	4550.7	4541.7	4537.3	4535.7	4533.6	4535.3
G17.0	4534.2	4527.1	4526.9	4529.0	4527.1	4519.2	4517.1	4517.3	4514.1	4507.2
G18.0	4499.0	4500.2	4501.0	4505.3	4502.3	4497.0	4494.5	4499.7	4488.2	4480.6
G19.0	4473.2	4479.5	4475.1	4473.1	4473.8	4467.4	4465.7	4470.2	4459.3	4452.3
G20.0	4443.8	4447.3	4442.0	4438.6	4440.9	4431.1	4429.5	4437.2	4427.9	4423.3
G21.0	4409.7	4414.9	4411.6	4404.6	4400.3	4392.8	4388.8	4397.2	4386.7	4386.3
G22.0	4373.8	4377.0	4377.8	4367.2	4368.7	4358.0	4353.0	4358.3	4351.8	4344.0
G23.0	4334.3	4336.5	4337.5	4330.5	4330.1	4322.5	4317.0	4324.8	4315.9	4310.8
G24.0	4299.2	4300.4	4296.2	4288.1	4289.8	4285.8	4281.3	4285.5	4275.1	4274.7
G25.0	4258.8	4260.9	4256.4	4249.5	4249.3	4251.3	4243.2	4244.4	4238.2	4236.5
G26.0	4219.3	4217.0	4214.0	4212.4	4213.2	4212.4	4204.2	4204.3	4198.4	4194.2
G27.0	4176.1	4170.1	4174.8	4173.4	4170.3	4172.0	4160.9	4159.4	4156.1	4151.8
G28.0	4129.2	4129.4	4129.4	4131.3	4128.7	4126.0	4114.4	4114.4	4107.6	4106.0
G29.0	4080.5	4084.1	4078.4	4082.8	4079.9	4079.4	4070.8	4067.2	4065.5	4057.9
G30.0	4032.9	4033.5	4025.7	4027.2	4035.7	4026.5	4023.8	4023.2	4019.3	4012.4
G31.0	3980.7	3981.0	3976.1	3981.7	3985.6	3980.4	3973.9	3979.4	3973.3	3966.5
G32.0	3930.0	3929.0	3927.4	3922.9	3930.4	3930.4	3923.3	3926.5	3925.7	3916.1
G33.0	3872.8	3873.6	3876.2	3871.2	3878.8	3881.1	3869.4	3872.3	3874.8	3862.3
G34.0	3820.0	3818.8	3825.8	3820.2	3832.1	3830.2	3817.7	3819.7	3818.8	3808.9
G35.0	3766.6	3766.0	3769.5	3767.3	3774.9	3770.3	3760.5	3761.7	3761.2	3751.8
G36.0	3711.4	3712.2	3712.2	3709.7	3716.3	3707.5	3704.9	3701.6	3698.3	3692.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	3654.3	3656.2	3652.9	3651.8	3660.1	3649.7	3651.4	3645.1	3640.9	3630.8
G38.0	3595.4	3595.7	3591.2	3593.1	3599.8	3595.0	3594.6	3581.9	3581.5	3570.7
G39.0	3533.3	3531.1	3528.1	3535.4	3536.1	3535.5	3533.7	3522.7	3517.3	3509.2
G40.0	3470.0	3462.4	3455.0	3466.8	3471.5	3469.1	3467.2	3459.4	3455.2	3440.8
G41.0	3402.9	3397.0	3392.1	3399.1	3398.9	3399.2	3402.8	3398.0	3392.7	3381.1
G42.0	3331.6	3329.9	3325.3	3328.5	3331.4	3324.5	3335.0	3326.1	3324.7	3312.1
G43.0	3264.0	3265.7	3261.4	3257.2	3260.0	3252.7	3260.2	3254.0	3260.3	3245.8
G44.0	3193.1	3199.2	3191.4	3187.1	3193.4	3182.2	3185.5	3178.3	3191.6	3173.0
G45.0	3127.7	3131.2	3125.0	3116.9	3125.7	3117.5	3111.7	3108.6	3111.3	3102.3
G46.0	3055.7	3056.3	3052.2	3049.5	3053.3	3045.0	3041.0	3030.0	3033.7	3023.9
G47.0	2981.3	2977.3	2981.6	2977.2	2978.5	2974.4	2970.3	2959.9	2951.6	2947.7
G48.0	2910.3	2896.2	2902.3	2894.5	2897.7	2898.1	2897.0	2885.5	2877.3	2868.0
G49.0	2837.9	2818.4	2822.9	2814.9	2812.8	2812.8	2814.5	2809.7	2798.4	2784.2
G50.0	2758.6	2744.6	2744.9	2739.7	2732.2	2729.6	2728.4	2724.0	2724.8	2703.1
G51.0	2685.7	2667.9	2662.0	2658.4	2651.3	2646.3	2639.6	2641.6	2639.3	2626.6
G52.0	2596.6	2591.3	2582.2	2581.4	2568.4	2566.9	2555.2	2553.7	2552.9	2541.2
G53.0	2514.0	2508.3	2494.6	2492.3	2482.7	2479.6	2473.9	2472.6	2462.5	2452.4
G54.0	2433.7	2424.8	2416.1	2404.7	2396.1	2390.8	2384.7	2384.2	2373.8	2365.2
G55.0	2356.3	2338.9	2330.0	2314.2	2310.4	2299.2	2296.0	2296.8	2285.6	2276.1
G56.0	2274.6	2254.0	2246.1	2227.7	2218.9	2209.9	2202.9	2208.4	2200.7	2184.6
G57.0	2196.3	2172.6	2161.6	2137.5	2134.0	2123.9	2112.7	2115.5	2109.1	2095.3
G58.0	2111.3	2090.1	2072.3	2048.2	2045.7	2030.0	2024.6	2021.5	2016.5	2006.3
G59.0	2024.4	2004.9	1981.7	1959.3	1953.2	1934.0	1927.5	1929.1	1915.9	1912.1
G60.0	1945.9	1922.2	1896.8	1875.4	1861.9	1838.6	1833.3	1835.8	1823.7	1818.4
G61.0	1862.8	1832.8	1807.5	1787.7	1766.7	1747.9	1741.9	1737.8	1730.2	1722.6
G62.0	1781.3	1745.5	1722.1	1695.3	1670.5	1653.6	1646.4	1638.3	1635.2	1630.2
G63.0	1693.9	1662.4	1631.5	1602.7	1579.9	1561.5	1551.6	1545.8	1536.9	1537.3
G64.0	1611.0	1575.9	1543.0	1509.2	1489.4	1469.5	1452.5	1447.6	1441.1	1439.9
G65.0	1530.0	1489.2	1456.7	1420.2	1400.8	1373.5	1356.8	1352.4	1345.5	1343.8
G66.0	1443.7	1411.7	1373.4	1337.5	1311.4	1284.3	1264.4	1257.8	1249.0	1253.2
G67.0	1365.3	1323.8	1286.7	1251.6	1223.1	1192.1	1171.7	1162.8	1154.7	1156.9
G68.0	1280.8	1241.7	1203.4	1163.9	1130.7	1103.2	1080.8	1067.7	1060.1	1067.8
G69.0	1201.2	1161.3	1123.0	1078.8	1048.9	1012.5	988.0	976.0	969.2	973.5
G70.0	1118.4	1080.5	1042.0	999.4	964.2	928.2	900.1	887.3	879.1	884.3
G71.0	1042.5	1003.5	959.9	916.2	883.3	843.7	812.9	798.7	793.2	796.2
G72.0	966.0	923.9	885.1	841.0	800.0	761.7	730.5	712.5	707.1	709.2
G73.0	892.1	849.2	806.5	761.9	722.2	679.8	650.4	631.0	621.6	628.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	817.9	776.8	731.0	689.1	646.6	605.5	573.7	554.0	543.9	550.8
G75.0	746.6	705.0	662.0	615.1	576.5	530.7	500.1	481.0	471.0	475.9
G76.0	679.9	642.8	597.1	550.4	510.4	465.2	432.9	413.5	403.4	411.0
G77.0	617.9	575.3	530.6	485.1	445.6	401.4	371.1	351.8	341.5	347.6
G78.0	553.3	514.9	471.9	428.7	386.7	345.8	315.7	296.0	288.3	290.5
G79.0	495.9	456.9	415.9	372.2	333.5	293.0	264.0	245.6	235.2	240.8
G80.0	441.0	403.6	364.4	325.1	285.6	248.9	218.1	200.5	191.5	196.8
G81.0	388.2	355.2	317.4	279.5	241.6	206.3	178.6	160.4	152.6	157.4
G82.0	342.4	309.2	275.3	239.3	205.6	172.0	144.7	128.0	120.8	124.5
G83.0	297.2	268.3	236.4	204.1	172.4	141.3	116.5	98.7	92.2	95.7
G84.0	258.2	230.6	202.4	173.9	145.0	115.9	91.0	73.7	67.6	71.6
G85.0	222.4	197.6	172.3	146.4	120.9	94.3	70.5	53.2	45.3	52.2
G86.0	189.9	169.0	146.0	123.0	100.3	76.0	53.5	35.7	27.1	35.8
G87.0	162.0	143.3	123.7	102.9	82.4	59.8	39.6	21.9	12.8	23.1
G88.0	140.2	122.8	104.9	86.5	67.8	47.5	28.7	12.3	5.0	14.0
G89.0	124.6	107.2	89.4	72.7	55.5	37.1	20.0	6.7	4.2	8.1
G90.0	114.4	95.1	77.5	61.5	45.3	28.7	13.8	4.9	4.4	5.5
G91.0	103.9	84.0	66.8	51.8	36.5	21.4	9.6	4.9	4.8	5.1
G92.0	92.9	73.6	57.7	43.2	29.5	16.4	7.1	5.1	5.0	5.2
G93.0	82.1	64.1	49.2	35.8	23.4	12.4	6.1	5.5	5.3	5.5
G94.0	72.9	55.9	42.0	29.5	18.4	9.6	5.8	5.8	5.7	5.8
G95.0	64.6	48.3	35.2	24.0	14.5	8.0	6.2	6.2	6.1	6.2
G96.0	56.7	41.0	29.1	19.3	11.5	7.1	6.7	6.4	6.5	6.5
G97.0	48.5	34.7	24.0	15.5	9.6	7.0	6.9	6.9	6.9	6.9
G98.0	40.9	28.9	19.9	12.8	8.6	7.5	7.4	7.3	7.4	7.4
G99.0	34.0	24.1	16.5	11.1	8.1	7.8	7.8	7.7	7.7	7.8
G100.0	28.5	20.2	14.1	10.0	8.3	8.3	8.2	8.2	8.2	8.2
G101.0	24.1	17.4	12.5	9.4	8.8	8.7	8.7	8.6	8.6	8.7
G102.0	20.5	15.0	11.3	9.4	9.3	9.3	9.2	9.0	9.0	9.2
G103.0	17.7	13.4	10.7	9.9	9.8	9.6	9.6	9.5	9.5	9.6
G104.0	15.7	12.5	10.5	10.2	10.1	10.1	10.1	10.0	10.0	10.1
G105.0	14.3	11.8	10.9	10.7	10.7	10.5	10.5	10.5	10.6	10.6
G106.0	13.3	11.4	11.4	11.1	11.2	11.1	11.1	11.1	10.9	11.1
G107.0	12.6	11.9	11.9	11.8	11.6	11.5	11.5	11.5	11.5	11.5
G108.0	12.4	12.4	12.4	12.1	12.1	12.0	12.1	12.1	12.0	12.1
G109.0	12.8	12.8	12.8	12.7	12.6	12.6	12.5	12.5	12.6	12.6
G110.0	13.4	13.4	13.3	13.3	13.2	13.1	13.1	13.1	13.1	13.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	13.9	13.8	13.8	13.7	13.7	13.6	13.7	13.6	13.7	13.6
G112.0	14.4	14.4	14.3	14.1	14.1	14.0	14.1	14.1	14.1	14.1
G113.0	14.9	14.9	14.8	14.8	14.6	14.6	14.6	14.6	14.8	14.8
G114.0	15.3	15.3	15.2	15.2	15.2	15.2	15.1	15.2	15.2	15.3
G115.0	15.8	15.9	15.8	15.7	15.7	15.7	15.7	15.7	15.7	15.8
G116.0	16.4	16.4	16.3	16.3	16.2	16.2	16.2	16.3	16.3	16.3
G117.0	16.9	16.9	16.9	16.8	16.8	16.8	16.8	16.8	16.8	16.9
G118.0	17.4	17.4	17.4	17.4	17.2	17.2	17.2	17.4	17.4	17.5
G119.0	17.8	17.8	18.0	17.8	17.7	17.8	17.8	17.7	17.8	18.0
G120.0	18.4	18.4	18.4	18.4	18.3	18.3	18.4	18.3	18.4	18.4
G121.0	18.9	18.9	18.9	18.9	18.8	18.9	18.9	18.9	18.9	19.0
G122.0	19.4	19.5	19.4	19.4	19.4	19.4	19.5	19.4	19.5	19.5
G123.0	19.9	19.9	20.0	19.9	20.0	19.9	20.0	20.0	20.0	20.1
G124.0	20.5	20.5	20.5	20.3	20.3	20.5	20.6	20.5	20.6	20.6
G125.0	20.9	21.0	20.9	20.9	20.9	21.0	21.0	21.0	21.2	21.2
G126.0	21.5	21.5	21.4	21.5	21.5	21.5	21.5	21.5	21.6	21.6
G127.0	21.9	22.0	22.0	21.9	22.0	22.0	22.0	22.0	22.0	22.1
G128.0	22.5	22.5	22.5	22.5	22.5	22.6	22.6	22.6	22.6	22.7
G129.0	23.0	23.0	23.0	23.0	23.1	23.1	23.1	23.1	23.2	23.2
G130.0	23.4	23.4	23.4	23.4	23.5	23.5	23.5	23.7	23.7	23.8
G131.0	23.9	24.0	23.9	24.0	24.0	24.1	24.0	24.0	24.1	24.3
G132.0	24.4	24.4	24.5	24.4	24.5	24.5	24.6	24.6	24.6	24.6
G133.0	25.0	24.9	25.0	25.0	25.0	25.1	25.0	25.1	25.1	25.2
G134.0	25.3	25.3	25.5	25.5	25.5	25.6	25.6	25.6	25.6	25.7
G135.0	25.8	25.8	25.9	25.9	25.9	25.9	26.0	26.0	26.2	26.2
G136.0	26.3	26.3	26.4	26.4	26.4	26.4	26.5	26.5	26.5	26.6
G137.0	26.6	26.8	26.8	26.8	26.9	26.9	27.0	27.0	27.0	27.0
G138.0	27.1	27.2	27.2	27.2	27.4	27.4	27.4	27.5	27.5	27.5
G139.0	27.6	27.6	27.7	27.7	27.7	27.7	27.8	27.8	28.0	28.0
G140.0	28.0	28.1	28.2	28.1	28.2	28.2	28.3	28.3	28.3	28.3
G141.0	28.4	28.5	28.5	28.5	28.5	28.7	28.7	28.8	28.8	28.8
G142.0	28.9	28.9	28.9	28.9	29.0	29.0	29.1	29.1	29.1	29.3
G143.0	29.3	29.4	29.5	29.4	29.4	29.5	29.5	29.5	29.5	29.6
G144.0	29.6	29.7	29.7	29.7	29.9	29.9	29.9	30.0	30.0	30.0
G145.0	30.1	30.2	30.2	30.1	30.2	30.2	30.3	30.3	30.3	30.4
G146.0	30.4	30.4	30.6	30.6	30.6	30.6	30.7	30.7	30.7	30.8
G147.0	30.8	31.0	30.9	30.9	30.9	30.9	31.0	31.2	31.0	31.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	31.3	31.3	31.4	31.3	31.3	31.3	31.4	31.4	31.4	31.5
G149.0	31.5	31.8	31.8	31.6	31.8	31.6	31.8	31.8	31.9	31.9
G150.0	32.0	32.0	32.1	32.0	32.0	32.0	32.1	32.1	32.1	32.1
G151.0	32.3	32.3	32.5	32.3	32.3	32.3	32.3	32.5	32.5	32.5
G152.0	32.6	32.7	32.8	32.7	32.7	32.7	32.7	32.8	32.8	32.8
G153.0	32.9	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.2	33.2
G154.0	33.3	33.3	33.4	33.4	33.4	33.4	33.4	33.4	33.5	33.5
G155.0	33.7	33.7	33.8	33.8	33.8	33.7	33.8	33.8	33.7	33.8
G156.0	33.9	33.9	34.0	34.0	34.0	34.0	34.0	34.1	34.0	34.1
G157.0	34.3	34.3	34.4	34.4	34.4	34.4	34.4	34.3	34.4	34.4
G158.0	34.5	34.5	34.6	34.6	34.7	34.7	34.7	34.6	34.6	34.7
G159.0	34.7	34.8	35.0	35.0	35.0	35.1	35.0	35.0	34.8	34.3
G160.0	35.0	35.1	35.2	35.2	35.2	35.2	35.2	35.1	35.2	35.2
G161.0	35.2	35.3	35.4	35.6	35.4	35.6	35.4	35.4	35.4	35.3
G162.0	35.6	35.6	35.7	35.8	35.8	35.8	35.8	35.7	35.6	35.6
G163.0	35.8	35.8	35.9	36.0	36.0	36.2	36.0	35.9	35.8	35.9
G164.0	36.0	36.0	36.2	36.3	36.3	36.3	36.3	36.2	36.0	36.0
G165.0	36.2	36.2	36.4	36.4	36.5	36.5	36.5	36.4	36.3	36.3
G166.0	36.4	36.5	36.5	36.8	36.8	36.8	36.8	36.6	36.5	36.5
G167.0	36.8	36.8	36.9	36.9	37.0	37.1	37.1	36.9	36.8	36.8
G168.0	36.9	36.9	37.0	37.1	37.1	37.3	37.2	37.1	36.9	36.9
G169.0	37.1	37.1	37.2	37.2	37.5	37.5	37.3	37.3	37.1	37.0
G170.0	37.3	37.3	37.5	37.5	37.6	37.6	37.6	37.5	37.2	37.2
G171.0	37.5	37.5	37.5	37.6	37.7	37.7	37.7	37.7	37.3	37.3
G172.0	37.7	37.7	37.7	37.7	37.8	37.8	37.9	37.8	37.6	37.6
G173.0	37.7	37.7	37.8	37.8	37.9	38.0	37.9	37.9	37.7	37.7
G174.0	37.1	37.9	37.9	37.9	37.9	38.0	38.2	38.0	37.8	37.8
G175.0	37.9	37.9	37.9	38.0	38.0	38.2	38.2	38.2	37.9	37.9
G176.0	38.0	38.0	38.0	38.0	38.0	38.2	38.3	38.3	38.0	38.0
G177.0	38.2	38.0	38.2	38.2	38.2	38.3	38.3	38.3	38.3	38.2
G178.0	38.2	38.3	38.2	38.2	38.3	38.3	38.4	38.4	38.3	38.2
G179.0	38.2	38.3	38.3	38.2	38.3	38.3	38.4	38.5	38.4	38.3
G180.0	38.2	38.2	38.3	38.2	38.3	38.3	38.3	38.4	38.4	38.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	4764.9	4764.7	4763.6	4766.0	4764.9	4764.5	4769.0	4770.6	4780.6	4784.5
G1.0	4759.9	4759.8	4760.6	4762.0	4759.2	4760.9	4763.1	4766.3	4771.5	4779.1
G2.0	4754.3	4754.2	4753.7	4755.9	4751.2	4752.2	4755.5	4759.9	4763.4	4769.3
G3.0	4745.3	4744.8	4745.5	4744.5	4741.5	4742.8	4742.7	4750.4	4754.0	4762.3
G4.0	4737.4	4736.0	4731.8	4732.1	4730.1	4732.1	4735.1	4739.7	4744.1	4753.1
G5.0	4727.1	4724.2	4722.5	4722.1	4719.8	4721.7	4721.1	4724.6	4732.4	4741.2
G6.0	4717.8	4714.1	4715.3	4711.0	4710.7	4708.2	4709.8	4712.5	4720.3	4728.8
G7.0	4706.4	4702.0	4703.1	4703.1	4699.5	4698.7	4702.0	4699.1	4710.2	4715.1
G8.0	4694.5	4688.6	4688.1	4691.3	4686.7	4686.7	4687.1	4689.4	4693.5	4698.8
G9.0	4681.2	4675.0	4677.0	4674.5	4670.8	4669.8	4671.0	4672.6	4677.6	4680.6
G10.0	4666.9	4659.4	4663.9	4658.5	4653.7	4651.8	4651.2	4654.0	4659.7	4667.5
G11.0	4646.1	4643.4	4640.5	4641.9	4636.6	4630.9	4634.3	4634.0	4643.8	4651.3
G12.0	4623.6	4622.6	4617.2	4618.2	4616.6	4613.4	4617.2	4617.2	4629.7	4639.1
G13.0	4600.9	4596.9	4591.5	4595.0	4590.9	4591.9	4598.3	4604.8	4617.7	4625.6
G14.0	4579.1	4573.2	4565.5	4561.3	4570.0	4571.5	4581.0	4586.6	4602.3	4607.2
G15.0	4552.6	4547.3	4540.4	4539.3	4544.8	4551.0	4560.6	4567.7	4574.5	4581.9
G16.0	4527.9	4522.5	4516.5	4511.7	4517.5	4527.3	4533.0	4543.2	4548.0	4560.1
G17.0	4499.6	4493.4	4493.0	4490.7	4494.6	4501.7	4507.6	4510.4	4521.7	4523.5
G18.0	4473.7	4468.0	4463.0	4461.5	4473.4	4478.3	4480.5	4483.1	4488.9	4497.3
G19.0	4444.9	4439.1	4432.2	4436.8	4448.0	4453.0	4449.4	4449.8	4456.4	4459.9
G20.0	4414.2	4406.6	4399.2	4409.9	4420.5	4424.9	4419.0	4416.7	4421.6	4427.0
G21.0	4379.8	4375.6	4366.8	4376.1	4389.7	4389.6	4384.5	4385.0	4385.4	4387.2
G22.0	4342.0	4339.9	4331.6	4345.4	4356.6	4356.5	4349.4	4350.2	4345.6	4344.2
G23.0	4305.4	4303.6	4297.7	4309.8	4322.6	4317.9	4312.5	4314.5	4303.3	4306.2
G24.0	4270.7	4263.8	4260.8	4275.3	4279.6	4277.1	4273.8	4271.1	4260.8	4267.0
G25.0	4230.6	4225.7	4225.8	4235.4	4240.8	4233.3	4227.5	4227.4	4219.1	4231.2
G26.0	4185.6	4183.5	4186.6	4189.8	4196.1	4189.1	4179.7	4180.4	4179.6	4193.7
G27.0	4138.7	4137.7	4148.5	4149.6	4147.1	4143.8	4132.6	4133.6	4140.3	4148.8
G28.0	4096.3	4088.5	4103.2	4106.4	4099.1	4091.6	4084.6	4088.0	4094.2	4105.5
G29.0	4047.9	4045.1	4058.3	4066.1	4055.4	4044.7	4040.8	4044.4	4051.4	4060.1
G30.0	4000.7	3996.2	4012.3	4016.4	4009.8	3988.7	3994.8	4000.3	4002.6	4013.6
G31.0	3954.6	3950.1	3966.5	3964.8	3958.4	3939.6	3945.7	3952.3	3954.3	3965.3
G32.0	3905.2	3900.2	3912.1	3913.1	3903.6	3889.6	3895.4	3897.9	3902.9	3913.0
G33.0	3854.3	3854.6	3859.7	3859.1	3849.7	3837.1	3841.6	3848.1	3847.6	3859.1
G34.0	3797.1	3802.4	3809.5	3805.3	3791.2	3787.7	3791.9	3795.0	3796.8	3802.0
G35.0	3741.2	3747.7	3756.8	3748.6	3735.8	3732.3	3737.3	3740.9	3739.4	3743.3
G36.0	3683.6	3693.9	3693.9	3686.9	3672.6	3677.3	3671.2	3676.8	3679.6	3689.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	3626.1	3634.9	3627.9	3624.8	3615.8	3619.3	3615.9	3615.9	3622.4	3628.7
G38.0	3561.3	3577.1	3568.8	3556.1	3555.8	3560.2	3558.8	3554.1	3558.6	3562.5
G39.0	3500.7	3517.4	3511.0	3493.3	3497.0	3498.6	3497.3	3492.3	3495.3	3496.5
G40.0	3433.0	3449.5	3443.1	3432.0	3433.9	3435.4	3433.8	3433.5	3431.3	3433.1
G41.0	3368.1	3382.7	3377.0	3365.0	3368.7	3371.0	3362.7	3371.8	3366.2	3375.0
G42.0	3301.9	3315.1	3304.1	3297.6	3303.0	3301.1	3296.4	3304.8	3299.2	3310.3
G43.0	3238.1	3246.9	3232.6	3231.3	3235.5	3233.2	3229.2	3231.8	3234.8	3244.9
G44.0	3166.5	3174.6	3157.6	3161.7	3163.5	3159.0	3159.0	3159.6	3169.2	3175.8
G45.0	3100.5	3102.9	3081.5	3094.3	3096.2	3088.6	3090.9	3089.7	3098.5	3103.8
G46.0	3027.0	3029.9	3010.0	3018.7	3022.4	3021.5	3017.7	3019.6	3030.6	3031.5
G47.0	2957.2	2957.1	2933.6	2944.6	2947.8	2947.9	2943.8	2949.9	2961.7	2962.1
G48.0	2878.0	2877.6	2860.0	2865.8	2868.8	2872.1	2867.9	2879.8	2882.5	2891.6
G49.0	2798.8	2794.1	2778.2	2788.2	2785.4	2791.9	2793.0	2803.2	2807.0	2818.9
G50.0	2713.5	2711.4	2702.9	2708.1	2709.4	2710.2	2715.8	2723.4	2731.4	2742.4
G51.0	2628.0	2624.8	2624.6	2628.0	2631.5	2632.4	2642.9	2648.0	2658.0	2668.7
G52.0	2545.6	2534.9	2545.6	2544.1	2548.0	2555.6	2563.1	2572.3	2580.4	2587.0
G53.0	2464.6	2443.8	2462.5	2458.4	2462.6	2475.3	2482.7	2491.6	2502.9	2513.4
G54.0	2380.0	2353.8	2371.8	2377.7	2378.4	2398.6	2402.2	2408.7	2420.3	2440.1
G55.0	2293.9	2273.6	2283.6	2290.9	2294.7	2316.2	2322.3	2332.7	2346.4	2362.9
G56.0	2203.1	2185.4	2192.5	2205.4	2213.0	2228.6	2240.3	2251.8	2271.5	2285.1
G57.0	2110.0	2101.3	2102.8	2117.4	2128.8	2144.3	2159.5	2170.8	2193.1	2205.6
G58.0	2011.9	2011.7	2012.1	2024.4	2045.2	2060.2	2074.2	2093.2	2110.2	2128.7
G59.0	1917.7	1919.7	1920.7	1933.2	1957.8	1975.5	1990.7	2016.2	2025.9	2049.2
G60.0	1824.9	1829.9	1834.9	1843.9	1870.1	1891.8	1914.0	1934.4	1949.7	1967.8
G61.0	1735.1	1735.2	1745.9	1757.2	1783.2	1803.9	1830.3	1846.1	1871.8	1891.7
G62.0	1634.1	1640.0	1655.0	1673.3	1694.7	1720.7	1747.3	1769.7	1789.4	1815.3
G63.0	1539.4	1552.5	1560.9	1585.4	1602.9	1639.8	1657.3	1688.4	1709.4	1735.4
G64.0	1445.9	1455.1	1470.3	1495.3	1515.4	1558.0	1577.1	1604.6	1634.9	1653.9
G65.0	1351.5	1361.6	1381.1	1408.7	1429.7	1471.5	1496.8	1526.6	1549.5	1573.9
G66.0	1257.1	1272.7	1292.8	1321.7	1354.5	1385.3	1410.2	1451.5	1468.4	1494.9
G67.0	1169.3	1181.7	1205.8	1235.2	1271.5	1307.1	1335.9	1367.3	1393.8	1422.2
G68.0	1079.3	1092.3	1118.8	1152.1	1181.7	1216.6	1259.7	1289.3	1320.4	1344.2
G69.0	989.2	1005.0	1032.1	1067.3	1103.3	1141.4	1177.4	1212.2	1241.2	1270.2
G70.0	900.3	920.0	950.7	987.6	1024.0	1068.4	1102.5	1135.4	1166.6	1192.8
G71.0	814.5	837.0	868.5	903.9	943.6	988.2	1022.5	1057.8	1091.0	1115.8
G72.0	730.8	755.7	786.8	826.7	869.3	911.4	947.2	988.8	1015.2	1040.1
G73.0	649.4	672.1	709.8	749.2	795.3	840.0	875.8	908.9	940.0	968.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	570.9	598.9	636.2	675.8	720.5	764.8	805.3	843.9	870.3	900.7
G75.0	498.3	524.3	564.2	606.3	650.3	698.2	736.2	771.1	803.9	828.3
G76.0	431.2	460.0	496.0	539.8	586.5	629.7	670.5	707.2	734.3	758.0
G77.0	370.2	396.0	433.8	475.9	522.1	567.8	604.3	637.3	668.8	692.0
G78.0	311.6	339.9	377.2	417.5	463.4	504.3	542.9	576.4	604.7	626.3
G79.0	261.0	286.0	323.3	366.2	406.2	449.5	482.9	517.7	546.1	565.1
G80.0	214.9	240.2	276.1	315.6	357.7	396.5	430.6	462.8	487.1	508.7
G81.0	173.7	200.3	232.4	269.7	307.4	346.5	377.9	407.2	431.8	453.2
G82.0	140.1	164.8	197.1	231.1	265.9	301.6	332.7	359.4	381.5	402.8
G83.0	112.3	135.7	163.9	194.1	226.1	259.8	288.1	312.3	334.0	353.0
G84.0	89.4	111.7	136.9	164.4	192.8	223.6	248.7	272.5	291.4	308.6
G85.0	69.4	90.6	114.5	138.3	164.7	191.8	214.5	236.4	254.4	268.9
G86.0	53.6	73.7	95.3	116.9	138.8	163.6	185.4	203.8	220.4	234.6
G87.0	40.5	59.1	79.3	98.3	117.4	139.1	159.4	178.9	195.0	208.6
G88.0	30.0	47.3	65.5	83.0	99.8	119.3	140.3	159.4	176.7	190.6
G89.0	21.5	37.3	54.2	70.0	85.5	103.7	123.8	144.1	162.1	176.8
G90.0	15.5	29.4	44.8	59.8	74.4	92.5	112.1	132.2	150.4	164.7
G91.0	10.8	22.7	36.8	51.0	64.8	83.2	102.2	122.1	139.7	153.9
G92.0	8.0	17.5	30.1	43.2	56.7	74.6	93.5	112.9	130.0	144.3
G93.0	6.7	13.3	24.4	36.6	49.2	65.5	84.7	104.2	121.4	135.2
G94.0	6.3	10.5	19.9	30.7	42.7	61.7	79.4	96.1	113.0	127.0
G95.0	6.3	8.9	15.8	25.7	37.0	53.4	75.8	94.4	111.8	120.6
G96.0	6.7	8.0	13.0	21.2	31.8	45.3	61.8	85.2	108.5	120.2
G97.0	7.0	7.6	11.1	17.6	26.9	39.6	54.0	71.1	90.5	111.2
G98.0	7.5	7.6	9.9	14.8	22.6	34.1	47.6	62.7	78.4	92.3
G99.0	7.8	8.1	9.2	12.8	19.0	28.5	41.5	55.4	69.1	81.9
G100.0	8.3	8.4	8.9	11.5	16.4	24.3	35.3	47.9	61.2	72.8
G101.0	8.8	8.8	9.2	10.7	14.4	20.6	29.7	41.7	53.3	64.1
G102.0	9.3	9.3	9.5	10.2	13.1	17.8	24.9	34.8	46.0	56.5
G103.0	9.8	9.8	9.9	10.2	12.3	15.9	21.5	29.0	38.4	47.6
G104.0	10.1	10.1	10.4	10.6	11.8	14.8	19.0	24.7	32.1	40.3
G105.0	10.6	10.6	10.8	11.1	11.5	13.8	17.2	21.6	27.1	33.4
G106.0	11.1	11.2	11.3	11.4	11.8	13.1	15.8	19.5	23.5	28.2
G107.0	11.5	11.6	11.8	11.9	12.3	12.8	15.0	18.0	21.2	24.3
G108.0	12.1	12.1	12.3	12.4	12.6	13.0	14.3	16.6	19.4	21.9
G109.0	12.6	12.6	12.8	12.8	13.1	13.3	13.9	15.7	18.1	20.1
G110.0	13.1	13.2	13.3	13.3	13.6	13.8	14.0	15.2	17.1	19.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	13.7	13.7	13.8	13.9	14.0	14.1	14.4	14.9	16.4	18.0
G112.0	14.1	14.1	14.4	14.4	14.6	14.8	14.9	15.1	15.8	17.1
G113.0	14.6	14.9	14.8	14.9	15.0	15.2	15.3	15.5	15.7	16.6
G114.0	15.2	15.3	15.3	15.5	15.6	15.7	15.8	15.9	16.0	16.5
G115.0	15.8	15.8	15.8	15.9	16.0	16.2	16.3	16.4	16.5	16.6
G116.0	16.3	16.3	16.4	16.5	16.5	16.6	16.9	16.9	17.0	17.1
G117.0	16.9	16.8	16.9	17.0	17.0	17.2	17.2	17.4	17.5	17.6
G118.0	17.4	17.5	17.5	17.5	17.6	17.7	17.7	18.0	18.0	18.1
G119.0	18.0	18.0	18.0	18.1	18.2	18.2	18.3	18.4	18.4	18.5
G120.0	18.4	18.4	18.4	18.5	18.7	18.7	18.8	18.9	18.9	19.0
G121.0	19.0	18.9	19.0	19.0	19.1	19.3	19.3	19.4	19.5	19.5
G122.0	19.5	19.5	19.5	19.6	19.6	19.7	19.9	20.0	20.0	19.7
G123.0	20.1	20.1	20.0	20.1	20.2	20.3	20.3	20.5	20.5	20.6
G124.0	20.6	20.6	20.6	20.6	20.7	20.8	20.8	20.9	21.0	20.9
G125.0	21.0	21.0	21.0	21.2	21.2	21.3	21.3	21.4	21.5	21.5
G126.0	21.6	21.5	21.5	21.6	21.6	21.8	21.8	21.9	22.0	22.0
G127.0	22.1	22.0	22.1	22.1	22.1	22.2	22.2	22.5	22.5	22.5
G128.0	22.6	22.6	22.6	22.6	22.7	22.8	22.7	22.8	23.0	23.0
G129.0	23.3	23.1	23.1	23.2	23.2	23.2	23.2	23.3	23.4	23.4
G130.0	23.7	23.7	23.7	23.7	23.7	23.8	23.7	23.8	23.9	23.9
G131.0	24.3	24.1	24.0	24.1	24.1	24.1	24.1	24.4	24.4	24.4
G132.0	24.7	24.6	24.5	24.6	24.6	24.7	24.6	24.9	24.9	24.9
G133.0	25.1	25.2	25.1	25.1	25.0	25.1	25.1	25.2	25.3	25.2
G134.0	25.7	25.6	25.6	25.6	25.6	25.7	25.6	25.7	25.7	25.7
G135.0	26.2	26.0	26.0	26.0	25.9	26.0	26.0	26.2	26.0	26.2
G136.0	26.6	26.4	26.4	26.4	26.4	26.5	26.4	26.5	26.5	26.6
G137.0	27.0	26.9	26.9	26.9	26.9	26.9	26.9	26.9	27.0	27.0
G138.0	27.4	27.4	27.4	27.2	27.4	27.4	27.4	27.5	27.4	27.5
G139.0	27.8	27.8	27.8	27.8	27.7	27.7	27.7	27.8	27.8	27.8
G140.0	28.3	28.3	28.2	28.2	28.2	28.2	28.2	28.2	28.3	28.3
G141.0	28.7	28.7	28.7	28.7	28.7	28.7	28.5	28.7	28.7	28.7
G142.0	29.1	29.0	29.0	29.0	29.0	29.0	28.9	29.0	29.0	29.0
G143.0	29.5	29.5	29.5	29.4	29.4	29.4	29.4	29.4	29.5	29.4
G144.0	30.0	29.9	29.9	29.7	29.9	29.7	29.7	29.7	29.9	29.9
G145.0	30.3	30.2	30.2	30.2	30.2	30.1	30.1	30.1	30.2	30.2
G146.0	30.7	30.6	30.6	30.6	30.6	30.6	30.4	30.6	30.6	30.6
G147.0	31.0	30.9	30.9	30.9	30.9	30.9	30.9	30.9	30.9	30.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	31.4	31.3	31.3	31.3	31.3	31.3	31.3	31.3	31.3	31.3
G149.0	31.8	31.8	31.6	31.6	31.6	31.6	31.5	31.6	31.6	31.6
G150.0	32.1	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
G151.0	32.5	32.3	32.3	32.3	32.3	32.2	32.2	32.3	32.2	32.3
G152.0	32.7	32.7	32.7	32.7	32.7	32.6	32.5	32.7	32.6	32.7
G153.0	33.1	32.9	33.1	32.9	32.9	32.9	32.9	32.9	32.9	32.9
G154.0	33.4	33.3	33.3	33.3	33.3	33.3	33.2	33.3	33.2	33.3
G155.0	33.7	33.7	33.7	33.7	33.5	33.5	33.5	33.5	33.5	33.5
G156.0	34.0	33.9	33.9	33.9	33.9	33.9	33.9	33.9	33.8	33.9
G157.0	34.4	34.3	34.3	34.1	34.1	34.1	34.1	34.1	34.1	34.3
G158.0	34.6	34.5	34.6	34.5	34.5	34.5	34.4	34.5	34.5	34.5
G159.0	34.8	34.8	34.8	34.7	34.7	34.7	34.7	34.7	34.7	34.7
G160.0	35.1	35.1	35.1	35.0	35.0	35.0	35.0	35.0	35.1	35.1
G161.0	35.4	35.4	35.3	35.3	35.3	35.2	35.2	35.2	35.3	35.2
G162.0	35.6	35.6	35.6	35.6	35.6	35.6	35.4	35.4	35.6	35.4
G163.0	35.9	35.9	35.8	35.8	35.8	35.8	35.7	35.7	35.8	35.8
G164.0	36.2	36.0	36.0	36.0	36.0	35.9	35.9	35.9	36.0	35.9
G165.0	36.3	36.3	36.3	36.3	36.3	36.2	36.2	36.3	36.2	36.3
G166.0	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.4	36.5	36.5
G167.0	36.8	36.8	36.8	36.8	36.6	36.8	36.8	36.6	36.8	36.6
G168.0	36.9	36.9	36.9	36.9	36.9	36.9	37.0	36.9	36.9	36.9
G169.0	37.1	37.1	37.0	37.1	37.0	37.1	37.1	37.1	37.2	37.1
G170.0	37.2	37.2	37.2	37.2	37.2	37.3	37.2	37.3	37.5	37.3
G171.0	37.5	37.3	37.3	37.3	37.3	37.3	37.5	37.5	37.6	37.6
G172.0	37.6	37.5	37.5	37.5	37.5	37.6	37.6	37.7	37.7	37.7
G173.0	37.7	37.6	37.7	37.7	37.6	37.7	37.7	37.8	37.9	37.8
G174.0	37.8	37.6	37.6	37.7	37.7	37.7	37.8	37.9	37.9	38.0
G175.0	37.8	37.7	37.8	37.7	37.8	37.7	37.8	37.9	38.0	38.2
G176.0	37.9	37.8	37.8	37.7	37.8	37.9	37.9	38.0	38.2	38.2
G177.0	37.9	37.8	37.8	37.9	37.9	37.9	38.0	38.2	38.2	38.2
G178.0	38.2	37.9	37.9	37.9	37.9	38.0	38.0	38.2	38.3	38.3
G179.0	38.0	38.0	37.9	38.0	38.0	38.0	38.0	38.2	38.3	38.3
G180.0	38.2	38.0	38.0	37.9	38.0	38.0	38.0	38.2	38.3	38.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	4789.9	4793.1	4794.2	4794.8	4795.6	4798.6	4812.5	4807.4	4807.0	4805.2
G1.0	4782.6	4788.5	4787.3	4790.0	4790.6	4792.4	4816.6	4810.5	4809.1	4809.0
G2.0	4774.1	4782.0	4779.1	4779.5	4781.9	4783.3	4815.3	4808.4	4808.4	4807.0
G3.0	4764.5	4772.6	4771.0	4774.4	4774.9	4774.7	4811.3	4805.0	4803.4	4801.9
G4.0	4757.4	4762.3	4763.1	4766.0	4764.5	4765.4	4802.8	4800.2	4799.8	4795.7
G5.0	4746.5	4748.3	4749.6	4754.4	4752.5	4756.6	4792.3	4786.9	4790.1	4787.1
G6.0	4734.8	4740.0	4739.6	4740.3	4737.3	4743.0	4785.0	4779.3	4783.0	4781.2
G7.0	4721.5	4726.1	4724.2	4728.9	4727.7	4729.9	4773.7	4771.1	4773.2	4771.1
G8.0	4701.9	4712.6	4714.2	4718.5	4718.5	4721.9	4765.3	4761.5	4763.2	4759.5
G9.0	4687.6	4698.4	4701.4	4710.6	4707.2	4712.7	4755.6	4754.3	4752.4	4749.0
G10.0	4676.7	4684.4	4689.1	4696.4	4699.3	4702.4	4746.2	4744.6	4740.4	4738.7
G11.0	4662.9	4672.4	4676.4	4684.0	4683.0	4686.2	4737.1	4735.3	4729.2	4726.5
G12.0	4649.5	4656.1	4660.3	4658.5	4659.3	4661.8	4728.0	4723.9	4719.1	4716.4
G13.0	4630.5	4633.4	4635.6	4639.1	4636.6	4638.7	4715.2	4711.8	4706.5	4703.5
G14.0	4606.9	4612.9	4610.2	4614.4	4610.9	4615.1	4692.6	4689.8	4687.1	4687.7
G15.0	4585.5	4586.4	4583.5	4585.3	4586.4	4591.4	4672.4	4667.9	4662.6	4662.4
G16.0	4554.4	4558.6	4554.8	4561.0	4561.9	4564.4	4647.9	4641.1	4638.1	4641.7
G17.0	4531.8	4530.2	4529.0	4528.9	4527.8	4532.8	4624.1	4614.4	4612.2	4613.2
G18.0	4497.9	4498.9	4492.1	4494.8	4491.7	4494.5	4599.4	4589.9	4585.2	4588.4
G19.0	4464.4	4462.3	4455.6	4456.0	4454.6	4460.1	4568.3	4556.4	4558.3	4560.5
G20.0	4424.9	4429.5	4421.1	4420.6	4421.2	4427.0	4531.1	4524.0	4523.9	4524.5
G21.0	4387.2	4395.2	4386.3	4384.1	4390.1	4398.1	4496.9	4486.9	4489.7	4492.3
G22.0	4348.0	4357.5	4353.7	4354.0	4355.6	4367.2	4459.3	4452.9	4456.2	4459.2
G23.0	4312.6	4322.8	4320.6	4315.9	4316.1	4328.5	4431.3	4426.2	4428.2	4425.5
G24.0	4275.2	4287.2	4278.6	4276.1	4276.9	4290.9	4395.8	4398.4	4396.7	4392.5
G25.0	4237.7	4246.6	4243.0	4239.4	4234.0	4248.2	4363.9	4358.8	4359.0	4359.3
G26.0	4199.1	4206.7	4197.6	4202.2	4194.1	4207.6	4325.6	4318.0	4317.4	4316.8
G27.0	4151.8	4161.6	4164.2	4157.5	4151.8	4164.4	4281.0	4274.8	4278.2	4280.1
G28.0	4103.8	4118.8	4124.0	4115.4	4103.1	4118.2	4239.6	4237.4	4237.5	4236.4
G29.0	4060.5	4070.1	4073.3	4068.0	4060.3	4069.0	4197.2	4196.7	4196.8	4198.1
G30.0	4013.7	4019.4	4019.9	4017.1	4010.9	4024.3	4150.8	4152.1	4150.2	4155.6
G31.0	3964.2	3967.1	3963.3	3970.0	3967.9	3983.6	4105.9	4106.9	4103.5	4105.7
G32.0	3911.5	3907.7	3917.9	3921.8	3919.0	3926.8	4055.1	4052.0	4050.1	4058.8
G33.0	3859.4	3858.0	3862.5	3864.6	3865.1	3873.1	4009.2	4003.3	4005.8	4004.5
G34.0	3807.5	3810.6	3807.8	3803.0	3807.2	3819.8	3957.0	3950.2	3957.9	3957.1
G35.0	3751.0	3752.5	3745.6	3744.7	3757.4	3771.7	3900.8	3895.1	3902.4	3900.9
G36.0	3690.6	3688.8	3685.8	3691.4	3698.3	3718.4	3841.6	3834.7	3842.0	3839.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	3626.7	3632.2	3628.7	3635.2	3640.4	3657.3	3789.4	3785.2	3787.1	3783.3
G38.0	3559.1	3576.3	3571.1	3574.8	3584.1	3596.1	3734.5	3735.6	3732.6	3731.6
G39.0	3503.5	3520.2	3508.8	3520.4	3527.2	3537.8	3678.0	3676.1	3676.7	3675.8
G40.0	3441.8	3454.2	3451.9	3460.6	3459.2	3469.5	3619.5	3617.3	3613.9	3614.6
G41.0	3377.5	3388.2	3390.3	3394.7	3395.4	3404.3	3562.6	3562.5	3556.4	3555.4
G42.0	3317.2	3325.7	3319.7	3328.4	3334.5	3342.1	3500.5	3494.7	3490.0	3496.7
G43.0	3253.7	3259.5	3252.1	3262.6	3269.6	3276.4	3428.1	3426.7	3421.3	3428.4
G44.0	3181.4	3190.0	3186.6	3196.5	3203.9	3209.8	3365.2	3366.3	3358.2	3360.7
G45.0	3108.7	3122.0	3119.8	3123.7	3137.6	3148.1	3296.9	3298.1	3291.6	3296.8
G46.0	3044.6	3053.8	3050.6	3059.5	3070.2	3074.7	3228.9	3229.2	3226.9	3229.3
G47.0	2971.7	2981.2	2982.1	2989.3	2998.3	3010.9	3163.4	3162.9	3160.4	3158.4
G48.0	2897.0	2912.2	2908.2	2917.9	2931.0	2944.6	3090.3	3087.6	3089.0	3092.4
G49.0	2827.1	2834.2	2831.7	2847.3	2860.8	2875.4	3019.5	3019.6	3018.8	3010.4
G50.0	2749.3	2760.4	2764.3	2778.1	2792.3	2802.5	2952.9	2948.6	2952.2	2942.0
G51.0	2673.4	2691.4	2692.0	2711.5	2717.1	2729.9	2877.6	2877.2	2882.6	2875.4
G52.0	2602.1	2616.4	2619.0	2634.7	2636.5	2649.4	2811.8	2806.9	2812.2	2804.5
G53.0	2530.1	2542.9	2539.9	2553.5	2566.9	2580.1	2729.7	2727.4	2731.4	2731.4
G54.0	2455.0	2456.8	2468.4	2477.6	2494.2	2506.6	2655.3	2648.4	2654.7	2646.7
G55.0	2369.5	2380.9	2394.5	2409.6	2415.5	2426.3	2579.6	2575.1	2580.2	2566.1
G56.0	2293.9	2306.5	2316.7	2327.9	2337.3	2352.7	2506.7	2508.3	2506.8	2498.5
G57.0	2218.8	2232.4	2236.9	2258.2	2270.2	2284.6	2423.6	2418.7	2421.1	2423.4
G58.0	2144.6	2148.1	2170.3	2187.1	2198.1	2207.8	2359.1	2351.8	2346.9	2338.9
G59.0	2057.4	2080.3	2096.7	2108.1	2113.4	2128.4	2279.7	2279.2	2272.0	2270.1
G60.0	1988.3	2003.1	2014.5	2031.9	2038.3	2047.3	2206.2	2199.7	2198.0	2196.2
G61.0	1914.6	1920.4	1932.6	1948.6	1961.2	1976.9	2123.7	2118.0	2121.7	2110.2
G62.0	1830.8	1842.0	1860.9	1874.3	1882.8	1898.8	2041.9	2036.3	2037.2	2030.6
G63.0	1749.4	1769.2	1778.0	1798.1	1805.3	1827.0	1963.7	1960.2	1958.3	1945.8
G64.0	1673.9	1688.7	1704.7	1717.0	1730.3	1748.8	1890.5	1891.1	1877.5	1869.8
G65.0	1591.8	1614.5	1626.8	1639.3	1652.8	1669.5	1809.6	1811.0	1804.7	1799.3
G66.0	1518.3	1536.4	1549.3	1560.6	1579.7	1597.3	1731.8	1729.8	1725.4	1718.3
G67.0	1442.0	1462.3	1475.3	1486.3	1490.4	1507.0	1649.1	1646.0	1643.1	1637.4
G68.0	1364.4	1389.3	1388.5	1410.5	1422.4	1442.3	1572.4	1572.6	1574.6	1555.7
G69.0	1287.2	1305.0	1322.9	1329.3	1337.3	1354.3	1491.1	1489.2	1483.2	1475.3
G70.0	1210.3	1229.5	1241.5	1261.8	1263.9	1273.5	1413.1	1414.3	1408.8	1404.1
G71.0	1131.3	1158.3	1160.4	1178.5	1195.2	1211.9	1338.9	1337.3	1329.2	1317.2
G72.0	1058.8	1077.9	1093.9	1099.8	1110.5	1125.1	1251.8	1251.8	1245.2	1241.3
G73.0	989.7	1006.1	1017.0	1026.4	1036.8	1049.8	1174.9	1173.4	1177.6	1172.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	911.5	929.6	941.4	952.3	963.7	974.2	1098.0	1097.0	1098.7	1086.0
G75.0	842.5	859.1	869.2	880.4	887.4	900.5	1019.5	1015.8	1019.4	1013.3
G76.0	772.5	789.6	800.1	810.1	817.5	829.1	944.7	942.8	941.3	939.0
G77.0	704.7	722.0	731.4	739.8	744.9	754.4	866.9	865.9	867.2	861.7
G78.0	641.3	653.8	664.4	675.0	680.6	687.6	796.3	794.6	790.9	791.4
G79.0	578.7	593.5	601.3	607.8	615.8	625.2	726.6	726.0	723.0	714.1
G80.0	518.8	534.4	541.2	552.2	555.2	562.8	658.5	655.6	656.1	652.0
G81.0	466.2	478.2	486.1	492.9	494.4	500.1	593.5	593.9	593.7	591.3
G82.0	413.4	423.5	429.7	436.8	438.2	442.1	533.2	533.0	532.0	531.0
G83.0	363.9	372.8	377.9	383.2	387.4	390.2	471.5	471.6	471.9	469.1
G84.0	319.8	328.8	333.7	338.8	339.2	342.7	416.0	416.5	417.2	415.6
G85.0	277.7	286.6	291.1	295.4	296.7	300.2	366.0	366.8	366.4	367.0
G86.0	243.9	252.1	256.0	260.3	260.4	263.9	318.2	320.6	321.1	321.7
G87.0	217.9	225.4	228.4	231.8	232.6	233.9	277.3	279.3	279.8	280.2
G88.0	200.1	206.4	209.3	210.7	210.6	210.9	245.6	246.2	247.8	247.6
G89.0	185.8	191.7	194.1	194.6	193.6	192.6	219.2	220.7	222.0	222.9
G90.0	173.6	179.9	182.1	182.9	181.2	180.5	197.9	199.3	201.6	202.3
G91.0	160.7	167.3	169.7	170.8	169.3	168.1	184.0	184.6	186.6	187.9
G92.0	150.4	156.9	159.5	160.5	159.2	158.3	171.1	172.0	174.1	175.2
G93.0	142.5	148.4	150.7	152.0	151.1	149.8	160.4	161.3	163.6	164.7
G94.0	134.9	140.0	142.6	143.8	143.2	142.8	152.0	152.8	154.9	156.0
G95.0	127.2	132.9	135.1	136.0	135.0	134.0	144.4	145.4	147.2	148.3
G96.0	124.4	130.5	132.4	131.9	130.0	128.2	136.4	137.7	139.1	139.9
G97.0	118.2	125.7	128.9	129.7	128.3	126.7	129.0	130.2	131.9	132.9
G98.0	103.0	113.3	118.3	120.3	120.5	119.9	126.8	128.2	130.0	131.1
G99.0	90.1	98.0	102.9	106.0	106.2	105.8	121.9	123.1	124.2	124.5
G100.0	79.9	87.2	91.2	93.3	94.1	94.1	109.2	109.9	110.7	109.9
G101.0	70.5	76.9	81.1	83.6	83.6	84.1	96.0	96.8	97.4	96.6
G102.0	61.7	67.6	70.9	73.6	74.1	74.6	85.9	86.2	87.1	86.0
G103.0	54.0	59.0	62.1	64.3	64.8	65.3	76.6	77.2	77.2	76.3
G104.0	46.1	51.4	54.1	56.3	57.0	57.6	67.6	67.8	68.3	67.1
G105.0	39.0	43.8	46.8	49.0	50.3	50.3	59.1	59.5	59.7	58.8
G106.0	32.7	37.1	39.8	42.0	43.2	44.0	51.7	51.7	52.0	50.8
G107.0	27.5	30.9	33.5	35.9	37.0	37.8	45.0	44.8	45.0	43.4
G108.0	23.9	26.3	28.1	30.1	31.2	32.1	38.8	38.8	38.5	37.1
G109.0	22.0	23.2	24.3	25.5	26.2	27.0	33.2	33.1	32.7	31.5
G110.0	20.3	21.5	21.6	22.4	22.6	23.1	28.0	27.6	27.6	26.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	19.3	20.3	20.7	20.9	20.9	21.0	23.5	23.5	23.5	23.1
G112.0	18.4	19.4	19.7	20.1	20.1	20.1	20.9	20.9	21.3	21.4
G113.0	17.7	18.7	19.1	19.4	19.5	19.5	20.0	20.1	20.3	20.2
G114.0	17.2	18.1	18.5	18.9	19.0	19.1	19.4	19.4	19.5	19.3
G115.0	17.1	17.7	18.3	18.5	18.7	18.8	18.9	18.8	18.9	18.5
G116.0	17.2	17.6	18.0	18.3	18.4	18.5	18.4	18.4	18.4	18.1
G117.0	17.7	17.7	18.0	18.2	18.3	18.4	18.3	18.2	18.0	17.6
G118.0	18.2	18.2	18.2	18.3	18.3	18.4	18.2	18.1	17.8	17.5
G119.0	18.7	18.7	18.7	18.7	18.7	18.7	18.1	18.0	17.7	17.5
G120.0	19.0	19.0	19.1	19.1	19.1	19.1	18.3	18.2	18.1	18.0
G121.0	19.6	19.6	19.6	19.6	19.6	19.6	18.7	18.7	18.5	18.5
G122.0	20.1	20.0	20.1	20.1	20.1	20.1	19.1	19.1	19.0	19.0
G123.0	20.6	20.6	20.6	20.5	20.6	20.7	19.6	19.6	19.5	19.5
G124.0	21.0	21.0	21.0	21.0	21.0	21.2	20.1	20.1	20.0	20.0
G125.0	21.6	21.4	21.5	21.5	21.5	21.6	20.7	20.6	20.6	20.5
G126.0	22.1	22.0	22.0	21.9	22.0	22.1	21.0	21.2	21.0	20.9
G127.0	22.5	22.5	22.4	22.5	22.5	22.5	21.6	21.5	21.5	21.4
G128.0	23.1	23.0	23.0	23.0	23.0	23.1	22.1	22.1	22.0	21.9
G129.0	23.5	23.4	23.4	23.3	23.4	23.4	22.6	22.6	22.5	22.4
G130.0	23.9	24.0	23.8	23.9	23.8	24.0	23.2	23.1	23.0	22.8
G131.0	24.5	24.5	24.4	24.3	24.4	24.4	23.4	23.5	23.4	23.3
G132.0	25.0	24.9	24.7	24.9	24.9	24.9	24.0	24.0	23.9	23.8
G133.0	25.3	25.3	25.2	25.2	25.2	25.3	24.6	24.5	24.3	24.1
G134.0	25.8	25.8	25.7	25.7	25.7	25.8	25.0	25.2	24.7	24.7
G135.0	26.3	26.2	26.2	26.0	26.0	26.2	25.5	25.3	25.2	25.1
G136.0	26.8	26.6	26.6	26.5	26.5	26.6	25.8	25.7	25.6	25.6
G137.0	27.1	27.1	27.0	26.9	27.0	27.0	26.2	26.2	26.0	26.0
G138.0	27.5	27.5	27.5	27.4	27.4	27.5	26.6	26.6	26.4	26.5
G139.0	28.0	28.0	27.8	27.7	27.8	27.8	27.2	27.1	26.9	26.9
G140.0	28.3	28.3	28.3	28.1	28.2	28.3	27.6	27.5	27.4	27.4
G141.0	28.7	28.7	28.7	28.5	28.5	28.7	28.0	27.8	27.7	27.7
G142.0	29.0	29.0	29.0	28.9	29.0	29.0	28.4	28.3	28.2	28.1
G143.0	29.5	29.4	29.5	29.4	29.4	29.4	28.8	28.7	28.5	28.4
G144.0	29.9	29.9	29.7	29.7	29.7	29.7	29.1	29.0	28.9	28.9
G145.0	30.2	30.2	30.2	30.1	30.1	30.1	29.5	29.4	29.3	29.3
G146.0	30.6	30.6	30.4	30.6	30.3	30.4	29.9	29.7	29.7	29.7
G147.0	30.9	30.9	30.8	30.9	30.7	30.8	30.2	30.1	30.1	30.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	31.3	31.2	31.2	31.3	31.0	31.2	30.7	30.4	30.4	30.4
G149.0	31.6	31.5	31.6	31.6	31.4	31.4	30.9	30.8	30.8	30.8
G150.0	32.0	32.0	32.0	32.0	31.8	31.8	31.3	31.2	31.2	31.2
G151.0	32.3	32.3	32.3	32.2	32.1	32.1	31.6	31.5	31.5	31.5
G152.0	32.7	32.6	32.7	32.6	32.5	32.5	32.0	31.8	31.9	31.9
G153.0	33.1	32.9	33.1	32.9	32.9	32.7	32.2	32.2	32.2	32.1
G154.0	33.4	33.3	33.4	33.3	33.2	33.1	32.6	32.5	32.6	32.5
G155.0	33.7	33.5	33.7	33.7	33.5	33.4	32.8	32.9	32.9	32.8
G156.0	34.0	34.0	34.0	33.9	33.9	33.7	33.2	33.2	33.3	33.2
G157.0	34.3	34.3	34.3	34.4	34.4	33.9	33.5	33.5	33.7	33.4
G158.0	34.6	34.6	34.6	34.6	34.6	34.3	33.9	34.0	33.9	33.9
G159.0	34.8	35.0	35.0	34.8	35.0	34.6	34.1	34.4	34.4	34.3
G160.0	35.1	35.2	35.2	35.2	35.3	34.8	34.6	34.6	34.6	34.6
G161.0	35.4	35.4	35.4	35.6	35.7	35.2	34.8	35.0	35.0	34.7
G162.0	35.7	35.8	35.8	35.8	35.9	35.6	35.2	35.3	35.3	35.4
G163.0	35.9	36.0	36.0	36.2	36.3	35.8	35.4	35.7	35.6	35.3
G164.0	36.2	36.2	36.3	36.3	36.5	36.2	35.7	35.9	35.8	35.7
G165.0	36.4	36.5	36.5	36.5	36.8	36.5	36.0	36.2	36.0	35.9
G166.0	36.6	36.8	36.8	36.9	37.0	36.8	36.3	36.4	36.4	36.2
G167.0	36.8	37.0	37.0	37.1	37.2	37.0	36.6	36.8	36.5	36.4
G168.0	37.1	37.0	37.2	37.3	37.3	37.3	36.9	37.0	36.9	36.6
G169.0	37.2	37.2	37.3	37.5	37.6	37.6	37.2	37.2	37.0	37.0
G170.0	37.5	37.5	37.5	37.7	37.8	37.8	37.5	37.5	37.3	37.1
G171.0	37.6	37.6	37.7	37.8	37.9	38.2	37.7	37.7	37.6	37.5
G172.0	37.8	37.8	37.9	37.9	38.0	38.4	37.9	37.8	37.7	37.6
G173.0	37.9	37.9	38.0	38.2	38.2	38.5	38.2	38.0	37.8	37.7
G174.0	37.9	38.0	38.0	38.2	38.2	38.7	38.4	38.3	38.0	37.9
G175.0	38.0	38.2	38.2	38.3	38.3	38.7	38.7	38.4	38.2	38.0
G176.0	38.3	38.3	38.2	38.3	38.4	38.8	38.8	38.4	38.5	38.2
G177.0	38.3	38.3	38.3	38.4	38.5	38.8	38.9	38.4	38.3	38.3
G178.0	38.4	38.3	38.4	38.4	38.7	38.8	38.9	38.7	38.4	38.4
G179.0	38.4	38.4	38.3	38.4	38.7	38.7	39.0	38.5	38.4	38.5
G180.0	38.4	38.4	38.4	38.4	38.5	38.7	39.0	38.5	38.5	38.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	4806.3	4803.3	4803.7	4802.7	4799.4	4795.4	4791.3	4794.5	4791.3	4791.9
G1.0	4808.5	4808.1	4808.3	4806.4	4803.2	4799.6	4795.1	4797.3	4792.3	4793.9
G2.0	4806.3	4806.3	4806.3	4803.7	4800.7	4795.1	4789.0	4792.5	4790.0	4789.9
G3.0	4803.8	4803.7	4801.5	4800.8	4795.2	4793.8	4790.5	4792.5	4788.0	4786.7
G4.0	4796.3	4796.3	4796.7	4793.7	4791.4	4789.8	4786.7	4788.8	4787.0	4787.7
G5.0	4788.6	4785.5	4791.2	4787.0	4784.5	4784.3	4782.3	4779.4	4779.4	4779.5
G6.0	4781.0	4779.9	4779.4	4773.5	4769.8	4776.8	4769.8	4772.8	4771.6	4771.7
G7.0	4770.7	4775.4	4774.7	4770.6	4765.6	4763.4	4760.5	4759.4	4760.4	4762.5
G8.0	4761.6	4761.5	4762.2	4758.0	4756.5	4752.2	4747.4	4748.4	4748.5	4749.6
G9.0	4749.7	4750.6	4751.2	4748.6	4746.4	4740.6	4734.7	4739.7	4741.6	4738.7
G10.0	4737.5	4732.4	4732.9	4734.3	4729.8	4728.2	4727.3	4729.5	4729.1	4729.4
G11.0	4724.0	4718.2	4719.8	4718.5	4714.1	4710.8	4714.1	4716.7	4715.9	4719.1
G12.0	4712.5	4706.8	4703.3	4702.8	4697.6	4695.3	4696.9	4702.0	4702.8	4702.6
G13.0	4699.4	4707.4	4694.0	4685.9	4686.2	4678.8	4677.3	4681.0	4683.4	4685.6
G14.0	4688.3	4682.6	4681.7	4676.2	4667.1	4661.9	4662.0	4665.0	4669.9	4671.4
G15.0	4666.8	4667.1	4669.0	4658.1	4655.3	4651.8	4645.3	4649.3	4651.1	4656.2
G16.0	4646.0	4642.6	4645.5	4639.2	4641.8	4640.0	4631.5	4631.1	4633.9	4638.6
G17.0	4615.9	4622.1	4619.7	4614.5	4624.3	4622.8	4617.7	4614.8	4615.2	4616.6
G18.0	4591.5	4585.8	4591.5	4597.1	4597.4	4603.3	4601.4	4595.1	4594.5	4596.0
G19.0	4560.8	4561.4	4565.5	4566.9	4574.0	4579.1	4578.9	4578.3	4574.0	4573.2
G20.0	4530.5	4532.6	4538.5	4540.1	4547.0	4546.0	4553.5	4555.4	4552.3	4545.1
G21.0	4494.5	4498.5	4509.0	4511.4	4517.5	4517.8	4522.4	4530.0	4523.5	4516.1
G22.0	4459.8	4465.1	4475.8	4477.7	4488.1	4486.4	4489.1	4497.5	4492.5	4486.0
G23.0	4426.3	4428.4	4439.7	4440.1	4457.4	4451.4	4453.3	4460.0	4462.6	4453.6
G24.0	4395.1	4394.6	4399.0	4402.2	4419.2	4420.8	4415.5	4423.5	4429.4	4423.5
G25.0	4363.4	4359.6	4361.3	4363.4	4379.4	4382.6	4378.4	4393.5	4397.6	4394.1
G26.0	4324.8	4324.2	4326.1	4327.5	4335.7	4335.8	4342.7	4350.9	4359.1	4362.5
G27.0	4281.1	4284.4	4292.5	4291.7	4297.1	4296.4	4305.4	4313.4	4322.8	4326.8
G28.0	4240.4	4244.1	4250.9	4253.5	4253.8	4253.5	4260.9	4272.1	4282.7	4284.7
G29.0	4196.1	4201.7	4210.5	4208.4	4210.7	4209.1	4216.4	4233.5	4231.5	4240.1
G30.0	4155.6	4161.5	4161.9	4156.9	4167.0	4165.8	4174.1	4187.1	4184.0	4188.7
G31.0	4107.2	4114.9	4115.7	4103.2	4116.3	4126.7	4127.9	4139.1	4136.8	4141.0
G32.0	4062.0	4067.8	4068.9	4056.9	4066.5	4082.5	4082.4	4085.5	4089.1	4096.9
G33.0	4010.5	4022.0	4019.3	4013.1	4021.1	4028.2	4031.6	4032.9	4044.5	4047.1
G34.0	3965.4	3966.4	3967.8	3967.9	3972.1	3974.2	3981.2	3982.8	3988.5	3993.0
G35.0	3910.2	3914.9	3913.0	3914.6	3921.6	3918.9	3927.4	3931.9	3931.0	3939.9
G36.0	3851.4	3858.5	3856.4	3859.8	3871.3	3865.3	3872.8	3879.9	3875.7	3887.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	3793.3	3796.9	3802.1	3802.7	3818.1	3815.1	3816.2	3825.4	3819.7	3833.8
G38.0	3736.4	3734.7	3738.5	3748.4	3759.4	3759.4	3757.6	3765.7	3763.9	3776.7
G39.0	3682.9	3670.5	3676.2	3690.2	3699.1	3703.3	3701.5	3702.2	3708.6	3719.2
G40.0	3623.3	3615.9	3615.9	3623.4	3638.9	3641.2	3643.0	3637.8	3653.0	3656.1
G41.0	3558.3	3558.6	3560.0	3554.1	3575.8	3578.7	3577.7	3580.2	3592.6	3591.6
G42.0	3497.4	3494.5	3501.0	3489.4	3506.9	3513.1	3517.4	3519.2	3526.5	3523.3
G43.0	3429.4	3431.3	3436.3	3429.4	3437.4	3446.0	3450.1	3451.8	3453.7	3454.8
G44.0	3358.8	3368.2	3370.9	3367.2	3370.6	3373.2	3383.1	3383.9	3382.7	3392.8
G45.0	3287.3	3296.6	3302.2	3296.6	3308.7	3299.8	3312.4	3314.8	3314.7	3326.0
G46.0	3224.5	3226.9	3231.3	3234.8	3241.4	3233.1	3235.6	3243.8	3245.7	3255.6
G47.0	3155.4	3159.1	3153.4	3158.9	3173.1	3162.4	3152.5	3169.5	3169.2	3176.4
G48.0	3080.3	3086.3	3088.7	3078.4	3100.9	3092.8	3079.0	3097.4	3095.5	3100.0
G49.0	3013.4	3015.9	3015.7	3003.9	3023.9	3015.8	3008.7	3020.6	3020.8	3024.9
G50.0	2938.4	2947.0	2942.4	2935.2	2943.8	2943.0	2940.6	2940.4	2949.1	2949.0
G51.0	2864.3	2857.2	2867.9	2862.9	2869.3	2865.6	2864.8	2859.0	2875.3	2871.2
G52.0	2796.1	2785.8	2784.5	2789.9	2798.1	2788.4	2791.3	2783.8	2792.7	2793.8
G53.0	2723.4	2718.1	2711.7	2714.0	2720.1	2707.0	2712.5	2706.8	2703.2	2710.2
G54.0	2648.8	2646.3	2645.7	2624.8	2640.9	2628.5	2627.6	2628.5	2615.9	2625.2
G55.0	2561.6	2568.8	2572.6	2548.9	2563.4	2546.2	2539.8	2544.5	2530.6	2536.2
G56.0	2484.3	2482.6	2492.3	2477.5	2474.9	2468.0	2459.8	2463.9	2448.6	2448.3
G57.0	2411.5	2405.3	2402.8	2398.3	2396.7	2386.1	2378.3	2372.0	2361.1	2362.8
G58.0	2332.4	2332.6	2319.1	2313.8	2321.2	2293.5	2293.9	2282.6	2278.8	2269.6
G59.0	2252.9	2251.3	2243.4	2226.4	2242.0	2218.6	2208.7	2197.8	2189.2	2177.7
G60.0	2175.9	2168.9	2168.3	2150.8	2149.1	2138.9	2116.1	2114.6	2102.3	2088.8
G61.0	2103.1	2091.1	2081.2	2075.4	2062.2	2054.6	2033.7	2025.3	2007.0	1998.8
G62.0	2020.8	2011.4	2008.8	1982.6	1989.2	1967.2	1955.8	1936.3	1917.1	1912.0
G63.0	1939.6	1930.9	1927.0	1911.7	1902.8	1878.5	1868.7	1841.8	1838.0	1812.1
G64.0	1864.1	1853.4	1847.4	1834.8	1818.3	1804.1	1778.5	1763.2	1745.6	1725.2
G65.0	1786.4	1776.6	1768.2	1752.4	1743.8	1720.7	1692.4	1681.8	1655.4	1629.1
G66.0	1706.2	1697.2	1689.6	1669.5	1660.4	1631.9	1609.1	1592.2	1558.3	1537.3
G67.0	1625.6	1617.2	1609.0	1589.5	1579.6	1551.7	1522.4	1499.1	1470.3	1446.8
G68.0	1546.0	1537.5	1530.6	1508.4	1496.0	1470.8	1438.3	1415.9	1387.8	1358.2
G69.0	1472.8	1454.0	1446.7	1434.8	1414.2	1389.0	1361.0	1332.5	1296.1	1267.7
G70.0	1382.3	1377.6	1369.1	1353.7	1336.8	1308.2	1278.6	1243.6	1209.2	1177.6
G71.0	1310.5	1302.2	1288.0	1273.3	1254.4	1225.0	1199.0	1166.5	1128.4	1095.5
G72.0	1232.3	1222.7	1216.4	1193.1	1178.1	1148.5	1116.4	1084.1	1046.6	1013.3
G73.0	1148.5	1146.2	1136.9	1121.5	1099.2	1072.3	1040.3	1003.6	964.4	926.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	1075.5	1076.6	1055.4	1040.6	1022.1	996.3	962.8	928.1	890.2	850.9
G75.0	1002.3	993.8	990.6	964.6	945.5	922.8	887.7	854.4	815.7	773.9
G76.0	926.3	923.1	912.2	896.9	873.2	851.5	813.5	783.6	742.9	701.8
G77.0	853.7	845.9	834.9	822.3	804.7	778.5	746.3	712.7	672.4	628.4
G78.0	780.4	773.7	765.5	750.3	734.9	713.4	679.3	646.9	606.6	559.5
G79.0	710.2	705.1	694.6	685.8	668.9	645.1	617.0	581.5	541.4	494.8
G80.0	646.1	639.4	628.0	617.7	605.0	582.5	553.2	521.5	479.7	433.4
G81.0	583.1	574.7	569.6	558.2	543.3	521.7	493.8	463.0	420.4	376.5
G82.0	524.6	517.9	510.6	496.6	487.5	466.2	437.0	406.4	367.1	326.7
G83.0	466.9	461.9	457.0	445.6	436.6	414.0	387.0	356.3	317.9	279.5
G84.0	411.6	410.3	404.5	394.8	383.8	365.8	338.8	309.8	274.2	236.4
G85.0	363.5	361.3	356.0	346.5	337.7	319.1	296.1	267.0	233.8	199.3
G86.0	317.5	316.5	311.6	302.8	294.6	277.9	253.7	229.2	197.9	167.7
G87.0	277.7	276.0	273.0	265.1	256.8	239.9	218.9	194.2	166.9	140.0
G88.0	246.4	243.6	239.7	232.9	223.7	208.1	187.4	164.6	140.1	116.3
G89.0	221.4	219.5	216.0	209.1	200.7	184.1	162.8	141.2	118.2	96.8
G90.0	201.6	199.7	196.6	190.5	180.9	163.6	143.2	121.1	99.3	80.5
G91.0	187.1	185.2	182.3	175.3	165.5	147.6	126.4	104.9	84.4	67.7
G92.0	174.3	172.4	169.2	162.2	151.1	133.7	112.9	91.7	72.7	57.0
G93.0	163.6	161.4	158.1	151.4	140.0	122.0	101.6	80.5	62.9	47.8
G94.0	155.2	152.8	149.1	142.0	129.7	112.0	91.9	71.5	54.1	40.0
G95.0	147.3	144.7	140.7	133.2	120.6	103.6	84.0	63.3	46.4	33.2
G96.0	138.4	135.6	131.8	125.2	113.9	97.2	75.5	54.9	39.6	27.2
G97.0	132.6	131.2	128.3	122.0	107.7	87.1	65.1	47.3	33.4	22.5
G98.0	130.5	128.3	123.6	112.1	94.2	74.6	56.3	40.5	28.0	18.0
G99.0	122.1	117.7	109.2	96.8	81.5	64.9	48.6	34.5	23.2	14.9
G100.0	106.7	101.3	94.3	84.1	71.2	56.1	41.5	29.0	19.1	12.4
G101.0	93.5	89.3	83.2	73.8	62.1	48.4	35.0	24.1	16.0	10.8
G102.0	83.2	79.4	73.5	64.7	53.4	40.9	29.3	20.2	13.8	9.9
G103.0	73.4	69.9	64.6	55.8	45.5	34.4	24.5	17.4	12.3	9.3
G104.0	64.8	61.0	55.4	47.3	38.2	28.9	20.7	15.2	11.4	9.4
G105.0	55.9	52.4	47.1	39.7	32.0	24.0	18.1	13.7	10.7	9.8
G106.0	48.0	44.4	39.7	33.4	26.9	20.9	16.2	12.6	10.6	10.2
G107.0	40.9	37.8	33.4	28.0	23.1	18.7	14.6	11.9	10.9	10.7
G108.0	34.7	31.8	28.1	24.0	20.5	16.8	13.6	11.6	11.4	11.1
G109.0	29.1	26.8	24.3	21.5	18.5	15.5	12.8	12.5	11.9	11.5
G110.0	24.9	23.4	21.9	19.6	17.1	14.5	12.6	12.6	12.4	12.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	22.2	21.5	20.1	18.1	15.9	13.9	13.1	13.0	12.7	12.6
G112.0	20.9	20.0	18.7	17.0	15.1	13.8	13.6	13.3	13.3	13.1
G113.0	19.7	18.9	17.7	16.0	14.6	14.3	14.0	13.9	13.8	13.6
G114.0	18.8	18.0	16.9	15.5	14.8	14.6	14.5	14.4	14.3	14.0
G115.0	18.1	17.2	16.2	15.5	15.3	15.2	15.0	14.9	14.8	14.5
G116.0	17.5	16.8	16.0	15.9	15.8	15.6	15.6	15.3	15.2	15.1
G117.0	17.2	16.5	16.4	16.4	16.2	16.2	16.0	15.9	15.7	15.6
G118.0	17.1	16.9	16.9	16.8	16.6	16.6	16.5	16.4	16.2	16.0
G119.0	17.5	17.5	17.4	17.4	17.2	17.1	17.0	16.9	16.8	16.5
G120.0	18.0	18.0	17.8	17.8	17.7	17.6	17.5	17.4	17.4	17.1
G121.0	18.4	18.4	18.4	18.3	18.2	18.1	18.0	18.0	17.8	17.6
G122.0	18.9	18.9	18.8	18.7	18.7	18.7	18.4	18.3	18.3	18.1
G123.0	19.4	19.4	19.3	19.3	19.1	19.1	18.9	18.8	18.8	18.7
G124.0	19.9	19.9	19.7	19.7	19.7	19.6	19.5	19.4	19.3	19.3
G125.0	20.5	20.3	20.3	20.3	20.2	20.1	20.0	19.9	19.7	19.6
G126.0	20.8	20.8	20.9	20.7	20.7	20.7	20.5	20.5	20.3	20.2
G127.0	21.4	21.3	21.4	21.3	21.2	21.0	21.0	20.9	20.8	20.7
G128.0	21.9	21.8	21.9	21.8	21.6	21.5	21.5	21.4	21.3	21.2
G129.0	22.4	22.2	22.4	22.2	22.1	22.1	22.0	21.9	21.9	21.8
G130.0	22.7	22.7	22.7	22.7	22.6	22.6	22.5	22.4	22.2	22.2
G131.0	23.3	23.2	23.2	23.2	23.1	23.1	23.0	23.0	22.8	22.7
G132.0	23.7	23.7	23.7	23.7	23.5	23.4	23.4	23.4	23.3	23.3
G133.0	24.1	24.1	24.1	24.1	24.0	24.0	23.9	23.9	23.8	23.7
G134.0	24.6	24.6	24.7	24.5	24.5	24.5	24.4	24.4	24.3	24.3
G135.0	25.1	25.1	25.1	25.0	25.0	25.0	24.9	24.7	24.7	24.7
G136.0	25.6	25.6	25.5	25.5	25.5	25.5	25.3	25.2	25.2	25.1
G137.0	25.9	25.9	25.9	25.9	25.8	25.8	25.8	25.8	25.8	25.6
G138.0	26.3	26.4	26.3	26.3	26.2	26.3	26.3	26.2	26.3	26.0
G139.0	26.8	26.9	26.9	26.8	26.8	26.8	26.6	26.6	26.6	26.5
G140.0	27.2	27.4	27.2	27.2	27.1	27.1	27.1	27.0	27.0	27.0
G141.0	27.7	27.7	27.7	27.6	27.6	27.6	27.5	27.5	27.5	27.5
G142.0	28.2	28.1	28.1	28.1	28.0	28.0	28.0	28.0	28.0	28.0
G143.0	28.5	28.4	28.5	28.4	28.4	28.4	28.3	28.3	28.3	28.3
G144.0	29.0	28.9	28.9	28.8	28.8	28.8	28.8	28.8	28.8	28.8
G145.0	29.4	29.3	29.3	29.3	29.1	29.3	29.1	29.3	29.3	29.3
G146.0	29.7	29.6	29.6	29.6	29.5	29.6	29.6	29.6	29.6	29.5
G147.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	30.4	30.3	30.3	30.3	30.3	30.3	30.4	30.4	30.4	30.3
G149.0	30.7	30.8	30.8	30.8	30.7	30.8	30.8	30.8	30.8	30.7
G150.0	31.2	31.2	31.0	31.0	31.0	31.0	31.2	31.2	31.2	31.0
G151.0	31.5	31.5	31.5	31.5	31.4	31.4	31.5	31.5	31.5	31.5
G152.0	31.9	31.9	31.9	31.9	31.8	31.8	31.8	31.9	31.9	31.9
G153.0	32.2	32.2	32.2	32.2	32.2	32.1	32.1	32.2	32.3	32.2
G154.0	32.6	32.5	32.6	32.5	32.5	32.5	32.1	32.6	32.6	32.5
G155.0	32.8	32.9	32.8	32.8	32.8	32.8	32.8	32.8	32.9	32.8
G156.0	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2
G157.0	33.5	33.5	33.5	33.5	33.4	33.5	33.5	33.5	33.5	33.4
G158.0	33.9	33.8	33.8	33.9	33.8	33.9	33.8	33.8	33.9	33.8
G159.0	34.1	34.1	34.1	34.1	34.1	34.1	34.0	34.1	34.1	34.1
G160.0	34.5	34.5	34.5	34.5	34.5	34.4	34.4	34.5	34.4	34.4
G161.0	34.8	34.7	34.8	34.7	34.7	34.7	34.7	34.7	34.7	34.7
G162.0	35.1	35.1	35.1	35.0	35.0	35.0	34.8	35.0	35.0	35.0
G163.0	35.4	35.4	35.3	35.3	35.3	35.3	35.2	35.2	35.2	35.2
G164.0	35.8	35.7	35.7	35.7	35.6	35.6	35.6	35.6	35.6	35.4
G165.0	35.9	35.9	35.9	35.8	35.8	35.7	35.7	35.7	35.8	35.8
G166.0	36.3	36.2	36.2	36.2	36.0	36.0	36.0	35.9	36.0	36.0
G167.0	36.5	36.4	36.4	36.4	36.3	36.3	36.3	36.3	36.3	36.3
G168.0	36.8	36.6	36.8	36.6	36.6	36.6	36.5	36.5	36.5	36.5
G169.0	37.0	36.9	36.9	36.9	36.8	36.9	36.8	36.8	36.9	36.8
G170.0	37.2	37.1	37.1	37.1	37.0	37.0	36.9	37.0	37.0	37.0
G171.0	37.5	37.5	37.3	37.2	37.2	37.2	37.2	37.2	37.3	37.2
G172.0	37.6	37.6	37.5	37.5	37.5	37.5	37.5	37.3	37.5	37.3
G173.0	37.7	37.7	37.7	37.7	37.7	37.7	37.6	37.6	37.6	37.5
G174.0	37.9	37.8	37.8	37.8	37.8	37.8	37.7	37.7	37.7	37.7
G175.0	38.0	38.0	38.0	38.0	37.9	37.9	37.8	37.9	37.9	37.8
G176.0	38.2	38.2	38.2	38.0	38.2	38.0	37.9	37.9	37.9	37.9
G177.0	38.3	38.2	38.3	38.3	38.2	38.2	37.9	38.0	38.2	38.0
G178.0	38.4	38.3	38.3	38.4	38.4	38.3	38.2	38.0	38.2	38.0
G179.0	38.4	38.4	38.4	38.4	38.4	38.3	38.2	38.3	38.3	38.2
G180.0	38.4	38.3	38.4	38.4	38.3	38.3	38.3	38.3	38.3	38.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	4788.0	4785.8	4776.4	4774.1	4766.8	4763.7	4764.9	4764.7	4763.6	4766.0
G1.0	4791.9	4789.5	4779.6	4773.7	4770.4	4766.7	4768.2	4769.1	4765.5	4769.3
G2.0	4788.7	4786.3	4778.6	4772.6	4767.4	4764.7	4764.3	4765.0	4762.4	4763.4
G3.0	4786.7	4785.0	4775.6	4770.7	4766.0	4765.4	4762.5	4763.1	4760.4	4759.8
G4.0	4786.9	4784.9	4777.0	4772.8	4767.4	4764.9	4762.9	4762.5	4759.3	4759.1
G5.0	4780.5	4780.3	4774.3	4770.7	4763.2	4761.9	4759.8	4761.7	4757.8	4757.2
G6.0	4771.1	4772.3	4764.9	4764.7	4756.9	4758.8	4755.6	4756.6	4752.5	4751.0
G7.0	4761.1	4764.1	4759.7	4755.4	4751.6	4752.7	4748.7	4753.6	4746.2	4745.3
G8.0	4748.7	4752.7	4750.0	4744.3	4743.4	4744.1	4742.2	4745.5	4740.8	4737.9
G9.0	4739.1	4745.5	4742.9	4737.3	4735.1	4735.1	4732.8	4736.1	4732.3	4729.1
G10.0	4728.8	4737.5	4732.9	4729.8	4727.4	4729.6	4726.0	4728.0	4721.3	4718.0
G11.0	4715.9	4723.3	4721.9	4720.2	4713.2	4715.3	4715.1	4714.7	4706.8	4706.4
G12.0	4700.5	4702.2	4704.1	4705.2	4701.3	4702.1	4699.6	4698.4	4689.6	4690.0
G13.0	4685.5	4688.6	4691.2	4691.2	4689.1	4686.3	4683.3	4679.9	4673.3	4671.7
G14.0	4672.9	4675.5	4674.9	4676.1	4673.0	4669.3	4665.1	4662.0	4653.7	4654.1
G15.0	4658.6	4661.9	4660.6	4657.9	4656.2	4651.1	4646.1	4644.9	4635.4	4637.9
G16.0	4641.7	4645.4	4645.0	4641.9	4637.0	4636.1	4628.6	4624.1	4616.5	4619.7
G17.0	4621.1	4621.4	4620.4	4617.4	4614.6	4614.4	4605.5	4601.8	4596.3	4598.5
G18.0	4596.9	4599.0	4597.2	4594.0	4589.5	4588.2	4578.2	4576.3	4572.5	4575.2
G19.0	4572.7	4571.2	4565.8	4568.8	4562.1	4558.9	4549.1	4546.7	4544.0	4554.2
G20.0	4544.9	4542.6	4535.3	4537.4	4534.3	4529.6	4517.2	4516.1	4512.3	4523.5
G21.0	4516.7	4511.7	4504.5	4502.5	4506.3	4503.0	4488.4	4485.9	4486.2	4493.3
G22.0	4483.3	4479.7	4473.3	4473.5	4476.2	4474.0	4461.1	4459.5	4461.7	4462.4
G23.0	4450.0	4451.3	4448.2	4444.6	4448.0	4444.6	4431.9	4435.4	4433.2	4433.4
G24.0	4416.2	4420.5	4414.6	4413.7	4419.0	4417.9	4403.5	4404.3	4401.5	4401.5
G25.0	4380.2	4386.3	4377.5	4378.4	4385.9	4384.4	4370.9	4372.5	4371.4	4368.9
G26.0	4346.5	4346.9	4340.4	4343.8	4350.1	4348.5	4336.1	4338.2	4338.2	4334.4
G27.0	4309.0	4309.3	4303.4	4307.2	4312.8	4306.5	4293.1	4300.9	4301.7	4300.2
G28.0	4270.2	4267.3	4266.3	4268.6	4271.3	4263.3	4254.5	4259.7	4259.6	4260.0
G29.0	4232.3	4228.1	4225.4	4228.5	4232.1	4223.6	4213.1	4214.3	4221.0	4214.3
G30.0	4190.4	4185.9	4184.7	4184.5	4189.8	4181.4	4172.0	4178.0	4177.4	4170.7
G31.0	4148.8	4143.1	4141.6	4135.8	4146.2	4137.5	4128.6	4136.6	4136.4	4127.0
G32.0	4104.7	4098.1	4091.5	4088.0	4100.9	4094.4	4083.6	4086.0	4093.5	4079.7
G33.0	4060.2	4049.5	4044.6	4036.5	4047.9	4042.5	4035.7	4043.4	4044.5	4032.4
G34.0	4008.6	3996.7	3990.6	3984.7	3994.4	3990.3	3982.5	3989.8	3989.8	3984.7
G35.0	3953.9	3947.6	3938.6	3934.7	3950.7	3939.1	3932.3	3938.2	3936.3	3931.5
G36.0	3897.3	3895.8	3888.7	3883.5	3897.1	3888.3	3881.3	3887.9	3878.5	3873.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	3840.4	3845.5	3835.5	3828.2	3843.8	3836.4	3827.6	3835.8	3829.2	3817.1
G38.0	3784.8	3793.7	3774.2	3770.6	3784.2	3777.9	3769.9	3779.2	3768.5	3759.7
G39.0	3720.9	3734.1	3715.8	3708.1	3722.8	3712.7	3710.3	3719.4	3711.1	3703.2
G40.0	3656.3	3674.1	3653.0	3647.5	3663.8	3651.1	3647.3	3659.4	3648.2	3645.6
G41.0	3592.7	3612.1	3593.7	3591.8	3602.2	3587.7	3587.4	3595.9	3586.1	3584.1
G42.0	3531.3	3552.8	3530.9	3528.9	3534.6	3523.3	3527.5	3533.7	3515.1	3521.9
G43.0	3467.1	3483.9	3469.0	3459.8	3471.6	3458.6	3463.8	3466.1	3451.1	3455.1
G44.0	3401.6	3413.9	3402.0	3391.1	3406.1	3393.0	3395.9	3398.5	3383.2	3391.6
G45.0	3327.6	3340.1	3326.7	3319.6	3334.9	3323.8	3323.1	3328.6	3315.5	3325.9
G46.0	3253.3	3265.3	3257.5	3253.9	3264.5	3255.3	3252.2	3253.5	3245.8	3253.9
G47.0	3177.9	3190.9	3191.0	3180.1	3193.4	3183.1	3183.6	3179.9	3173.1	3179.8
G48.0	3104.5	3112.6	3117.4	3103.2	3118.4	3108.9	3106.8	3102.4	3101.8	3104.3
G49.0	3029.3	3034.4	3043.3	3026.4	3041.3	3029.7	3031.6	3026.3	3029.4	3030.9
G50.0	2953.6	2957.2	2962.3	2948.4	2964.1	2955.5	2958.3	2946.6	2951.8	2951.7
G51.0	2871.1	2878.6	2883.0	2866.6	2877.4	2872.9	2875.4	2867.5	2874.2	2870.9
G52.0	2792.4	2799.7	2804.1	2780.9	2793.9	2792.6	2796.3	2787.5	2795.6	2789.4
G53.0	2706.5	2718.3	2720.2	2700.8	2708.5	2709.0	2712.0	2706.5	2715.6	2706.8
G54.0	2617.2	2627.8	2634.9	2617.7	2625.8	2621.1	2628.4	2624.5	2626.1	2626.4
G55.0	2533.2	2539.8	2538.5	2532.2	2540.7	2532.6	2535.9	2537.8	2540.4	2543.5
G56.0	2443.2	2447.4	2451.2	2441.0	2452.6	2446.2	2444.3	2451.9	2450.6	2461.1
G57.0	2358.4	2356.8	2354.4	2348.4	2361.9	2359.5	2353.4	2359.9	2362.0	2371.0
G58.0	2267.6	2268.3	2260.7	2255.7	2269.9	2269.8	2263.4	2272.3	2270.3	2280.7
G59.0	2175.1	2173.0	2168.8	2162.1	2172.7	2172.2	2167.7	2175.2	2177.8	2186.6
G60.0	2080.3	2078.1	2074.8	2072.1	2078.4	2077.3	2072.7	2088.1	2092.9	2105.1
G61.0	1987.8	1981.1	1979.0	1975.4	1985.0	1978.5	1979.2	1992.0	1999.2	2014.0
G62.0	1888.2	1885.1	1886.9	1875.1	1885.8	1885.5	1882.5	1899.6	1908.0	1922.5
G63.0	1792.1	1787.4	1790.0	1780.4	1785.9	1787.0	1788.0	1800.9	1812.2	1831.1
G64.0	1697.1	1697.8	1691.1	1684.8	1692.5	1692.4	1689.7	1702.6	1719.9	1738.5
G65.0	1607.6	1603.1	1593.3	1587.3	1593.1	1594.4	1594.8	1606.7	1628.6	1644.8
G66.0	1511.6	1510.8	1495.2	1489.7	1492.4	1495.5	1499.1	1513.6	1531.6	1556.9
G67.0	1423.7	1408.7	1397.9	1391.7	1396.3	1397.9	1407.9	1419.4	1439.9	1462.3
G68.0	1331.3	1313.8	1305.8	1290.5	1300.5	1300.9	1309.8	1327.9	1349.3	1374.6
G69.0	1237.8	1218.9	1207.6	1198.6	1201.2	1203.9	1216.6	1233.7	1255.0	1285.2
G70.0	1144.1	1128.3	1113.4	1102.0	1108.3	1110.4	1122.0	1147.2	1166.1	1198.4
G71.0	1065.3	1037.0	1018.3	1010.9	1011.4	1016.1	1027.6	1052.9	1078.6	1112.4
G72.0	977.8	951.2	930.4	917.3	919.8	926.8	937.3	966.6	995.1	1029.7
G73.0	895.1	866.7	842.4	826.6	829.5	833.4	849.6	880.5	910.1	945.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	812.0	781.8	757.5	738.0	742.2	747.9	765.5	796.7	829.8	867.4
G75.0	737.1	702.5	677.0	656.7	658.9	665.4	685.2	714.7	751.5	789.3
G76.0	656.7	627.7	597.6	576.7	578.0	585.2	604.8	637.8	677.6	717.9
G77.0	584.1	549.4	517.9	498.0	496.4	504.8	528.5	559.5	600.3	643.8
G78.0	513.7	476.4	446.7	423.6	421.7	432.5	453.8	488.3	530.5	571.2
G79.0	447.5	410.0	379.0	356.8	354.3	364.1	385.8	421.7	463.0	507.2
G80.0	386.9	348.3	316.3	294.8	292.0	303.1	325.0	360.3	399.1	445.6
G81.0	332.1	291.8	262.3	240.0	236.6	247.4	269.1	302.8	343.9	386.0
G82.0	281.4	243.3	213.5	193.4	189.1	199.2	218.9	253.5	293.5	333.7
G83.0	237.4	200.1	171.0	152.2	149.3	157.8	178.6	210.4	247.5	285.4
G84.0	198.0	164.5	136.6	117.6	115.6	123.0	142.2	172.9	207.4	243.4
G85.0	164.4	134.4	107.4	89.3	86.6	94.5	113.7	141.3	173.4	206.1
G86.0	135.4	109.2	83.8	64.6	61.8	69.9	88.4	115.1	143.7	172.8
G87.0	113.0	87.3	63.5	44.7	39.7	48.6	68.3	92.8	118.7	144.0
G88.0	92.2	69.3	47.3	28.7	20.9	31.9	51.5	74.2	97.5	120.3
G89.0	75.9	54.7	34.7	16.8	7.4	20.0	37.9	58.5	80.0	100.6
G90.0	61.6	42.6	24.6	8.7	3.9	11.6	27.2	46.1	65.3	83.6
G91.0	50.2	33.1	16.8	5.0	4.0	6.8	19.6	36.2	53.6	70.6
G92.0	40.8	25.2	11.5	4.5	4.3	5.0	13.7	27.7	43.8	59.5
G93.0	32.8	19.0	8.0	4.6	4.5	4.6	9.5	21.3	35.6	50.5
G94.0	26.2	14.4	6.1	4.9	4.9	5.0	7.1	16.2	28.7	42.3
G95.0	20.9	10.8	5.6	5.2	5.1	5.2	5.9	12.3	23.0	35.4
G96.0	16.4	8.6	5.7	5.6	5.6	5.6	5.7	9.5	18.1	29.1
G97.0	13.1	7.3	6.1	6.1	5.9	5.9	5.9	7.8	14.3	23.7
G98.0	10.6	6.8	6.4	6.4	6.3	6.3	6.3	7.0	11.4	19.0
G99.0	8.9	7.0	6.8	6.8	6.7	6.8	6.7	6.8	9.5	15.5
G100.0	8.2	7.3	7.3	7.1	7.0	7.1	7.1	7.1	8.4	12.8
G101.0	8.0	7.7	7.6	7.6	7.5	7.5	7.6	7.6	7.8	11.1
G102.0	8.3	8.2	8.1	8.0	8.0	7.8	7.8	8.0	8.1	9.9
G103.0	8.8	8.7	8.6	8.4	8.3	8.3	8.4	8.4	8.6	9.3
G104.0	9.2	9.0	8.9	8.8	8.8	8.8	8.8	8.9	8.8	8.9
G105.0	9.6	9.5	9.4	9.4	9.3	9.3	9.3	9.3	9.4	9.4
G106.0	10.1	10.0	10.0	9.9	9.8	9.8	9.6	9.8	9.9	9.9
G107.0	10.5	10.5	10.4	10.4	10.2	10.2	10.2	10.1	10.2	10.4
G108.0	10.9	10.8	10.8	10.7	10.7	10.7	10.7	10.7	10.7	10.8
G109.0	11.4	11.3	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2
G110.0	11.9	11.9	11.9	11.8	11.6	11.6	11.6	11.6	11.6	11.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	12.5	12.4	12.3	12.3	12.1	12.1	12.1	12.1	12.1	12.3
G112.0	13.0	12.8	12.8	12.7	12.7	12.6	12.6	12.6	12.7	12.7
G113.0	13.4	13.3	13.3	13.3	13.2	13.2	13.1	13.1	13.2	13.2
G114.0	14.0	13.8	13.8	13.7	13.7	13.7	13.7	13.6	13.7	13.7
G115.0	14.5	14.4	14.3	14.3	14.1	14.1	14.0	14.1	14.1	14.3
G116.0	15.0	15.0	14.8	14.9	14.8	14.6	14.6	14.6	14.8	14.8
G117.0	15.6	15.5	15.3	15.3	15.2	15.2	15.1	15.1	15.2	15.2
G118.0	16.0	15.9	15.9	15.8	15.8	15.7	15.7	15.5	15.7	15.8
G119.0	16.5	16.4	16.4	16.4	16.3	16.3	16.2	16.2	16.2	16.2
G120.0	17.1	17.0	17.0	16.9	16.9	16.9	16.8	16.6	16.6	16.8
G121.0	17.6	17.5	17.4	17.5	17.4	17.4	17.4	17.1	17.2	17.2
G122.0	18.1	18.1	18.0	17.5	17.8	17.8	17.8	17.7	17.7	17.7
G123.0	18.7	18.5	18.5	18.4	18.4	18.4	18.3	18.2	18.2	18.2
G124.0	19.1	19.0	19.0	19.0	18.9	18.9	18.9	18.8	18.8	18.8
G125.0	19.7	19.6	19.5	19.5	19.5	19.4	19.4	19.3	19.3	19.4
G126.0	20.2	20.1	20.1	20.0	20.0	19.9	20.0	19.9	19.7	19.9
G127.0	20.7	20.7	20.6	20.6	20.5	20.5	20.5	20.3	20.3	20.3
G128.0	21.2	21.2	21.2	21.0	21.0	20.9	20.9	20.8	20.8	20.8
G129.0	21.8	21.8	21.6	21.5	21.5	21.5	21.4	21.4	21.3	21.4
G130.0	22.2	22.2	22.1	22.1	22.1	22.0	22.0	21.9	21.8	21.8
G131.0	22.7	22.7	22.6	22.6	22.6	22.6	22.5	22.4	22.4	22.4
G132.0	23.3	23.3	23.2	23.1	23.1	23.1	23.0	22.8	22.8	22.8
G133.0	23.8	23.7	23.7	23.7	23.5	23.5	23.4	23.3	23.3	23.3
G134.0	24.3	24.3	24.1	24.1	24.0	24.0	23.9	23.9	23.8	23.8
G135.0	24.7	24.6	24.6	24.6	24.5	24.5	24.5	24.4	24.3	24.3
G136.0	25.2	25.1	25.1	25.0	25.1	25.0	25.0	24.9	24.7	24.7
G137.0	25.7	25.6	25.6	25.6	25.6	25.5	25.5	25.3	25.3	25.2
G138.0	26.2	26.0	26.0	25.9	26.0	25.9	25.8	25.8	25.7	25.6
G139.0	26.6	26.5	26.5	26.5	26.4	26.4	26.3	26.3	26.2	26.2
G140.0	27.0	27.0	26.9	27.0	26.9	26.9	26.8	26.6	26.6	26.5
G141.0	27.6	27.5	27.4	27.4	27.4	27.5	27.1	27.1	27.1	27.0
G142.0	28.0	27.8	27.8	27.7	27.8	27.7	27.6	27.6	27.5	27.5
G143.0	28.4	28.3	28.3	28.3	28.2	28.2	28.1	28.0	28.0	27.6
G144.0	28.9	28.8	28.8	28.7	28.7	28.7	28.4	28.4	28.4	28.3
G145.0	29.3	29.1	29.1	29.3	29.1	29.0	28.9	28.8	28.8	28.8
G146.0	29.7	29.6	29.5	29.5	29.5	29.5	29.4	29.3	29.3	29.3
G147.0	30.1	30.0	30.0	30.0	30.0	29.9	29.7	29.6	29.6	29.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	30.4	30.3	30.3	30.3	30.3	30.3	30.2	30.1	30.1	30.0
G149.0	30.8	30.8	30.7	30.8	30.7	30.7	30.6	30.4	30.4	30.4
G150.0	31.2	31.2	31.2	31.2	31.2	31.0	30.9	30.8	30.7	30.8
G151.0	31.5	31.5	31.5	31.5	31.5	31.4	31.3	31.2	31.2	31.2
G152.0	31.9	31.9	31.9	31.9	31.8	31.6	31.6	31.5	31.5	31.5
G153.0	32.1	32.2	32.2	32.1	32.1	32.1	32.0	31.9	31.9	31.9
G154.0	32.5	32.5	32.6	32.5	32.5	32.5	32.3	32.2	32.2	32.2
G155.0	32.9	32.8	32.9	32.8	32.8	32.7	32.7	32.6	32.6	32.6
G156.0	33.3	33.3	33.2	33.2	33.2	33.2	33.1	32.9	32.9	32.8
G157.0	33.5	33.5	33.7	33.5	33.4	33.4	33.4	33.3	33.2	33.2
G158.0	33.9	33.9	33.9	33.8	33.8	33.8	33.8	33.7	33.7	33.5
G159.0	34.3	34.3	34.1	34.1	34.1	34.0	34.1	34.0	33.9	33.8
G160.0	34.5	34.5	34.5	34.5	34.4	34.4	34.4	34.3	34.3	34.1
G161.0	34.8	34.8	34.7	34.7	34.7	34.7	34.6	34.6	34.5	34.4
G162.0	35.1	35.1	35.1	35.0	35.0	35.0	35.0	34.8	34.7	34.6
G163.0	35.3	35.3	35.4	35.3	35.3	35.3	35.2	35.2	35.1	34.8
G164.0	35.6	35.6	35.7	35.7	35.6	35.6	35.6	35.3	35.3	35.2
G165.0	35.8	35.8	35.9	35.9	35.9	35.9	35.8	35.8	35.6	35.4
G166.0	36.0	36.0	36.2	36.2	36.2	36.2	36.2	35.9	35.8	35.7
G167.0	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.2	36.0	36.0
G168.0	36.5	36.5	36.5	36.6	36.6	36.6	36.5	36.4	36.3	36.2
G169.0	36.8	36.8	36.8	36.8	37.0	36.9	36.8	36.6	36.6	36.4
G170.0	37.0	37.0	37.0	37.1	37.1	37.1	37.1	36.9	36.8	36.8
G171.0	37.2	37.2	37.1	37.3	37.3	37.3	37.3	37.1	37.0	36.9
G172.0	37.3	37.3	37.3	37.5	37.6	37.6	37.5	37.3	37.1	37.1
G173.0	37.6	37.5	37.6	37.7	37.7	37.7	37.6	37.5	37.3	37.2
G174.0	37.7	37.7	37.7	37.8	37.8	37.9	37.7	37.6	37.3	37.3
G175.0	37.8	37.9	37.9	37.9	38.0	38.0	37.8	37.7	37.6	37.6
G176.0	37.9	37.9	38.0	38.0	38.2	38.0	37.9	37.7	37.7	37.7
G177.0	38.0	38.0	38.2	38.2	38.3	38.2	38.0	37.9	37.8	37.8
G178.0	38.2	38.0	38.3	38.3	38.4	38.3	38.0	37.9	37.9	37.8
G179.0	38.3	38.2	38.3	38.4	38.4	38.3	38.0	37.9	37.9	37.8
G180.0	38.3	38.3	38.4	38.5	38.5	38.3	38.2	38.0	37.9	37.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	4764.9	4764.5	4769.0	4770.6	4780.6	4784.5	4789.9	4793.1	4794.2	4794.8
G1.0	4767.8	4765.7	4772.9	4770.6	4781.5	4789.2	4792.9	4795.1	4798.1	4796.4
G2.0	4765.1	4765.3	4769.3	4772.6	4778.3	4784.6	4790.0	4794.5	4797.1	4795.0
G3.0	4760.6	4761.7	4763.4	4765.6	4772.9	4778.8	4785.5	4788.5	4793.5	4789.2
G4.0	4759.7	4759.3	4759.7	4760.9	4766.9	4773.8	4780.4	4782.5	4786.4	4782.5
G5.0	4758.4	4756.1	4754.3	4755.6	4759.4	4763.8	4769.3	4775.0	4778.6	4777.1
G6.0	4751.1	4750.9	4751.5	4751.7	4755.5	4758.5	4761.6	4764.7	4767.6	4771.3
G7.0	4744.5	4745.9	4744.5	4745.6	4748.5	4749.3	4751.9	4758.0	4763.2	4762.8
G8.0	4738.6	4736.8	4732.0	4737.8	4742.8	4744.2	4748.6	4752.4	4756.5	4757.6
G9.0	4728.3	4727.0	4728.9	4729.8	4735.8	4742.8	4744.1	4744.3	4746.4	4748.1
G10.0	4714.8	4716.5	4717.3	4723.3	4726.9	4731.8	4736.6	4735.2	4735.1	4734.3
G11.0	4699.4	4703.1	4709.0	4712.3	4720.4	4720.3	4724.5	4722.2	4718.4	4719.5
G12.0	4687.8	4690.2	4690.0	4700.6	4707.5	4704.7	4708.9	4708.5	4706.4	4705.6
G13.0	4672.3	4671.8	4679.8	4681.0	4688.1	4689.9	4693.9	4694.5	4689.1	4688.0
G14.0	4657.4	4659.3	4660.6	4661.9	4669.5	4671.9	4675.1	4679.6	4675.5	4673.2
G15.0	4639.4	4639.3	4640.6	4641.8	4649.9	4651.7	4657.2	4658.1	4655.9	4653.5
G16.0	4618.5	4616.1	4616.5	4624.5	4627.9	4630.5	4633.6	4637.1	4631.7	4630.8
G17.0	4594.5	4591.0	4594.1	4597.8	4605.4	4604.4	4610.4	4607.0	4605.3	4603.9
G18.0	4570.4	4570.6	4568.6	4577.0	4580.3	4579.9	4582.6	4580.6	4578.3	4576.3
G19.0	4546.1	4549.8	4550.4	4548.8	4553.1	4549.1	4552.9	4551.1	4549.5	4549.2
G20.0	4523.5	4523.4	4518.9	4522.9	4524.7	4519.0	4524.5	4522.8	4522.9	4521.1
G21.0	4495.7	4496.7	4496.1	4490.8	4493.3	4489.7	4493.0	4490.8	4493.2	4492.3
G22.0	4466.3	4467.6	4462.7	4458.2	4460.0	4459.5	4460.2	4460.8	4459.6	4457.5
G23.0	4435.7	4436.0	4429.9	4425.1	4431.5	4427.3	4430.6	4425.7	4428.2	4426.5
G24.0	4403.3	4400.3	4393.9	4394.0	4401.0	4399.7	4395.7	4393.6	4394.5	4392.9
G25.0	4367.1	4357.4	4355.5	4356.5	4363.3	4364.3	4363.5	4360.7	4364.5	4353.8
G26.0	4332.3	4323.0	4314.9	4317.9	4325.9	4327.5	4327.8	4327.5	4323.7	4319.3
G27.0	4294.9	4285.9	4273.6	4281.1	4285.7	4289.1	4290.5	4286.0	4287.3	4279.4
G28.0	4252.7	4245.0	4236.2	4235.5	4243.3	4248.1	4249.6	4243.4	4244.6	4235.2
G29.0	4212.4	4200.3	4197.8	4190.3	4202.6	4202.5	4206.5	4202.9	4199.0	4193.0
G30.0	4168.0	4156.9	4152.7	4155.4	4158.5	4158.6	4166.3	4156.4	4156.6	4151.9
G31.0	4118.7	4111.8	4107.8	4118.0	4116.1	4113.5	4120.6	4113.0	4108.9	4113.3
G32.0	4065.1	4064.8	4063.3	4069.3	4064.2	4063.4	4070.9	4066.5	4064.9	4063.8
G33.0	4019.9	4017.3	4018.3	4023.9	4020.1	4013.7	4019.6	4020.7	4013.8	4012.1
G34.0	3973.1	3969.4	3970.8	3971.7	3967.5	3962.6	3968.7	3970.0	3965.1	3955.8
G35.0	3922.9	3914.5	3915.7	3913.4	3919.0	3914.9	3912.3	3919.6	3909.5	3900.2
G36.0	3870.1	3867.2	3860.0	3859.2	3865.5	3863.6	3861.8	3863.6	3855.5	3844.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	3814.3	3816.6	3808.3	3806.1	3812.1	3809.7	3805.0	3807.2	3798.3	3797.7
G38.0	3758.1	3756.7	3749.7	3747.4	3749.9	3749.8	3748.4	3752.3	3747.1	3743.3
G39.0	3706.6	3698.9	3690.1	3690.3	3694.7	3688.2	3690.5	3693.0	3695.9	3687.8
G40.0	3649.9	3639.4	3628.9	3630.9	3632.1	3630.4	3633.0	3636.0	3640.8	3627.3
G41.0	3592.5	3573.1	3569.0	3572.5	3571.8	3566.3	3573.6	3573.6	3578.9	3570.0
G42.0	3521.5	3513.0	3505.1	3508.6	3509.1	3506.5	3509.5	3511.0	3514.1	3503.8
G43.0	3450.0	3448.2	3446.1	3436.2	3443.9	3444.8	3447.5	3447.4	3445.0	3430.7
G44.0	3383.6	3380.8	3381.1	3370.8	3377.2	3382.7	3383.2	3379.0	3371.4	3368.8
G45.0	3316.4	3311.8	3308.7	3303.0	3309.7	3314.9	3313.4	3302.8	3307.3	3304.8
G46.0	3244.0	3244.3	3241.3	3237.0	3238.6	3247.8	3237.6	3234.3	3243.4	3241.5
G47.0	3173.1	3172.9	3169.0	3169.7	3169.9	3170.4	3165.4	3166.6	3176.6	3177.9
G48.0	3098.1	3100.0	3097.5	3097.5	3104.1	3090.9	3097.5	3102.0	3109.9	3109.6
G49.0	3029.3	3025.9	3024.0	3026.9	3029.9	3022.4	3026.6	3034.7	3037.5	3040.8
G50.0	2956.1	2950.4	2953.1	2953.8	2946.7	2950.4	2958.6	2964.6	2963.5	2965.2
G51.0	2877.5	2873.7	2878.7	2874.1	2868.7	2877.4	2889.2	2888.0	2889.3	2892.7
G52.0	2797.1	2798.0	2805.2	2793.4	2795.9	2808.3	2811.5	2815.0	2820.0	2822.5
G53.0	2715.1	2722.1	2729.3	2715.2	2725.7	2732.7	2731.6	2742.4	2752.2	2748.3
G54.0	2633.7	2639.1	2643.7	2641.6	2656.4	2651.8	2662.1	2673.4	2677.1	2670.7
G55.0	2549.3	2559.4	2556.3	2564.4	2574.1	2578.0	2590.3	2590.1	2596.1	2595.2
G56.0	2462.4	2474.9	2472.5	2489.5	2487.9	2502.8	2515.3	2508.0	2518.6	2518.6
G57.0	2377.8	2384.8	2390.4	2410.2	2410.2	2426.1	2431.6	2433.2	2441.6	2439.3
G58.0	2292.2	2293.9	2311.5	2323.5	2334.1	2343.1	2348.8	2352.5	2365.2	2360.6
G59.0	2205.7	2208.2	2230.9	2237.1	2258.1	2260.6	2270.3	2272.9	2279.4	2288.9
G60.0	2117.9	2126.8	2146.9	2164.2	2172.8	2177.7	2192.5	2190.2	2210.3	2216.9
G61.0	2024.0	2042.7	2061.0	2086.0	2087.8	2097.4	2104.9	2117.1	2130.5	2129.1
G62.0	1935.4	1956.5	1978.8	1997.4	2008.8	2015.7	2033.9	2036.9	2042.2	2051.6
G63.0	1842.2	1868.0	1896.2	1908.2	1926.5	1938.8	1956.2	1954.6	1964.3	1964.7
G64.0	1761.1	1778.7	1810.6	1828.8	1842.4	1861.2	1869.9	1878.2	1881.3	1890.9
G65.0	1674.4	1700.3	1721.8	1743.7	1765.7	1775.5	1793.7	1798.6	1812.3	1811.2
G66.0	1584.8	1614.6	1640.9	1661.9	1689.2	1696.4	1710.9	1717.6	1730.1	1734.0
G67.0	1491.0	1521.8	1553.2	1581.4	1603.2	1611.6	1632.9	1635.8	1647.6	1654.4
G68.0	1406.7	1437.8	1464.5	1498.3	1517.7	1535.9	1550.6	1554.1	1565.6	1573.3
G69.0	1324.5	1353.3	1385.8	1413.8	1437.4	1453.3	1466.1	1478.2	1483.1	1491.6
G70.0	1238.0	1267.9	1305.3	1333.9	1360.7	1372.7	1388.8	1393.0	1410.6	1407.5
G71.0	1149.0	1186.5	1220.6	1254.6	1279.5	1293.7	1308.2	1314.1	1327.4	1333.0
G72.0	1066.8	1102.8	1141.6	1175.7	1200.5	1215.0	1229.0	1240.0	1246.2	1250.2
G73.0	989.1	1023.7	1061.0	1094.5	1121.8	1134.9	1152.6	1157.4	1167.9	1169.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	911.3	945.4	988.0	1016.9	1041.2	1058.4	1072.2	1077.2	1086.7	1093.9
G75.0	832.9	868.7	908.8	939.6	968.0	983.7	994.7	1003.2	1010.0	1016.8
G76.0	761.2	796.3	838.4	871.5	893.1	905.1	922.0	927.2	936.7	940.5
G77.0	686.9	727.2	765.1	795.6	820.2	832.0	847.7	855.4	858.3	863.6
G78.0	619.0	657.5	694.6	727.1	751.8	761.9	777.3	782.3	793.0	792.0
G79.0	553.0	592.9	628.6	659.2	684.6	695.2	706.0	714.8	718.6	721.7
G80.0	491.7	529.1	566.1	594.8	618.3	628.1	641.0	642.5	650.5	652.9
G81.0	430.1	468.3	505.6	531.5	551.4	565.1	576.0	579.0	585.6	585.0
G82.0	375.2	412.4	447.1	471.9	493.3	503.0	513.5	516.0	522.1	522.5
G83.0	324.8	359.6	391.4	417.2	436.0	446.4	455.1	459.3	463.7	460.8
G84.0	278.3	311.2	342.3	366.2	383.0	391.6	401.1	403.9	407.7	407.5
G85.0	238.7	268.5	297.1	318.7	334.5	343.1	350.3	354.0	357.1	356.9
G86.0	201.2	228.1	254.1	274.2	289.1	295.6	304.6	306.9	310.0	310.9
G87.0	169.6	194.6	216.1	235.8	249.4	256.4	262.9	263.2	267.9	267.1
G88.0	142.2	163.9	184.7	201.1	213.6	218.9	225.7	228.2	230.1	230.7
G89.0	119.9	138.7	157.6	173.1	184.7	189.7	194.8	196.7	199.4	199.1
G90.0	101.1	118.7	136.0	150.6	162.3	167.4	172.3	173.6	175.9	175.8
G91.0	86.9	104.5	123.0	138.4	150.1	157.0	161.3	163.5	164.9	165.1
G92.0	75.3	94.1	114.9	132.7	146.4	154.2	158.6	161.1	162.4	162.3
G93.0	65.4	84.0	106.4	127.0	143.2	152.0	157.4	160.3	161.5	161.1
G94.0	56.1	73.6	95.0	116.8	135.1	146.0	153.1	156.3	157.9	157.7
G95.0	48.3	64.4	83.6	103.8	122.0	133.8	141.4	145.8	148.4	148.2
G96.0	41.3	56.0	73.1	90.6	107.5	119.3	127.8	132.0	134.6	135.2
G97.0	34.8	48.5	65.1	80.5	94.9	105.0	113.0	117.5	120.3	120.8
G98.0	28.9	41.3	57.1	72.8	86.1	94.8	101.2	105.1	107.7	108.2
G99.0	24.0	34.7	48.6	64.0	78.5	88.0	93.3	96.0	98.1	98.6
G100.0	19.9	28.9	40.5	54.1	68.3	79.0	85.6	88.8	90.5	90.3
G101.0	16.8	24.3	34.0	45.3	57.8	68.1	75.3	79.1	81.6	81.7
G102.0	14.1	20.6	28.4	37.7	47.9	56.8	64.1	68.5	70.9	71.5
G103.0	12.6	17.7	24.4	31.6	40.0	47.5	53.6	57.7	61.1	61.7
G104.0	11.3	15.5	20.9	27.2	33.5	39.4	44.7	48.0	51.0	52.2
G105.0	10.6	13.7	18.3	23.7	29.0	32.7	36.4	39.5	42.3	43.2
G106.0	10.1	12.5	16.2	20.8	25.2	28.5	30.8	32.3	34.3	35.2
G107.0	10.5	11.6	14.6	18.4	22.1	25.2	27.2	28.2	28.5	28.3
G108.0	10.9	11.2	13.4	16.4	19.7	22.6	24.7	25.6	25.7	25.0
G109.0	11.4	11.6	12.6	15.1	17.8	20.3	22.4	23.3	23.7	23.0
G110.0	11.9	12.0	12.1	14.1	16.4	18.7	20.5	21.5	21.9	21.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	12.4	12.5	12.6	13.4	15.5	17.4	18.9	20.0	20.5	20.5
G112.0	12.8	13.0	13.1	13.3	14.6	16.3	17.7	18.8	19.5	19.5
G113.0	13.3	13.4	13.6	13.8	14.3	15.6	17.0	17.8	18.5	18.8
G114.0	13.8	13.9	14.0	14.3	14.3	15.1	16.2	17.1	17.8	18.2
G115.0	14.4	14.4	14.5	14.8	14.8	15.1	15.7	16.6	17.2	17.7
G116.0	14.9	15.0	15.0	15.2	15.2	15.5	15.6	16.2	16.9	17.4
G117.0	15.3	15.5	15.5	15.7	15.8	15.9	15.9	16.2	16.6	17.1
G118.0	15.8	15.9	16.0	16.2	16.2	16.4	16.4	16.5	16.6	16.9
G119.0	16.3	16.4	16.5	16.5	16.6	16.9	17.0	17.0	17.1	17.2
G120.0	16.9	17.0	17.0	17.2	17.2	17.4	17.5	17.6	17.6	17.7
G121.0	17.2	17.5	17.5	17.7	17.7	18.0	18.0	18.1	18.1	18.2
G122.0	18.0	18.0	18.0	18.1	18.2	18.4	18.4	18.5	18.5	18.7
G123.0	18.4	18.4	18.5	18.7	18.7	18.9	18.9	19.1	19.1	19.3
G124.0	18.8	18.9	19.0	19.1	19.3	19.3	19.4	19.6	19.5	19.7
G125.0	19.3	19.4	19.5	19.6	19.7	19.9	19.9	20.0	20.1	20.2
G126.0	19.9	20.0	20.1	20.1	20.2	20.3	20.5	20.6	20.5	20.7
G127.0	20.3	20.5	20.5	20.6	20.8	20.8	20.9	21.0	21.0	21.2
G128.0	20.9	21.0	20.9	21.0	21.3	21.3	21.4	21.5	21.5	21.6
G129.0	21.4	21.4	21.5	21.6	21.8	21.9	22.0	22.0	22.1	22.1
G130.0	21.9	22.0	22.0	22.1	22.2	22.4	22.5	22.5	22.6	22.6
G131.0	22.4	22.5	22.5	22.6	22.7	22.8	22.8	23.1	23.1	23.1
G132.0	22.8	23.0	23.0	23.1	23.2	23.3	23.3	23.4	23.4	23.5
G133.0	23.3	23.4	23.4	23.7	23.7	23.8	23.8	24.0	23.9	24.0
G134.0	23.9	23.9	24.0	24.0	24.1	24.3	24.4	24.4	24.4	24.5
G135.0	24.3	24.4	24.4	24.5	24.5	24.7	24.7	24.9	24.9	24.9
G136.0	24.9	24.9	24.9	25.0	25.1	25.1	25.2	25.2	25.3	25.3
G137.0	25.2	25.3	25.3	25.5	25.6	25.6	25.7	25.7	25.7	25.8
G138.0	25.8	25.8	25.8	25.8	25.9	26.0	26.0	26.0	26.2	26.2
G139.0	26.2	26.2	26.2	26.4	26.4	26.4	26.5	26.6	26.6	26.6
G140.0	26.6	26.6	26.6	26.8	26.9	26.9	26.9	27.0	27.0	27.1
G141.0	27.1	27.1	27.1	27.2	27.1	27.2	27.4	27.4	27.4	27.5
G142.0	27.5	27.5	27.5	27.6	27.7	27.7	27.7	27.8	27.7	28.0
G143.0	28.0	28.0	28.0	28.1	28.1	28.1	28.2	28.2	28.2	28.3
G144.0	28.4	28.3	28.4	28.5	28.5	28.5	28.4	28.7	28.7	28.7
G145.0	28.8	28.8	28.8	28.9	28.9	28.9	28.9	29.0	28.9	29.0
G146.0	29.1	29.3	29.3	29.3	29.3	29.4	29.3	29.4	29.4	29.4
G147.0	29.6	29.6	29.6	29.7	29.7	29.6	29.6	29.7	29.7	29.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	30.1	30.0	30.0	30.1	30.1	30.1	30.0	30.1	30.1	30.1
G149.0	30.4	30.4	30.3	30.3	30.4	30.3	30.3	30.4	30.4	30.4
G150.0	30.8	30.8	30.7	30.7	30.8	30.7	30.8	30.8	30.8	30.8
G151.0	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2
G152.0	31.5	31.5	31.5	31.5	31.4	31.5	31.5	31.5	31.4	31.6
G153.0	31.9	31.9	31.8	31.8	31.8	31.9	31.9	31.8	31.8	31.9
G154.0	32.2	32.2	32.1	32.1	32.2	32.2	32.2	32.2	32.1	32.2
G155.0	32.6	32.6	32.5	32.5	32.6	32.6	32.6	32.5	32.5	32.6
G156.0	32.8	32.8	32.8	32.8	32.8	32.8	32.8	32.8	32.7	32.8
G157.0	33.2	33.1	33.1	33.2	33.2	33.2	33.2	33.2	33.2	33.2
G158.0	33.4	33.5	33.4	33.4	33.4	33.5	33.5	33.4	33.4	33.5
G159.0	33.8	33.8	33.7	33.8	33.8	33.8	33.8	33.8	33.8	33.8
G160.0	34.0	34.0	34.0	34.0	34.1	34.1	34.1	34.1	34.1	34.1
G161.0	34.3	34.3	34.3	34.4	34.4	34.4	34.4	34.4	34.4	34.4
G162.0	34.6	34.6	34.5	34.6	34.6	34.7	34.7	34.7	34.6	34.7
G163.0	34.8	34.8	34.8	35.0	35.0	35.0	35.0	35.1	35.0	35.0
G164.0	35.2	35.1	35.1	35.2	35.2	35.2	35.2	35.3	35.2	35.2
G165.0	35.4	35.3	35.4	35.3	35.4	35.4	35.4	35.6	35.6	35.6
G166.0	35.8	35.7	35.7	35.7	35.7	35.7	35.8	35.8	35.8	35.7
G167.0	35.9	35.9	35.9	36.0	35.9	36.0	35.9	36.0	36.0	36.0
G168.0	36.2	36.2	36.2	36.2	36.2	36.3	36.3	36.3	36.2	36.3
G169.0	36.4	36.4	36.3	36.4	36.4	36.5	36.5	36.5	36.5	36.5
G170.0	36.6	36.8	36.6	36.6	36.6	36.8	36.8	36.8	36.8	36.8
G171.0	36.9	36.9	36.8	37.0	37.0	37.0	37.0	37.0	37.0	37.0
G172.0	37.1	37.1	37.1	37.1	37.2	37.2	37.2	37.2	37.2	37.2
G173.0	37.2	37.2	37.2	37.3	37.3	37.3	37.3	37.5	37.5	37.5
G174.0	37.3	37.3	37.3	37.6	37.6	37.6	37.6	37.6	37.6	37.6
G175.0	37.6	37.6	37.6	37.6	37.7	37.8	37.8	37.8	37.8	37.9
G176.0	37.7	37.7	37.7	37.7	37.8	37.9	37.9	37.9	37.9	37.9
G177.0	37.8	37.8	37.8	37.9	37.9	38.0	38.0	38.0	38.0	38.2
G178.0	37.8	37.8	37.8	38.0	38.0	38.0	38.2	38.2	38.3	38.3
G179.0	37.9	38.0	38.0	38.0	38.2	38.2	38.3	38.3	38.3	38.3
G180.0	38.0	38.0	38.0	38.2	38.2	38.3	38.4	38.4	38.4	38.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	4795.6	4798.6	4812.5						
G1.0	4796.9	4801.6	4808.5						
G2.0	4798.8	4800.7	4800.6						
G3.0	4791.1	4795.4	4795.7						
G4.0	4786.7	4786.9	4786.5						
G5.0	4777.6	4780.8	4783.3						
G6.0	4770.7	4775.9	4770.3						
G7.0	4765.3	4766.1	4757.5						
G8.0	4757.8	4761.0	4742.7						
G9.0	4749.2	4750.6	4728.2						
G10.0	4736.0	4734.8	4712.5						
G11.0	4719.6	4721.1	4695.8						
G12.0	4702.5	4706.4	4678.1						
G13.0	4690.3	4692.4	4654.1						
G14.0	4671.7	4674.3	4629.2						
G15.0	4653.7	4654.9	4601.6						
G16.0	4630.4	4630.0	4573.0						
G17.0	4603.0	4600.4	4543.8						
G18.0	4571.5	4571.2	4522.3						
G19.0	4551.1	4545.9	4490.9						
G20.0	4520.9	4515.3	4458.9						
G21.0	4489.7	4489.1	4425.4						
G22.0	4456.5	4456.9	4387.6						
G23.0	4426.9	4425.1	4351.7						
G24.0	4392.8	4387.9	4317.5						
G25.0	4355.3	4349.4	4277.1						
G26.0	4313.7	4312.2	4235.4						
G27.0	4274.8	4270.3	4190.5						
G28.0	4231.9	4228.2	4147.2						
G29.0	4189.2	4184.2	4101.9						
G30.0	4148.0	4144.4	4053.5						
G31.0	4110.8	4098.4	4002.3						
G32.0	4060.3	4055.1	3950.4						
G33.0	4013.1	4002.6	3898.1						
G34.0	3953.4	3949.9	3849.0						
G35.0	3905.8	3900.5	3793.9						
G36.0	3855.6	3851.8	3742.3						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	3803.4	3798.0	3687.4						
G38.0	3750.2	3743.1	3629.6						
G39.0	3690.0	3684.4	3568.6						
G40.0	3631.4	3626.9	3500.5						
G41.0	3567.5	3560.2	3440.1						
G42.0	3503.4	3494.1	3375.7						
G43.0	3435.7	3427.6	3313.0						
G44.0	3372.9	3366.5	3247.7						
G45.0	3311.1	3303.5	3184.3						
G46.0	3245.5	3238.3	3117.0						
G47.0	3179.5	3174.8	3042.8						
G48.0	3109.8	3106.4	2979.6						
G49.0	3036.9	3032.4	2909.3						
G50.0	2972.9	2971.1	2840.5						
G51.0	2903.1	2899.6	2765.9						
G52.0	2825.6	2832.4	2694.5						
G53.0	2757.4	2753.7	2622.9						
G54.0	2675.2	2678.1	2543.5						
G55.0	2602.8	2600.8	2461.2						
G56.0	2526.7	2518.7	2387.4						
G57.0	2446.7	2437.9	2317.6						
G58.0	2370.4	2369.9	2241.4						
G59.0	2294.7	2296.5	2158.5						
G60.0	2215.6	2220.5	2081.2						
G61.0	2136.3	2133.8	2001.4						
G62.0	2058.2	2046.9	1926.2						
G63.0	1977.2	1978.0	1842.2						
G64.0	1900.8	1899.3	1764.1						
G65.0	1816.4	1822.1	1683.4						
G66.0	1740.8	1740.8	1605.6						
G67.0	1653.9	1658.8	1532.4						
G68.0	1575.9	1578.0	1447.9						
G69.0	1499.9	1497.0	1363.9						
G70.0	1419.6	1418.0	1282.1						
G71.0	1338.2	1334.6	1206.8						
G72.0	1256.0	1251.6	1129.2						
G73.0	1177.2	1173.0	1048.1						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	1098.2	1095.3	974.2						
G75.0	1021.2	1018.5	894.9						
G76.0	947.2	937.2	824.5						
G77.0	869.8	868.1	754.8						
G78.0	796.3	792.0	685.5						
G79.0	724.3	718.6	617.2						
G80.0	652.4	649.3	554.5						
G81.0	587.0	583.8	491.3						
G82.0	523.4	518.7	433.9						
G83.0	463.7	460.6	379.5						
G84.0	407.2	403.5	330.0						
G85.0	357.7	352.6	288.1						
G86.0	309.4	306.7	246.3						
G87.0	267.5	263.9	212.0						
G88.0	229.8	227.0	185.3						
G89.0	198.6	196.6	166.1						
G90.0	175.1	173.0	160.1						
G91.0	164.4	162.7	157.8						
G92.0	161.1	159.6	155.4						
G93.0	159.7	157.9	150.6						
G94.0	156.1	154.1	139.5						
G95.0	147.0	144.9	126.7						
G96.0	133.9	132.1	112.1						
G97.0	120.2	117.7	101.4						
G98.0	107.5	105.6	92.0						
G99.0	97.5	96.0	83.4						
G100.0	89.1	86.9	74.6						
G101.0	80.9	78.4	64.9						
G102.0	70.9	68.8	55.7						
G103.0	61.1	59.1	47.7						
G104.0	52.0	50.7	39.6						
G105.0	43.4	42.2	32.2						
G106.0	35.4	34.3	25.5						
G107.0	28.2	26.8	21.5						
G108.0	23.1	22.0	19.6						
G109.0	21.8	20.3	18.9						
G110.0	20.6	19.6	18.5						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	19.9	19.1	18.5							
G112.0	19.3	18.9	18.7							
G113.0	18.8	18.8	18.4							
G114.0	18.4	18.4	18.2							
G115.0	18.0	18.0	18.0							
G116.0	17.6	17.7	17.7							
G117.0	17.4	17.5	17.7							
G118.0	17.1	17.5	18.0							
G119.0	17.2	17.5	18.4							
G120.0	17.8	18.0	18.9							
G121.0	18.3	18.4	19.5							
G122.0	18.8	18.9	20.0							
G123.0	19.3	19.4	20.5							
G124.0	19.7	19.9	20.9							
G125.0	20.3	20.5	21.4							
G126.0	20.8	20.8	21.9							
G127.0	21.3	21.4	22.4							
G128.0	21.6	21.9	22.8							
G129.0	22.2	22.2	23.4							
G130.0	22.7	22.8	23.8							
G131.0	23.2	23.3	24.3							
G132.0	23.8	23.7	24.7							
G133.0	24.0	24.1	25.2							
G134.0	24.5	24.6	25.7							
G135.0	24.9	25.1	26.0							
G136.0	25.5	25.6	26.5							
G137.0	25.8	25.9	26.9							
G138.0	26.3	26.4	27.4							
G139.0	26.8	26.9	27.7							
G140.0	27.1	27.2	28.2							
G141.0	27.6	27.7	28.5							
G142.0	28.0	28.1	28.9							
G143.0	28.3	28.4	29.4							
G144.0	28.8	28.8	29.9							
G145.0	29.1	29.1	30.0							
G146.0	29.4	29.5	30.2							
G147.0	29.9	30.0	30.7							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	30.2	30.3	30.9							
G149.0	30.4	30.7	31.3							
G150.0	30.8	30.9	31.8							
G151.0	31.3	31.3	32.0							
G152.0	31.5	31.6	32.3							
G153.0	31.9	32.0	32.7							
G154.0	32.2	32.3	33.1							
G155.0	32.6	32.6	33.4							
G156.0	32.8	32.9	33.7							
G157.0	33.2	33.3	34.0							
G158.0	33.5	33.5	34.3							
G159.0	33.8	33.9	34.6							
G160.0	34.1	34.3	34.8							
G161.0	34.5	34.5	35.1							
G162.0	34.7	34.8	35.4							
G163.0	35.1	35.2	35.7							
G164.0	35.3	35.6	35.9							
G165.0	35.6	35.8	36.2							
G166.0	35.8	36.0	36.3							
G167.0	36.2	36.3	36.6							
G168.0	36.4	36.5	36.9							
G169.0	36.5	36.8	37.1							
G170.0	36.9	37.0	37.5							
G171.0	37.1	37.2	37.6							
G172.0	37.3	37.5	37.8							
G173.0	37.6	37.7	38.0							
G174.0	37.8	37.9	38.2							
G175.0	37.9	38.2	38.3							
G176.0	38.2	38.3	38.5							
G177.0	38.3	38.4	38.7							
G178.0	38.4	38.4	38.8							
G179.0	38.4	38.7	38.9							
G180.0	38.5	38.7	39.0							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector: