

Report No.:

Test Time: 2020-09-30 15:18

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: EG-3 Linz

Luminous Width (mm): 254

Voltage: 226.3 V

Power: 52.13 W

Luminous Length (mm): 130

Luminous Height (mm): 105

Current: 0.234 A

Power Factor: 0.980

Photometric Results

CIE Class: Direct

Measurement Flux: 6360.7 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(50%): H154

Vertical Diffuse Angle(50%): V53.3

Luminaire Efficacy Rating (LER): 122

Max. Intensity: 4516.84 cd

Total Rated Lamp Lumens: 6360.7 lm


Efficiency: 100%

Upward Ratio: 1%


Central Intensity: 1944.23 cd

Pos of Max. Intensity: H190 V66

Picture Of Luminaire



Luminous Intensity Distribution Curve

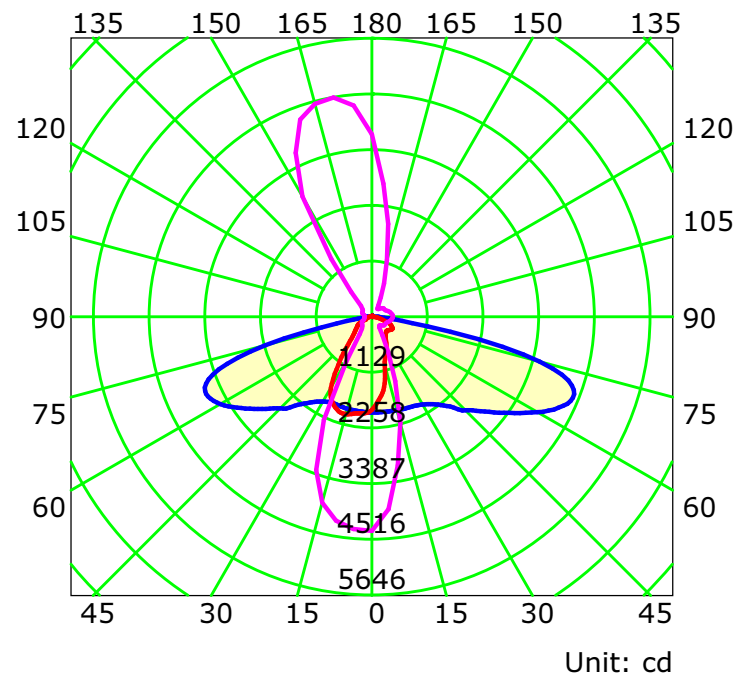

— C0-C180 — C90-C270 — G66

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:


Luminous Intensity Distribution Curve

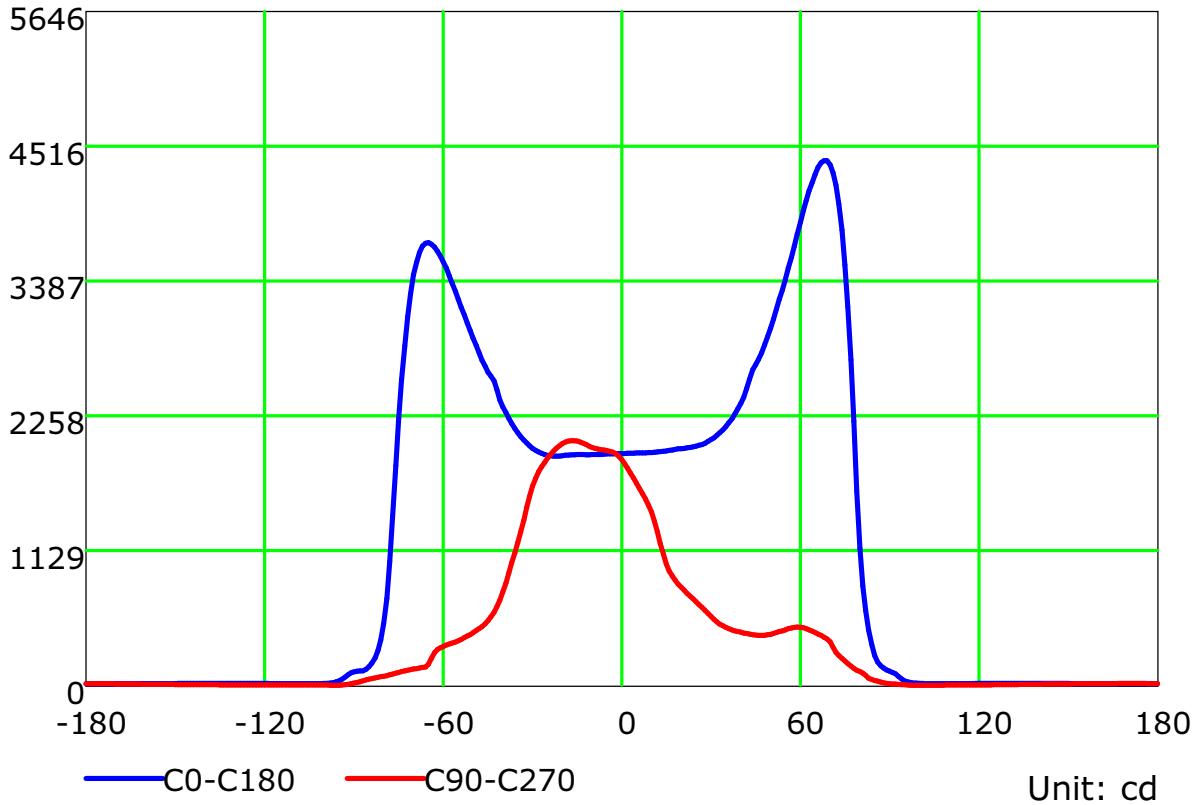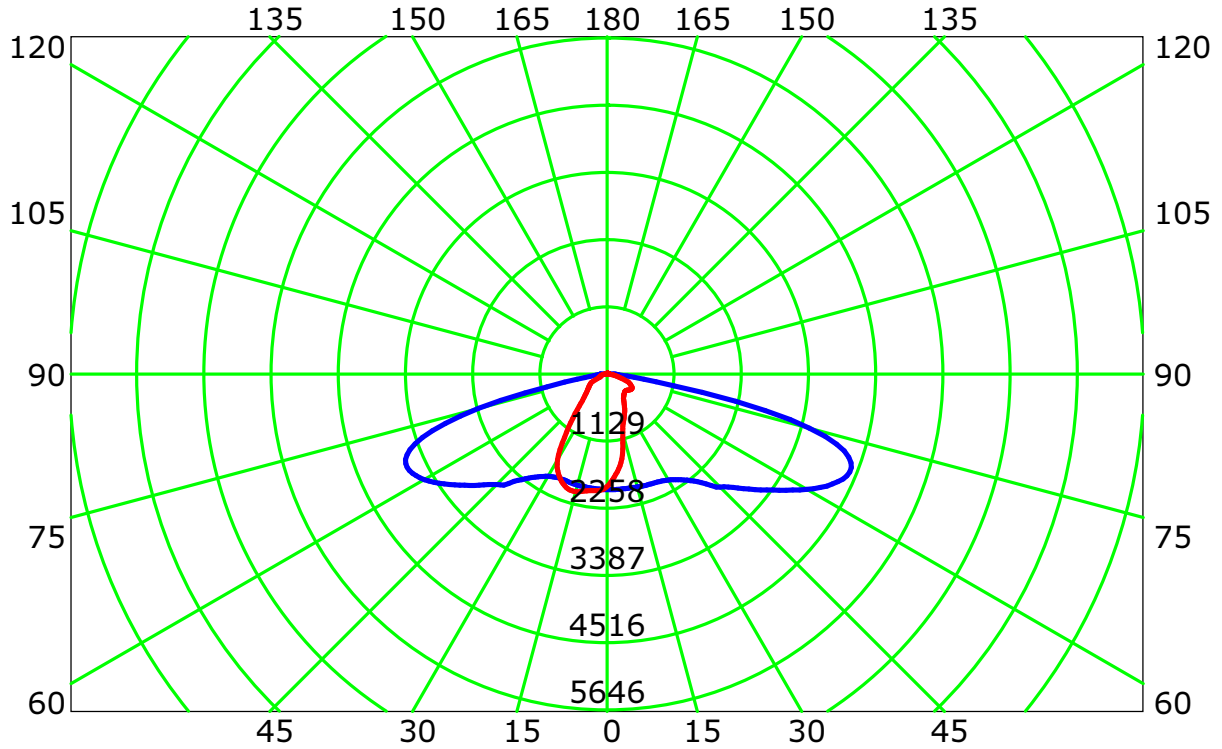

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Luminous Intensity Distribution Curve(cd/klm)

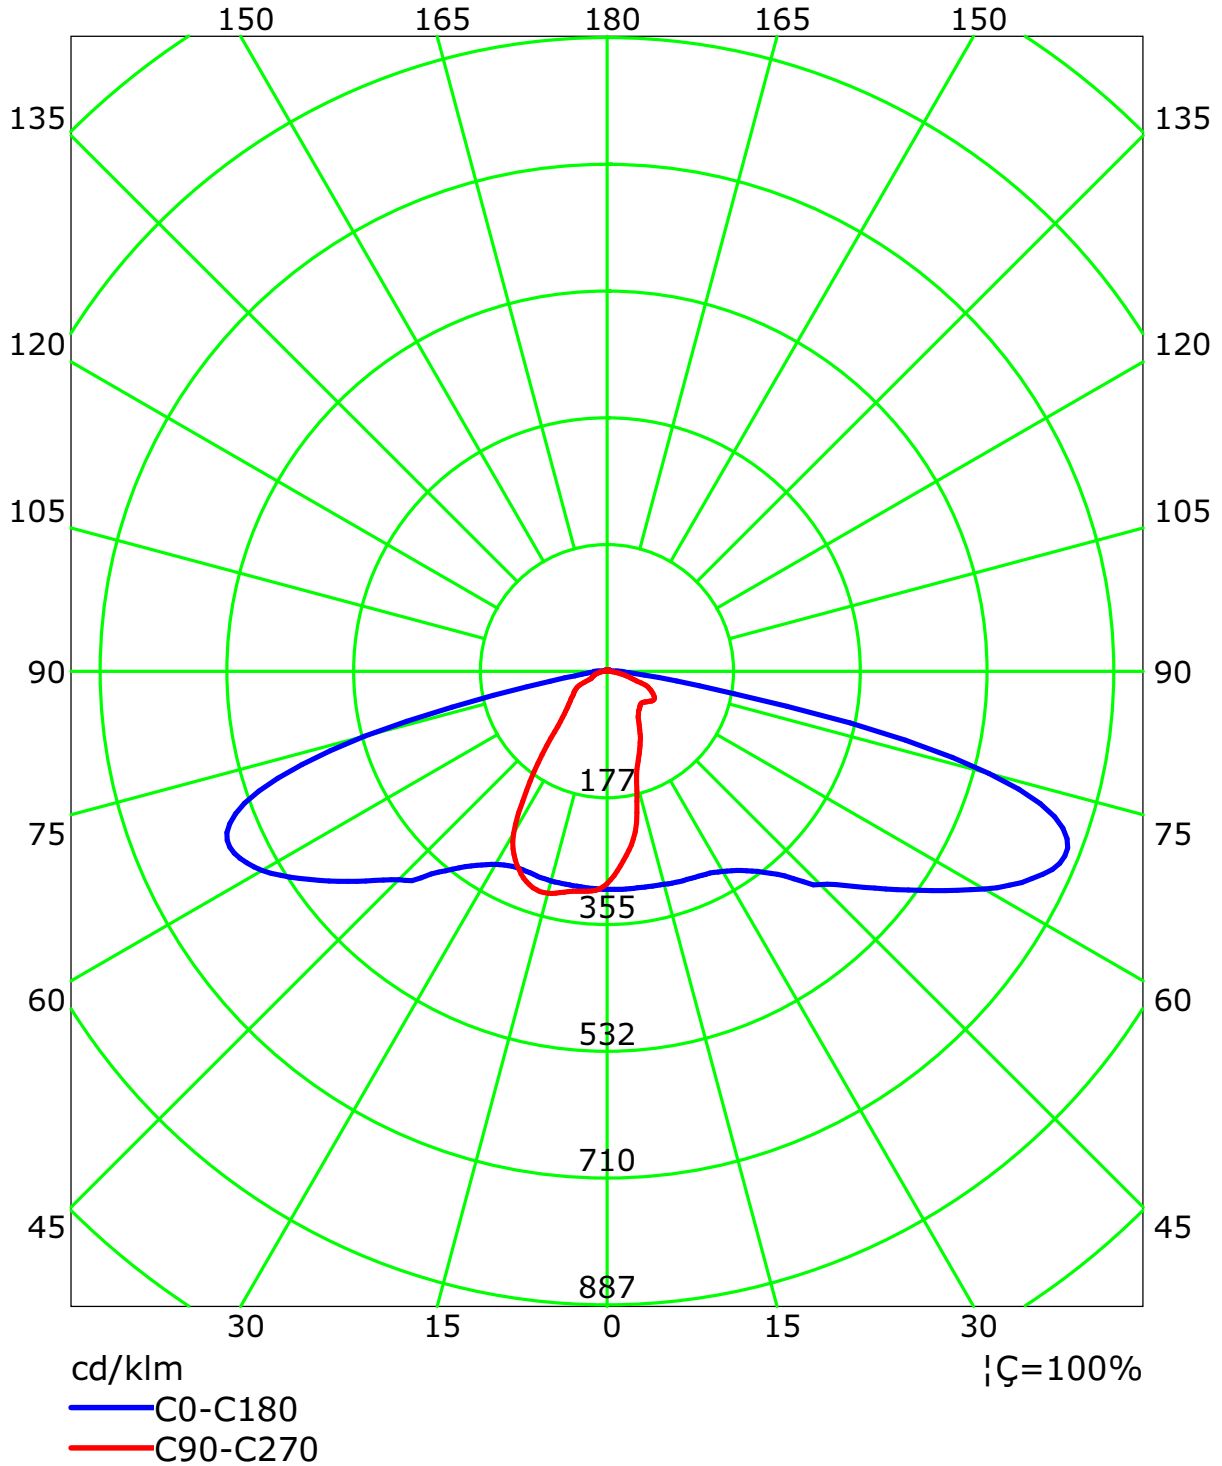

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40


Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	107	101	96	92	104	99	94	90	94	91	87	90	87	84	86	84	82	79
2	96	86	78	72	93	84	77	71	80	74	69	77	72	67	73	69	65	63
3	86	74	65	58	83	73	64	57	69	62	56	66	60	55	63	58	54	51
4	78	65	55	48	76	63	54	47	61	53	46	58	51	46	56	50	45	42
5	71	57	48	40	69	56	47	40	54	46	39	52	44	39	50	43	38	36
6	66	51	42	35	64	50	41	34	48	40	34	46	39	34	45	38	33	31
7	61	46	37	30	59	45	36	30	44	36	30	42	35	29	41	34	29	27
8	56	42	33	27	55	41	33	27	40	32	26	38	31	26	37	31	26	24
9	53	39	30	24	51	38	30	24	37	29	24	35	28	23	34	28	23	21
10	49	36	27	22	48	35	27	22	34	26	21	33	26	21	32	26	21	19

Spacing Criteria (0-180): 1.94
Spacing Criteria (90-270): 0.96
Spacing Criteria (Diagonal): 1.19


Curves of Luminaires vs Lighting Area

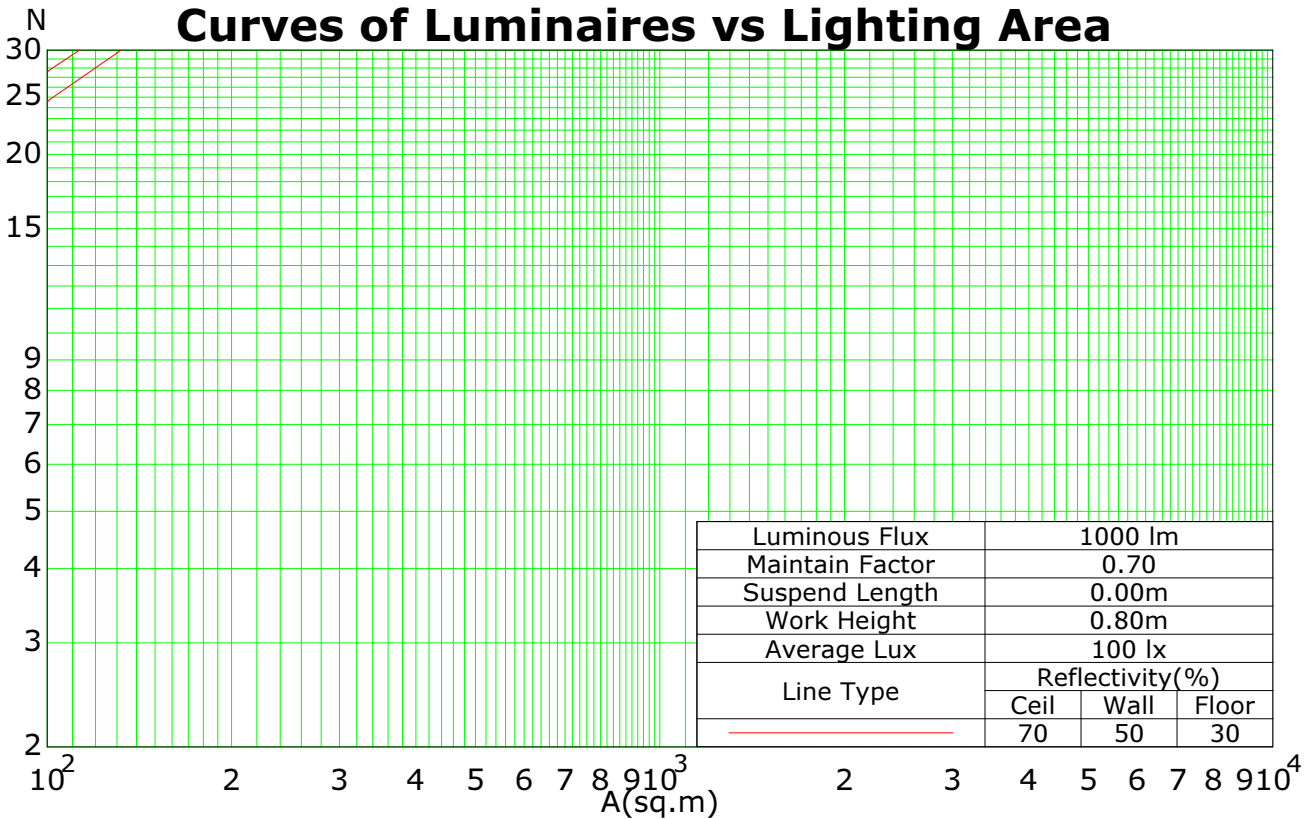

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Isocandela (rectangle)

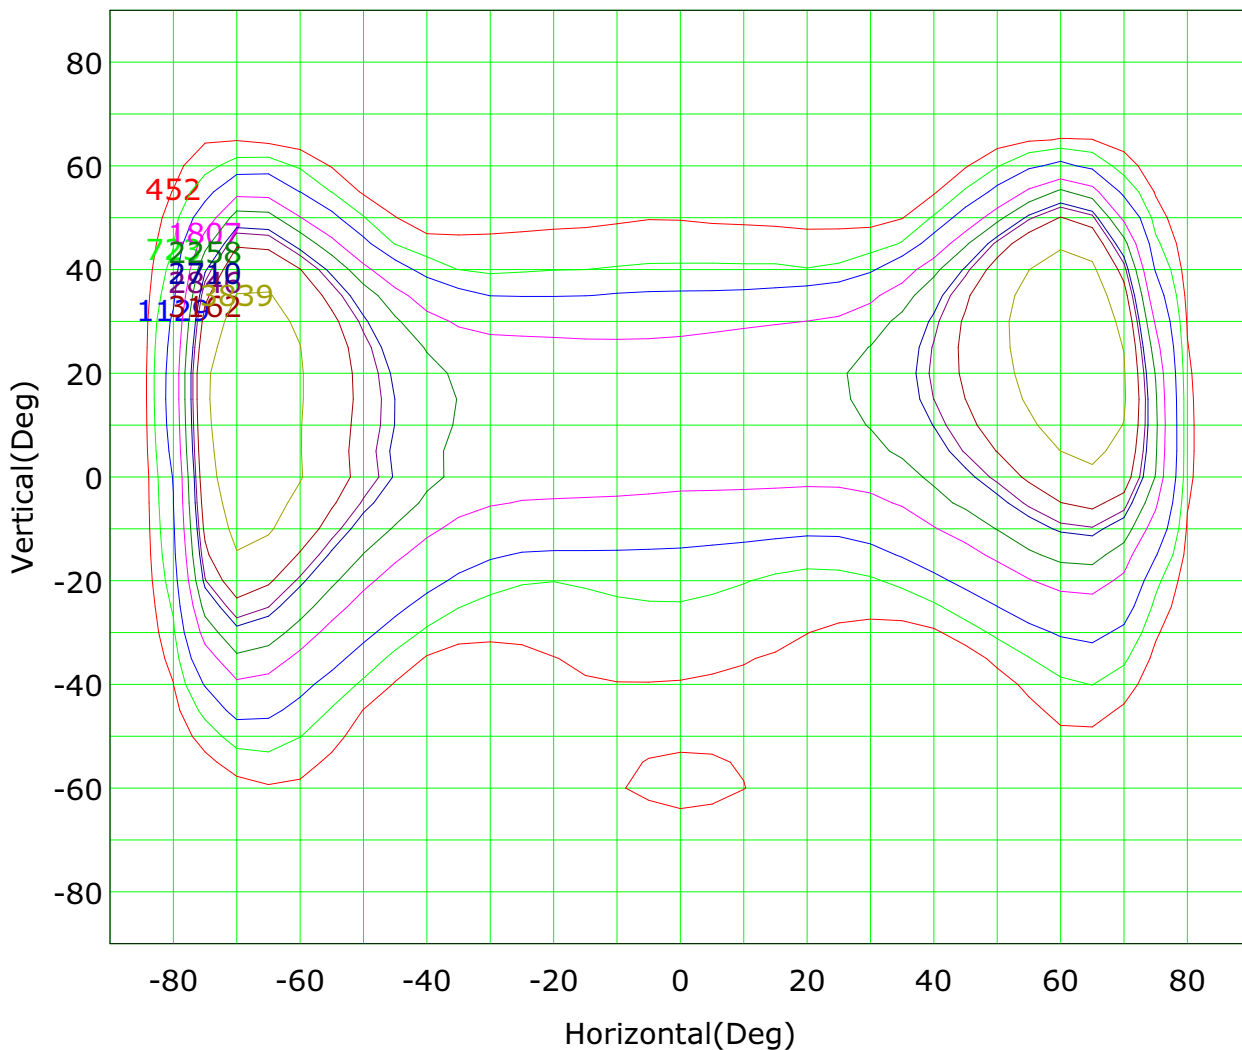


Imax (100%): 4517 cd

— (10%): 452 cd	— (16%): 723 cd
— (25%): 1129 cd	— (40%): 1807 cd
— (63%): 2846 cd	— (100%): 4517 cd
— (50%): 2258 cd	— (60%): 2710 cd
— (70%): 3162 cd	— (85%): 3839 cd

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

Isocandela (sphere)

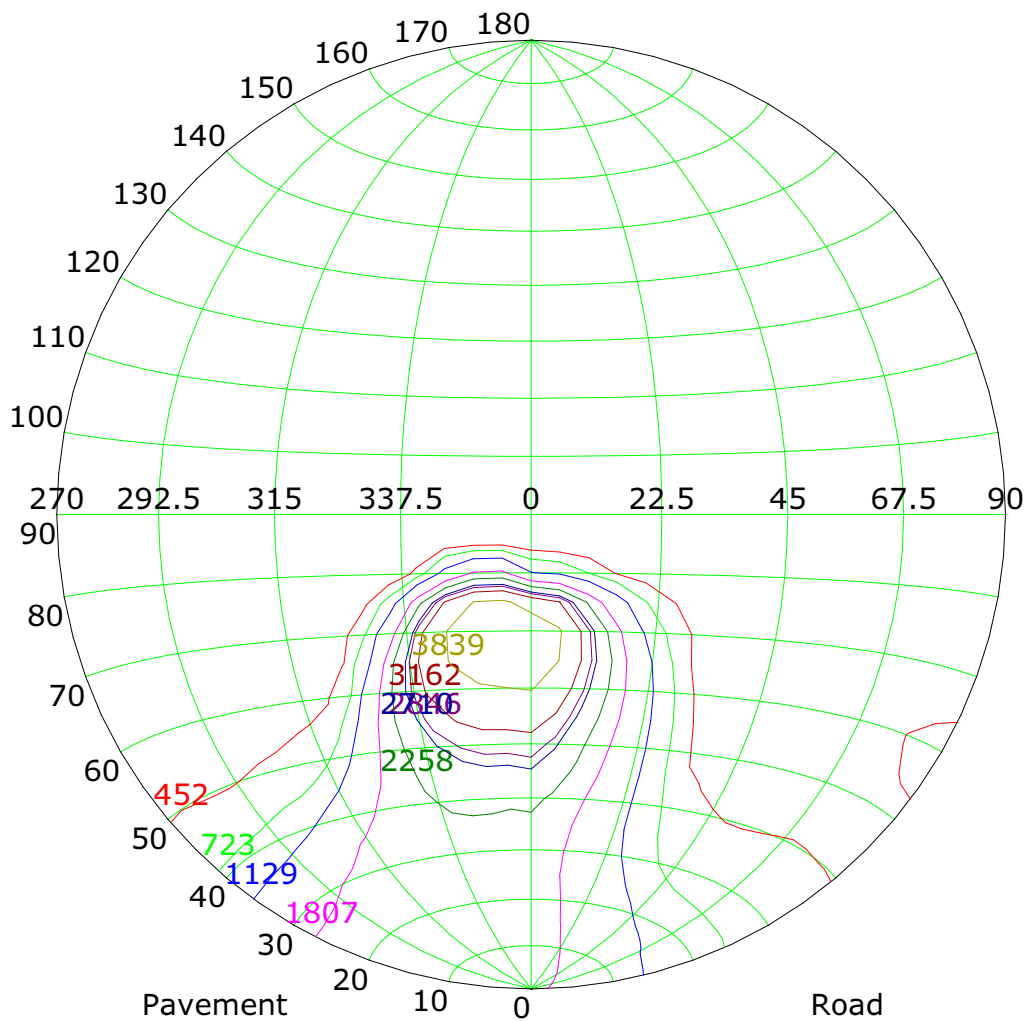


Imax (100%): 4517 cd

— (10%): 452 cd	— (16%): 723 cd
— (25%): 1129 cd	— (40%): 1807 cd
— (63%): 2846 cd	— (100%): 4517 cd
— (50%): 2258 cd	— (60%): 2710 cd
— (70%): 3162 cd	— (85%): 3839 cd

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

IsoLux Plot

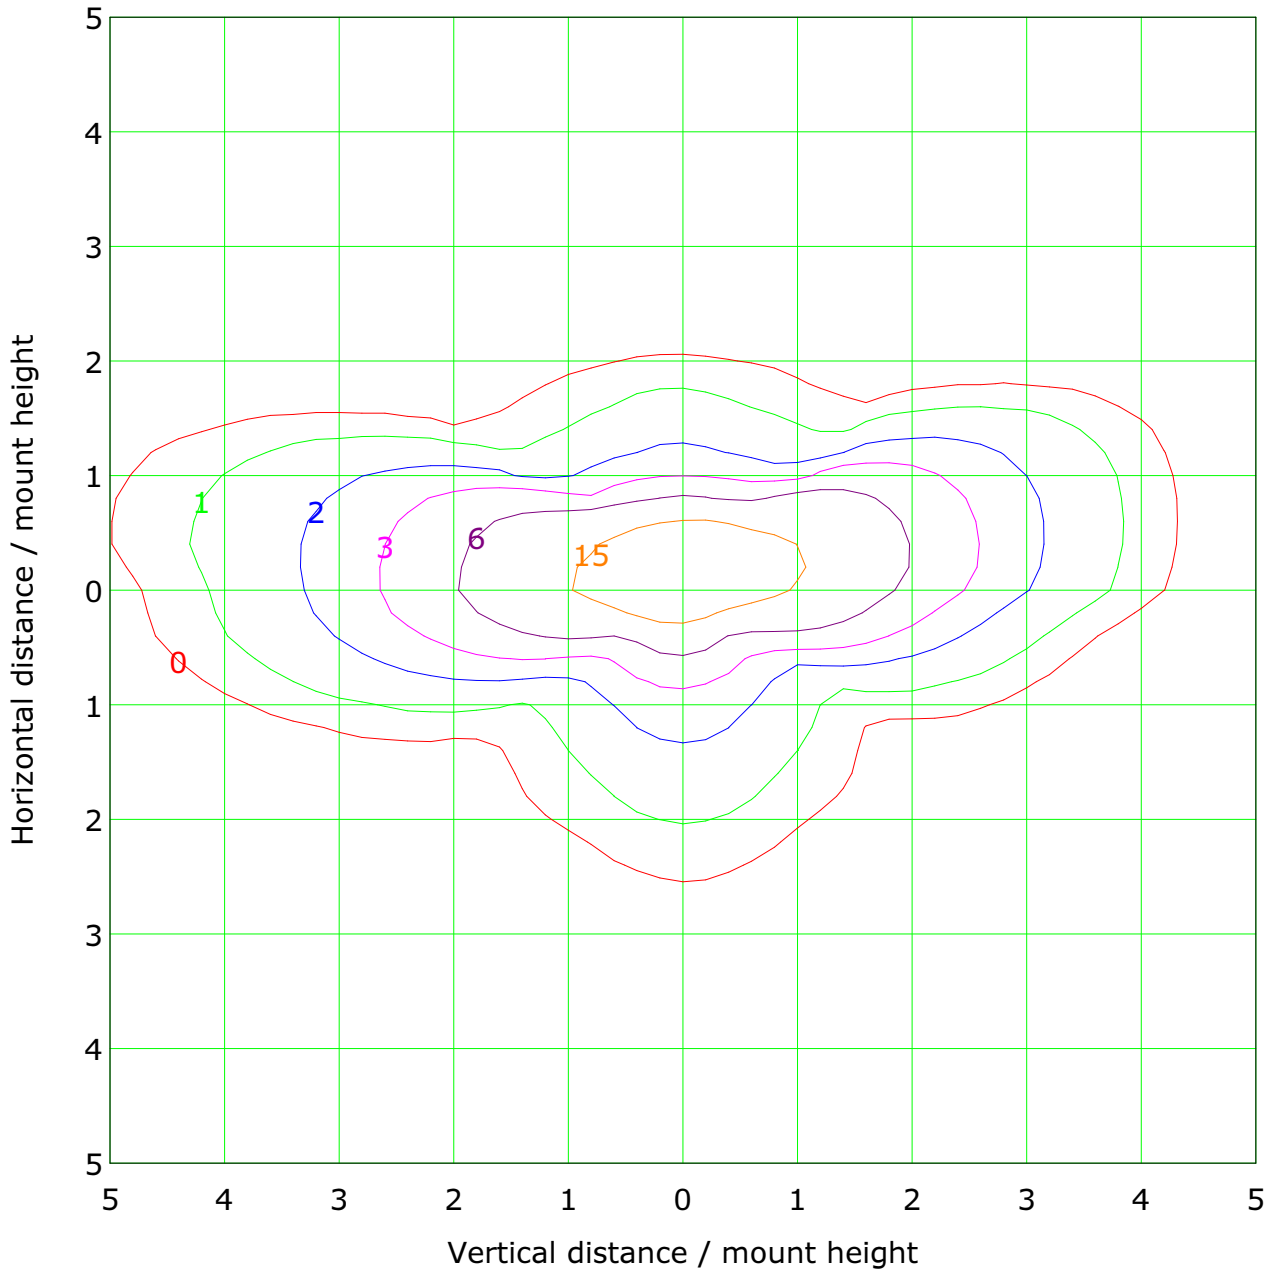

Mounting Height: 8.0m		Max Lux(100%): 30.6 lx
<ul style="list-style-type: none"> — (1%): 0.3 lx — (5%): 1.5 lx — (20%): 6.1 lx — (100%): 30.6 lx — (300%): 91.7 lx 	<ul style="list-style-type: none"> — (2%): 0.6 lx — (10%): 3.1 lx — (50%): 15.3 lx — (200%): 61.1 lx — (500%): 152.8 lx 	

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.100 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

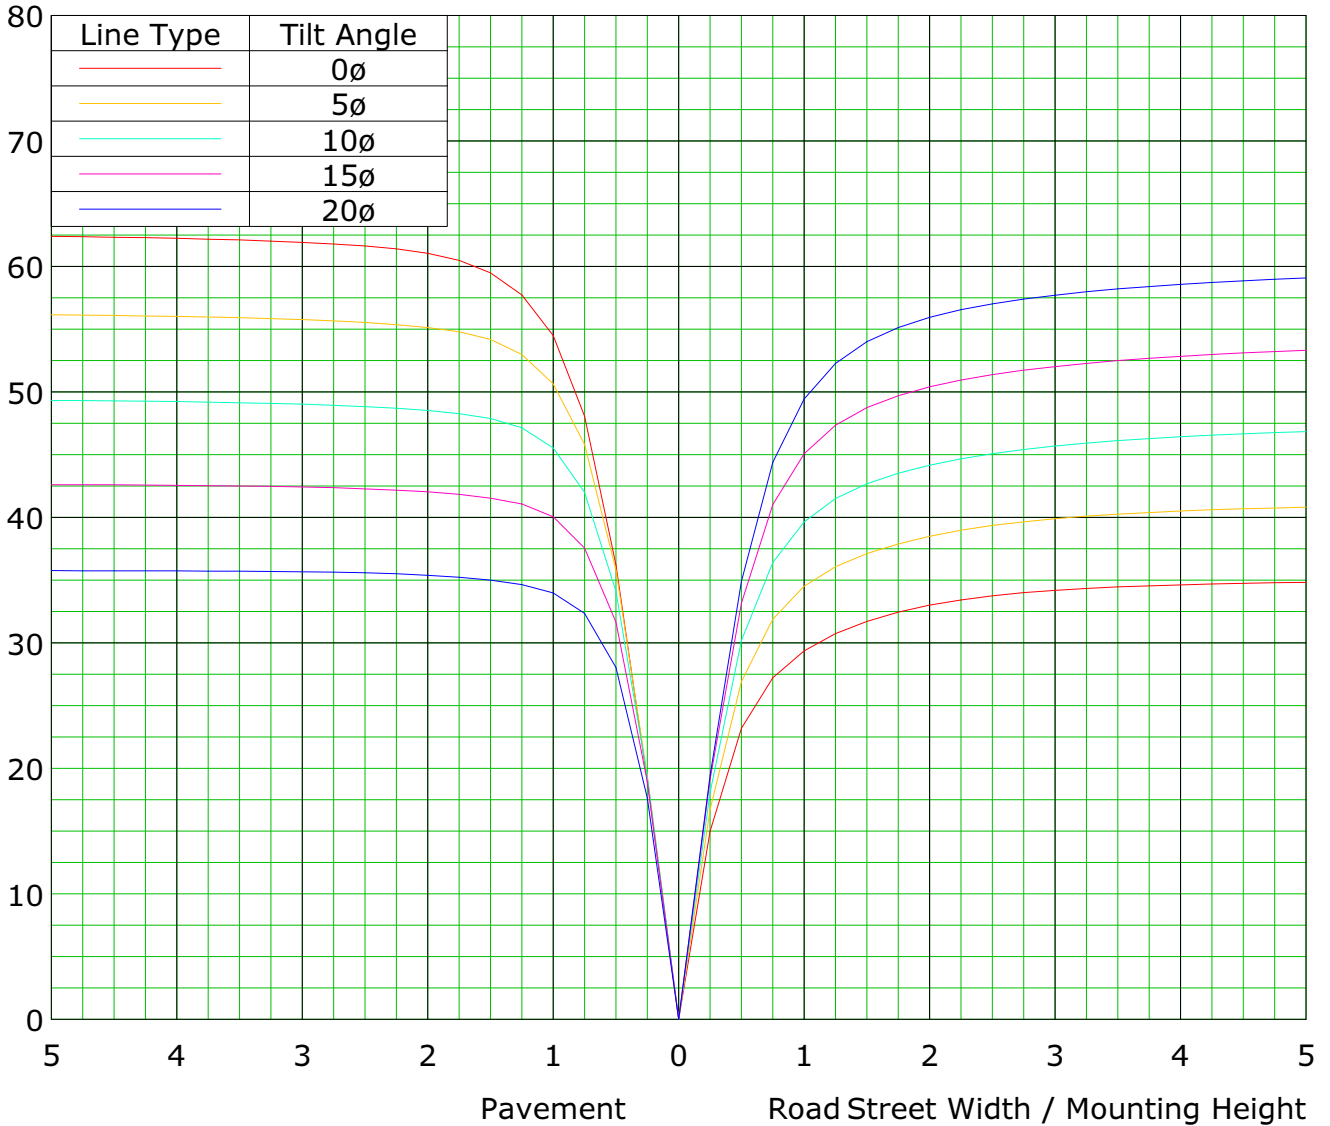

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

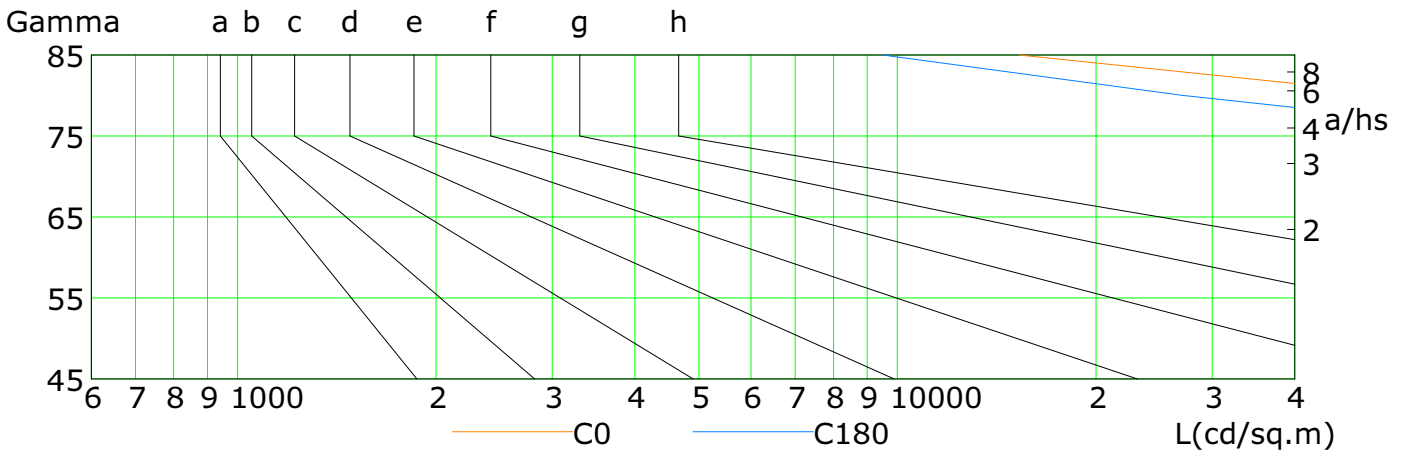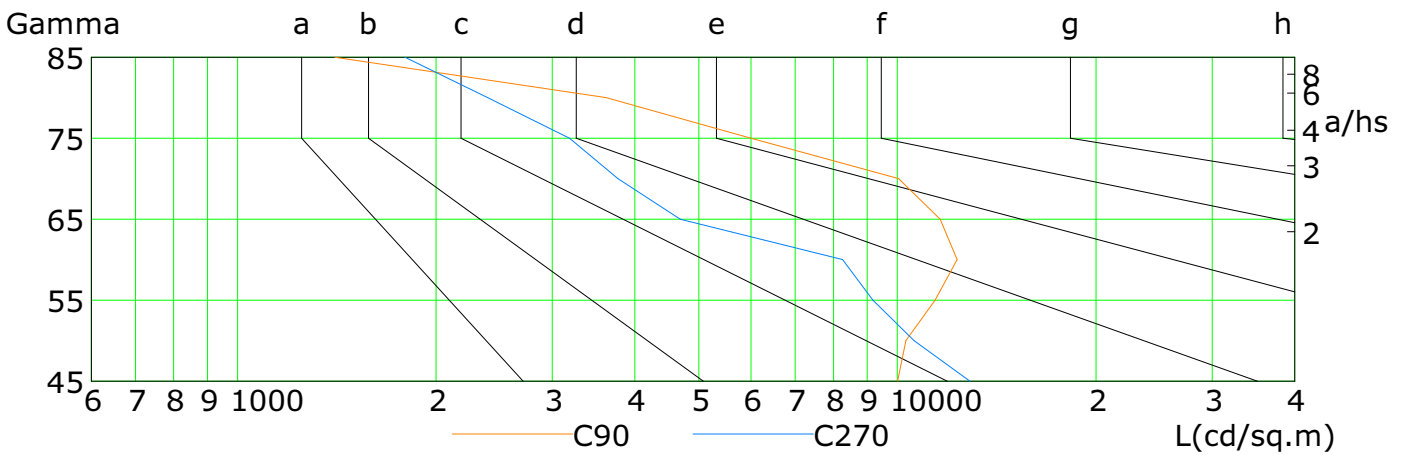

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	81423	94551	112959	136952	162706	180834	162130	59955	15273
C90	10002	10300	11409	12319	11609	10036	5997	3616	1405
C180	79563	91923	107392	125299	140951	142579	103121	27020	9491
C270	12882	10589	9179	8257	4685	3772	3186	2393	1793

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:


Illuminance at a Distance

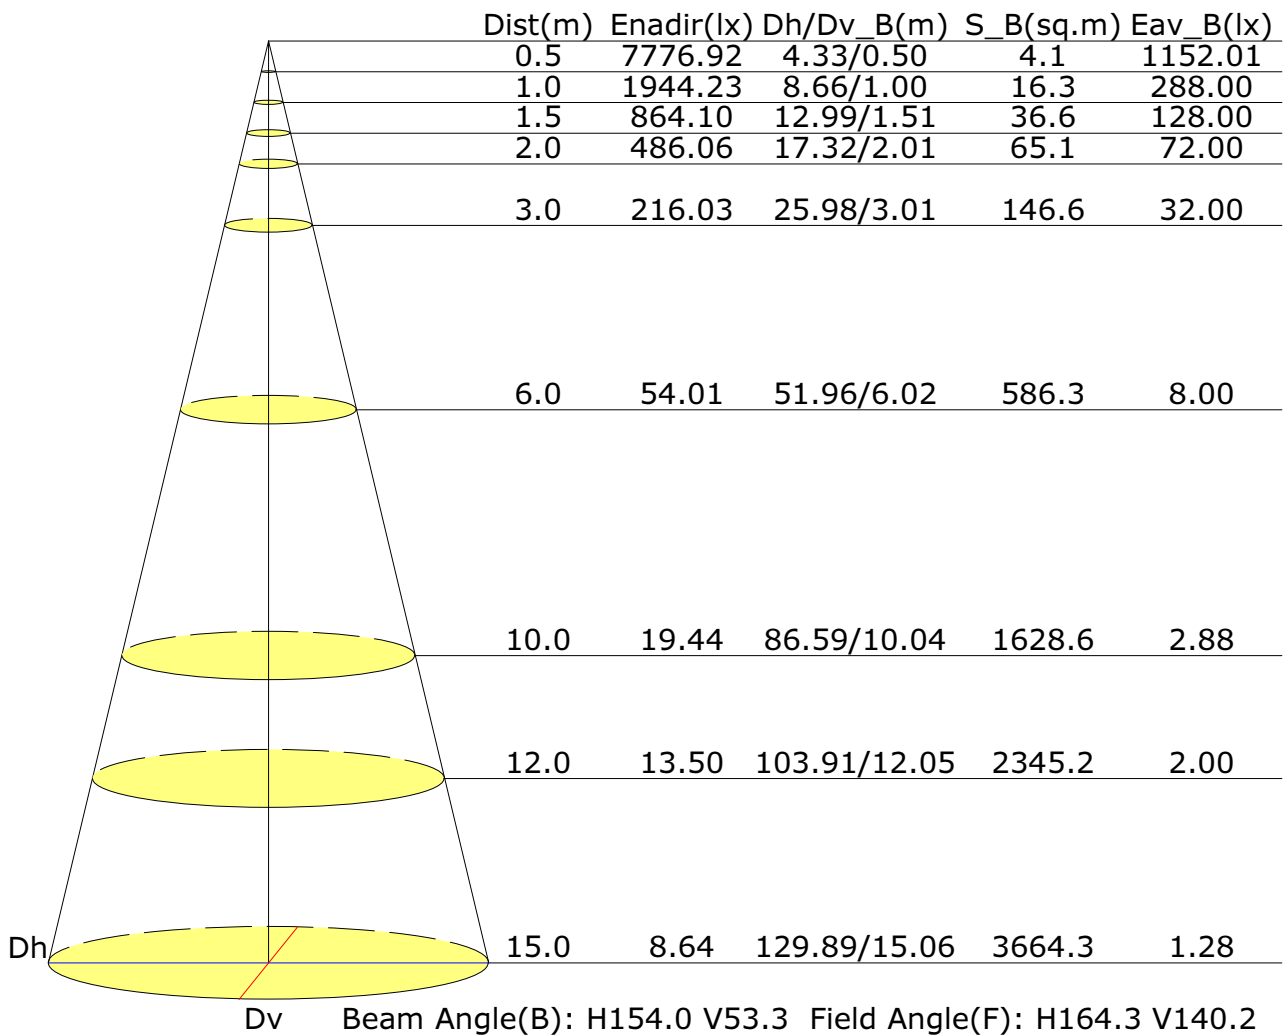

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Vertical IsoLux Plot

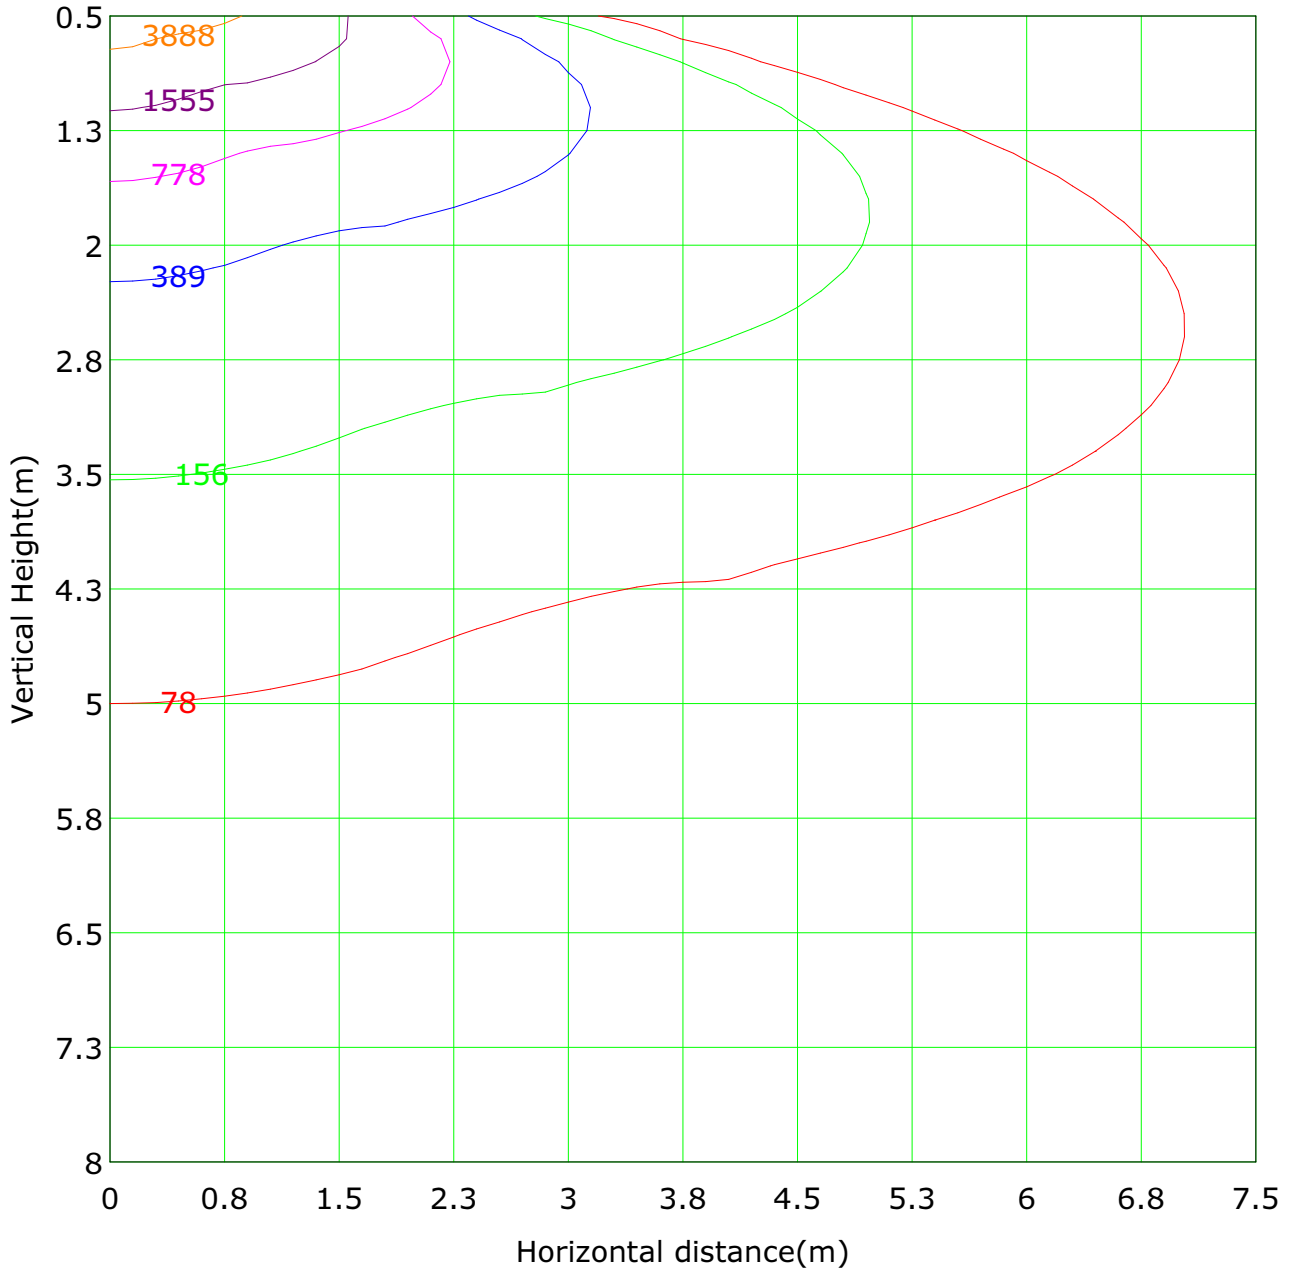


Lowest(m): 0.5m	Highest(m): 8.0m	Max Lux: 7776.9 lx
— (1%): 77.8 lx	— (2%): 155.5 lx	
— (5%): 388.8 lx	— (10%): 777.7 lx	
— (20%): 1555.4 lx	— (50%): 3888.5 lx	
— (100%): 7776.9 lx	— (200%): 15553.8 lx	
— (300%): 23330.8 lx	— (500%): 38884.6 lx	

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

The Average Illuminance Effective Figure

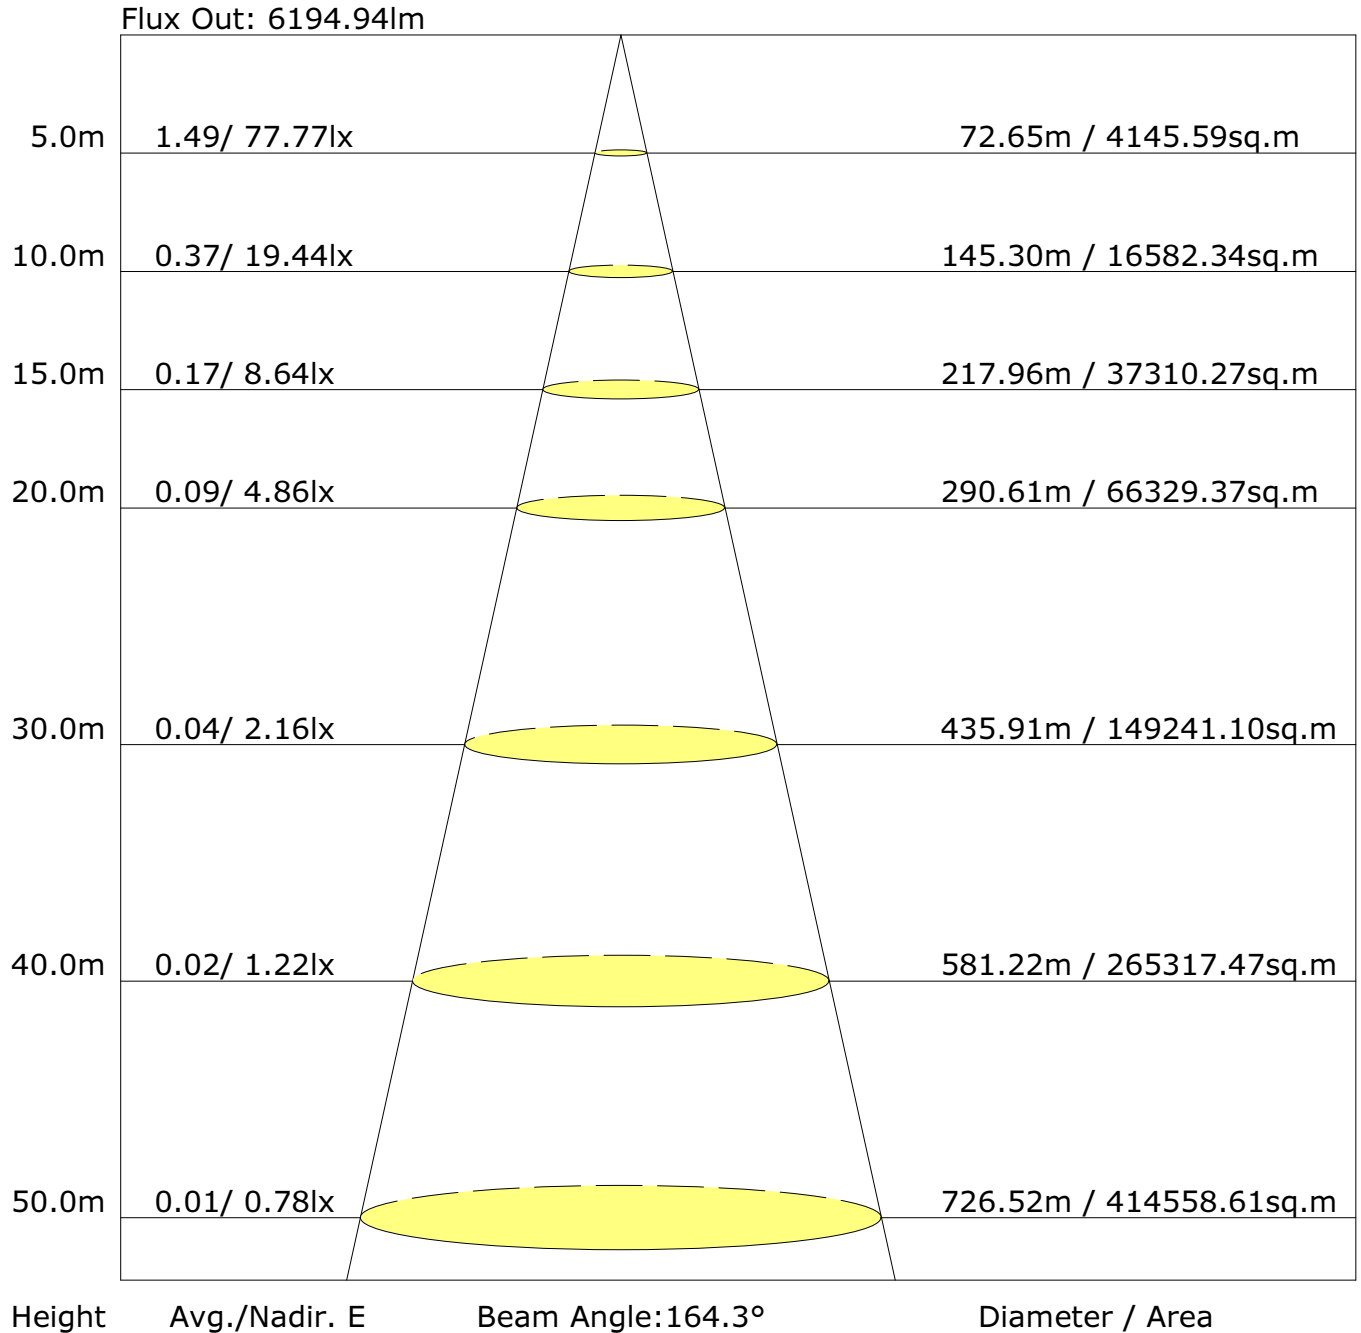

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	22.9	24.7	23.3	25.0	25.3	10.7	12.5	11.1	12.8	13.1
3H	27.4	29.0	27.8	29.3	29.7	13.4	15.0	13.8	15.3	15.7
4H	29.0	30.6	29.5	30.9	31.3	14.0	15.5	14.4	15.9	16.3
6H	29.8	31.2	30.2	31.6	32.0	14.3	15.7	14.7	16.1	16.5
8H	29.8	31.2	30.3	31.6	32.0	14.4	15.7	14.8	16.1	16.6
12H	29.8	31.1	30.3	31.5	32.0	14.4	15.7	14.8	16.1	16.5
X=4H Y=2H	22.7	24.2	23.1	24.6	25.0	10.9	12.5	11.3	12.8	13.2
3H	27.2	28.5	27.7	28.9	29.4	13.8	15.1	14.2	15.5	15.9
4H	29.0	30.1	29.4	30.6	31.0	14.5	15.7	15.0	16.1	16.6
6H	29.8	30.9	30.3	31.3	31.8	15.0	16.0	15.4	16.5	16.9
8H	29.9	30.9	30.4	31.3	31.8	15.1	16.1	15.6	16.5	17.0
12H	29.9	30.8	30.4	31.3	31.8	15.2	16.0	15.7	16.5	17.0
X=8H Y=4H	28.9	29.9	29.4	30.3	30.8	14.8	15.7	15.3	16.2	16.7
6H	29.7	30.6	30.3	31.1	31.6	15.3	16.2	15.9	16.7	17.2
8H	29.8	30.5	30.3	31.1	31.6	15.6	16.3	16.1	16.8	17.3
12H	29.9	30.5	30.4	31.0	31.6	15.7	16.3	16.2	16.8	17.4
X=12H Y=4H	28.9	29.8	29.4	30.3	30.8	14.8	15.7	15.3	16.2	16.7
6H	29.7	30.5	30.3	30.9	31.5	15.4	16.2	16.0	16.6	17.2
8H	29.8	30.4	30.3	31.0	31.5	15.7	16.3	16.2	16.8	17.4

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

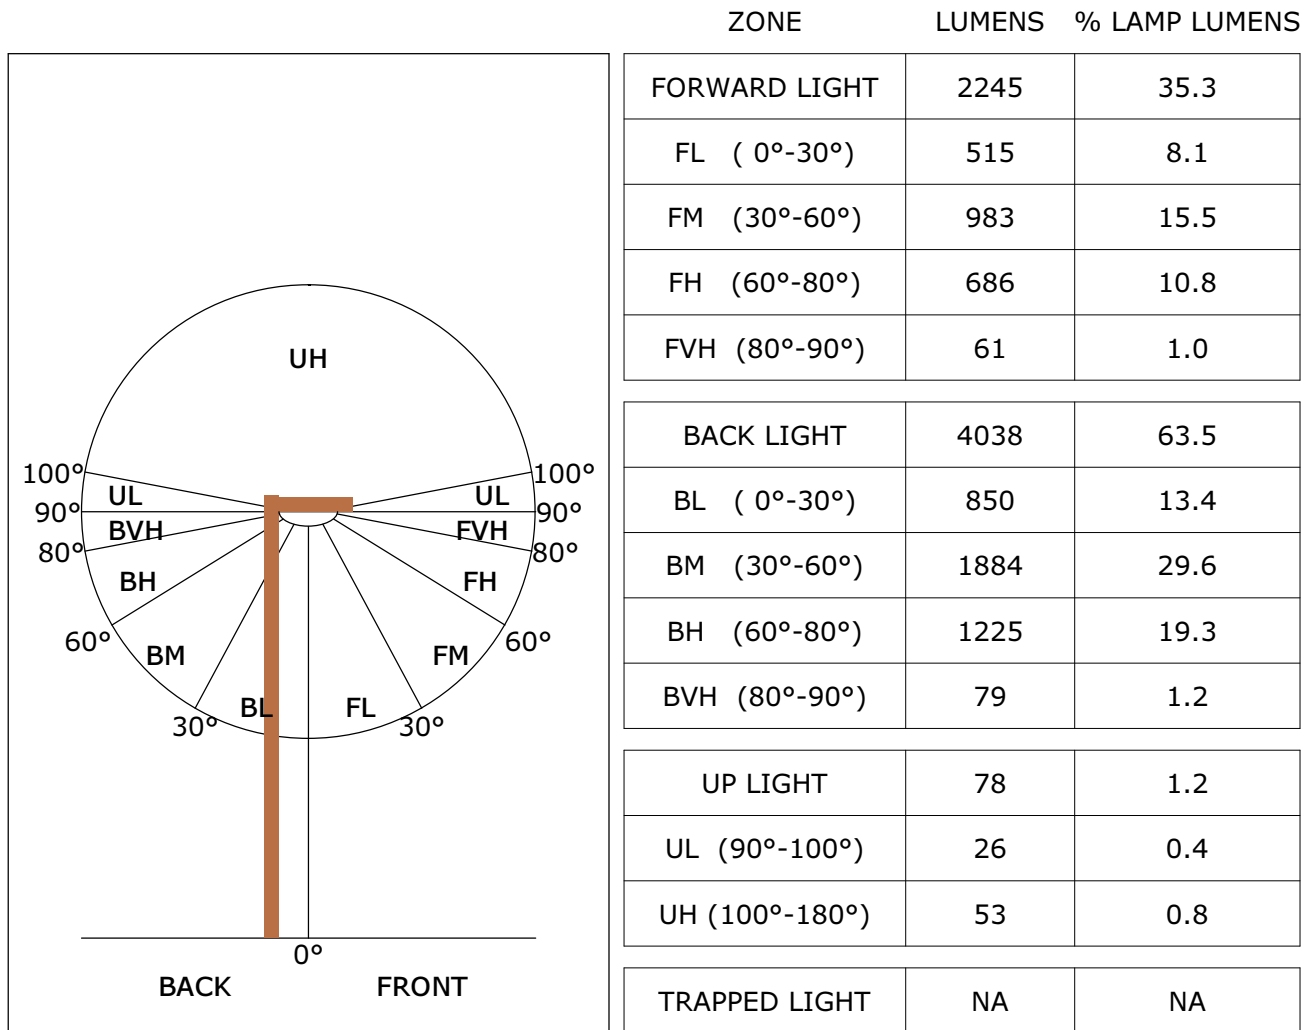


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U2 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U2 G1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

LCS Graph

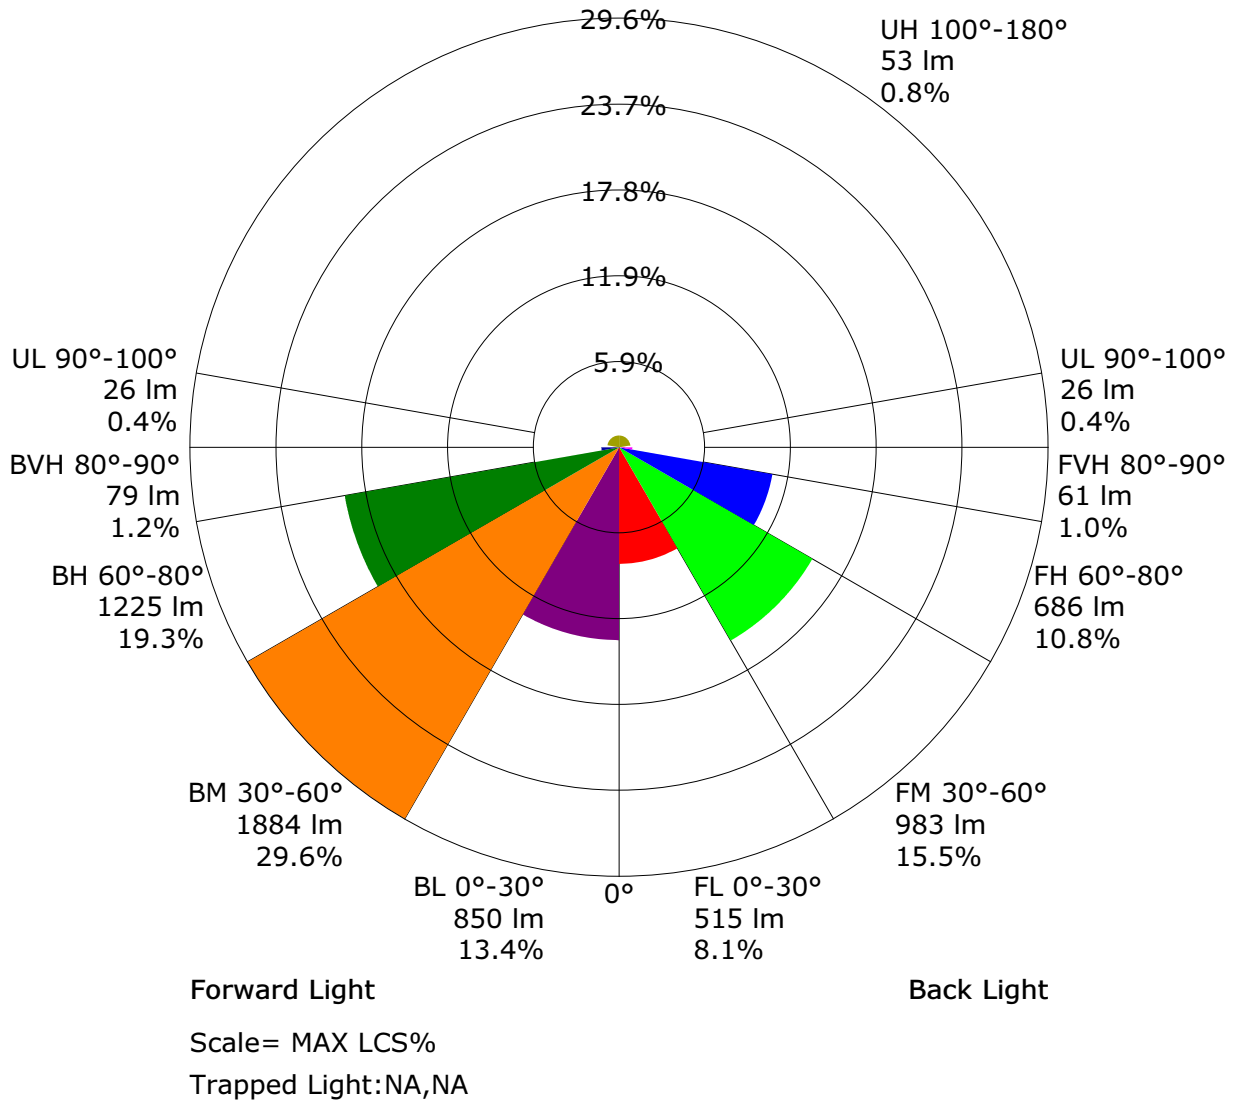

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1906.7	1.8	1.8	0.03	0.03
1.0-2.0	1903.6	5.5	7.3	0.09	0.11
2.0-3.0	1897.6	9.1	16.4	0.14	0.26
3.0-4.0	1889.1	12.6	29.0	0.20	0.46
4.0-5.0	1879.2	16.2	45.2	0.25	0.71
5.0-6.0	1868.1	19.6	64.8	0.31	1.02
6.0-7.0	1856.4	23.0	87.9	0.36	1.38
7.0-8.0	1844.3	26.4	114.3	0.42	1.80
8.0-9.0	1831.6	29.7	143.9	0.47	2.26
9.0-10.0	1817.9	32.9	176.8	0.52	2.78
10.0-11.0	1802.4	36.0	212.9	0.57	3.35
11.0-12.0	1784.8	39.0	251.9	0.61	3.96
12.0-13.0	1764.9	41.9	293.8	0.66	4.62
13.0-14.0	1743.0	44.6	338.4	0.70	5.32
14.0-15.0	1720.1	47.2	385.6	0.74	6.06
15.0-16.0	1697.7	49.8	435.4	0.78	6.84
16.0-17.0	1676.7	52.2	487.6	0.82	7.67
17.0-18.0	1657.4	54.7	542.3	0.86	8.53
18.0-19.0	1639.1	57.0	599.3	0.90	9.42
19.0-20.0	1621.2	59.3	658.6	0.93	10.35
20.0-21.0	1603.8	61.6	720.2	0.97	11.32
21.0-22.0	1586.9	63.8	784.0	1.00	12.33
22.0-23.0	1570.4	65.9	849.9	1.04	13.36
23.0-24.0	1554.0	68.0	917.9	1.07	14.43
24.0-25.0	1537.8	69.9	987.8	1.10	15.53
25.0-26.0	1521.7	71.8	1059.6	1.13	16.66
26.0-27.0	1505.8	73.7	1133.3	1.16	17.82
27.0-28.0	1489.9	75.4	1208.8	1.19	19.00
28.0-29.0	1473.9	77.1	1285.9	1.21	20.22
29.0-30.0	1457.3	78.7	1364.6	1.24	21.45
30.0-31.0	1439.9	80.1	1444.7	1.26	22.71
31.0-32.0	1421.3	81.4	1526.2	1.28	23.99
32.0-33.0	1401.4	82.6	1608.7	1.30	25.29
33.0-34.0	1380.7	83.6	1692.3	1.31	26.61
34.0-35.0	1359.8	84.5	1776.8	1.33	27.93
35.0-36.0	1339.3	85.3	1862.0	1.34	29.27

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1319.5	86.1	1948.1	1.35	30.63
37.0-38.0	1300.4	86.8	2034.9	1.36	31.99
38.0-39.0	1282.0	87.5	2122.4	1.38	33.37
39.0-40.0	1264.8	88.2	2210.7	1.39	34.75
40.0-41.0	1249.2	89.0	2299.6	1.40	36.15
41.0-42.0	1236.4	89.8	2389.5	1.41	37.57
42.0-43.0	1226.0	90.8	2480.3	1.43	38.99
43.0-44.0	1216.8	91.8	2572.1	1.44	40.44
44.0-45.0	1208.0	92.8	2665.0	1.46	41.90
45.0-46.0	1200.1	93.9	2758.9	1.48	43.37
46.0-47.0	1194.5	95.0	2853.9	1.49	44.87
47.0-48.0	1190.8	96.3	2950.2	1.51	46.38
48.0-49.0	1189.2	97.7	3047.8	1.54	47.92
49.0-50.0	1189.2	99.2	3147.0	1.56	49.48
50.0-51.0	1190.8	100.8	3247.8	1.58	51.06
51.0-52.0	1194.1	102.5	3350.2	1.61	52.67
52.0-53.0	1198.3	104.3	3454.5	1.64	54.31
53.0-54.0	1202.7	106.0	3560.5	1.67	55.98
54.0-55.0	1207.2	107.8	3668.3	1.69	57.67
55.0-56.0	1211.9	109.5	3777.8	1.72	59.39
56.0-57.0	1216.4	111.2	3889.0	1.75	61.14
57.0-58.0	1220.3	112.9	4001.9	1.77	62.92
58.0-59.0	1223.5	114.4	4116.3	1.80	64.71
59.0-60.0	1225.9	115.8	4232.1	1.82	66.54
60.0-61.0	1226.7	117.1	4349.2	1.84	68.38
61.0-62.0	1225.4	118.1	4467.3	1.86	70.23
62.0-63.0	1221.3	118.8	4586.1	1.87	72.10
63.0-64.0	1212.8	119.0	4705.1	1.87	73.97
64.0-65.0	1199.3	118.7	4823.8	1.87	75.84
65.0-66.0	1182.2	118.0	4941.8	1.85	77.69
66.0-67.0	1162.5	116.9	5058.7	1.84	79.53
67.0-68.0	1139.5	115.5	5174.2	1.82	81.35
68.0-69.0	1111.8	113.4	5287.6	1.78	83.13
69.0-70.0	1077.8	110.7	5398.3	1.74	84.87
70.0-71.0	1035.8	107.1	5505.4	1.68	86.55
71.0-72.0	985.2	102.5	5607.8	1.61	88.16

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	925.7	96.8	5704.6	1.52	89.69
73.0-74.0	857.1	90.1	5794.8	1.42	91.10
74.0-75.0	778.8	82.3	5877.1	1.29	92.40
75.0-76.0	690.3	73.3	5950.4	1.15	93.55
76.0-77.0	592.8	63.2	6013.6	0.99	94.54
77.0-78.0	492.6	52.7	6066.3	0.83	95.37
78.0-79.0	398.2	42.8	6109.1	0.67	96.04
79.0-80.0	315.6	34.0	6143.1	0.53	96.58
80.0-81.0	249.0	26.9	6170.1	0.42	97.00
81.0-82.0	200.0	21.7	6191.7	0.34	97.34
82.0-83.0	164.9	17.9	6209.7	0.28	97.62
83.0-84.0	138.9	15.1	6224.8	0.24	97.86
84.0-85.0	119.2	13.0	6237.8	0.20	98.07
85.0-86.0	103.7	11.3	6249.2	0.18	98.25
86.0-87.0	91.4	10.0	6259.2	0.16	98.40
87.0-88.0	80.8	8.9	6268.0	0.14	98.54
88.0-89.0	71.4	7.8	6275.8	0.12	98.67
89.0-90.0	62.6	6.9	6282.7	0.11	98.77
90.0-91.0	54.0	5.9	6288.6	0.09	98.87
91.0-92.0	45.2	5.0	6293.6	0.08	98.94
92.0-93.0	36.3	4.0	6297.6	0.06	99.01
93.0-94.0	27.6	3.0	6300.6	0.05	99.05
94.0-95.0	20.3	2.2	6302.8	0.03	99.09
95.0-96.0	14.8	1.6	6304.4	0.03	99.11
96.0-97.0	11.2	1.2	6305.6	0.02	99.13
97.0-98.0	9.0	1.0	6306.6	0.02	99.15
98.0-99.0	7.8	0.8	6307.4	0.01	99.16
99.0-100.0	7.1	0.8	6308.2	0.01	99.17
100.0-101.0	6.8	0.7	6308.9	0.01	99.19
101.0-102.0	6.6	0.7	6309.7	0.01	99.20
102.0-103.0	6.5	0.7	6310.3	0.01	99.21
103.0-104.0	6.5	0.7	6311.0	0.01	99.22
104.0-105.0	6.6	0.7	6311.7	0.01	99.23
105.0-106.0	6.8	0.7	6312.5	0.01	99.24
106.0-107.0	7.0	0.7	6313.2	0.01	99.25
107.0-108.0	7.2	0.7	6313.9	0.01	99.26

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	7.3	0.8	6314.7	0.01	99.28
109.0-110.0	7.5	0.8	6315.5	0.01	99.29
110.0-111.0	7.7	0.8	6316.3	0.01	99.30
111.0-112.0	7.8	0.8	6317.1	0.01	99.31
112.0-113.0	8.0	0.8	6317.9	0.01	99.33
113.0-114.0	8.2	0.8	6318.7	0.01	99.34
114.0-115.0	8.3	0.8	6319.5	0.01	99.35
115.0-116.0	8.5	0.8	6320.4	0.01	99.37
116.0-117.0	8.6	0.8	6321.2	0.01	99.38
117.0-118.0	8.8	0.9	6322.1	0.01	99.39
118.0-119.0	9.0	0.9	6322.9	0.01	99.41
119.0-120.0	9.1	0.9	6323.8	0.01	99.42
120.0-121.0	9.3	0.9	6324.7	0.01	99.43
121.0-122.0	9.4	0.9	6325.6	0.01	99.45
122.0-123.0	9.6	0.9	6326.5	0.01	99.46
123.0-124.0	9.7	0.9	6327.3	0.01	99.47
124.0-125.0	9.9	0.9	6328.2	0.01	99.49
125.0-126.0	10.0	0.9	6329.1	0.01	99.50
126.0-127.0	10.2	0.9	6330.0	0.01	99.52
127.0-128.0	10.4	0.9	6330.9	0.01	99.53
128.0-129.0	10.5	0.9	6331.8	0.01	99.55
129.0-130.0	10.7	0.9	6332.7	0.01	99.56
130.0-131.0	10.8	0.9	6333.6	0.01	99.57
131.0-132.0	10.9	0.9	6334.5	0.01	99.59
132.0-133.0	11.1	0.9	6335.4	0.01	99.60
133.0-134.0	11.2	0.9	6336.3	0.01	99.62
134.0-135.0	11.3	0.9	6337.2	0.01	99.63
135.0-136.0	11.5	0.9	6338.1	0.01	99.64
136.0-137.0	11.6	0.9	6339.0	0.01	99.66
137.0-138.0	11.7	0.9	6339.8	0.01	99.67
138.0-139.0	11.8	0.9	6340.7	0.01	99.68
139.0-140.0	11.9	0.8	6341.5	0.01	99.70
140.0-141.0	12.0	0.8	6342.4	0.01	99.71
141.0-142.0	12.0	0.8	6343.2	0.01	99.72
142.0-143.0	12.1	0.8	6344.0	0.01	99.74
143.0-144.0	12.2	0.8	6344.8	0.01	99.75

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	12.3	0.8	6345.6	0.01	99.76
145.0-146.0	12.4	0.8	6346.3	0.01	99.77
146.0-147.0	12.5	0.8	6347.1	0.01	99.79
147.0-148.0	12.5	0.7	6347.8	0.01	99.80
148.0-149.0	12.6	0.7	6348.6	0.01	99.81
149.0-150.0	12.7	0.7	6349.3	0.01	99.82
150.0-151.0	12.8	0.7	6350.0	0.01	99.83
151.0-152.0	12.9	0.7	6350.6	0.01	99.84
152.0-153.0	13.0	0.7	6351.3	0.01	99.85
153.0-154.0	13.1	0.6	6351.9	0.01	99.86
154.0-155.0	13.1	0.6	6352.6	0.01	99.87
155.0-156.0	13.2	0.6	6353.2	0.01	99.88
156.0-157.0	13.3	0.6	6353.7	0.01	99.89
157.0-158.0	13.4	0.6	6354.3	0.01	99.90
158.0-159.0	13.5	0.5	6354.8	0.01	99.91
159.0-160.0	13.6	0.5	6355.4	0.01	99.92
160.0-161.0	13.7	0.5	6355.9	0.01	99.92
161.0-162.0	13.8	0.5	6356.3	0.01	99.93
162.0-163.0	13.9	0.5	6356.8	0.01	99.94
163.0-164.0	14.0	0.4	6357.2	0.01	99.94
164.0-165.0	14.0	0.4	6357.6	0.01	99.95
165.0-166.0	14.1	0.4	6358.0	0.01	99.96
166.0-167.0	14.2	0.4	6358.4	0.01	99.96
167.0-168.0	14.3	0.3	6358.7	0.01	99.97
168.0-169.0	14.4	0.3	6359.1	0.00	99.97
169.0-170.0	14.4	0.3	6359.3	0.00	99.98
170.0-171.0	14.5	0.3	6359.6	0.00	99.98
171.0-172.0	14.6	0.2	6359.8	0.00	99.99
172.0-173.0	14.7	0.2	6360.1	0.00	99.99
173.0-174.0	14.7	0.2	6360.2	0.00	99.99
174.0-175.0	14.8	0.2	6360.4	0.00	99.99
175.0-176.0	14.8	0.1	6360.5	0.00	100.00
176.0-177.0	14.9	0.1	6360.6	0.00	100.00
177.0-178.0	14.9	0.1	6360.7	0.00	100.00
178.0-179.0	14.9	0.0	6360.7	0.00	100.00
179.0-180.0	14.9	0.0	6360.7	0.00	100.00

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	1944.2	1941.1	1937.7	1933.7	1931.2	1927.2	1923.5	1920.3	1917.1	1914.3
G1.0	1944.5	1939.6	1933.9	1928.2	1922.9	1916.3	1910.0	1904.5	1899.4	1893.6
G2.0	1944.8	1938.5	1930.0	1922.5	1915.0	1905.7	1895.7	1888.0	1879.9	1871.1
G3.0	1946.1	1937.0	1926.6	1916.5	1905.3	1893.6	1881.2	1869.6	1858.4	1846.7
G4.0	1946.7	1935.3	1922.8	1910.0	1895.7	1880.4	1864.8	1850.5	1836.4	1820.0
G5.0	1947.6	1933.9	1918.4	1902.7	1885.3	1866.6	1846.9	1829.8	1810.8	1793.0
G6.0	1947.6	1932.3	1913.8	1894.4	1873.7	1851.3	1828.5	1807.2	1786.1	1763.3
G7.0	1948.3	1930.8	1909.0	1886.4	1861.8	1836.6	1809.1	1784.4	1759.6	1734.6
G8.0	1949.0	1928.8	1904.4	1878.5	1849.8	1821.5	1789.5	1760.4	1731.6	1702.3
G9.0	1950.7	1927.9	1899.5	1870.1	1838.8	1805.6	1769.7	1736.1	1703.2	1670.8
G10.0	1952.2	1926.9	1894.8	1862.2	1826.0	1788.7	1749.3	1711.7	1675.2	1639.1
G11.0	1954.1	1925.8	1890.0	1852.9	1812.8	1771.8	1728.0	1686.7	1645.4	1606.4
G12.0	1956.2	1923.7	1885.0	1843.7	1799.3	1752.8	1705.7	1658.8	1615.3	1572.8
G13.0	1959.0	1923.3	1880.5	1833.9	1784.4	1735.2	1681.9	1631.1	1583.1	1537.4
G14.0	1962.5	1923.2	1876.2	1823.8	1769.4	1714.0	1655.8	1598.9	1549.3	1496.4
G15.0	1964.4	1922.9	1871.7	1813.7	1753.5	1693.1	1628.3	1568.7	1511.8	1448.9
G16.0	1970.9	1924.0	1867.4	1803.6	1737.1	1669.8	1599.5	1534.1	1469.7	1393.4
G17.0	1974.1	1925.0	1862.9	1793.0	1719.6	1645.2	1568.7	1496.5	1421.0	1331.6
G18.0	1978.5	1925.9	1858.4	1781.3	1703.3	1621.0	1536.7	1455.6	1367.8	1263.8
G19.0	1983.6	1926.0	1852.2	1768.9	1683.8	1592.8	1502.0	1411.7	1306.7	1190.3
G20.0	1984.8	1924.7	1845.2	1755.0	1662.5	1563.8	1465.6	1360.2	1242.0	1112.3
G21.0	1986.1	1922.9	1836.6	1739.8	1638.7	1532.7	1426.0	1307.1	1173.6	1042.5
G22.0	1991.6	1920.6	1827.3	1723.0	1614.8	1498.9	1382.6	1248.8	1105.5	971.8
G23.0	1995.1	1918.1	1817.5	1705.9	1588.1	1465.3	1335.2	1188.0	1036.9	909.4
G24.0	1999.1	1917.2	1809.8	1689.6	1563.8	1429.1	1286.0	1125.3	974.8	854.8
G25.0	2004.3	1917.3	1802.8	1675.0	1539.2	1392.6	1236.3	1065.5	915.1	807.8
G26.0	2012.0	1919.1	1798.0	1661.8	1516.1	1355.1	1181.7	1006.5	861.1	767.4
G27.0	2019.3	1923.1	1794.8	1650.8	1492.9	1320.7	1136.5	955.2	814.8	731.7
G28.0	2029.8	1930.1	1793.9	1642.5	1471.5	1287.0	1092.4	907.6	773.8	701.5
G29.0	2045.6	1939.3	1795.8	1634.8	1451.4	1254.8	1050.5	866.2	736.4	675.5
G30.0	2059.9	1950.5	1799.5	1627.8	1432.5	1225.7	1012.4	830.9	705.7	651.2
G31.0	2075.9	1962.1	1804.7	1622.6	1416.1	1200.0	980.9	800.2	676.8	629.7
G32.0	2096.3	1977.4	1811.2	1618.2	1400.8	1174.9	952.8	772.5	651.5	608.4
G33.0	2118.2	1995.0	1821.6	1616.6	1389.1	1155.1	929.4	747.8	628.5	588.7
G34.0	2141.6	2014.6	1833.6	1618.3	1380.6	1137.9	908.1	723.6	608.9	569.0
G35.0	2169.5	2037.1	1848.7	1622.2	1374.5	1125.1	889.9	702.2	590.1	551.2
G36.0	2200.1	2063.1	1865.3	1628.7	1372.3	1114.6	872.3	681.2	572.4	532.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	2234.3	2092.6	1886.0	1638.1	1373.2	1107.5	857.1	662.4	555.8	515.3
G38.0	2273.1	2126.9	1910.9	1650.4	1378.8	1103.1	842.2	642.2	539.9	498.8
G39.0	2316.0	2165.9	1939.5	1668.9	1387.6	1099.7	827.9	621.5	524.7	483.4
G40.0	2363.7	2207.9	1973.5	1691.5	1399.6	1096.9	814.8	601.6	509.2	467.6
G41.0	2416.0	2256.8	2010.5	1715.7	1413.8	1095.6	801.4	581.8	493.8	451.9
G42.0	2487.3	2318.8	2055.3	1746.3	1431.4	1093.9	786.1	559.5	477.6	437.0
G43.0	2564.8	2385.8	2105.1	1778.1	1447.6	1091.0	770.3	537.8	462.4	424.0
G44.0	2645.6	2456.8	2155.6	1806.2	1460.2	1085.3	753.8	517.8	447.3	410.9
G45.0	2687.0	2492.9	2184.0	1823.3	1467.1	1080.4	739.2	498.8	432.9	398.7
G46.0	2730.9	2529.3	2209.3	1843.2	1476.3	1077.8	727.2	480.1	418.4	386.7
G47.0	2787.4	2579.5	2245.6	1868.0	1488.5	1076.3	716.3	462.4	404.1	374.6
G48.0	2852.4	2636.0	2286.3	1893.9	1499.9	1075.4	704.6	444.2	390.4	363.1
G49.0	2920.9	2697.6	2327.4	1919.4	1509.5	1072.8	693.1	426.7	377.7	352.2
G50.0	2995.5	2761.0	2372.9	1948.3	1517.9	1067.2	681.4	409.8	365.1	342.4
G51.0	3070.6	2831.1	2421.3	1977.5	1526.5	1061.4	667.9	394.6	352.2	333.1
G52.0	3153.5	2899.5	2468.2	2009.4	1535.1	1055.5	653.5	379.0	340.2	325.0
G53.0	3235.2	2968.5	2519.4	2037.9	1543.3	1049.2	639.4	364.4	329.2	317.4
G54.0	3317.2	3042.7	2570.2	2070.2	1550.0	1042.1	624.7	349.3	317.6	310.4
G55.0	3402.4	3117.1	2620.4	2099.9	1554.8	1033.4	609.8	336.5	306.3	303.4
G56.0	3495.7	3194.7	2672.1	2130.0	1558.2	1022.1	595.2	324.8	295.9	295.8
G57.0	3587.5	3274.5	2722.6	2158.3	1560.2	1008.6	579.6	314.2	287.0	288.3
G58.0	3680.8	3351.1	2772.1	2183.7	1559.4	994.4	562.8	305.0	278.1	281.1
G59.0	3780.1	3432.8	2820.0	2207.0	1554.8	977.5	544.4	295.9	270.4	274.4
G60.0	3880.0	3513.4	2868.4	2226.1	1546.3	959.0	525.6	287.7	263.4	268.6
G61.0	3976.7	3594.3	2911.6	2241.3	1533.1	936.3	507.0	281.0	257.3	264.1
G62.0	4061.5	3668.2	2952.4	2252.5	1514.1	911.9	489.1	276.5	252.2	260.7
G63.0	4146.3	3742.3	2986.7	2258.1	1490.7	885.0	472.5	272.7	247.8	258.5
G64.0	4214.3	3804.1	3015.5	2257.8	1462.3	854.2	458.1	269.2	244.7	255.1
G65.0	4283.4	3866.8	3042.2	2251.4	1430.0	821.4	446.3	265.5	242.1	250.2
G66.0	4342.1	3915.8	3058.0	2236.4	1391.5	790.7	436.1	263.4	239.6	246.8
G67.0	4380.9	3948.5	3061.7	2207.3	1345.7	760.6	430.7	262.3	233.8	243.8
G68.0	4398.8	3964.4	3050.1	2165.1	1292.2	729.7	425.3	261.3	229.4	240.2
G69.0	4396.3	3962.1	3019.8	2103.7	1232.7	696.9	416.1	259.5	226.2	235.9
G70.0	4361.8	3929.1	2969.6	2028.6	1167.4	670.2	405.8	257.2	223.1	231.4
G71.0	4296.6	3859.4	2892.4	1933.4	1096.2	637.8	395.4	255.1	219.8	226.7
G72.0	4192.5	3760.7	2781.7	1827.8	1018.2	602.7	381.5	252.0	216.2	221.3
G73.0	4034.5	3615.7	2631.9	1699.0	945.1	563.9	364.5	248.3	212.4	215.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	3815.7	3421.2	2450.5	1557.0	859.3	520.4	346.5	243.1	208.4	207.9
G75.0	3523.3	3162.3	2223.9	1381.6	763.3	474.5	326.3	235.8	203.5	199.7
G76.0	3173.3	2840.4	1960.8	1191.6	660.7	429.8	300.8	227.3	197.2	189.8
G77.0	2729.1	2425.9	1661.0	976.1	559.3	380.0	273.5	216.0	189.1	179.2
G78.0	2213.1	1964.3	1325.6	763.8	467.2	328.2	245.6	200.6	179.1	167.3
G79.0	1630.5	1452.6	993.7	573.5	389.0	283.1	219.1	184.2	168.6	156.0
G80.0	1149.7	1033.9	724.5	430.4	318.0	246.2	195.9	170.9	158.6	145.6
G81.0	833.9	734.1	522.3	333.6	259.8	212.5	174.7	157.4	143.7	136.6
G82.0	626.1	533.4	386.1	268.2	221.8	185.5	158.6	144.3	133.9	128.2
G83.0	465.1	389.6	295.5	216.2	191.6	161.7	143.7	128.3	125.1	120.0
G84.0	340.8	287.0	239.6	183.7	167.9	143.7	130.7	117.5	117.1	112.4
G85.0	251.6	218.6	198.0	159.6	144.5	126.5	118.7	108.6	108.2	105.1
G86.0	196.9	181.2	160.8	140.6	123.2	109.3	107.7	100.0	99.9	97.3
G87.0	164.7	153.6	130.9	122.0	107.5	98.2	95.0	89.7	91.3	86.2
G88.0	146.5	135.1	107.5	101.9	93.8	86.3	82.8	80.8	80.3	75.3
G89.0	130.9	125.8	96.4	89.1	84.3	75.8	74.1	73.6	72.1	66.7
G90.0	120.3	121.8	89.7	79.1	77.2	66.7	65.6	65.6	65.4	58.9
G91.0	109.4	113.4	83.4	70.2	70.4	58.5	57.0	58.0	57.2	51.0
G92.0	97.2	102.5	77.9	61.0	60.8	50.2	49.3	50.1	49.1	43.0
G93.0	77.4	81.9	66.2	53.9	51.8	41.9	40.2	39.6	37.8	32.9
G94.0	55.2	59.2	50.2	42.2	36.6	32.3	30.6	30.0	28.5	23.4
G95.0	39.7	43.8	39.7	33.3	29.4	26.0	24.4	22.4	20.7	17.5
G96.0	31.5	33.5	30.1	26.8	23.8	21.5	20.1	18.2	15.8	13.3
G97.0	24.6	26.2	23.8	22.1	20.5	18.4	16.5	14.6	12.8	10.5
G98.0	21.2	21.4	20.6	19.6	17.7	16.3	14.6	12.8	10.8	8.3
G99.0	19.0	18.9	18.7	18.1	16.8	15.3	13.2	11.2	9.2	6.8
G100.0	17.7	18.0	17.8	17.2	15.9	14.0	12.1	10.1	8.0	6.1
G101.0	16.6	17.1	16.9	16.2	14.8	13.2	11.4	9.4	7.5	5.9
G102.0	15.2	15.7	15.6	15.0	14.0	12.6	10.9	9.3	7.6	6.1
G103.0	14.1	14.8	14.6	14.1	13.4	12.4	11.1	9.5	8.0	6.4
G104.0	13.4	14.0	14.3	14.0	13.6	12.6	11.4	9.9	8.3	6.8
G105.0	13.7	14.1	14.4	14.3	13.8	13.0	11.8	10.2	8.7	7.0
G106.0	13.9	14.5	14.6	14.5	14.0	13.3	12.1	10.6	8.9	7.4
G107.0	14.1	14.8	14.9	14.9	14.3	13.6	12.4	10.9	9.3	7.6
G108.0	14.4	15.0	15.1	15.0	14.5	13.8	12.7	11.2	9.5	8.0
G109.0	14.8	15.2	15.3	15.1	14.6	14.0	12.8	11.4	9.9	8.2
G110.0	14.9	15.5	15.5	15.3	14.9	14.1	13.1	11.6	10.1	8.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	15.1	15.6	15.7	15.5	15.1	14.4	13.2	11.9	10.4	8.8
G112.0	15.3	15.8	15.8	15.6	15.2	14.4	13.4	12.1	10.7	9.0
G113.0	15.5	15.8	15.9	15.7	15.2	14.5	13.6	12.4	10.8	9.3
G114.0	15.6	15.8	16.0	15.8	15.3	14.6	13.7	12.5	11.1	9.5
G115.0	15.7	16.2	16.2	15.9	15.5	14.8	13.9	12.7	11.4	9.8
G116.0	15.8	16.3	16.3	16.0	15.6	15.0	14.0	13.0	11.4	10.0
G117.0	15.9	16.4	16.4	16.0	15.6	15.1	14.3	13.1	11.6	10.4
G118.0	16.0	16.5	16.5	16.2	15.8	15.1	14.3	13.3	12.0	10.6
G119.0	16.2	16.5	16.5	16.4	15.8	15.2	14.4	13.4	12.1	10.7
G120.0	16.4	16.6	16.8	16.4	15.9	15.3	14.5	13.6	12.4	11.1
G121.0	16.5	16.8	16.8	16.4	15.9	15.3	14.6	13.7	12.6	11.2
G122.0	16.6	16.9	16.8	16.5	16.0	15.3	14.6	13.8	12.7	11.5
G123.0	16.8	17.0	16.9	16.5	16.0	15.5	14.8	13.8	12.8	11.6
G124.0	16.9	17.1	17.0	16.6	16.2	15.5	14.8	13.9	13.0	11.8
G125.0	17.0	17.2	17.1	16.6	16.2	15.6	14.8	14.0	13.1	11.9
G126.0	17.1	17.4	17.2	16.9	16.3	15.7	14.9	14.1	13.2	12.0
G127.0	17.2	17.5	17.4	16.9	16.4	15.8	15.0	14.1	13.3	12.3
G128.0	17.4	17.6	17.6	17.1	16.5	15.9	15.1	14.4	13.4	12.4
G129.0	17.5	17.7	17.7	17.4	16.6	16.0	15.2	14.4	13.6	12.6
G130.0	17.6	18.0	17.8	17.5	16.9	16.2	15.3	14.5	13.7	12.7
G131.0	17.7	18.0	18.0	17.6	17.0	16.3	15.5	14.6	13.8	12.8
G132.0	17.8	18.1	18.1	17.7	17.1	16.4	15.7	14.9	13.9	13.1
G133.0	17.8	18.2	18.2	18.0	17.2	16.5	15.7	14.9	14.0	13.1
G134.0	17.8	18.2	18.2	18.0	17.4	16.6	15.8	14.9	14.1	13.2
G135.0	17.8	18.2	18.3	18.0	17.4	16.6	15.9	15.0	14.3	13.3
G136.0	17.8	18.2	18.3	18.0	17.5	16.8	15.9	15.1	14.3	13.4
G137.0	17.7	18.2	18.2	18.0	17.5	16.8	16.0	15.1	14.4	13.6
G138.0	17.6	18.1	18.1	18.0	17.4	16.8	15.9	15.2	14.5	13.7
G139.0	17.6	18.1	18.1	17.8	17.5	16.8	16.0	15.3	14.5	13.7
G140.0	17.5	17.8	18.0	17.7	17.4	16.8	16.0	15.3	14.6	13.8
G141.0	17.2	17.8	17.8	17.7	17.2	16.8	16.0	15.3	14.5	13.9
G142.0	17.1	17.6	17.8	17.6	17.2	16.6	16.0	15.3	14.6	13.9
G143.0	17.0	17.5	17.5	17.5	17.1	16.6	16.0	15.3	14.6	14.0
G144.0	16.9	17.4	17.5	17.4	17.1	16.6	16.0	15.3	14.8	14.1
G145.0	16.8	17.1	17.4	17.2	17.0	16.5	15.9	15.3	14.9	14.1
G146.0	16.6	17.0	17.2	17.1	16.9	16.5	16.0	15.3	14.8	14.1
G147.0	16.5	16.9	17.0	17.0	16.8	16.4	15.8	15.3	14.9	14.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	16.4	16.8	16.9	16.8	16.6	16.3	15.9	15.3	14.9	14.3
G149.0	16.3	16.5	16.8	16.8	16.5	16.3	15.8	15.3	14.9	14.4
G150.0	16.2	16.4	16.6	16.6	16.4	16.3	15.8	15.3	15.0	14.4
G151.0	16.0	16.3	16.5	16.5	16.4	16.2	15.8	15.5	15.0	14.5
G152.0	15.8	16.2	16.3	16.4	16.3	16.0	15.8	15.3	15.0	14.6
G153.0	15.8	16.0	16.3	16.3	16.2	16.0	15.8	15.3	15.1	14.6
G154.0	15.7	15.9	16.2	16.3	16.2	15.9	15.7	15.3	15.1	14.8
G155.0	15.6	15.9	16.0	16.2	16.0	15.9	15.7	15.5	15.1	14.8
G156.0	15.6	15.8	15.9	15.9	15.9	15.9	15.7	15.3	15.1	14.9
G157.0	15.5	15.7	15.9	15.9	15.9	15.8	15.7	15.5	15.1	15.0
G158.0	15.3	15.6	15.7	15.8	15.8	15.8	15.7	15.3	15.2	15.0
G159.0	15.2	15.5	15.7	15.8	15.8	15.8	15.6	15.3	15.2	15.1
G160.0	15.2	15.5	15.6	15.7	15.7	15.7	15.6	15.3	15.2	15.1
G161.0	15.1	15.3	15.5	15.6	15.7	15.6	15.6	15.3	15.2	15.1
G162.0	15.1	15.2	15.3	15.6	15.7	15.7	15.5	15.3	15.3	15.2
G163.0	15.1	15.2	15.3	15.5	15.6	15.5	15.5	15.3	15.3	15.2
G164.0	15.1	15.1	15.3	15.5	15.5	15.5	15.5	15.3	15.3	15.2
G165.0	15.0	15.1	15.2	15.5	15.5	15.5	15.5	15.5	15.3	15.2
G166.0	15.0	15.1	15.2	15.3	15.5	15.5	15.3	15.3	15.3	15.3
G167.0	15.0	15.1	15.1	15.2	15.3	15.3	15.3	15.3	15.3	15.3
G168.0	15.0	15.1	15.1	15.2	15.3	15.3	15.3	15.3	15.3	15.3
G169.0	15.0	15.0	15.1	15.2	15.3	15.3	15.3	15.3	15.3	15.3
G170.0	15.0	15.0	15.1	15.1	15.2	15.3	15.3	16.0	15.3	15.5
G171.0	15.1	15.0	15.1	15.1	15.2	15.3	15.3	16.3	15.3	15.5
G172.0	15.1	15.0	15.1	15.2	15.1	15.3	15.2	15.2	15.3	15.3
G173.0	15.1	15.1	15.1	15.1	15.1	15.2	15.2	15.2	15.3	15.3
G174.0	15.1	15.0	15.0	15.1	15.1	15.2	15.2	15.1	15.3	15.3
G175.0	15.1	15.0	15.1	15.1	15.1	15.1	15.1	15.2	15.2	15.2
G176.0	15.2	15.0	15.0	15.1	15.1	15.2	15.1	15.1	15.1	15.2
G177.0	15.2	15.0	15.0	15.0	15.1	15.1	15.1	15.1	15.1	15.2
G178.0	15.1	15.1	15.0	15.0	15.1	15.0	15.0	16.2	15.0	15.1
G179.0	15.2	15.1	15.0	15.1	15.0	15.0	15.0	15.0	15.0	15.0
G180.0	15.2	15.1	15.0	15.0	15.0	15.0	14.9	14.9	14.9	15.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	1911.2	1909.6	1906.9	1902.7	1900.0	1896.5	1895.5	1894.4	1891.2	1888.7
G1.0	1888.8	1884.7	1879.5	1874.9	1870.9	1866.9	1863.8	1860.2	1857.8	1855.0
G2.0	1864.3	1857.7	1849.8	1843.0	1837.7	1831.4	1828.1	1822.9	1821.0	1818.4
G3.0	1835.7	1826.5	1816.8	1808.8	1799.2	1791.2	1786.7	1783.3	1780.1	1776.2
G4.0	1805.2	1794.4	1780.5	1770.5	1759.7	1751.7	1744.1	1741.9	1736.9	1734.3
G5.0	1775.5	1761.1	1744.8	1732.3	1720.5	1709.1	1702.7	1696.6	1693.2	1689.9
G6.0	1744.8	1726.3	1707.7	1691.9	1678.6	1667.3	1660.1	1654.4	1650.1	1646.6
G7.0	1711.0	1689.5	1669.4	1652.3	1638.5	1626.1	1617.6	1611.4	1606.1	1604.0
G8.0	1675.7	1652.5	1631.7	1613.5	1598.1	1584.8	1574.3	1568.8	1561.1	1558.2
G9.0	1641.2	1618.3	1593.3	1573.4	1555.5	1541.8	1529.2	1520.3	1512.2	1506.4
G10.0	1607.1	1579.6	1552.9	1530.5	1507.2	1487.5	1471.1	1460.8	1451.5	1446.4
G11.0	1571.4	1540.1	1509.3	1478.5	1450.3	1422.4	1403.4	1386.5	1375.2	1367.3
G12.0	1533.4	1497.1	1453.4	1418.4	1378.6	1346.1	1322.5	1304.7	1288.6	1279.1
G13.0	1490.3	1442.4	1390.8	1343.7	1297.1	1259.5	1230.0	1210.3	1190.3	1184.8
G14.0	1439.5	1379.7	1314.6	1258.2	1206.6	1165.7	1135.3	1116.9	1101.2	1088.5
G15.0	1379.7	1305.4	1232.8	1169.6	1116.5	1077.4	1049.3	1032.1	1018.7	1009.6
G16.0	1309.6	1227.1	1143.4	1081.9	1034.3	1003.2	984.0	971.2	958.5	950.7
G17.0	1234.4	1144.3	1059.5	1006.2	968.4	947.2	934.4	923.9	915.0	903.9
G18.0	1155.8	1064.3	989.9	945.3	917.2	902.8	895.7	889.0	880.6	870.6
G19.0	1076.2	989.8	928.9	894.8	877.6	868.1	863.4	858.5	850.2	840.9
G20.0	1000.6	925.7	878.0	857.7	844.1	838.2	833.5	830.2	823.2	813.8
G21.0	933.8	873.0	840.8	825.0	815.7	810.0	807.2	804.3	796.7	787.1
G22.0	879.3	831.6	809.0	797.6	788.7	783.0	781.0	779.0	772.3	762.6
G23.0	829.0	797.2	780.6	771.8	762.6	758.4	757.6	756.1	749.2	739.0
G24.0	790.6	767.6	754.2	747.2	739.1	734.7	733.4	732.5	725.2	714.6
G25.0	757.9	741.5	730.9	723.8	716.1	710.9	708.8	707.2	700.3	689.0
G26.0	729.8	716.8	706.6	700.9	692.6	686.5	684.5	684.2	677.7	666.8
G27.0	704.3	692.8	683.5	677.5	669.3	663.5	661.4	659.5	653.7	642.4
G28.0	680.3	669.0	659.7	655.3	647.4	640.2	637.5	636.6	629.8	618.6
G29.0	656.8	645.6	637.4	633.4	625.2	618.0	613.8	611.6	603.6	592.2
G30.0	634.8	624.0	615.3	610.2	602.0	594.5	588.3	585.9	578.5	568.3
G31.0	613.0	602.2	593.9	588.5	581.5	572.3	565.2	561.3	554.9	545.4
G32.0	591.8	581.9	572.3	567.0	559.2	550.2	542.3	538.5	533.6	524.6
G33.0	571.9	560.8	551.0	545.6	538.5	529.4	522.8	519.7	514.8	507.2
G34.0	551.4	540.6	532.0	527.3	519.9	512.4	505.6	503.8	499.7	492.2
G35.0	532.0	521.5	515.3	510.2	504.5	497.6	492.0	490.7	486.9	479.5
G36.0	513.6	502.9	498.6	495.4	490.1	484.8	480.8	479.5	475.9	468.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	494.6	487.0	484.4	482.6	478.9	474.7	471.4	470.0	466.5	460.0
G38.0	475.7	470.0	470.6	471.0	468.8	466.2	463.5	462.1	458.4	452.9
G39.0	459.4	454.4	457.8	461.0	461.0	459.5	456.8	455.1	451.2	446.1
G40.0	443.0	439.5	445.7	452.7	454.9	453.4	451.0	449.2	445.5	440.5
G41.0	429.4	426.0	435.0	446.1	449.4	448.3	445.6	443.5	439.6	435.1
G42.0	416.6	413.8	425.6	439.4	444.5	443.5	440.6	438.6	434.9	430.6
G43.0	404.8	402.5	415.8	433.0	439.5	438.7	436.4	434.5	430.5	426.3
G44.0	393.3	392.0	405.3	425.9	435.3	434.6	432.8	430.4	425.9	421.9
G45.0	382.5	382.2	395.6	418.4	430.4	431.3	429.0	426.5	422.2	418.8
G46.0	371.6	373.0	387.2	410.5	425.6	428.0	426.3	424.0	419.8	416.7
G47.0	361.2	364.3	379.2	403.3	420.9	425.0	424.3	422.6	419.0	416.8
G48.0	351.2	355.7	371.4	395.9	416.9	423.2	424.0	423.4	420.7	419.0
G49.0	342.0	348.1	364.5	389.6	413.1	422.6	425.0	425.6	424.2	422.6
G50.0	333.9	341.3	358.3	384.0	409.6	422.8	426.9	429.4	429.1	427.8
G51.0	326.7	335.2	352.4	378.0	406.1	423.1	429.7	434.6	435.6	434.4
G52.0	320.7	329.9	346.9	372.8	403.7	424.1	433.9	441.3	444.4	442.6
G53.0	315.7	325.4	342.5	368.2	401.4	425.6	438.7	448.0	451.4	448.9
G54.0	312.0	321.4	338.0	364.5	399.3	426.9	441.3	452.4	457.5	454.9
G55.0	309.1	318.0	334.8	361.5	397.4	425.5	443.0	457.3	465.3	463.2
G56.0	305.9	315.0	332.5	359.3	392.7	424.3	447.3	465.1	475.1	472.6
G57.0	301.9	312.8	331.5	355.5	389.4	425.6	451.8	471.5	482.2	479.3
G58.0	297.4	311.5	330.5	353.0	387.7	426.3	455.1	475.4	486.9	483.0
G59.0	293.4	311.2	328.7	351.8	386.0	425.7	456.5	477.5	488.9	484.7
G60.0	290.8	309.7	327.7	350.5	383.5	424.2	455.5	476.5	487.9	483.4
G61.0	289.2	308.1	326.7	348.3	379.7	420.3	450.4	472.1	483.4	478.9
G62.0	286.2	308.0	325.7	345.3	374.4	413.7	443.0	464.6	475.8	470.9
G63.0	283.4	309.0	323.8	340.7	367.2	405.3	433.5	455.0	465.9	460.9
G64.0	282.4	309.8	320.6	334.8	358.3	395.4	423.1	443.5	453.9	448.9
G65.0	281.1	309.4	317.2	327.6	347.8	384.2	411.4	431.3	442.6	437.5
G66.0	279.3	307.3	312.4	319.7	337.9	373.2	398.7	417.9	431.1	425.9
G67.0	275.5	302.8	306.7	312.0	327.9	360.5	385.0	405.3	418.8	414.1
G68.0	270.3	296.4	299.9	303.8	318.1	347.3	370.2	391.0	404.7	400.3
G69.0	263.4	288.0	291.5	294.8	308.1	333.0	354.3	375.8	389.7	384.1
G70.0	255.6	278.5	282.1	284.6	296.8	319.2	337.1	353.5	364.9	357.2
G71.0	246.9	268.3	272.2	274.0	285.0	304.3	308.7	313.8	320.9	314.4
G72.0	238.2	257.5	261.0	261.9	272.5	283.0	277.7	276.1	277.1	271.0
G73.0	228.1	245.8	248.8	248.3	256.1	256.5	251.4	252.0	249.5	245.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	217.5	232.3	234.1	231.8	235.0	230.8	232.5	231.9	227.9	223.8
G75.0	204.9	217.7	218.0	214.6	212.0	209.4	211.7	211.6	205.7	202.4
G76.0	192.4	201.4	200.0	195.7	190.1	189.0	191.1	190.3	183.9	181.0
G77.0	178.3	184.3	182.4	178.9	173.0	169.2	170.3	168.8	162.9	159.6
G78.0	164.8	169.2	167.2	164.1	162.2	153.2	152.5	149.1	144.4	141.0
G79.0	151.4	155.3	154.5	159.1	155.9	140.7	136.0	132.1	128.0	125.6
G80.0	142.4	143.5	143.5	160.8	154.2	132.4	125.5	119.6	115.7	113.4
G81.0	133.1	133.6	132.8	159.5	151.3	123.0	113.8	106.7	102.4	100.4
G82.0	124.9	124.0	123.0	147.8	144.9	114.0	101.7	90.4	83.7	80.3
G83.0	116.1	114.3	113.4	134.3	134.5	104.3	82.9	68.7	61.1	58.6
G84.0	108.7	106.2	105.2	121.5	122.7	91.3	68.6	57.0	49.3	47.7
G85.0	101.7	98.9	96.9	108.9	106.1	76.5	59.9	48.2	41.4	39.7
G86.0	94.8	91.2	89.1	96.0	89.7	63.9	51.6	41.2	35.1	33.3
G87.0	85.7	82.4	81.1	83.6	74.8	54.3	43.6	34.4	29.1	27.1
G88.0	76.6	72.5	71.9	73.0	62.8	45.9	36.0	28.3	23.5	21.6
G89.0	66.7	62.4	62.9	61.8	51.0	37.1	28.9	22.1	16.9	15.6
G90.0	56.4	53.3	53.5	50.2	41.4	29.6	22.8	17.2	14.5	13.9
G91.0	48.2	44.8	43.8	37.1	28.9	22.6	17.6	14.5	12.8	12.6
G92.0	38.4	36.5	33.9	26.8	21.6	17.0	14.4	13.4	11.6	11.6
G93.0	28.8	27.2	22.7	18.1	14.3	12.4	11.8	11.9	9.9	9.8
G94.0	20.5	18.9	15.5	12.4	10.0	9.2	9.0	9.0	7.6	7.4
G95.0	14.9	12.6	10.2	8.2	6.8	7.0	7.1	7.3	5.7	5.7
G96.0	10.5	8.2	5.9	4.0	3.7	4.2	4.6	4.6	3.8	3.7
G97.0	7.6	5.6	3.5	2.5	2.4	2.6	2.8	2.7	2.6	2.6
G98.0	5.8	4.0	2.6	2.0	1.8	1.9	2.0	2.0	2.1	2.1
G99.0	4.6	3.5	2.5	2.0	1.9	1.9	1.8	1.9	1.9	2.0
G100.0	4.4	3.5	2.5	2.0	1.9	1.9	1.9	1.9	1.9	2.0
G101.0	4.5	3.5	2.6	2.1	2.0	1.9	2.0	1.9	2.1	2.0
G102.0	4.8	3.6	2.7	2.3	2.0	2.0	2.0	2.1	2.1	2.1
G103.0	5.0	3.8	3.0	2.4	2.1	2.1	2.1	2.1	2.1	2.1
G104.0	5.2	3.9	3.1	2.5	2.1	2.1	2.3	2.1	2.3	2.3
G105.0	5.5	4.2	3.2	2.6	2.3	2.1	2.4	2.3	2.4	2.4
G106.0	5.8	4.4	3.5	2.8	2.4	2.4	2.4	2.4	2.4	2.5
G107.0	6.1	4.6	3.7	3.0	2.5	2.4	2.5	2.4	2.5	2.6
G108.0	6.3	5.0	3.8	3.1	2.6	2.5	2.5	2.6	2.6	2.7
G109.0	6.7	5.2	4.0	3.3	2.8	2.6	2.6	2.6	2.7	2.7
G110.0	6.9	5.5	4.3	3.6	3.0	2.7	2.7	2.7	2.8	2.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	7.1	5.7	4.5	3.7	3.1	3.0	2.8	2.8	3.0	2.8
G112.0	7.4	5.9	4.8	3.8	3.3	3.1	3.0	3.0	3.0	3.0
G113.0	7.6	6.2	5.0	4.0	3.5	3.2	3.1	3.1	3.1	3.2
G114.0	8.0	6.5	5.3	4.3	3.7	3.3	3.3	3.2	3.2	3.3
G115.0	8.2	6.7	5.6	4.6	3.9	3.6	3.3	3.3	3.5	3.5
G116.0	8.6	7.0	5.8	4.8	4.0	3.7	3.7	3.5	3.6	3.7
G117.0	8.8	7.4	6.1	5.1	4.4	3.9	3.8	3.6	3.7	3.8
G118.0	9.0	7.6	6.3	5.2	4.6	4.2	3.9	3.8	3.9	3.9
G119.0	9.3	7.8	6.7	5.6	4.9	4.4	4.2	4.0	4.2	4.2
G120.0	9.5	8.1	6.9	5.8	5.1	4.6	4.4	4.3	4.3	4.3
G121.0	9.8	8.4	7.1	6.2	5.3	4.9	4.6	4.5	4.5	4.5
G122.0	10.0	8.7	7.5	6.4	5.6	5.1	4.9	4.8	4.8	4.8
G123.0	10.4	8.9	7.6	6.7	5.8	5.3	5.2	5.0	5.0	5.1
G124.0	10.5	9.2	8.0	6.9	6.2	5.7	5.3	5.2	5.1	5.2
G125.0	10.6	9.4	8.2	7.3	6.4	5.9	5.7	5.5	5.5	5.6
G126.0	10.9	9.6	8.4	7.5	6.7	6.2	5.9	5.7	5.7	5.8
G127.0	11.1	9.9	8.8	7.7	7.0	6.5	6.2	5.9	6.1	6.1
G128.0	11.2	10.1	9.0	8.1	7.3	6.8	6.4	6.3	6.4	6.4
G129.0	11.4	10.2	9.3	8.3	7.5	7.0	6.8	6.5	6.7	6.8
G130.0	11.6	10.5	9.5	8.6	7.8	7.4	7.0	6.9	6.9	7.0
G131.0	11.8	10.7	9.8	8.8	8.2	7.6	7.4	7.3	7.3	7.4
G132.0	11.9	10.9	10.0	9.2	8.4	8.0	7.6	7.5	7.6	7.7
G133.0	12.1	11.2	10.2	9.4	8.8	8.3	8.0	7.7	7.8	8.1
G134.0	12.3	11.3	10.5	9.8	9.0	8.6	8.2	8.1	8.2	8.3
G135.0	12.5	11.5	10.7	10.0	9.3	8.8	8.6	8.4	8.6	8.7
G136.0	12.5	11.6	10.9	10.2	9.5	9.2	8.9	8.8	8.8	8.9
G137.0	12.6	11.9	11.1	10.5	9.9	9.4	9.2	9.0	9.2	9.3
G138.0	12.8	12.0	11.3	10.6	10.1	9.8	9.5	9.4	9.5	9.6
G139.0	13.0	12.1	11.5	10.8	10.4	10.1	9.8	9.8	9.8	9.9
G140.0	13.1	12.4	11.8	11.2	10.6	10.4	10.1	10.0	10.1	10.2
G141.0	13.2	12.5	11.9	11.3	10.9	10.6	10.4	10.2	10.5	10.6
G142.0	13.3	12.6	12.0	11.5	11.1	10.8	10.7	10.6	10.8	10.9
G143.0	13.4	12.7	12.3	11.8	11.3	11.2	10.9	10.9	11.1	11.3
G144.0	13.4	12.8	12.4	12.0	11.6	11.4	11.3	11.2	11.4	11.5
G145.0	13.6	13.1	12.6	12.1	11.8	11.6	11.6	11.5	11.6	11.8
G146.0	13.6	13.2	12.7	12.4	12.0	11.9	11.9	11.8	12.0	12.1
G147.0	13.7	13.3	12.8	12.5	12.3	12.1	12.1	12.1	12.3	12.4

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	13.8	13.3	13.0	12.6	12.5	12.4	12.4	12.4	12.5	12.6
G149.0	13.9	13.6	13.2	12.8	12.6	12.6	12.6	12.6	12.8	13.0
G150.0	14.0	13.7	13.3	13.1	12.8	12.7	12.8	12.8	13.0	13.2
G151.0	14.0	13.8	13.4	13.2	13.1	13.0	13.1	13.1	13.3	13.4
G152.0	14.1	13.9	13.7	13.3	13.2	13.2	13.2	13.3	13.6	13.7
G153.0	14.3	14.0	13.8	13.6	13.3	13.3	13.4	13.6	13.7	13.9
G154.0	14.4	14.1	13.9	13.7	13.6	13.6	13.7	13.8	14.0	14.0
G155.0	14.5	14.1	14.0	13.8	13.8	13.8	13.9	13.9	14.1	14.3
G156.0	14.6	14.3	14.1	14.0	13.9	14.0	14.0	14.1	14.4	14.5
G157.0	14.6	14.5	14.3	14.1	14.1	14.3	14.4	14.4	14.6	14.8
G158.0	14.8	14.5	14.4	14.4	14.4	14.5	14.5	14.6	14.8	15.0
G159.0	14.9	14.6	14.6	14.5	14.5	14.6	14.8	14.8	15.0	15.1
G160.0	15.0	14.8	14.8	14.6	14.8	14.8	14.9	15.0	15.1	15.3
G161.0	15.0	14.9	14.8	14.9	14.9	15.0	15.1	15.2	15.2	15.5
G162.0	15.0	15.0	14.9	14.9	15.0	15.2	15.3	15.3	15.5	15.6
G163.0	15.1	15.1	15.0	15.1	15.2	15.3	15.6	15.5	15.7	15.7
G164.0	15.2	15.2	15.1	15.2	15.3	15.6	15.7	15.7	15.8	15.8
G165.0	15.2	15.2	15.2	15.3	15.5	15.6	15.8	15.8	15.9	15.9
G166.0	15.2	15.3	15.3	15.5	15.6	15.7	15.9	15.9	16.0	16.0
G167.0	15.3	15.3	15.3	15.6	15.7	15.8	16.0	16.0	16.2	16.2
G168.0	15.3	15.5	15.5	15.6	15.7	15.9	16.0	16.2	16.3	16.2
G169.0	15.3	15.5	15.5	15.7	15.8	15.9	16.2	16.3	16.3	16.3
G170.0	15.5	15.5	15.6	15.8	15.8	16.0	16.2	16.3	16.4	16.3
G171.0	15.5	15.5	15.6	15.8	15.8	16.0	16.3	16.3	16.4	16.3
G172.0	15.5	15.6	15.6	15.7	15.8	16.2	16.3	16.4	16.4	16.4
G173.0	15.5	15.5	15.6	15.7	15.8	16.0	16.3	16.3	16.4	16.3
G174.0	15.5	15.5	15.6	15.7	15.8	15.9	16.2	16.3	16.3	16.3
G175.0	15.3	15.5	15.5	15.7	15.7	15.9	16.0	16.2	16.3	16.2
G176.0	15.2	15.3	15.5	15.6	15.7	15.8	16.0	16.0	16.2	16.0
G177.0	15.2	15.2	15.3	15.5	15.6	15.7	15.9	15.9	16.0	15.9
G178.0	15.2	15.2	15.3	15.5	15.5	15.6	15.7	15.8	15.9	15.8
G179.0	15.1	15.1	15.2	15.3	15.5	15.5	15.6	15.7	15.8	15.7
G180.0	15.0	15.1	15.1	15.2	15.3	15.3	15.5	15.6	15.6	15.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	1885.5	1886.2	1887.3	1886.3	1888.7	1891.9	1892.0	1895.9	1898.0	1902.1
G1.0	1853.1	1854.6	1854.9	1855.6	1859.4	1861.6	1866.0	1870.7	1876.6	1882.2
G2.0	1815.6	1817.7	1819.1	1821.2	1826.3	1830.9	1837.3	1844.2	1852.1	1859.8
G3.0	1773.9	1776.9	1780.2	1782.1	1790.2	1796.1	1804.0	1812.8	1823.9	1836.3
G4.0	1733.0	1733.6	1739.4	1743.6	1752.7	1759.6	1770.3	1782.4	1795.0	1810.1
G5.0	1689.5	1691.2	1697.6	1702.9	1714.0	1723.5	1735.9	1751.5	1767.2	1785.3
G6.0	1645.7	1648.7	1656.0	1661.8	1673.8	1685.7	1701.4	1719.3	1738.4	1759.1
G7.0	1603.1	1606.7	1613.8	1621.4	1635.0	1650.1	1666.3	1687.0	1709.2	1733.9
G8.0	1557.7	1560.2	1568.9	1578.0	1594.0	1609.6	1629.4	1652.9	1678.0	1705.1
G9.0	1505.5	1511.0	1521.5	1531.9	1548.3	1566.1	1588.8	1615.5	1643.7	1676.2
G10.0	1443.2	1448.8	1463.7	1476.5	1499.5	1521.6	1545.3	1575.0	1604.8	1640.6
G11.0	1366.2	1375.1	1390.8	1412.4	1437.9	1469.4	1498.4	1530.2	1565.5	1603.3
G12.0	1275.8	1288.5	1310.3	1331.6	1367.9	1403.4	1442.5	1483.2	1524.4	1565.1
G13.0	1183.8	1195.6	1216.9	1244.9	1284.0	1329.7	1375.4	1427.8	1476.5	1525.0
G14.0	1085.3	1099.5	1122.8	1147.9	1194.4	1241.5	1299.4	1363.7	1423.4	1481.3
G15.0	1004.6	1013.3	1032.5	1057.7	1101.3	1154.6	1216.8	1291.2	1363.5	1433.9
G16.0	943.3	945.3	958.7	978.8	1016.4	1066.8	1130.1	1213.0	1296.7	1381.7
G17.0	897.5	896.3	903.0	916.3	942.2	985.0	1047.9	1130.6	1223.2	1320.3
G18.0	863.5	862.0	862.0	866.7	885.7	916.9	972.2	1054.1	1147.2	1253.5
G19.0	833.4	829.6	828.4	831.0	838.5	860.2	907.4	978.5	1071.5	1183.4
G20.0	805.5	800.2	799.6	797.7	803.0	814.6	848.8	911.4	997.5	1111.8
G21.0	778.6	774.5	772.2	770.4	771.7	779.9	802.1	850.9	930.9	1042.5
G22.0	753.0	748.3	746.9	744.1	744.4	749.8	761.9	801.8	873.1	980.6
G23.0	729.2	724.5	721.8	718.9	719.1	720.9	729.3	758.1	823.6	925.1
G24.0	704.7	699.8	698.3	692.6	693.3	693.1	699.8	721.7	780.7	877.5
G25.0	680.5	675.5	672.7	669.4	669.3	668.3	673.0	690.8	742.4	836.6
G26.0	656.2	651.8	648.2	643.7	644.1	644.1	647.4	664.2	709.0	798.8
G27.0	632.1	628.1	624.3	621.6	619.8	619.9	623.6	638.6	677.4	764.9
G28.0	607.9	603.9	602.2	598.3	596.0	595.7	600.9	615.9	648.8	732.7
G29.0	584.0	581.2	579.3	575.8	573.3	573.4	579.5	593.7	624.2	703.3
G30.0	560.0	558.2	556.2	551.9	551.1	551.9	558.1	572.8	600.4	675.8
G31.0	538.3	536.0	534.3	530.6	529.9	532.3	537.2	551.8	580.1	651.1
G32.0	518.0	516.1	514.1	510.3	510.6	512.0	517.0	532.9	560.2	627.5
G33.0	500.9	499.7	496.1	492.6	493.4	493.8	498.2	513.7	541.3	605.2
G34.0	486.5	484.6	482.1	478.1	478.1	475.8	480.4	496.0	523.7	583.9
G35.0	475.0	473.1	468.9	465.0	464.1	460.9	464.3	479.3	507.2	564.0
G36.0	464.7	462.4	458.2	454.0	451.0	446.3	449.4	462.7	491.4	545.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	456.3	454.4	449.2	445.1	439.0	433.5	435.1	447.9	477.4	528.4
G38.0	449.4	447.3	442.5	437.5	429.7	421.9	422.2	432.8	461.6	510.6
G39.0	444.0	441.2	436.4	431.3	421.3	411.8	410.0	419.1	446.2	493.5
G40.0	438.9	436.6	431.1	425.7	414.4	403.1	398.5	405.9	430.3	475.4
G41.0	433.9	431.6	427.2	421.2	408.4	394.8	387.6	393.4	416.1	458.1
G42.0	429.4	426.9	423.7	416.0	402.4	386.4	377.0	381.3	401.8	440.7
G43.0	425.6	423.2	420.1	411.5	396.4	378.5	367.4	370.0	388.4	423.7
G44.0	421.8	419.4	416.6	406.7	390.1	370.6	358.0	358.8	375.2	407.1
G45.0	419.0	416.5	413.3	402.7	384.4	363.2	349.5	348.6	362.5	390.9
G46.0	417.2	414.6	410.4	399.0	378.6	356.4	341.7	338.9	350.5	375.8
G47.0	416.9	413.5	408.4	395.2	372.8	350.0	334.6	330.2	339.2	361.0
G48.0	418.5	413.7	407.3	391.5	367.1	344.4	328.5	322.3	328.5	346.1
G49.0	421.1	414.8	406.7	387.7	362.0	339.2	323.0	315.7	318.6	332.4
G50.0	424.9	416.6	406.0	384.5	356.5	334.0	318.2	310.0	309.5	319.2
G51.0	429.8	419.1	405.8	381.5	351.8	329.2	314.2	305.5	301.2	306.6
G52.0	436.0	422.8	405.9	378.6	347.3	324.9	310.6	301.7	293.7	294.2
G53.0	440.6	425.7	406.2	375.5	343.7	321.4	307.5	297.5	285.8	282.2
G54.0	444.0	426.5	404.6	372.7	340.6	318.5	303.7	293.3	277.4	271.5
G55.0	450.0	428.8	402.5	368.5	338.0	316.7	300.6	288.4	268.9	261.5
G56.0	457.0	433.6	403.7	366.0	334.9	315.4	298.5	282.7	260.7	252.1
G57.0	462.5	437.6	404.9	365.3	333.2	312.9	297.4	277.1	252.7	243.3
G58.0	465.9	439.9	405.3	363.9	332.4	311.8	295.5	272.8	245.6	235.3
G59.0	467.2	440.5	404.6	362.1	331.0	311.2	293.3	269.5	239.7	228.2
G60.0	465.2	438.0	402.4	359.4	329.4	310.6	292.9	264.7	235.1	222.6
G61.0	460.5	431.8	397.5	355.0	326.7	309.8	293.5	260.8	231.1	218.2
G62.0	452.5	424.8	390.5	348.6	322.8	308.7	293.6	259.3	225.5	215.3
G63.0	441.7	414.8	381.7	341.1	318.0	306.9	293.3	257.6	220.5	212.5
G64.0	430.0	403.3	371.8	332.4	312.3	304.3	291.8	255.1	217.3	208.5
G65.0	417.0	391.3	360.8	323.9	306.0	300.6	288.1	251.3	213.9	204.5
G66.0	404.7	378.3	348.1	314.9	299.3	295.2	282.7	246.2	210.7	202.5
G67.0	391.7	364.0	336.4	306.0	292.3	287.7	275.3	240.2	207.2	201.8
G68.0	377.6	350.1	323.9	296.9	283.4	279.1	266.6	232.7	203.4	200.9
G69.0	359.7	334.0	311.3	286.6	273.2	269.6	257.1	225.5	199.1	199.4
G70.0	330.1	310.1	296.8	274.7	261.7	258.5	245.9	216.9	194.1	197.4
G71.0	289.6	279.5	274.5	260.4	249.4	245.7	234.3	208.2	188.3	194.8
G72.0	259.0	252.9	249.5	242.9	234.5	231.5	221.8	198.0	181.7	191.2
G73.0	240.0	233.8	225.5	221.6	217.3	215.3	206.8	186.6	174.1	185.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	219.6	214.1	205.3	199.6	198.8	198.6	190.9	174.1	165.2	178.9
G75.0	198.9	193.6	186.5	178.6	181.8	180.9	175.5	161.3	155.4	168.9
G76.0	178.1	173.9	167.9	163.5	165.9	165.5	160.7	149.1	145.1	158.6
G77.0	157.9	155.7	152.1	153.8	156.1	152.0	147.3	137.7	135.2	149.0
G78.0	139.5	139.4	138.9	148.9	152.0	140.6	135.7	128.4	128.3	138.5
G79.0	124.4	125.5	129.4	147.8	152.9	130.9	126.2	120.8	121.4	128.9
G80.0	112.3	114.4	119.5	144.1	148.8	121.5	117.3	113.1	114.2	121.3
G81.0	100.0	102.4	109.8	135.7	138.4	112.1	108.3	105.6	106.9	114.8
G82.0	76.8	84.8	99.7	125.0	126.8	103.2	100.4	98.5	100.4	107.7
G83.0	59.8	67.3	86.7	112.7	115.9	95.0	93.5	92.2	93.8	99.8
G84.0	50.0	58.0	72.7	99.4	103.0	87.9	85.3	86.5	87.6	92.5
G85.0	42.3	50.3	61.0	82.3	88.4	79.9	77.2	80.2	78.3	82.4
G86.0	35.8	43.3	52.4	68.3	76.9	72.1	69.8	72.5	69.8	74.1
G87.0	29.4	35.3	43.8	55.8	66.5	64.2	62.5	63.6	63.2	68.7
G88.0	23.7	28.4	36.5	44.4	54.3	56.6	55.3	56.4	57.2	63.7
G89.0	17.6	23.1	29.4	36.3	45.3	48.2	48.2	49.7	52.2	57.4
G90.0	14.8	18.2	22.5	26.6	33.9	39.2	40.7	41.7	45.7	50.0
G91.0	13.1	14.9	17.1	20.7	25.2	30.0	33.1	34.1	37.9	41.6
G92.0	12.7	13.9	13.9	15.5	18.1	21.2	23.9	26.3	29.0	32.9
G93.0	10.0	10.9	10.9	10.9	12.4	14.0	16.2	19.0	21.3	24.0
G94.0	7.8	8.8	8.8	8.2	8.8	9.6	10.7	13.2	15.8	18.1
G95.0	6.2	7.0	6.8	6.2	5.6	6.2	7.3	8.7	11.3	13.7
G96.0	3.8	4.9	4.8	4.0	3.7	3.9	4.9	6.3	8.3	10.5
G97.0	2.6	2.8	3.0	2.6	2.7	3.1	3.9	5.0	6.8	8.6
G98.0	2.0	2.1	2.1	2.1	2.4	3.0	3.7	4.5	5.8	7.5
G99.0	1.9	2.0	2.0	2.1	2.3	2.8	3.7	4.5	5.6	7.0
G100.0	2.0	2.1	2.1	2.3	2.4	2.8	3.6	4.5	5.7	7.1
G101.0	2.0	2.1	2.3	2.4	2.5	3.0	3.7	4.8	5.9	7.4
G102.0	2.1	2.3	2.4	2.5	2.6	3.1	3.8	4.9	6.3	7.7
G103.0	2.3	2.3	2.5	2.6	2.8	3.3	4.0	5.1	6.5	8.1
G104.0	2.4	2.4	2.5	2.7	2.8	3.6	4.3	5.5	6.9	8.4
G105.0	2.4	2.5	2.7	2.8	3.1	3.7	4.5	5.7	7.3	8.9
G106.0	2.5	2.6	2.7	3.0	3.2	3.9	4.8	6.2	7.6	9.3
G107.0	2.6	2.7	2.8	3.1	3.5	4.0	5.2	6.4	8.0	9.5
G108.0	2.6	2.8	3.0	3.2	3.7	4.4	5.3	6.8	8.3	9.9
G109.0	2.7	2.8	3.1	3.3	3.8	4.6	5.8	7.0	8.7	10.2
G110.0	2.8	3.0	3.2	3.6	4.0	4.9	6.1	7.5	8.9	10.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	3.0	3.1	3.5	3.7	4.3	5.1	6.4	7.7	9.3	10.8
G112.0	3.1	3.2	3.6	3.9	4.5	5.3	6.7	8.1	9.6	11.2
G113.0	3.3	3.6	3.7	4.2	4.8	5.7	7.0	8.4	10.0	11.4
G114.0	3.5	3.6	3.9	4.4	5.0	6.1	7.3	8.8	10.2	11.8
G115.0	3.6	3.8	4.2	4.6	5.3	6.3	7.6	9.0	10.6	12.0
G116.0	3.7	4.0	4.4	4.8	5.5	6.7	8.0	9.4	10.9	12.4
G117.0	3.9	4.0	4.5	5.1	5.9	6.9	8.3	9.6	11.2	12.7
G118.0	4.2	4.4	4.8	5.3	6.2	7.3	8.6	10.0	11.4	12.8
G119.0	4.3	4.6	5.0	5.6	6.4	7.5	8.8	10.2	11.6	13.2
G120.0	4.5	4.9	5.2	5.9	6.8	7.8	9.2	10.5	11.9	13.3
G121.0	4.8	5.1	5.6	6.2	7.0	8.1	9.3	10.7	12.1	13.6
G122.0	5.0	5.3	5.8	6.4	7.3	8.4	9.8	11.1	12.4	13.8
G123.0	5.3	5.6	6.1	6.8	7.6	8.8	10.0	11.3	12.6	13.9
G124.0	5.6	5.9	6.4	7.0	7.8	9.0	10.2	11.5	12.8	14.1
G125.0	5.8	6.2	6.7	7.4	8.2	9.3	10.5	11.8	13.1	14.3
G126.0	6.1	6.4	7.0	7.7	8.4	9.5	10.7	11.9	13.3	14.4
G127.0	6.4	6.8	7.3	8.0	8.8	9.9	10.9	12.1	13.4	14.6
G128.0	6.7	7.0	7.6	8.3	9.2	10.1	11.2	12.4	13.6	14.8
G129.0	7.0	7.4	8.0	8.7	9.4	10.5	11.4	12.5	13.7	14.8
G130.0	7.3	7.7	8.2	8.9	9.6	10.7	11.6	12.7	13.8	15.0
G131.0	7.6	8.0	8.4	9.2	10.0	10.8	11.9	13.0	14.0	15.0
G132.0	7.8	8.3	8.8	9.5	10.4	11.1	12.1	13.1	14.1	15.1
G133.0	8.2	8.7	9.2	9.9	10.6	11.4	12.4	13.3	14.3	15.1
G134.0	8.6	8.9	9.5	10.1	10.8	11.6	12.5	13.3	14.3	15.2
G135.0	8.9	9.3	9.8	10.5	11.2	11.9	12.7	13.6	14.4	15.2
G136.0	9.2	9.6	10.0	10.8	11.4	12.1	12.8	13.7	14.5	15.2
G137.0	9.5	10.0	10.5	11.1	11.6	12.4	13.0	13.8	14.6	15.2
G138.0	9.9	10.2	10.7	11.3	11.9	12.6	13.2	13.9	14.6	15.3
G139.0	10.2	10.6	11.1	11.6	12.1	12.7	13.4	14.0	14.6	15.3
G140.0	10.6	10.9	11.4	11.9	12.4	13.0	13.6	14.1	14.8	15.3
G141.0	10.8	11.3	11.6	12.1	12.6	13.1	13.7	14.3	14.8	15.3
G142.0	11.2	11.5	11.9	12.4	12.8	13.3	13.8	14.4	14.9	15.3
G143.0	11.5	11.9	12.3	12.6	13.0	13.6	13.9	14.4	14.9	15.5
G144.0	11.8	12.0	12.5	12.8	13.2	13.6	14.0	14.5	14.9	15.3
G145.0	12.0	12.4	12.7	13.1	13.4	13.9	14.1	14.6	14.9	15.3
G146.0	12.3	12.6	13.1	13.3	13.6	13.9	14.3	14.8	15.0	15.3
G147.0	12.7	13.0	13.3	13.6	13.8	14.1	14.4	14.8	15.0	15.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	13.0	13.2	13.6	13.8	13.9	14.1	14.5	14.8	15.1	15.3
G149.0	13.2	13.4	13.7	13.9	14.1	14.3	14.6	14.9	15.1	15.3
G150.0	13.4	13.7	13.9	14.1	14.3	14.5	14.8	15.0	15.1	15.3
G151.0	13.7	13.9	14.1	14.3	14.5	14.6	14.8	15.0	15.1	15.3
G152.0	13.9	14.0	14.4	14.5	14.5	14.8	14.9	15.1	15.1	15.2
G153.0	14.1	14.3	14.5	14.6	14.8	14.9	14.9	15.1	15.1	15.2
G154.0	14.3	14.5	14.8	14.8	14.9	14.9	15.0	15.2	15.2	15.2
G155.0	14.5	14.6	14.9	15.0	15.0	15.0	15.1	15.1	15.2	15.2
G156.0	14.8	14.9	15.0	15.1	15.1	15.2	15.2	15.2	15.2	15.3
G157.0	14.9	15.1	15.2	15.2	15.2	15.2	15.2	15.2	15.2	15.3
G158.0	15.1	15.2	15.3	15.3	15.3	15.3	15.3	15.2	15.2	15.3
G159.0	15.3	15.3	15.5	15.5	15.5	15.5	15.3	15.2	15.2	15.3
G160.0	15.3	15.5	15.6	15.6	15.6	15.5	15.3	15.3	15.3	15.3
G161.0	15.5	15.6	15.7	15.6	15.6	15.5	15.5	15.3	15.3	15.2
G162.0	15.6	15.7	15.8	15.8	15.7	15.6	15.5	15.3	15.2	15.2
G163.0	15.8	15.9	15.9	15.8	15.8	15.6	15.6	15.3	15.3	15.2
G164.0	15.9	15.9	15.9	15.8	15.8	15.6	15.6	15.3	15.2	15.2
G165.0	16.0	16.0	16.0	15.9	15.8	15.7	15.6	15.3	15.2	15.2
G166.0	16.0	16.2	16.0	16.0	15.8	15.7	15.6	15.3	15.2	15.1
G167.0	16.2	16.2	16.2	16.0	15.8	15.6	15.5	15.3	15.3	15.2
G168.0	16.2	16.3	16.2	16.0	15.8	15.7	15.5	15.3	15.2	15.2
G169.0	16.2	16.3	16.3	16.0	15.8	15.7	15.5	15.3	15.2	15.1
G170.0	16.3	16.3	16.2	16.0	15.8	15.6	15.5	15.2	15.2	15.1
G171.0	16.3	16.3	16.2	16.0	15.8	15.6	15.3	15.3	15.2	15.1
G172.0	16.3	16.3	16.2	16.0	15.8	15.6	15.3	15.2	15.1	15.1
G173.0	16.3	16.2	16.0	15.9	15.7	15.5	15.2	15.1	15.1	15.0
G174.0	16.2	16.2	16.0	15.8	15.6	15.3	15.2	15.0	15.0	15.0
G175.0	16.0	16.0	15.9	15.7	15.5	15.2	15.1	15.0	15.0	14.9
G176.0	15.9	15.8	15.7	15.6	15.3	15.1	15.1	14.9	14.9	14.9
G177.0	15.8	15.8	15.6	15.5	15.2	15.1	15.0	14.8	14.8	14.6
G178.0	15.7	15.6	15.5	15.3	15.1	14.9	14.9	14.6	14.6	14.6
G179.0	15.5	15.5	15.3	15.2	15.0	14.8	14.6	14.5	14.5	14.5
G180.0	15.3	15.2	15.1	15.0	14.8	14.6	14.5	14.5	14.4	14.4

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	1905.0	1907.3	1911.8	1913.7	1916.8	1919.1	1944.2	1941.1	1937.7	1933.7
G1.0	1887.9	1892.7	1900.1	1905.0	1910.3	1915.4	1943.5	1942.3	1940.4	1938.5
G2.0	1868.4	1876.7	1887.0	1895.6	1903.4	1912.2	1942.9	1943.0	1943.3	1943.3
G3.0	1846.9	1859.9	1872.4	1884.5	1895.3	1907.3	1941.5	1944.3	1947.0	1949.0
G4.0	1825.6	1840.7	1857.9	1873.7	1887.5	1902.8	1939.6	1944.5	1949.2	1952.8
G5.0	1803.1	1822.9	1841.8	1862.3	1880.6	1898.7	1939.3	1945.7	1951.6	1957.1
G6.0	1781.3	1803.9	1827.7	1850.3	1872.8	1894.9	1937.1	1947.6	1955.1	1961.8
G7.0	1759.1	1784.5	1812.3	1838.9	1864.3	1890.7	1935.8	1949.3	1959.0	1967.1
G8.0	1735.3	1765.1	1796.2	1826.3	1856.7	1885.7	1934.7	1950.3	1963.1	1973.0
G9.0	1707.3	1742.1	1778.6	1812.9	1847.8	1881.4	1934.7	1952.4	1967.7	1979.8
G10.0	1678.1	1717.7	1758.9	1799.5	1839.5	1877.5	1933.9	1956.2	1972.4	1986.1
G11.0	1647.8	1692.1	1738.7	1785.3	1830.9	1873.7	1933.2	1959.9	1977.9	1992.3
G12.0	1613.2	1664.1	1717.2	1770.4	1821.0	1868.6	1933.7	1962.3	1982.4	1999.7
G13.0	1575.9	1633.6	1694.1	1753.4	1810.1	1863.1	1934.1	1965.5	1988.1	2006.5
G14.0	1538.8	1601.6	1668.0	1733.4	1796.8	1856.3	1934.2	1970.2	1994.5	2014.4
G15.0	1499.3	1567.4	1639.1	1710.8	1781.3	1848.7	1934.0	1972.8	2001.3	2021.4
G16.0	1456.4	1529.8	1607.9	1687.2	1765.5	1840.5	1933.1	1976.2	2007.6	2029.3
G17.0	1408.0	1491.5	1576.3	1664.4	1748.4	1830.7	1931.9	1981.0	2014.2	2036.4
G18.0	1355.6	1452.1	1543.9	1639.6	1731.5	1821.2	1931.0	1983.1	2020.7	2044.1
G19.0	1299.7	1408.7	1511.9	1613.3	1714.0	1811.5	1928.8	1985.3	2026.8	2051.5
G20.0	1238.0	1365.2	1478.7	1590.0	1697.6	1802.8	1925.4	1987.4	2031.8	2059.4
G21.0	1177.4	1317.2	1447.1	1566.3	1684.2	1796.9	1922.6	1990.3	2038.4	2068.1
G22.0	1116.2	1270.1	1412.5	1546.1	1673.1	1792.4	1922.7	1996.2	2047.1	2079.1
G23.0	1060.5	1221.7	1380.3	1526.3	1663.3	1790.2	1922.9	2001.8	2057.9	2090.5
G24.0	1010.9	1173.0	1346.8	1507.1	1654.9	1790.8	1925.0	2009.9	2068.5	2102.9
G25.0	969.2	1131.8	1313.4	1486.5	1648.2	1793.8	1928.2	2018.6	2081.5	2116.1
G26.0	931.9	1094.9	1280.1	1467.6	1642.4	1799.5	1934.9	2030.8	2096.0	2132.5
G27.0	897.5	1064.2	1252.6	1448.4	1638.7	1807.5	1944.7	2045.8	2115.1	2151.4
G28.0	865.9	1037.7	1230.7	1433.1	1635.0	1817.6	1956.4	2063.8	2135.2	2173.3
G29.0	838.9	1015.5	1213.8	1421.1	1633.1	1829.3	1969.7	2082.6	2157.7	2196.6
G30.0	811.5	994.3	1202.2	1414.3	1635.0	1843.7	1986.4	2106.6	2183.3	2223.5
G31.0	787.7	976.7	1193.0	1411.9	1638.7	1860.0	2007.3	2130.6	2211.9	2254.0
G32.0	765.7	960.9	1186.5	1413.4	1647.1	1878.2	2031.3	2160.6	2243.4	2285.9
G33.0	744.9	945.2	1183.0	1419.4	1658.9	1901.3	2057.1	2190.6	2277.1	2321.2
G34.0	724.3	932.0	1180.5	1428.8	1675.5	1926.8	2085.0	2225.0	2313.9	2359.0
G35.0	704.0	919.0	1180.1	1441.7	1694.3	1957.2	2117.5	2263.5	2356.5	2401.7
G36.0	683.9	906.7	1181.4	1457.8	1720.1	1990.5	2152.8	2306.8	2402.2	2446.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	663.9	893.8	1183.7	1475.2	1747.7	2025.4	2194.2	2353.1	2453.3	2496.6
G38.0	642.3	880.5	1186.2	1496.0	1778.2	2065.1	2237.9	2405.9	2507.0	2551.8
G39.0	621.0	867.8	1189.3	1517.5	1814.7	2112.7	2286.7	2459.3	2566.3	2611.5
G40.0	599.7	854.9	1192.8	1542.8	1857.7	2176.4	2334.9	2515.9	2627.4	2677.3
G41.0	576.5	839.2	1190.2	1556.9	1890.2	2221.2	2392.2	2582.2	2700.8	2753.6
G42.0	553.7	824.1	1185.8	1565.0	1909.9	2248.8	2478.3	2684.5	2793.9	2834.4
G43.0	532.6	810.9	1180.4	1571.8	1926.3	2270.2	2551.4	2770.7	2889.4	2915.4
G44.0	510.5	797.6	1176.6	1581.5	1948.2	2301.2	2591.0	2815.7	2942.3	2990.1
G45.0	490.8	785.8	1174.1	1590.9	1971.8	2336.9	2625.6	2862.2	2994.3	3048.6
G46.0	470.8	773.9	1169.1	1599.2	1997.5	2375.6	2674.5	2916.2	3053.3	3105.9
G47.0	450.8	760.0	1162.7	1606.1	2022.7	2414.3	2727.6	2984.4	3120.9	3174.2
G48.0	431.9	744.6	1154.5	1613.3	2049.1	2456.5	2787.0	3053.9	3197.1	3245.9
G49.0	414.0	727.3	1145.8	1618.8	2074.3	2498.2	2850.1	3129.8	3276.4	3323.9
G50.0	395.8	710.2	1135.6	1623.5	2101.2	2540.5	2912.2	3205.4	3353.7	3402.2
G51.0	378.8	691.9	1124.0	1626.9	2127.7	2581.6	2975.3	3285.2	3441.3	3483.8
G52.0	362.4	673.5	1111.4	1627.9	2152.1	2625.4	3038.4	3364.7	3524.9	3566.1
G53.0	346.8	653.5	1096.6	1627.9	2175.2	2666.4	3103.8	3444.2	3612.6	3651.7
G54.0	332.0	633.7	1080.4	1624.4	2194.4	2705.7	3169.0	3528.9	3701.3	3731.6
G55.0	320.1	613.5	1062.6	1616.6	2208.4	2742.2	3234.8	3615.5	3796.8	3819.5
G56.0	308.4	593.1	1041.7	1606.0	2219.8	2775.8	3302.7	3702.5	3885.1	3903.0
G57.0	297.7	573.0	1018.1	1590.6	2225.6	2805.7	3369.7	3788.0	3977.6	3985.5
G58.0	287.9	553.5	991.0	1569.2	2224.4	2830.2	3431.4	3876.3	4069.8	4070.9
G59.0	279.9	533.2	958.5	1540.0	2216.4	2846.2	3495.6	3961.8	4159.2	4155.9
G60.0	275.3	513.7	923.9	1502.7	2203.0	2857.1	3549.9	4039.7	4244.4	4230.2
G61.0	272.3	495.8	886.8	1464.0	2180.5	2858.9	3597.6	4111.7	4319.9	4298.5
G62.0	271.5	478.1	851.2	1420.5	2148.6	2856.2	3638.1	4176.8	4389.1	4359.9
G63.0	270.5	466.0	813.9	1368.9	2109.6	2843.1	3672.5	4232.3	4443.3	4410.6
G64.0	269.1	456.4	779.2	1315.1	2059.8	2817.6	3697.7	4272.7	4487.5	4447.9
G65.0	268.0	447.0	750.0	1256.3	1995.0	2775.7	3710.7	4297.4	4511.1	4470.8
G66.0	265.8	439.5	722.1	1189.6	1917.5	2712.2	3705.6	4302.5	4516.8	4472.8
G67.0	263.5	431.6	692.3	1121.3	1824.9	2625.9	3680.7	4283.5	4496.3	4452.3
G68.0	262.1	421.2	658.0	1053.9	1718.5	2517.1	3628.4	4237.5	4448.0	4413.5
G69.0	259.8	407.5	623.3	986.6	1608.6	2381.9	3548.5	4162.5	4369.4	4343.8
G70.0	255.9	389.9	585.9	911.9	1488.5	2221.3	3439.1	4039.3	4241.5	4238.7
G71.0	250.2	369.5	546.6	833.6	1343.1	2045.3	3282.6	3870.7	4073.5	4087.4
G72.0	240.6	346.6	502.4	743.8	1187.9	1825.1	3087.9	3657.8	3856.5	3887.3
G73.0	228.2	318.9	454.6	651.9	1014.3	1593.8	2844.0	3375.4	3588.9	3619.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	214.9	287.5	400.4	558.0	842.0	1326.4	2566.5	3049.9	3256.2	3313.1
G75.0	198.7	258.1	346.3	479.0	671.1	1077.2	2240.9	2656.6	2860.8	2919.9
G76.0	183.3	229.6	299.0	400.9	520.4	806.8	1841.6	2181.2	2372.1	2440.5
G77.0	168.5	202.6	256.3	330.0	407.3	593.5	1419.8	1672.1	1836.6	1884.4
G78.0	157.6	181.9	223.4	274.0	327.3	439.0	1038.8	1213.1	1313.0	1338.0
G79.0	143.3	163.3	191.1	231.2	266.6	343.9	728.9	863.1	923.7	925.1
G80.0	129.4	147.2	167.6	198.5	220.0	280.6	518.1	628.8	657.4	644.2
G81.0	118.3	132.5	148.3	171.4	185.5	231.7	382.3	469.9	483.3	473.7
G82.0	109.8	120.3	132.0	148.8	160.5	189.8	290.6	343.8	363.7	355.9
G83.0	102.0	108.2	113.8	125.7	139.3	153.8	228.4	257.0	275.4	281.4
G84.0	94.3	99.5	101.8	110.1	121.8	125.6	186.4	201.0	213.7	231.8
G85.0	85.2	87.3	90.0	97.0	103.3	102.6	156.4	165.1	178.6	198.1
G86.0	77.9	79.6	81.2	88.7	94.4	93.1	136.3	146.3	157.7	177.2
G87.0	73.0	73.1	75.4	83.0	89.4	90.9	122.1	137.6	147.6	160.3
G88.0	68.1	68.4	70.4	76.7	84.8	89.7	121.7	141.8	142.1	142.9
G89.0	59.5	62.1	64.3	69.7	77.9	88.5	119.5	138.2	134.1	123.2
G90.0	52.0	55.1	57.9	63.0	70.4	80.5	115.2	129.9	127.5	105.7
G91.0	43.9	46.1	49.1	54.0	59.9	67.7	105.4	115.0	114.9	97.4
G92.0	35.4	37.3	40.2	44.7	50.8	55.3	90.6	99.1	99.3	89.2
G93.0	26.4	29.5	32.6	35.6	40.1	42.8	70.9	76.6	76.5	73.8
G94.0	20.8	23.1	25.8	28.5	32.3	33.3	53.2	57.8	58.2	60.7
G95.0	15.9	18.4	21.0	23.3	26.6	26.2	39.6	42.5	44.2	44.6
G96.0	12.4	15.1	17.8	19.9	21.4	21.9	30.2	32.2	34.8	34.5
G97.0	10.2	12.3	14.4	16.6	18.4	19.1	23.7	24.5	26.8	26.4
G98.0	9.4	11.3	13.1	14.6	15.9	17.1	20.2	20.0	19.9	19.4
G99.0	8.8	10.7	12.6	14.1	15.3	16.2	17.6	17.0	16.2	15.0
G100.0	8.7	10.5	12.1	13.6	14.6	15.3	16.3	15.8	15.0	13.4
G101.0	9.0	10.5	11.9	13.1	14.0	14.6	15.5	15.1	14.0	12.7
G102.0	9.4	10.8	12.1	13.1	13.9	14.3	14.8	14.4	13.4	12.1
G103.0	9.8	11.2	12.5	13.3	14.0	14.3	14.0	13.7	12.7	11.8
G104.0	10.1	11.5	12.7	13.6	14.1	14.5	14.0	13.7	13.0	11.9
G105.0	10.5	11.9	13.1	13.9	14.4	14.6	14.3	13.9	13.2	12.1
G106.0	10.8	12.3	13.3	14.1	14.6	14.9	14.4	14.1	13.4	12.4
G107.0	11.1	12.5	13.6	14.3	14.8	15.0	14.6	14.4	13.7	12.6
G108.0	11.4	12.7	13.7	14.5	14.9	15.1	14.8	14.6	13.9	13.0
G109.0	11.6	13.0	13.9	14.6	15.0	15.3	14.9	14.6	14.0	13.2
G110.0	12.0	13.2	14.1	14.8	15.1	15.3	15.1	14.9	14.1	13.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	12.3	13.4	14.3	14.9	15.2	15.5	15.2	15.0	14.3	13.4
G112.0	12.5	13.7	14.4	15.0	15.3	15.6	15.3	15.0	14.4	13.6
G113.0	12.8	13.9	14.8	15.1	15.6	15.7	15.5	15.1	14.5	13.7
G114.0	13.1	14.1	14.9	15.3	15.7	15.8	15.6	15.2	14.6	13.8
G115.0	13.3	14.5	15.1	15.5	15.8	15.9	15.6	15.3	14.8	13.9
G116.0	13.7	14.6	15.2	15.6	15.9	16.0	15.7	15.6	14.9	14.1
G117.0	13.9	14.9	15.5	15.8	16.0	16.2	15.9	15.6	15.1	14.3
G118.0	14.1	15.0	15.7	15.9	16.3	16.3	16.0	15.7	15.2	14.4
G119.0	14.4	15.2	15.8	16.0	16.3	16.4	16.2	15.8	15.3	14.6
G120.0	14.5	15.3	16.0	16.3	16.4	16.4	16.2	15.9	15.6	14.8
G121.0	14.8	15.5	16.0	16.4	16.5	16.5	16.3	16.0	15.6	14.9
G122.0	15.0	15.7	16.3	16.5	16.6	16.6	16.4	16.3	15.7	15.0
G123.0	15.1	15.8	16.4	16.6	16.8	16.8	16.4	16.4	15.8	15.1
G124.0	15.2	15.9	16.4	16.8	17.0	16.9	16.5	16.4	15.9	15.2
G125.0	15.5	16.2	16.6	17.0	17.1	16.9	16.8	16.5	16.0	15.2
G126.0	15.5	16.3	16.8	17.0	17.2	17.1	16.9	16.6	16.3	15.3
G127.0	15.6	16.3	16.8	17.1	17.2	17.2	17.1	16.9	16.3	15.5
G128.0	15.7	16.4	16.9	17.2	17.4	17.4	17.2	17.1	16.4	15.6
G129.0	15.7	16.5	17.0	17.4	17.5	17.5	17.5	17.1	16.5	15.6
G130.0	15.8	16.5	17.0	17.4	17.6	17.5	17.5	17.2	16.5	15.7
G131.0	15.8	16.5	17.0	17.4	17.6	17.5	17.6	17.4	16.6	15.7
G132.0	15.8	16.5	17.1	17.4	17.6	17.6	17.7	17.4	16.6	15.7
G133.0	15.9	16.5	17.1	17.4	17.6	17.5	17.8	17.5	16.6	15.7
G134.0	15.9	16.5	17.0	17.4	17.6	17.5	17.8	17.5	16.6	15.7
G135.0	15.9	16.5	17.0	17.2	17.5	17.5	17.7	17.4	16.5	15.6
G136.0	15.9	16.4	16.9	17.2	17.4	17.4	17.7	17.2	16.4	15.6
G137.0	15.9	16.5	16.9	17.1	17.2	17.2	17.6	17.2	16.5	15.6
G138.0	15.9	16.4	16.8	17.0	17.1	17.1	17.6	17.1	16.4	15.5
G139.0	15.8	16.3	16.8	17.0	17.0	17.0	17.5	17.0	16.3	15.5
G140.0	15.8	16.4	16.6	16.8	16.9	16.8	17.4	16.9	16.2	15.3
G141.0	15.8	16.2	16.5	16.8	16.8	16.6	17.2	16.8	16.0	15.2
G142.0	15.7	16.3	16.5	16.6	16.6	16.5	17.0	16.8	15.9	15.1
G143.0	15.7	16.0	16.4	16.5	16.5	16.4	16.9	16.5	15.8	15.1
G144.0	15.7	16.0	16.3	16.4	16.4	16.3	16.9	16.4	15.8	15.0
G145.0	15.7	16.0	16.2	16.3	16.2	16.2	16.6	16.2	15.6	15.0
G146.0	15.6	15.9	16.2	16.2	16.0	15.9	16.5	16.2	15.5	14.8
G147.0	15.6	15.9	16.0	16.2	15.9	15.8	16.3	16.0	15.5	14.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	15.6	15.8	15.9	15.9	15.9	15.7	16.3	15.8	15.3	14.6
G149.0	15.5	15.8	15.8	15.9	15.8	15.6	16.2	15.8	15.2	14.6
G150.0	15.5	15.7	15.8	15.8	15.7	15.5	16.0	15.7	15.1	14.5
G151.0	15.5	15.6	15.7	15.7	15.6	15.3	15.9	15.6	15.0	14.5
G152.0	15.5	15.6	15.7	15.6	15.5	15.3	15.8	15.5	15.0	14.5
G153.0	15.5	15.5	15.6	15.5	15.3	15.2	15.6	15.3	15.0	14.4
G154.0	15.5	15.5	15.5	15.5	15.3	15.1	15.6	15.2	14.9	14.4
G155.0	15.5	15.5	15.5	15.3	15.2	15.0	15.5	15.1	14.8	14.4
G156.0	15.3	15.5	15.3	15.3	15.2	15.0	15.5	15.2	14.8	14.3
G157.0	15.2	15.3	15.3	15.2	15.1	15.0	15.3	15.1	14.8	14.3
G158.0	15.3	15.3	15.2	15.2	15.1	14.9	15.2	15.0	14.6	14.3
G159.0	15.2	15.3	15.2	15.1	15.1	14.9	15.2	14.9	14.6	14.3
G160.0	15.2	15.2	15.2	15.1	15.0	14.8	15.1	14.9	14.6	14.3
G161.0	15.2	15.2	15.1	15.1	15.0	14.8	15.1	14.9	14.6	14.3
G162.0	15.2	15.2	15.1	15.0	15.0	14.8	15.0	14.8	14.5	14.3
G163.0	15.1	15.1	15.1	15.0	14.9	14.8	15.0	14.8	14.5	14.3
G164.0	15.2	15.1	15.0	15.0	15.0	14.8	15.0	14.8	14.5	14.3
G165.0	15.1	15.1	15.0	14.9	14.9	14.6	14.9	14.8	14.5	14.3
G166.0	15.1	15.0	15.0	14.9	14.9	14.8	14.9	14.9	14.6	14.4
G167.0	15.1	15.0	15.0	14.9	14.9	14.8	15.0	14.8	14.5	14.4
G168.0	15.0	15.0	15.0	14.9	14.8	14.8	15.0	14.9	14.6	14.4
G169.0	15.1	15.0	14.9	14.9	14.9	14.8	14.9	14.9	14.6	14.4
G170.0	15.0	15.0	14.9	14.9	14.8	14.8	15.0	14.8	14.6	14.5
G171.0	15.0	15.0	14.8	14.9	14.8	14.8	15.0	14.9	14.6	14.6
G172.0	14.9	14.9	14.9	14.8	14.8	14.8	15.0	14.9	14.8	14.6
G173.0	14.9	14.9	14.8	14.8	14.8	14.8	15.0	15.0	14.8	14.6
G174.0	14.9	14.8	14.8	14.8	14.8	14.6	15.0	15.0	14.9	14.6
G175.0	14.8	14.8	14.8	14.6	14.8	14.8	15.1	14.9	14.9	14.8
G176.0	14.8	14.8	14.8	14.8	14.8	14.8	15.1	15.1	14.9	14.8
G177.0	14.8	14.6	14.8	14.6	14.6	14.8	15.1	15.1	15.0	14.9
G178.0	14.6	14.6	14.6	14.6	14.6	14.8	15.1	15.1	15.0	15.0
G179.0	14.5	14.5	14.5	14.5	14.6	14.8	15.1	15.1	15.0	14.9
G180.0	14.4	14.5	14.5	14.5	14.5	14.8	15.1	15.1	15.0	15.0

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	1931.2	1927.2	1923.5	1920.3	1917.1	1914.3	1911.2	1909.6	1906.9	1902.7
G1.0	1937.6	1935.9	1934.7	1934.0	1932.9	1931.3	1930.2	1929.6	1928.7	1926.8
G2.0	1944.8	1945.3	1944.6	1946.1	1946.6	1946.0	1946.5	1947.8	1947.3	1945.8
G3.0	1951.5	1952.8	1954.6	1956.6	1956.8	1958.3	1958.3	1960.3	1960.4	1959.0
G4.0	1956.7	1959.6	1961.9	1964.4	1966.1	1968.0	1968.7	1970.3	1970.0	1969.1
G5.0	1962.4	1966.2	1969.3	1972.1	1974.3	1975.9	1975.0	1976.8	1976.8	1975.7
G6.0	1968.7	1973.3	1976.8	1979.7	1980.6	1982.2	1980.5	1982.2	1981.8	1979.7
G7.0	1975.2	1980.1	1983.0	1985.3	1986.4	1987.6	1986.2	1986.7	1985.7	1983.0
G8.0	1982.4	1986.2	1989.3	1991.3	1992.2	1993.1	1991.1	1990.5	1989.5	1986.7
G9.0	1988.2	1992.8	1996.2	1997.0	1997.7	1997.3	1994.3	1994.7	1994.1	1991.8
G10.0	1994.7	1999.8	2002.0	2002.7	2002.7	2001.6	1999.3	1999.4	1999.4	1998.6
G11.0	2001.7	2006.2	2008.6	2008.2	2007.5	2006.4	2004.5	2005.7	2006.3	2007.7
G12.0	2008.7	2013.4	2014.9	2014.0	2013.3	2011.8	2011.5	2014.6	2015.8	2018.0
G13.0	2015.8	2020.7	2021.1	2020.5	2018.9	2018.8	2020.3	2024.7	2027.0	2029.0
G14.0	2024.3	2029.0	2028.2	2027.2	2026.5	2027.6	2030.7	2036.4	2038.9	2041.5
G15.0	2032.8	2035.6	2035.2	2034.8	2036.3	2038.4	2042.6	2048.5	2052.1	2054.4
G16.0	2040.0	2042.5	2043.9	2044.0	2046.3	2050.7	2056.5	2062.4	2064.7	2066.0
G17.0	2047.6	2050.2	2052.1	2053.5	2059.6	2064.1	2069.8	2075.8	2076.4	2075.6
G18.0	2055.9	2057.9	2061.0	2065.1	2072.4	2079.3	2084.2	2087.9	2086.5	2082.4
G19.0	2063.5	2066.2	2070.1	2077.2	2085.9	2093.9	2098.7	2100.7	2094.4	2085.8
G20.0	2071.9	2075.8	2080.9	2089.7	2099.4	2108.6	2112.4	2110.4	2099.5	2085.3
G21.0	2080.9	2085.8	2092.6	2103.0	2113.8	2122.6	2122.6	2116.9	2100.7	2081.1
G22.0	2091.8	2097.5	2105.1	2115.8	2128.2	2135.7	2132.1	2119.6	2097.9	2073.1
G23.0	2103.2	2111.3	2118.3	2129.6	2142.1	2145.3	2137.2	2118.9	2091.7	2061.5
G24.0	2117.1	2123.9	2133.6	2143.8	2154.2	2152.9	2139.4	2113.8	2081.6	2045.9
G25.0	2131.6	2137.8	2148.1	2157.6	2164.7	2158.8	2137.7	2104.9	2068.5	2027.1
G26.0	2148.8	2155.0	2162.9	2172.4	2174.8	2161.9	2132.4	2092.8	2049.8	2004.4
G27.0	2167.9	2172.9	2179.2	2184.9	2181.7	2162.1	2123.7	2077.4	2027.6	1978.1
G28.0	2190.4	2194.2	2197.2	2197.5	2187.9	2158.8	2111.8	2056.9	2002.9	1946.0
G29.0	2213.5	2215.0	2215.5	2209.9	2191.4	2152.2	2096.4	2032.1	1973.4	1912.1
G30.0	2238.7	2239.5	2235.1	2221.6	2193.1	2143.5	2078.5	2007.7	1939.6	1872.4
G31.0	2267.9	2262.3	2254.4	2233.0	2193.4	2132.4	2056.7	1977.5	1904.5	1832.9
G32.0	2298.3	2290.1	2275.1	2243.9	2191.4	2117.4	2030.1	1943.9	1863.1	1789.9
G33.0	2334.5	2320.6	2296.0	2252.9	2187.7	2098.9	2002.0	1903.9	1819.0	1740.9
G34.0	2371.8	2353.3	2317.6	2261.8	2182.1	2077.5	1966.8	1859.8	1771.7	1678.1
G35.0	2411.6	2385.9	2340.1	2271.3	2173.5	2053.9	1927.7	1812.0	1720.7	1598.9
G36.0	2453.9	2421.7	2364.1	2280.3	2164.7	2029.6	1885.4	1759.3	1652.9	1491.7

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	2500.3	2458.4	2390.3	2291.0	2155.6	2000.8	1839.6	1702.5	1571.1	1362.5
G38.0	2552.3	2502.4	2421.0	2303.4	2145.3	1968.1	1788.4	1635.0	1459.4	1228.8
G39.0	2610.7	2552.4	2454.9	2315.5	2133.6	1932.9	1736.1	1555.5	1332.0	1100.7
G40.0	2675.0	2604.2	2491.3	2328.5	2122.7	1894.1	1678.8	1457.7	1184.2	994.5
G41.0	2741.0	2656.9	2527.9	2342.5	2110.5	1854.3	1617.6	1340.5	1042.5	897.1
G42.0	2813.2	2713.5	2568.8	2358.9	2098.1	1811.4	1546.6	1206.7	918.3	818.5
G43.0	2881.7	2769.3	2611.3	2376.4	2083.6	1765.8	1463.0	1060.8	813.2	745.4
G44.0	2948.0	2826.7	2653.8	2394.8	2070.4	1722.6	1368.3	922.9	736.4	686.4
G45.0	3009.3	2881.0	2692.5	2411.8	2055.4	1672.6	1250.8	804.4	671.1	634.4
G46.0	3065.3	2933.8	2732.0	2427.9	2039.1	1618.6	1124.2	716.0	617.1	588.9
G47.0	3125.0	2987.6	2771.3	2445.2	2020.8	1554.9	980.9	650.3	572.1	549.2
G48.0	3189.7	3046.1	2810.9	2462.4	2000.1	1482.2	852.7	600.2	536.2	514.1
G49.0	3259.4	3105.7	2853.5	2480.0	1976.1	1397.0	742.4	561.5	507.0	484.6
G50.0	3331.2	3171.9	2896.3	2496.3	1947.0	1295.3	656.1	529.7	482.0	459.0
G51.0	3405.8	3236.3	2940.1	2510.5	1909.4	1184.7	597.0	502.8	460.0	435.8
G52.0	3479.4	3303.0	2978.6	2521.6	1861.5	1068.3	553.7	479.8	441.3	415.8
G53.0	3554.1	3370.7	3018.4	2528.8	1799.4	951.0	518.1	456.6	423.5	396.4
G54.0	3631.2	3433.5	3053.5	2528.8	1728.4	833.6	487.9	433.4	405.4	379.7
G55.0	3711.1	3494.1	3087.8	2517.7	1636.5	720.2	459.6	410.2	385.3	363.3
G56.0	3794.3	3552.6	3116.3	2494.5	1534.3	631.2	433.7	387.4	365.8	348.4
G57.0	3867.1	3608.6	3139.1	2456.9	1428.1	558.0	410.2	367.7	346.5	334.4
G58.0	3943.6	3654.2	3155.0	2403.5	1322.2	500.9	388.8	350.0	330.7	321.1
G59.0	4015.2	3693.3	3165.2	2333.3	1218.7	459.5	370.2	337.3	318.9	310.0
G60.0	4083.7	3731.5	3167.4	2247.6	1114.4	430.7	355.2	327.6	309.9	300.4
G61.0	4145.6	3752.1	3157.5	2137.8	1015.9	406.6	343.4	318.5	301.0	291.7
G62.0	4199.2	3765.9	3131.5	2015.8	926.4	388.0	331.5	306.1	289.5	281.1
G63.0	4241.1	3765.4	3086.3	1872.2	848.3	371.4	316.8	290.5	274.4	268.8
G64.0	4265.8	3750.2	3023.9	1731.8	780.7	355.7	299.7	271.0	256.0	253.3
G65.0	4273.5	3715.2	2934.0	1575.8	720.5	338.2	279.5	250.1	236.5	235.0
G66.0	4259.5	3668.6	2821.1	1441.8	664.2	318.4	260.0	228.6	217.5	216.2
G67.0	4223.8	3600.9	2671.3	1300.2	606.4	295.2	239.9	211.0	199.6	198.5
G68.0	4164.4	3511.6	2490.2	1178.1	544.5	272.6	221.1	195.5	185.6	182.7
G69.0	4081.6	3400.6	2285.2	1058.9	482.7	250.2	203.6	183.7	176.5	172.7
G70.0	3963.3	3253.9	2054.1	941.8	422.0	229.4	189.9	175.8	170.2	165.4
G71.0	3803.3	3070.5	1805.1	815.7	367.5	207.9	180.2	168.4	163.2	158.4
G72.0	3593.8	2841.5	1542.3	686.3	306.9	190.9	171.4	160.4	156.0	150.9
G73.0	3325.6	2536.2	1280.8	572.3	255.3	178.3	161.7	152.5	147.7	143.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	2998.9	2179.3	1014.6	451.1	210.5	165.8	151.4	143.9	139.4	135.6
G75.0	2614.1	1759.3	781.3	331.3	182.2	152.8	141.4	135.2	131.4	128.4
G76.0	2154.1	1307.8	571.8	240.5	162.3	141.5	131.8	126.5	124.2	121.5
G77.0	1648.4	893.0	374.4	184.2	146.0	130.6	122.3	119.0	117.1	115.7
G78.0	1119.6	602.3	266.7	152.8	133.2	120.8	114.3	112.0	111.1	111.9
G79.0	744.4	429.4	218.0	136.0	122.0	111.7	106.6	106.1	105.7	110.0
G80.0	527.9	331.7	189.0	126.2	111.1	102.2	100.1	100.6	101.1	107.4
G81.0	399.2	270.9	168.5	117.5	103.5	96.2	94.4	94.9	95.3	104.1
G82.0	309.8	227.4	152.9	113.4	98.8	92.5	89.7	90.7	90.4	98.5
G83.0	252.8	194.7	138.9	110.4	95.6	89.6	86.2	87.1	85.0	91.9
G84.0	207.9	168.9	126.9	106.2	93.1	86.3	83.2	83.0	80.2	86.9
G85.0	175.2	145.9	114.5	101.8	90.3	82.4	78.7	77.5	74.6	81.0
G86.0	153.8	127.2	104.3	95.0	87.4	78.6	73.8	71.1	69.1	72.7
G87.0	140.7	110.6	93.8	86.9	83.5	72.4	66.9	63.0	61.1	64.3
G88.0	135.0	95.7	84.9	76.8	79.2	65.9	59.6	55.1	53.9	56.3
G89.0	119.2	82.2	75.9	68.1	74.8	59.7	52.6	48.5	47.8	48.5
G90.0	102.4	72.2	69.1	63.0	67.7	53.2	44.7	41.5	40.4	40.8
G91.0	83.5	64.1	60.8	58.4	59.7	48.4	39.4	35.3	33.9	33.3
G92.0	65.6	55.2	51.8	51.1	48.5	40.2	31.2	27.5	25.1	21.8
G93.0	51.6	43.9	41.3	40.3	36.2	30.1	22.8	19.9	17.8	13.9
G94.0	41.0	34.7	32.2	30.8	25.6	20.9	15.3	13.0	11.2	8.2
G95.0	32.3	26.9	24.0	22.7	18.0	13.9	10.1	8.1	6.1	4.3
G96.0	25.8	21.3	18.5	16.9	12.1	9.2	6.2	4.8	3.7	2.8
G97.0	19.9	16.4	13.8	11.1	8.0	5.9	4.4	3.6	2.8	2.4
G98.0	15.0	12.6	10.0	7.7	5.9	4.5	3.7	3.0	2.6	2.5
G99.0	12.8	10.8	8.7	6.7	5.2	4.0	3.2	2.7	2.6	2.5
G100.0	11.9	10.0	8.0	6.2	4.8	3.8	3.1	2.7	2.7	2.6
G101.0	10.9	9.3	7.5	5.9	4.8	3.8	3.3	3.0	2.7	2.7
G102.0	10.5	8.9	7.4	5.9	4.9	4.0	3.5	3.0	2.8	2.7
G103.0	10.4	9.0	7.5	6.1	5.1	4.3	3.6	3.2	3.0	2.8
G104.0	10.7	9.2	7.7	6.4	5.3	4.4	3.7	3.3	3.1	3.0
G105.0	10.9	9.5	8.1	6.7	5.6	4.6	3.9	3.5	3.1	3.1
G106.0	11.3	9.8	8.3	6.9	5.9	4.8	3.9	3.6	3.2	3.1
G107.0	11.5	10.0	8.6	7.1	6.2	5.0	4.2	3.7	3.3	3.2
G108.0	11.6	10.4	8.8	7.4	6.4	5.1	4.3	3.8	3.5	3.3
G109.0	11.9	10.6	9.0	7.5	6.5	5.2	4.5	3.9	3.5	3.5
G110.0	12.0	10.7	9.3	7.7	6.8	5.5	4.6	4.0	3.6	3.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	12.3	10.8	9.5	8.0	6.9	5.7	4.9	4.2	3.7	3.6
G112.0	12.4	11.1	9.6	8.2	7.3	5.8	5.0	4.3	3.9	3.6
G113.0	12.5	11.3	9.9	8.4	7.5	5.9	5.1	4.4	4.0	3.7
G114.0	12.7	11.5	10.1	8.6	7.4	6.2	5.3	4.6	4.2	3.9
G115.0	13.0	11.6	10.2	8.8	7.8	6.4	5.5	4.8	4.3	3.9
G116.0	13.1	11.8	10.4	9.0	8.0	6.5	5.6	4.9	4.4	4.0
G117.0	13.2	12.0	10.6	9.2	8.2	6.8	5.8	5.0	4.5	4.2
G118.0	13.3	12.1	10.7	9.4	8.4	6.9	5.9	5.2	4.6	4.3
G119.0	13.6	12.4	10.9	9.5	8.7	7.1	6.1	5.3	4.8	4.4
G120.0	13.7	12.5	11.1	9.6	8.8	7.3	6.3	5.6	4.9	4.5
G121.0	13.8	12.6	11.2	9.9	9.0	7.5	6.5	5.7	5.0	4.6
G122.0	14.0	12.7	11.4	10.0	9.0	7.6	6.7	5.8	5.1	4.8
G123.0	14.0	12.8	11.5	10.1	9.2	7.7	6.8	5.9	5.3	4.9
G124.0	14.1	13.1	11.6	10.2	9.5	7.8	6.9	6.1	5.5	5.0
G125.0	14.3	13.2	11.6	10.4	9.9	8.0	7.0	6.2	5.6	5.1
G126.0	14.3	13.2	11.9	10.6	9.8	8.1	7.1	6.3	5.7	5.2
G127.0	14.5	13.3	12.0	10.7	10.0	8.3	7.4	6.5	5.8	5.3
G128.0	14.5	13.3	12.0	10.7	10.4	8.4	7.5	6.7	5.9	5.5
G129.0	14.6	13.4	12.1	10.8	9.8	8.6	7.6	6.8	6.1	5.6
G130.0	14.6	13.4	12.1	10.9	9.8	8.7	7.7	6.9	6.2	5.7
G131.0	14.6	13.4	12.3	11.1	10.2	8.8	7.8	7.0	6.4	5.9
G132.0	14.6	13.4	12.3	11.1	10.5	9.0	8.0	7.3	6.7	6.1
G133.0	14.6	13.4	12.4	11.2	10.6	9.2	8.1	7.4	6.7	6.2
G134.0	14.6	13.4	12.5	11.3	10.9	9.2	8.3	7.6	6.9	6.3
G135.0	14.6	13.6	12.5	11.3	10.9	9.4	8.4	7.7	7.0	6.5
G136.0	14.6	13.6	12.5	11.4	10.9	9.4	8.6	7.8	7.3	6.8
G137.0	14.5	13.4	12.5	11.4	11.1	9.5	8.7	8.0	7.4	6.8
G138.0	14.5	13.4	12.5	11.5	11.1	9.8	8.9	8.2	7.5	7.0
G139.0	14.4	13.4	12.6	11.6	11.2	9.9	9.0	8.3	7.7	7.1
G140.0	14.4	13.4	12.6	11.6	11.3	10.0	9.2	8.4	7.8	7.4
G141.0	14.3	13.4	12.6	11.8	10.8	10.1	9.4	8.7	8.1	7.6
G142.0	14.3	13.4	12.7	11.8	11.6	10.2	9.4	8.8	8.2	7.7
G143.0	14.1	13.4	12.6	11.8	11.6	10.4	9.6	8.9	8.4	8.0
G144.0	14.1	13.4	12.7	12.0	11.3	10.6	9.8	9.2	8.6	8.1
G145.0	14.1	13.4	12.7	12.0	11.3	10.6	9.9	9.4	8.8	8.3
G146.0	14.0	13.4	12.8	12.0	11.4	10.7	10.0	9.5	8.9	8.6
G147.0	13.9	13.4	12.8	12.0	11.4	10.8	10.2	9.6	9.2	8.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	14.0	13.4	12.8	12.1	11.5	10.9	10.4	9.8	9.4	8.9
G149.0	13.9	13.4	12.8	12.3	11.6	11.1	10.5	10.0	9.5	9.0
G150.0	13.9	13.4	13.0	12.3	11.8	11.2	10.6	10.1	9.6	9.3
G151.0	13.9	13.4	13.0	12.4	11.8	11.3	10.8	10.4	9.9	9.5
G152.0	13.9	13.4	13.0	12.4	11.9	11.4	10.9	10.5	10.1	9.8
G153.0	13.9	13.6	13.1	12.4	12.0	11.6	11.1	10.7	10.2	10.0
G154.0	13.8	13.4	13.0	12.6	12.1	11.6	11.2	10.8	10.5	10.1
G155.0	13.9	13.6	13.1	12.6	12.3	11.8	11.4	11.1	10.6	10.4
G156.0	13.9	13.6	13.1	12.7	12.4	11.9	11.5	11.2	10.8	10.5
G157.0	13.8	13.6	13.1	12.7	13.1	12.1	11.6	11.4	11.1	10.8
G158.0	13.9	13.7	13.2	12.7	13.1	12.1	11.8	11.5	11.2	11.1
G159.0	13.9	13.7	13.2	12.8	12.6	12.3	12.0	11.6	11.4	11.2
G160.0	13.9	13.7	13.3	13.0	12.7	12.4	12.1	11.9	11.6	11.4
G161.0	13.9	13.7	13.3	13.1	12.8	12.5	12.3	12.1	11.8	11.5
G162.0	13.9	13.7	13.4	13.1	12.8	12.6	12.5	12.3	12.0	11.8
G163.0	13.9	13.8	13.6	13.2	13.0	12.7	12.6	12.4	12.1	12.0
G164.0	14.0	13.8	13.6	13.2	13.1	13.0	12.7	12.6	12.4	12.3
G165.0	14.1	13.9	13.7	13.3	13.2	13.0	12.8	12.7	12.5	12.4
G166.0	14.1	13.9	13.7	13.4	13.2	13.1	13.1	12.8	12.7	12.6
G167.0	14.1	14.0	13.8	13.6	13.4	13.3	13.2	13.1	12.8	12.7
G168.0	14.3	14.0	13.8	13.7	13.6	13.4	13.3	13.2	13.1	13.0
G169.0	14.1	14.1	13.9	13.7	13.7	13.6	13.4	13.3	13.3	13.2
G170.0	14.4	14.1	14.0	13.9	13.8	13.7	13.6	13.4	13.4	13.4
G171.0	14.4	14.3	14.1	13.9	13.9	13.8	13.8	13.7	13.6	13.6
G172.0	14.4	14.3	14.3	14.0	14.0	14.0	13.9	13.8	13.8	13.8
G173.0	14.5	14.4	14.3	14.1	14.1	14.1	14.1	14.0	14.0	14.0
G174.0	14.5	14.5	14.4	14.4	14.3	14.3	14.1	14.3	14.1	14.1
G175.0	14.6	14.6	14.5	14.4	14.4	14.4	14.4	14.4	14.4	14.4
G176.0	14.8	14.6	14.6	14.5	15.5	14.5	14.5	14.5	14.5	14.6
G177.0	14.8	14.8	14.6	14.6	14.6	14.6	14.6	14.6	14.8	14.8
G178.0	14.9	14.9	14.8	14.8	14.8	14.9	14.8	14.9	14.9	14.9
G179.0	14.9	14.9	14.9	14.8	15.3	14.9	14.9	15.0	15.0	15.1
G180.0	14.9	15.0	15.0	14.9	15.0	15.0	15.0	15.1	15.2	15.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	1900.0	1896.5	1895.5	1894.4	1891.2	1888.7	1885.5	1886.2	1887.3	1886.3
G1.0	1925.3	1923.4	1922.8	1920.4	1918.3	1916.1	1912.8	1912.6	1912.5	1912.1
G2.0	1945.2	1943.8	1943.2	1942.1	1939.7	1937.0	1934.9	1933.4	1932.0	1931.3
G3.0	1958.7	1956.8	1956.4	1956.1	1953.2	1950.1	1947.1	1946.3	1945.1	1944.0
G4.0	1968.7	1967.3	1966.3	1965.8	1963.3	1960.2	1957.8	1955.8	1954.3	1953.3
G5.0	1975.4	1973.5	1971.7	1970.9	1968.6	1965.4	1962.9	1961.0	1959.6	1958.5
G6.0	1979.0	1977.7	1975.3	1974.0	1972.1	1969.0	1966.1	1963.8	1962.8	1961.9
G7.0	1982.4	1980.5	1978.6	1976.5	1975.4	1972.1	1969.6	1967.4	1965.3	1964.8
G8.0	1986.1	1984.3	1983.4	1981.0	1979.9	1976.6	1973.7	1970.8	1968.6	1967.7
G9.0	1991.1	1989.5	1988.8	1986.7	1985.3	1982.5	1979.4	1976.5	1973.5	1971.7
G10.0	1997.3	1997.3	1997.2	1995.8	1994.2	1991.1	1987.5	1984.8	1981.7	1979.4
G11.0	2007.0	2007.0	2007.3	2006.4	2004.9	2001.3	1996.8	1994.8	1990.1	1987.5
G12.0	2017.8	2019.2	2018.9	2018.6	2017.3	2013.8	2009.3	2006.1	2001.2	1996.9
G13.0	2030.2	2031.4	2031.4	2032.5	2029.5	2026.3	2021.4	2017.8	2013.6	2008.7
G14.0	2043.7	2043.4	2043.8	2042.8	2040.4	2036.8	2032.2	2028.9	2025.1	2021.1
G15.0	2055.7	2053.0	2052.3	2051.3	2047.8	2044.5	2040.0	2036.5	2033.7	2031.2
G16.0	2065.1	2061.6	2058.9	2055.3	2051.3	2047.7	2043.2	2041.3	2040.0	2039.8
G17.0	2072.4	2066.0	2061.5	2056.5	2051.7	2047.4	2043.5	2042.2	2042.0	2043.4
G18.0	2076.1	2067.0	2061.0	2053.6	2047.8	2043.2	2039.7	2039.5	2040.6	2044.5
G19.0	2075.6	2064.1	2055.8	2046.6	2039.1	2034.3	2031.4	2032.2	2035.3	2041.4
G20.0	2070.9	2057.1	2046.0	2034.7	2025.7	2020.0	2018.7	2020.8	2026.8	2035.0
G21.0	2063.5	2046.7	2032.0	2018.7	2008.8	2002.3	2001.8	2006.1	2012.0	2024.6
G22.0	2051.1	2030.8	2014.3	1999.9	1988.5	1982.4	1982.1	1986.9	1994.8	2010.6
G23.0	2035.8	2012.1	1993.3	1976.6	1963.4	1957.8	1958.3	1963.7	1974.9	1994.2
G24.0	2015.2	1988.6	1966.9	1949.1	1934.8	1927.9	1930.0	1937.3	1950.8	1973.7
G25.0	1993.9	1962.4	1938.6	1917.9	1904.4	1898.2	1900.3	1909.4	1923.9	1950.2
G26.0	1966.6	1930.6	1903.8	1883.2	1869.2	1864.6	1866.9	1878.0	1894.3	1921.4
G27.0	1935.2	1896.7	1868.2	1846.4	1831.7	1826.1	1831.4	1842.9	1861.2	1891.9
G28.0	1897.8	1857.5	1829.7	1806.5	1789.4	1782.5	1789.5	1803.9	1825.6	1857.8
G29.0	1860.4	1819.0	1789.2	1757.8	1736.2	1727.1	1739.4	1755.0	1783.6	1821.0
G30.0	1820.8	1777.6	1735.4	1695.8	1668.7	1661.9	1672.7	1699.0	1733.6	1779.5
G31.0	1778.6	1722.3	1669.3	1616.5	1587.3	1579.5	1594.6	1627.6	1670.5	1730.2
G32.0	1724.9	1651.7	1579.0	1522.4	1492.8	1485.4	1505.2	1543.6	1597.6	1669.5
G33.0	1657.2	1557.0	1476.2	1414.3	1384.6	1383.6	1409.8	1448.1	1509.1	1599.1
G34.0	1562.1	1440.7	1356.5	1306.9	1285.3	1290.1	1310.4	1346.4	1406.3	1504.3
G35.0	1449.3	1316.2	1246.5	1207.6	1198.2	1200.3	1219.5	1251.9	1298.5	1400.1
G36.0	1317.4	1203.4	1144.1	1121.9	1111.3	1115.9	1135.3	1162.6	1202.5	1285.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	1194.0	1103.0	1059.0	1035.4	1027.3	1031.2	1048.3	1075.6	1115.6	1187.9
G38.0	1084.7	1008.9	973.0	949.5	942.1	946.3	967.7	990.7	1028.2	1088.7
G39.0	991.7	925.2	888.5	864.3	856.5	863.5	880.1	905.9	940.0	1000.1
G40.0	905.2	842.5	806.4	786.1	780.8	784.3	801.5	822.1	856.9	912.2
G41.0	829.2	769.9	734.8	718.8	714.6	718.8	731.0	749.4	776.5	831.6
G42.0	759.5	709.4	679.4	664.0	660.1	662.6	674.0	688.7	712.7	759.7
G43.0	703.2	660.6	628.7	615.2	613.3	614.9	623.5	636.5	656.8	702.3
G44.0	656.8	616.4	587.0	575.6	575.5	578.5	583.9	593.3	611.5	656.1
G45.0	612.9	576.4	550.6	541.6	543.7	549.9	549.8	557.9	572.5	613.9
G46.0	572.6	542.0	519.2	512.4	516.7	524.0	521.8	526.5	539.0	575.2
G47.0	535.6	510.8	490.7	485.3	493.0	503.3	496.5	499.1	508.4	541.7
G48.0	503.0	483.2	466.3	464.3	475.4	486.9	476.4	474.1	482.8	512.1
G49.0	474.7	455.4	445.2	446.2	459.0	467.7	459.3	454.4	459.4	484.8
G50.0	446.1	432.2	426.8	429.8	441.1	449.0	441.5	437.1	439.0	457.8
G51.0	419.7	410.8	410.3	414.3	424.2	431.1	424.9	420.7	420.6	432.5
G52.0	399.9	393.9	394.9	404.9	414.6	417.0	414.3	407.2	404.2	412.3
G53.0	383.4	379.8	384.1	393.8	400.3	402.9	402.8	397.5	389.5	394.3
G54.0	369.8	368.4	372.5	380.2	385.0	389.7	388.6	385.1	378.5	380.3
G55.0	357.1	356.4	361.4	369.1	374.4	378.2	376.6	371.8	366.6	367.6
G56.0	344.5	345.7	350.0	358.1	363.4	367.2	365.9	360.7	355.5	355.9
G57.0	331.8	333.0	338.0	347.7	354.4	357.7	356.3	349.4	344.2	343.6
G58.0	319.1	320.5	326.3	338.2	346.8	348.2	347.7	339.3	331.7	330.2
G59.0	306.2	307.4	314.5	328.6	338.2	339.6	338.9	330.1	320.0	317.8
G60.0	296.4	295.6	303.3	316.8	327.0	329.6	328.3	319.7	308.5	304.3
G61.0	287.4	285.0	292.2	305.6	315.6	319.4	317.5	309.5	297.4	292.5
G62.0	277.6	275.3	280.5	291.1	301.0	304.9	306.2	298.5	287.1	282.7
G63.0	264.2	262.1	262.8	268.6	275.9	281.1	286.8	283.0	276.3	274.2
G64.0	248.2	241.6	229.0	223.2	225.9	230.6	243.8	253.4	257.7	263.4
G65.0	229.0	208.1	188.1	180.5	178.6	183.6	194.2	205.6	220.0	245.9
G66.0	210.7	179.7	157.6	155.9	154.6	154.2	158.4	166.3	179.4	216.8
G67.0	193.3	163.9	151.3	151.9	150.6	149.7	152.2	153.2	154.5	189.9
G68.0	178.5	156.7	147.9	147.2	146.4	145.4	148.6	149.7	150.4	173.9
G69.0	167.9	151.7	143.9	142.7	141.8	141.4	144.3	146.1	147.1	164.4
G70.0	161.4	147.7	139.7	138.3	137.1	137.0	139.3	141.4	143.2	157.7
G71.0	154.7	143.1	135.3	134.7	132.6	132.2	134.5	136.6	138.9	153.6
G72.0	148.2	137.6	132.2	130.6	127.5	127.5	129.9	132.7	134.7	148.6
G73.0	140.9	132.0	127.6	125.2	121.8	121.8	124.6	129.3	130.1	141.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	133.6	125.9	122.0	119.0	115.5	115.7	118.6	123.9	124.0	135.0
G75.0	126.9	119.8	115.7	113.0	109.3	109.3	111.9	117.3	118.2	127.2
G76.0	120.7	113.9	108.9	106.2	102.2	102.8	105.2	110.2	111.8	120.1
G77.0	115.7	108.0	102.3	98.7	95.6	95.5	98.0	102.0	105.2	113.4
G78.0	113.7	102.9	95.1	91.1	88.8	88.6	91.0	94.2	98.8	109.4
G79.0	112.3	98.7	88.9	85.0	82.9	82.9	84.4	87.6	92.9	106.1
G80.0	109.4	93.8	82.9	78.5	76.6	76.8	78.8	82.1	87.5	102.4
G81.0	104.8	89.8	78.6	74.8	72.7	72.4	73.7	76.7	83.2	98.6
G82.0	99.1	84.2	73.1	70.3	67.4	68.3	71.8	73.4	80.3	94.4
G83.0	94.2	79.6	69.2	64.4	63.3	63.9	66.6	68.6	76.2	89.3
G84.0	86.6	74.2	64.2	58.8	58.4	58.8	61.7	64.1	72.1	85.0
G85.0	78.1	68.7	59.0	53.2	52.8	53.4	55.8	59.1	67.9	79.8
G86.0	73.0	62.3	53.9	47.5	46.6	47.0	49.7	53.8	62.4	74.1
G87.0	61.7	54.1	46.5	40.3	39.0	39.5	42.8	47.7	56.1	66.2
G88.0	51.4	44.5	38.5	33.5	31.4	31.5	34.8	40.3	47.8	57.4
G89.0	43.2	36.5	31.8	27.2	25.2	25.0	28.3	33.3	39.5	47.3
G90.0	35.4	30.2	25.9	21.4	20.0	19.5	22.6	26.8	31.8	38.5
G91.0	27.6	23.3	19.6	15.8	14.4	13.8	16.3	20.2	24.7	30.0
G92.0	17.2	14.6	12.1	10.0	10.0	10.0	10.8	13.3	16.8	21.8
G93.0	11.2	9.0	7.4	6.9	7.1	7.1	7.0	8.1	10.8	13.7
G94.0	6.2	4.5	3.9	3.8	4.0	4.0	3.8	3.8	5.5	8.3
G95.0	3.1	2.5	2.4	2.4	2.4	2.4	2.3	2.3	3.0	4.8
G96.0	2.4	2.4	2.4	2.4	2.5	2.4	2.4	2.3	2.3	2.6
G97.0	2.4	2.4	2.5	2.5	2.5	2.5	2.4	2.4	2.3	2.3
G98.0	2.5	2.5	2.6	2.5	2.6	2.6	2.5	2.5	2.4	2.3
G99.0	2.5	2.6	2.7	2.6	2.7	2.7	2.5	2.5	2.5	2.4
G100.0	2.6	2.6	2.7	2.7	2.7	2.7	2.6	2.6	2.5	2.4
G101.0	2.6	2.7	2.8	2.7	2.8	2.7	2.7	2.7	2.6	2.5
G102.0	2.8	2.7	2.8	2.8	2.8	2.8	2.7	2.7	2.6	2.5
G103.0	2.8	2.8	3.0	3.0	3.0	3.0	2.8	2.8	2.7	2.6
G104.0	3.0	3.0	3.1	3.1	3.1	3.1	3.0	3.0	2.7	2.7
G105.0	3.0	3.0	3.1	3.1	3.2	3.1	3.1	3.0	2.8	2.7
G106.0	3.1	3.1	3.2	3.2	3.2	3.2	3.1	3.1	3.0	2.8
G107.0	3.1	3.1	3.2	3.2	3.3	3.3	3.2	3.1	3.0	2.8
G108.0	3.2	3.2	3.3	3.3	3.3	3.3	3.3	3.2	3.1	3.0
G109.0	3.3	3.3	3.3	3.3	3.5	3.3	3.3	3.2	3.1	3.0
G110.0	3.5	3.3	3.5	3.5	3.5	3.5	3.5	3.3	3.2	3.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	3.5	3.5	3.5	3.5	3.6	3.6	3.5	3.3	3.3	3.1
G112.0	3.6	3.6	3.6	3.6	3.7	3.6	3.5	3.5	3.3	3.2
G113.0	3.6	3.6	3.6	3.6	3.7	3.7	3.6	3.5	3.5	3.3
G114.0	3.7	3.7	3.8	3.7	3.8	3.7	3.6	3.6	3.6	3.5
G115.0	3.8	3.7	3.8	3.8	3.8	3.8	3.7	3.6	3.6	3.5
G116.0	3.9	3.8	3.9	3.8	3.9	3.8	3.7	3.7	3.6	3.6
G117.0	3.9	3.9	3.9	3.8	4.0	3.9	3.8	3.6	3.7	3.6
G118.0	4.0	4.0	4.0	3.9	4.0	3.9	3.8	3.7	3.7	3.7
G119.0	4.2	4.0	4.0	3.9	4.0	4.0	3.9	3.9	3.8	3.7
G120.0	4.3	4.2	4.0	4.0	4.2	4.0	4.0	3.9	3.8	3.8
G121.0	4.3	4.3	4.2	4.2	4.2	4.2	4.0	4.0	3.9	3.9
G122.0	4.5	4.4	4.2	4.2	4.3	4.3	4.2	4.2	4.0	3.9
G123.0	4.5	4.4	4.3	4.3	4.3	4.3	4.2	4.2	4.2	4.0
G124.0	4.6	4.5	4.4	4.4	4.4	4.4	4.3	4.3	4.2	4.2
G125.0	4.8	4.5	4.4	4.5	4.5	4.4	4.4	4.3	4.3	4.3
G126.0	4.8	4.6	4.5	4.5	4.5	4.5	4.4	4.4	4.3	4.3
G127.0	5.0	4.9	4.8	4.5	4.6	4.5	4.5	4.4	4.4	4.4
G128.0	5.1	4.9	4.8	4.6	4.8	4.6	4.6	4.5	4.5	4.5
G129.0	5.2	4.9	5.0	4.8	4.8	4.8	4.8	4.6	4.5	4.6
G130.0	5.3	5.1	5.0	4.9	4.9	4.9	4.9	4.8	4.6	4.8
G131.0	5.5	5.2	5.0	5.0	5.0	5.0	4.9	4.9	4.9	4.8
G132.0	5.6	5.3	5.1	5.1	5.1	5.0	5.0	5.0	4.9	5.0
G133.0	5.7	5.5	5.3	5.1	5.1	5.1	5.0	5.0	5.1	5.1
G134.0	5.9	5.6	5.5	5.3	5.2	5.2	5.1	5.1	5.1	5.1
G135.0	6.1	5.7	5.6	5.5	5.3	5.3	5.2	5.2	5.3	5.3
G136.0	6.2	5.8	5.7	5.6	5.6	5.5	5.3	5.3	5.3	5.5
G137.0	6.4	6.1	5.8	5.7	5.7	5.6	5.6	5.5	5.6	5.6
G138.0	6.5	6.3	6.1	5.8	5.8	5.7	5.7	5.6	5.7	5.8
G139.0	6.7	6.4	6.2	5.9	5.9	5.8	5.8	5.8	5.8	5.9
G140.0	6.9	6.5	6.4	6.1	6.1	5.9	5.9	5.9	5.9	6.1
G141.0	7.1	6.8	6.5	6.3	6.2	6.1	6.1	6.1	6.1	6.2
G142.0	7.3	6.9	6.8	6.4	6.3	6.4	6.3	6.3	6.3	6.3
G143.0	7.5	7.1	6.9	6.7	6.7	6.5	6.4	6.4	6.4	6.5
G144.0	7.6	7.4	7.1	6.9	6.8	6.7	6.7	6.5	6.7	6.8
G145.0	7.8	7.6	7.3	7.1	6.9	6.9	6.8	6.8	6.9	6.9
G146.0	8.1	7.7	7.5	7.3	7.1	7.0	7.0	6.9	7.0	7.1
G147.0	8.2	8.0	7.7	7.5	7.4	7.3	7.1	7.1	7.3	7.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	8.6	8.2	8.0	7.6	7.5	7.4	7.4	7.3	7.5	7.5
G149.0	8.8	8.4	8.1	7.8	7.7	7.6	7.6	7.5	7.6	7.7
G150.0	8.9	8.6	8.3	8.1	8.0	7.8	7.7	7.7	7.8	8.0
G151.0	9.0	8.8	8.6	8.3	8.2	8.1	8.0	8.0	8.0	8.2
G152.0	9.3	9.0	8.8	8.6	8.4	8.2	8.2	8.2	8.2	8.3
G153.0	9.5	9.3	9.0	8.8	8.7	8.6	8.4	8.6	8.4	8.6
G154.0	9.8	9.5	9.3	9.0	8.9	8.8	8.6	8.7	8.7	8.8
G155.0	10.0	9.8	9.5	9.3	9.2	8.9	8.8	8.8	8.9	9.0
G156.0	10.2	10.0	9.8	9.5	9.4	9.3	9.2	9.2	9.2	9.3
G157.0	10.5	10.2	10.0	9.9	9.8	9.5	9.4	9.4	9.4	9.5
G158.0	10.6	10.5	10.4	10.1	9.9	9.8	9.6	9.6	9.6	9.6
G159.0	10.9	10.7	10.6	10.2	10.2	10.0	9.9	9.9	10.0	9.9
G160.0	11.1	10.9	10.8	10.6	10.5	10.4	10.2	10.2	10.1	10.2
G161.0	11.3	11.2	11.1	10.8	10.7	10.6	10.5	10.5	10.5	10.4
G162.0	11.5	11.4	11.3	11.2	11.1	10.8	10.7	10.7	10.6	10.7
G163.0	11.9	11.8	11.5	11.4	11.3	11.2	10.9	10.9	10.9	10.9
G164.0	12.0	11.9	11.8	11.6	11.5	11.4	11.3	11.2	11.2	11.1
G165.0	12.3	12.1	12.1	11.9	11.8	11.8	11.5	11.5	11.4	11.4
G166.0	12.5	12.4	12.4	12.1	12.1	12.0	11.8	11.8	11.8	11.5
G167.0	12.6	12.6	12.6	12.4	12.4	12.3	12.1	12.1	12.0	11.8
G168.0	12.8	12.8	12.8	12.7	12.6	12.5	12.4	12.3	12.1	12.1
G169.0	13.1	13.1	13.1	12.8	13.0	12.8	12.6	12.5	12.5	12.3
G170.0	13.3	13.3	13.3	13.1	13.2	13.1	12.8	12.7	12.7	12.5
G171.0	13.6	13.6	13.4	13.3	13.4	13.3	13.2	13.1	13.0	12.7
G172.0	13.8	13.8	13.7	13.8	13.7	13.6	13.4	13.3	13.2	13.1
G173.0	13.9	13.9	14.0	13.9	14.0	13.9	13.8	13.6	13.6	13.3
G174.0	14.1	14.1	14.1	14.1	14.3	14.1	13.9	13.9	13.7	13.6
G175.0	14.4	14.4	14.4	14.5	14.5	14.4	14.3	14.1	14.0	13.8
G176.0	14.5	14.6	14.6	14.6	14.8	14.5	14.5	14.4	14.1	14.0
G177.0	14.8	14.8	14.9	14.9	15.0	14.9	14.8	14.6	14.4	14.3
G178.0	15.0	15.0	15.0	15.1	15.2	15.1	15.0	14.8	14.6	14.5
G179.0	15.1	15.2	15.3	15.3	15.5	15.3	15.2	15.1	14.9	14.6
G180.0	15.3	15.5	15.6	15.6	15.7	15.6	15.5	15.2	15.1	15.0

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	1888.7	1891.9	1892.0	1895.9	1898.0	1902.1	1905.0	1907.3	1911.8	1913.7
G1.0	1913.2	1912.9	1913.9	1916.1	1916.3	1917.6	1918.4	1920.1	1920.7	1921.6
G2.0	1931.6	1930.9	1930.9	1930.0	1930.8	1930.3	1930.7	1929.7	1929.1	1928.3
G3.0	1943.8	1943.3	1942.8	1941.1	1941.6	1940.7	1939.9	1937.6	1935.9	1934.1
G4.0	1952.6	1952.6	1951.0	1949.2	1949.1	1947.9	1947.1	1944.1	1941.5	1938.3
G5.0	1957.9	1958.3	1957.1	1956.2	1954.9	1953.5	1952.6	1949.7	1946.8	1942.4
G6.0	1961.6	1961.8	1961.1	1960.5	1959.1	1959.0	1957.7	1954.8	1951.8	1946.8
G7.0	1964.2	1964.2	1963.5	1963.0	1962.4	1962.4	1961.1	1958.7	1955.5	1950.5
G8.0	1967.4	1966.8	1966.0	1966.0	1964.9	1965.4	1964.6	1961.9	1959.0	1954.2
G9.0	1971.0	1970.6	1969.1	1968.6	1967.5	1967.8	1967.3	1965.3	1962.9	1957.4
G10.0	1977.8	1975.7	1973.1	1971.9	1970.4	1970.4	1970.8	1968.1	1966.5	1961.2
G11.0	1985.8	1982.9	1978.6	1976.6	1974.3	1973.3	1973.3	1972.4	1970.2	1964.9
G12.0	1995.3	1991.1	1986.6	1982.5	1979.0	1977.7	1975.5	1974.6	1973.6	1968.5
G13.0	2005.7	2000.5	1995.1	1989.4	1984.9	1982.3	1979.3	1978.1	1976.6	1973.6
G14.0	2017.5	2011.3	2004.6	1997.9	1992.5	1987.5	1984.1	1981.8	1981.4	1977.5
G15.0	2028.1	2022.4	2015.3	2008.3	2000.5	1994.2	1989.3	1985.4	1984.5	1981.7
G16.0	2036.6	2032.3	2025.4	2018.3	2010.2	2002.5	1994.9	1991.0	1988.5	1986.4
G17.0	2043.3	2040.2	2036.4	2029.3	2020.5	2010.7	2002.1	1996.6	1994.4	1992.3
G18.0	2045.3	2047.3	2044.8	2039.7	2030.9	2020.3	2010.8	2003.4	2000.2	1997.4
G19.0	2046.3	2050.2	2051.6	2049.5	2040.3	2030.8	2019.7	2010.5	2006.2	2003.8
G20.0	2042.8	2050.6	2055.4	2056.9	2051.6	2042.8	2030.3	2019.7	2013.8	2010.5
G21.0	2036.6	2048.4	2057.1	2061.6	2061.3	2055.1	2042.3	2029.8	2021.7	2017.3
G22.0	2026.2	2042.6	2055.4	2065.6	2070.1	2067.1	2054.8	2040.2	2030.6	2024.6
G23.0	2012.5	2033.4	2052.2	2067.9	2077.4	2078.9	2066.6	2051.7	2040.1	2032.2
G24.0	1996.7	2020.9	2045.0	2067.1	2082.8	2089.6	2079.7	2064.8	2050.1	2040.0
G25.0	1976.7	2005.9	2035.2	2063.5	2086.6	2098.4	2092.5	2076.4	2059.7	2048.4
G26.0	1953.6	1987.0	2022.8	2057.7	2087.2	2104.8	2104.3	2089.3	2071.7	2057.3
G27.0	1924.8	1965.0	2006.7	2048.4	2084.8	2110.0	2115.6	2101.4	2084.6	2067.2
G28.0	1895.5	1938.8	1986.9	2035.3	2079.4	2112.4	2124.0	2113.7	2096.9	2077.9
G29.0	1860.9	1911.2	1965.9	2019.5	2072.3	2112.7	2129.8	2125.4	2108.7	2090.1
G30.0	1826.4	1877.6	1939.7	2000.5	2061.6	2109.1	2134.7	2136.1	2120.7	2103.6
G31.0	1786.9	1844.1	1911.3	1978.6	2047.9	2103.0	2137.4	2145.2	2134.5	2119.5
G32.0	1739.3	1808.4	1879.1	1953.9	2030.7	2093.8	2138.3	2154.5	2149.0	2136.2
G33.0	1682.7	1766.3	1845.1	1926.5	2010.7	2082.8	2137.7	2163.3	2164.5	2155.4
G34.0	1616.4	1717.1	1805.8	1895.0	1986.1	2069.1	2134.9	2172.0	2180.9	2176.2
G35.0	1528.4	1659.4	1764.4	1858.6	1958.9	2052.1	2130.3	2180.8	2199.0	2199.7
G36.0	1429.9	1586.3	1714.2	1817.8	1926.8	2032.6	2124.9	2189.1	2217.3	2225.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	1314.2	1498.6	1658.1	1775.0	1893.9	2012.0	2119.3	2197.9	2236.3	2251.9
G38.0	1196.1	1389.6	1586.2	1725.9	1854.2	1988.3	2112.0	2206.8	2258.8	2279.4
G39.0	1094.2	1272.8	1497.7	1667.0	1810.9	1963.6	2105.1	2215.6	2280.2	2313.2
G40.0	1000.2	1154.5	1391.4	1597.3	1764.3	1935.2	2097.0	2226.4	2305.3	2347.6
G41.0	914.9	1044.6	1278.9	1518.4	1715.6	1906.7	2088.5	2237.6	2334.5	2387.8
G42.0	838.2	945.2	1152.0	1425.9	1662.4	1874.5	2080.0	2251.9	2369.1	2433.9
G43.0	770.5	858.1	1020.2	1322.4	1603.3	1839.9	2071.6	2267.2	2405.1	2484.4
G44.0	715.9	783.8	903.6	1213.7	1541.4	1804.3	2062.1	2282.8	2440.1	2534.7
G45.0	666.8	719.0	804.0	1083.3	1470.8	1769.3	2054.8	2301.5	2479.9	2590.0
G46.0	626.1	666.0	725.8	962.2	1388.6	1734.1	2048.2	2324.4	2523.7	2647.2
G47.0	585.8	617.4	664.8	846.8	1299.4	1696.5	2040.6	2345.8	2566.5	2705.6
G48.0	548.8	576.3	616.6	751.5	1202.5	1654.7	2034.1	2366.6	2607.1	2758.6
G49.0	516.8	541.9	576.4	679.0	1095.4	1606.4	2026.1	2388.5	2651.3	2813.4
G50.0	486.9	510.3	544.3	626.5	979.4	1555.6	2017.7	2409.8	2696.9	2868.5
G51.0	456.4	482.1	517.5	585.5	873.1	1495.1	2010.9	2434.5	2745.3	2929.6
G52.0	430.4	458.7	495.7	555.2	778.2	1429.5	2002.6	2460.9	2797.4	2995.3
G53.0	409.8	437.0	476.2	528.5	690.6	1350.3	1992.3	2490.1	2850.1	3066.2
G54.0	393.5	418.5	457.5	503.9	625.3	1263.7	1978.5	2516.6	2902.7	3136.9
G55.0	378.4	400.2	437.3	478.8	573.4	1169.6	1956.4	2541.7	2958.6	3213.6
G56.0	364.9	382.1	415.5	453.8	533.5	1074.1	1924.7	2563.8	3012.3	3291.8
G57.0	351.2	363.3	392.6	429.3	500.5	976.5	1879.8	2583.8	3064.7	3369.9
G58.0	336.8	346.1	370.4	405.4	472.8	878.1	1823.8	2596.6	3113.1	3446.8
G59.0	321.3	329.2	349.1	381.9	445.4	790.5	1757.8	2605.1	3164.0	3521.5
G60.0	307.0	314.7	332.3	361.6	420.7	721.6	1680.8	2604.9	3208.1	3594.6
G61.0	296.2	303.6	318.7	345.2	397.2	656.0	1587.6	2595.6	3244.7	3664.6
G62.0	288.7	294.7	309.1	332.6	376.7	601.3	1484.8	2576.4	3278.3	3730.4
G63.0	281.4	286.1	299.3	322.2	359.3	548.6	1371.2	2542.5	3302.4	3789.5
G64.0	271.5	276.7	289.0	309.9	344.9	503.6	1264.2	2488.6	3319.9	3840.4
G65.0	257.2	264.4	274.5	296.0	330.6	464.6	1156.0	2411.6	3321.4	3879.2
G66.0	239.4	248.8	257.0	277.3	315.0	432.3	1049.9	2312.3	3309.0	3909.3
G67.0	220.6	229.5	237.1	257.6	296.4	403.7	960.9	2186.0	3279.0	3928.7
G68.0	201.6	209.9	217.1	237.4	277.6	377.3	881.8	2047.8	3233.8	3930.8
G69.0	185.4	192.5	198.7	219.2	257.1	348.0	811.4	1878.1	3172.1	3914.3
G70.0	172.9	180.1	185.8	202.1	238.1	318.0	738.7	1717.9	3093.5	3873.8
G71.0	165.7	172.3	178.7	188.9	218.3	289.8	668.2	1545.8	2983.7	3811.6
G72.0	159.4	165.9	173.3	181.1	200.7	265.1	598.4	1375.0	2840.1	3718.2
G73.0	152.2	159.1	167.1	174.0	188.4	240.2	524.6	1215.8	2649.1	3600.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	144.1	151.3	159.9	165.8	179.3	215.5	452.1	1060.8	2412.1	3441.1
G75.0	135.8	142.6	151.6	157.1	169.2	194.3	371.9	904.4	2134.5	3258.8
G76.0	127.2	134.4	143.2	147.7	158.4	179.1	305.6	746.0	1812.9	3033.4
G77.0	119.2	125.9	134.4	138.3	147.3	163.8	236.9	575.9	1460.7	2729.2
G78.0	112.6	118.3	125.9	128.9	136.6	150.0	187.3	415.9	1121.7	2329.4
G79.0	108.0	111.6	118.0	119.8	125.9	136.9	158.5	272.0	785.3	1866.7
G80.0	105.5	106.7	110.7	111.7	116.4	125.7	139.3	198.8	513.4	1292.3
G81.0	106.3	102.8	105.0	105.1	107.0	115.3	126.4	166.9	353.7	843.0
G82.0	107.4	100.7	99.8	98.8	100.1	106.6	117.6	149.5	290.8	601.6
G83.0	104.1	98.6	94.5	94.7	94.9	100.4	110.7	135.0	247.8	458.7
G84.0	97.0	94.5	90.7	91.3	91.4	97.3	108.3	127.8	216.7	360.5
G85.0	90.7	88.7	86.2	88.4	88.5	93.2	104.1	122.0	190.5	294.5
G86.0	81.9	83.1	81.8	84.4	85.9	90.3	100.4	117.4	169.6	241.5
G87.0	74.1	75.6	76.2	79.3	82.7	87.9	96.4	110.7	149.8	198.9
G88.0	65.1	67.4	69.4	73.4	78.3	83.4	92.9	102.5	130.5	164.1
G89.0	54.6	58.3	61.1	65.9	72.3	78.4	87.3	92.5	111.1	136.9
G90.0	46.6	49.6	52.9	56.0	63.0	70.5	78.7	80.8	90.5	114.5
G91.0	37.8	39.7	42.3	43.6	50.1	59.1	65.2	66.1	73.6	94.8
G92.0	29.7	31.2	33.1	33.8	39.2	47.8	54.3	55.3	57.8	76.7
G93.0	18.2	22.2	25.2	26.3	31.3	41.0	44.5	46.6	45.7	54.8
G94.0	10.7	13.3	16.4	17.6	21.4	31.2	35.9	37.1	36.2	41.7
G95.0	6.4	8.6	10.1	10.2	12.1	18.5	23.4	25.0	26.9	30.8
G96.0	3.5	4.8	6.7	7.0	7.8	10.4	13.6	15.8	19.4	21.6
G97.0	2.4	3.2	4.5	4.9	5.7	6.8	10.4	12.1	14.6	17.1
G98.0	2.1	2.3	3.3	3.8	4.4	5.2	8.7	10.4	11.9	14.8
G99.0	2.3	2.1	2.5	3.1	3.7	4.5	7.3	8.9	10.1	12.8
G100.0	2.3	2.1	2.3	2.5	3.2	4.0	5.7	7.4	8.9	11.4
G101.0	2.3	2.3	2.3	2.4	2.8	3.7	5.1	6.4	8.2	10.6
G102.0	2.4	2.5	2.4	2.5	2.8	3.6	4.6	6.1	7.8	10.1
G103.0	2.5	2.4	2.5	2.6	3.0	3.6	4.5	5.8	7.5	9.4
G104.0	2.6	2.5	2.6	2.7	3.1	3.7	4.6	5.8	7.3	8.9
G105.0	2.7	2.5	2.6	2.7	3.2	3.8	4.9	5.9	7.4	8.9
G106.0	2.7	2.6	2.7	2.8	3.3	4.0	5.0	6.3	7.6	9.2
G107.0	2.7	2.7	2.8	3.0	3.5	4.2	5.2	6.5	8.0	9.4
G108.0	2.8	2.8	2.8	3.2	3.6	4.3	5.3	6.8	8.2	9.8
G109.0	2.8	2.8	3.0	3.2	3.8	4.5	5.6	6.9	8.4	10.0
G110.0	3.0	3.0	3.1	3.5	3.9	4.8	5.8	7.1	8.7	10.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	3.0	3.1	3.2	3.6	4.0	4.9	6.1	7.4	8.8	10.5
G112.0	3.1	3.1	3.3	3.6	4.2	5.1	6.2	7.5	9.0	10.6
G113.0	3.2	3.2	3.5	3.7	4.4	5.2	6.3	7.7	9.3	10.8
G114.0	3.3	3.3	3.5	3.8	4.5	5.5	6.5	7.8	9.4	11.1
G115.0	3.3	3.5	3.6	3.9	4.6	5.6	6.7	8.1	9.6	11.2
G116.0	3.5	3.6	3.7	4.2	4.8	5.7	6.9	8.3	9.9	11.4
G117.0	3.6	3.6	3.8	4.2	5.0	5.9	7.0	8.4	10.0	11.5
G118.0	3.6	3.7	3.9	4.3	5.1	6.1	7.3	8.7	10.1	11.5
G119.0	3.7	3.8	4.0	4.5	5.2	6.2	7.5	8.9	10.4	11.8
G120.0	3.8	3.9	4.2	4.6	5.5	6.4	7.6	9.0	10.6	11.9
G121.0	3.9	4.0	4.3	4.8	5.5	6.5	7.8	9.2	10.7	12.1
G122.0	3.9	4.0	4.4	4.9	5.6	6.7	8.0	9.4	10.7	12.1
G123.0	4.0	4.2	4.4	5.0	5.8	6.9	8.1	9.4	10.9	12.3
G124.0	4.2	4.3	4.6	5.1	5.9	7.0	8.2	9.6	10.9	12.4
G125.0	4.2	4.4	4.8	5.3	6.1	7.1	8.4	9.8	11.1	12.5
G126.0	4.4	4.5	4.9	5.3	6.2	7.3	8.6	9.9	11.2	12.5
G127.0	4.4	4.6	5.0	5.6	6.3	7.4	8.6	9.9	11.3	12.6
G128.0	4.5	4.8	5.1	5.7	6.5	7.6	8.8	10.1	11.3	12.6
G129.0	4.6	5.0	5.2	5.8	6.8	7.6	8.9	10.2	11.5	12.8
G130.0	4.9	5.0	5.3	6.1	6.9	7.8	9.0	10.2	11.6	12.8
G131.0	4.9	5.1	5.6	6.2	7.0	8.0	9.2	10.4	11.8	13.0
G132.0	5.0	5.2	5.6	6.3	7.1	8.2	9.3	10.6	11.8	13.1
G133.0	5.1	5.3	5.8	6.4	7.3	8.2	9.4	10.6	11.9	13.2
G134.0	5.3	5.5	5.8	6.5	7.4	8.3	9.4	10.7	11.9	13.2
G135.0	5.5	5.7	6.1	6.8	7.5	8.6	9.5	10.7	11.9	13.3
G136.0	5.7	5.8	6.3	6.9	7.6	8.6	9.6	10.8	12.1	13.3
G137.0	5.8	6.1	6.4	7.0	7.7	8.7	9.8	10.9	12.0	13.3
G138.0	5.8	6.2	6.5	7.3	8.0	8.8	9.9	10.9	12.1	13.3
G139.0	6.1	6.3	6.8	7.4	8.1	8.9	10.0	10.9	12.3	13.3
G140.0	6.2	6.5	6.9	7.5	8.3	9.2	10.1	11.1	12.3	13.4
G141.0	6.3	6.7	7.0	7.7	8.4	9.3	10.2	11.2	12.4	13.4
G142.0	6.5	6.9	7.3	7.8	8.6	9.3	10.2	11.3	12.4	13.4
G143.0	6.8	7.0	7.5	8.0	8.6	9.4	10.4	11.3	12.4	13.4
G144.0	7.0	7.1	7.6	8.1	8.7	9.6	10.5	11.4	12.4	13.4
G145.0	7.1	7.4	7.7	8.3	8.9	9.6	10.6	11.4	12.4	13.4
G146.0	7.4	7.5	8.0	8.4	9.2	9.9	10.7	11.5	12.5	13.4
G147.0	7.5	7.7	8.2	8.6	9.3	10.0	10.8	11.6	12.5	13.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	7.6	7.8	8.3	8.8	9.4	10.1	10.8	11.6	12.6	13.4
G149.0	7.8	8.1	8.4	8.9	9.5	10.2	10.9	11.8	12.6	13.3
G150.0	8.1	8.3	8.7	9.2	9.6	10.4	11.1	11.8	12.6	13.4
G151.0	8.3	8.6	8.9	9.4	9.8	10.5	11.2	11.8	12.6	13.3
G152.0	8.6	8.7	9.0	9.5	10.0	10.6	11.3	11.9	12.6	13.4
G153.0	8.7	8.8	9.2	9.6	10.1	10.7	11.4	12.0	12.7	13.4
G154.0	8.9	9.2	9.4	9.9	10.4	10.8	11.5	12.1	12.7	13.3
G155.0	9.2	9.3	9.5	10.0	10.5	10.9	11.5	12.1	12.7	13.3
G156.0	9.4	9.5	9.8	10.1	10.6	11.1	11.6	12.3	12.8	13.3
G157.0	9.6	9.8	10.0	10.4	10.8	11.2	11.8	12.3	12.8	13.4
G158.0	9.9	10.0	10.2	10.5	10.9	11.3	11.9	12.4	12.8	13.4
G159.0	10.1	10.1	10.4	10.7	11.1	11.4	11.9	12.4	13.0	13.4
G160.0	10.2	10.4	10.6	10.8	11.2	11.5	12.0	12.5	13.0	13.4
G161.0	10.5	10.6	10.7	10.9	11.3	11.8	12.1	12.6	13.0	13.4
G162.0	10.7	10.8	10.9	11.2	11.4	11.9	12.3	12.6	13.1	13.4
G163.0	10.9	10.9	11.2	11.4	11.6	12.0	12.4	12.7	13.1	13.4
G164.0	11.2	11.2	11.3	11.4	11.8	12.1	12.4	12.8	13.2	13.4
G165.0	11.3	11.4	11.5	11.6	11.9	12.3	12.5	12.8	13.2	13.4
G166.0	11.5	11.5	11.8	11.9	12.0	12.4	12.6	13.0	13.3	13.6
G167.0	11.8	11.8	11.9	12.1	12.1	12.5	12.7	13.0	13.3	13.7
G168.0	12.0	12.0	12.0	12.3	12.4	12.6	13.0	13.1	13.4	13.7
G169.0	12.3	12.3	12.4	12.4	12.6	12.7	13.0	13.2	13.6	13.8
G170.0	12.5	12.5	12.5	12.5	12.7	13.0	13.1	13.3	13.6	13.7
G171.0	12.7	12.6	12.6	12.8	12.8	13.1	13.2	13.4	13.7	13.8
G172.0	13.0	12.8	12.8	13.0	13.1	13.2	13.3	13.6	13.8	13.9
G173.0	13.2	13.1	13.1	13.2	13.2	13.3	13.6	13.7	13.8	14.0
G174.0	13.3	13.3	13.3	13.3	13.4	13.6	13.7	13.8	13.9	14.1
G175.0	13.7	13.6	13.6	13.6	13.6	13.8	13.8	13.9	14.0	14.3
G176.0	13.8	13.8	13.8	13.7	13.8	13.8	14.0	14.0	14.1	14.3
G177.0	14.0	14.0	13.9	13.8	13.9	14.0	14.0	14.1	14.3	14.3
G178.0	14.4	14.1	14.1	14.0	14.1	14.1	14.1	14.3	14.4	14.4
G179.0	14.5	14.4	14.3	14.3	14.3	14.3	14.3	14.4	14.5	14.4
G180.0	14.8	14.6	14.6	14.4	14.4	14.4	14.4	14.5	14.5	14.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	1916.8	1919.1	1944.2						
G1.0	1922.5	1922.9	1944.5						
G2.0	1927.1	1925.3	1944.8						
G3.0	1931.3	1928.2	1946.1						
G4.0	1934.5	1930.8	1946.7						
G5.0	1938.4	1933.4	1947.6						
G6.0	1941.6	1935.6	1947.6						
G7.0	1944.2	1937.6	1948.3						
G8.0	1947.3	1939.7	1949.0						
G9.0	1950.4	1941.8	1950.7						
G10.0	1954.2	1944.7	1952.2						
G11.0	1957.7	1946.8	1954.1						
G12.0	1962.1	1950.4	1956.2						
G13.0	1967.1	1954.5	1959.0						
G14.0	1971.6	1959.1	1962.5						
G15.0	1975.9	1962.8	1964.4						
G16.0	1980.9	1967.5	1970.9						
G17.0	1985.6	1972.1	1974.1						
G18.0	1991.9	1977.9	1978.5						
G19.0	1998.6	1983.8	1983.6						
G20.0	2005.8	1990.3	1984.8						
G21.0	2011.9	1996.2	1986.1						
G22.0	2018.2	2001.7	1991.6						
G23.0	2024.5	2006.2	1995.1						
G24.0	2032.2	2011.4	1999.1						
G25.0	2038.5	2017.0	2004.3						
G26.0	2046.3	2024.0	2012.0						
G27.0	2054.7	2031.4	2019.3						
G28.0	2064.1	2040.6	2029.8						
G29.0	2075.4	2051.6	2045.6						
G30.0	2089.0	2064.2	2059.9						
G31.0	2104.9	2081.0	2075.9						
G32.0	2122.1	2097.6	2096.3						
G33.0	2141.6	2116.4	2118.2						
G34.0	2163.5	2137.7	2141.6						
G35.0	2187.4	2161.6	2169.5						
G36.0	2214.7	2187.2	2200.1						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	2245.0	2217.5	2234.3						
G38.0	2279.1	2250.7	2273.1						
G39.0	2313.9	2287.6	2316.0						
G40.0	2355.2	2327.1	2363.7						
G41.0	2400.4	2375.2	2416.0						
G42.0	2449.8	2425.9	2487.3						
G43.0	2511.5	2486.4	2564.8						
G44.0	2576.8	2557.0	2645.6						
G45.0	2646.3	2639.7	2687.0						
G46.0	2715.4	2715.4	2730.9						
G47.0	2783.0	2775.3	2787.4						
G48.0	2838.2	2823.5	2852.4						
G49.0	2893.8	2881.0	2920.9						
G50.0	2956.7	2950.4	2995.5						
G51.0	3028.2	3024.9	3070.6						
G52.0	3100.6	3103.7	3153.5						
G53.0	3178.3	3188.0	3235.2						
G54.0	3254.9	3271.7	3317.2						
G55.0	3338.3	3357.7	3402.4						
G56.0	3422.6	3447.7	3495.7						
G57.0	3508.1	3537.5	3587.5						
G58.0	3598.5	3636.2	3680.8						
G59.0	3683.8	3728.8	3780.1						
G60.0	3770.5	3828.4	3880.0						
G61.0	3854.3	3921.9	3976.7						
G62.0	3938.3	4016.2	4061.5						
G63.0	4020.1	4104.7	4146.3						
G64.0	4085.8	4184.1	4214.3						
G65.0	4151.5	4256.6	4283.4						
G66.0	4204.0	4321.1	4342.1						
G67.0	4253.1	4378.6	4380.9						
G68.0	4290.5	4419.6	4398.8						
G69.0	4311.0	4439.3	4396.3						
G70.0	4310.3	4437.3	4361.8						
G71.0	4290.6	4413.0	4296.6						
G72.0	4240.6	4358.2	4192.5						
G73.0	4157.0	4264.5	4034.5						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	4038.3	4140.1	3815.7						
G75.0	3874.6	3964.9	3523.3						
G76.0	3651.2	3715.8	3173.3						
G77.0	3325.6	3404.1	2729.1						
G78.0	2949.2	2994.6	2213.1						
G79.0	2442.5	2498.6	1630.5						
G80.0	1861.1	1916.9	1149.7						
G81.0	1291.9	1363.7	833.9						
G82.0	905.9	964.8	626.1						
G83.0	653.2	705.4	465.1						
G84.0	489.2	512.2	340.8						
G85.0	371.9	377.2	251.6						
G86.0	292.5	286.4	196.9						
G87.0	233.8	226.5	164.7						
G88.0	187.9	193.0	146.5						
G89.0	156.6	167.0	130.9						
G90.0	134.5	146.0	120.3						
G91.0	114.6	129.9	109.4						
G92.0	93.5	117.4	97.2						
G93.0	74.1	100.0	77.4						
G94.0	60.5	81.7	55.2						
G95.0	40.8	53.4	39.7						
G96.0	27.8	37.1	31.5						
G97.0	21.6	29.0	24.6						
G98.0	19.4	23.8	21.2						
G99.0	17.8	20.7	19.0						
G100.0	16.2	18.4	17.7						
G101.0	14.4	16.9	16.6						
G102.0	13.3	15.5	15.2						
G103.0	11.8	13.8	14.1						
G104.0	10.8	12.5	13.4						
G105.0	10.5	11.8	13.7						
G106.0	10.6	12.0	13.9						
G107.0	10.9	12.4	14.1						
G108.0	11.3	12.6	14.4						
G109.0	11.5	12.8	14.8						
G110.0	11.8	13.1	14.9						

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	11.9	13.3	15.1							
G112.0	12.3	13.6	15.3							
G113.0	12.4	13.7	15.5							
G114.0	12.6	13.8	15.6							
G115.0	12.6	14.0	15.7							
G116.0	12.8	14.0	15.8							
G117.0	13.0	14.1	15.9							
G118.0	13.1	14.3	16.0							
G119.0	13.2	14.4	16.2							
G120.0	13.3	14.5	16.4							
G121.0	13.4	14.6	16.5							
G122.0	13.6	14.8	16.6							
G123.0	13.6	14.8	16.8							
G124.0	13.6	14.9	16.9							
G125.0	13.7	14.8	17.0							
G126.0	13.8	14.9	17.1							
G127.0	13.8	15.0	17.2							
G128.0	13.9	15.1	17.4							
G129.0	14.0	15.2	17.5							
G130.0	14.1	15.3	17.6							
G131.0	14.3	15.5	17.7							
G132.0	14.4	15.6	17.8							
G133.0	14.5	15.7	17.8							
G134.0	14.5	15.7	17.8							
G135.0	14.6	15.8	17.8							
G136.0	14.5	15.8	17.8							
G137.0	14.6	15.8	17.7							
G138.0	14.6	15.8	17.6							
G139.0	14.6	15.8	17.6							
G140.0	14.6	15.8	17.5							
G141.0	14.6	15.7	17.2							
G142.0	14.5	15.7	17.1							
G143.0	14.5	15.6	17.0							
G144.0	14.4	15.5	16.9							
G145.0	14.4	15.3	16.8							
G146.0	14.5	15.3	16.6							
G147.0	14.4	15.2	16.5							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	14.4	15.2	16.4							
G149.0	14.3	15.1	16.3							
G150.0	14.3	15.1	16.2							
G151.0	14.3	15.0	16.0							
G152.0	14.1	14.9	15.8							
G153.0	14.0	14.8	15.8							
G154.0	14.0	14.6	15.7							
G155.0	14.0	14.6	15.6							
G156.0	14.0	14.6	15.6							
G157.0	14.0	14.5	15.5							
G158.0	13.9	14.5	15.3							
G159.0	13.9	14.4	15.2							
G160.0	13.9	14.4	15.2							
G161.0	13.9	14.3	15.1							
G162.0	13.9	14.3	15.1							
G163.0	13.9	14.3	15.1							
G164.0	13.9	14.3	15.1							
G165.0	13.9	14.1	15.0							
G166.0	13.9	14.1	15.0							
G167.0	13.9	14.1	15.0							
G168.0	13.9	14.1	15.0							
G169.0	14.0	14.1	15.0							
G170.0	14.0	14.3	15.0							
G171.0	14.0	14.3	15.1							
G172.0	14.1	14.3	15.1							
G173.0	14.1	14.3	15.1							
G174.0	14.1	14.4	15.1							
G175.0	14.3	14.5	15.1							
G176.0	14.3	14.5	15.2							
G177.0	14.5	14.5	15.2							
G178.0	14.5	14.5	15.1							
G179.0	14.5	14.6	15.2							
G180.0	14.6	14.8	15.2							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector: