

Report No.:

Test Time: 2016-12-05 18:20

Luminaire Property

Luminaire Manufacturer: SVETOLUB

Luminaire Category: SVETOLUB 2863-40-21500

Luminous Length (mm): 570

Luminous Width (mm): 130

Luminous Height (mm): 130

Voltage: 220.1 V

Current: 0.63 A

Power: 136.8 W

Power Factor: 0.983

Photometric Results

CIE Class: Direct

Total Rated Lamp Lumens: 20212.7 lm

Measurement Flux: 20212.7 lm

Efficiency: 100%

Downward Ratio: 99%

Upward Ratio: 1%

Field Angle: H160.1 V153.7

Beam Angle: H114.9 V114.4


Luminaire Efficacy Rating (LER): 148

Central Intensity: 6963.85 cd


Max. Intensity: 6963.86 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

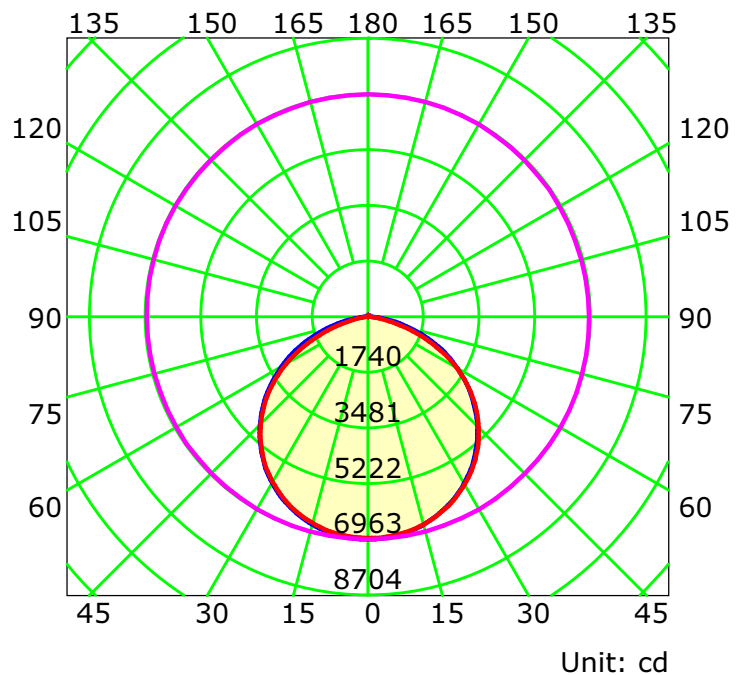

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-360.0: 5.0

Gamma Plane (°):0.0-180.0:1.0

Test Lab:

Test Device: LSG-1600B

Test Type: TYPE C

Distance: 8.000 m



Temperature: 20

Humidity: 40

Operator:

Inspector:

Luminous Intensity Distribution Curve

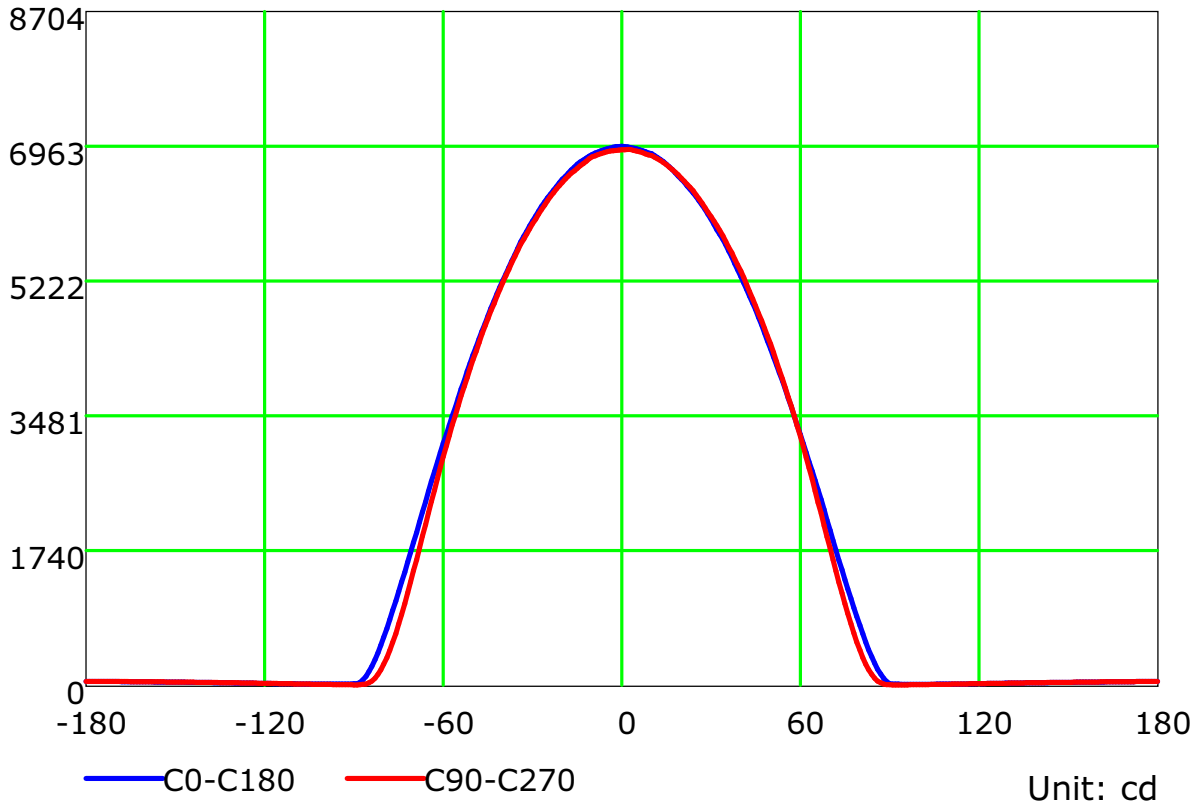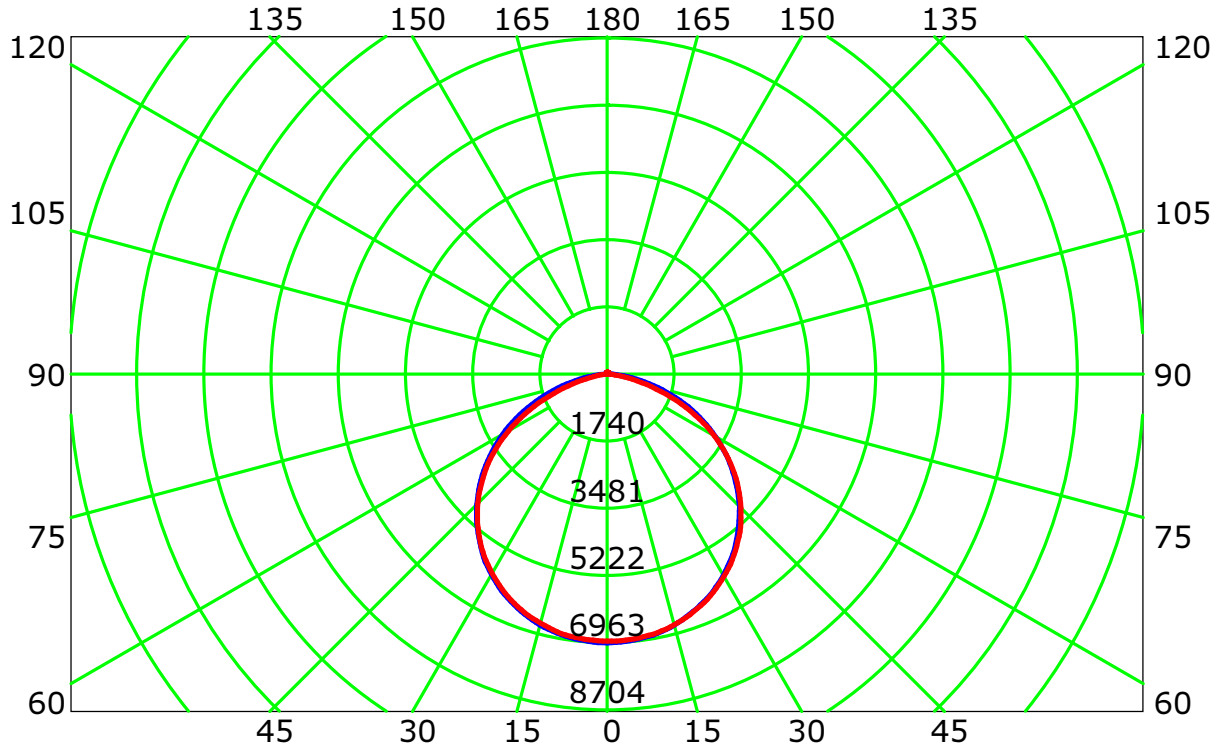


Unit: cd

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

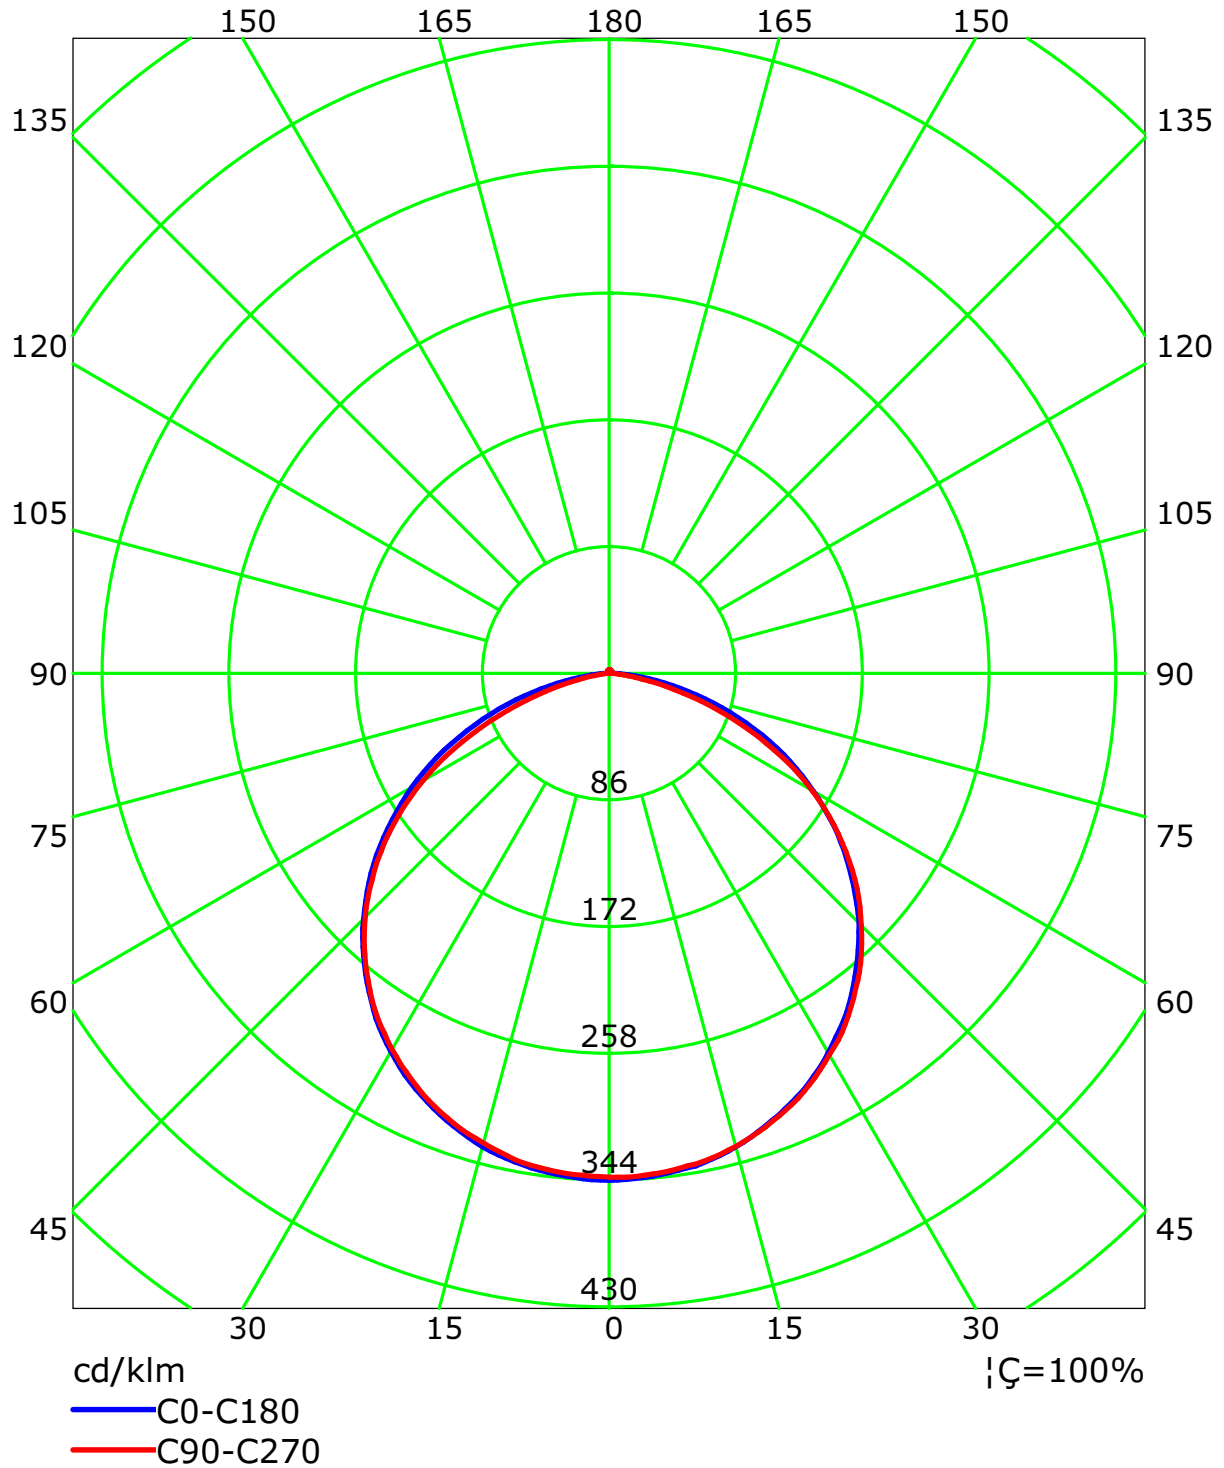


C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	109	104	100	96	106	102	98	95	97	94	91	93	91	88	90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	76	82	77	74	79	75	72	70
3	90	80	72	65	88	78	71	65	75	69	63	72	67	62	69	65	61	59
4	83	71	62	55	80	69	61	55	67	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	44	40	38
7	65	51	43	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	51	39	31	26	38	31	26	37	31	26	36	30	26	24


Spacing Criteria (0-180): 1.28
 Spacing Criteria (90-270): 1.29
 Spacing Criteria (Diagonal): 1.40

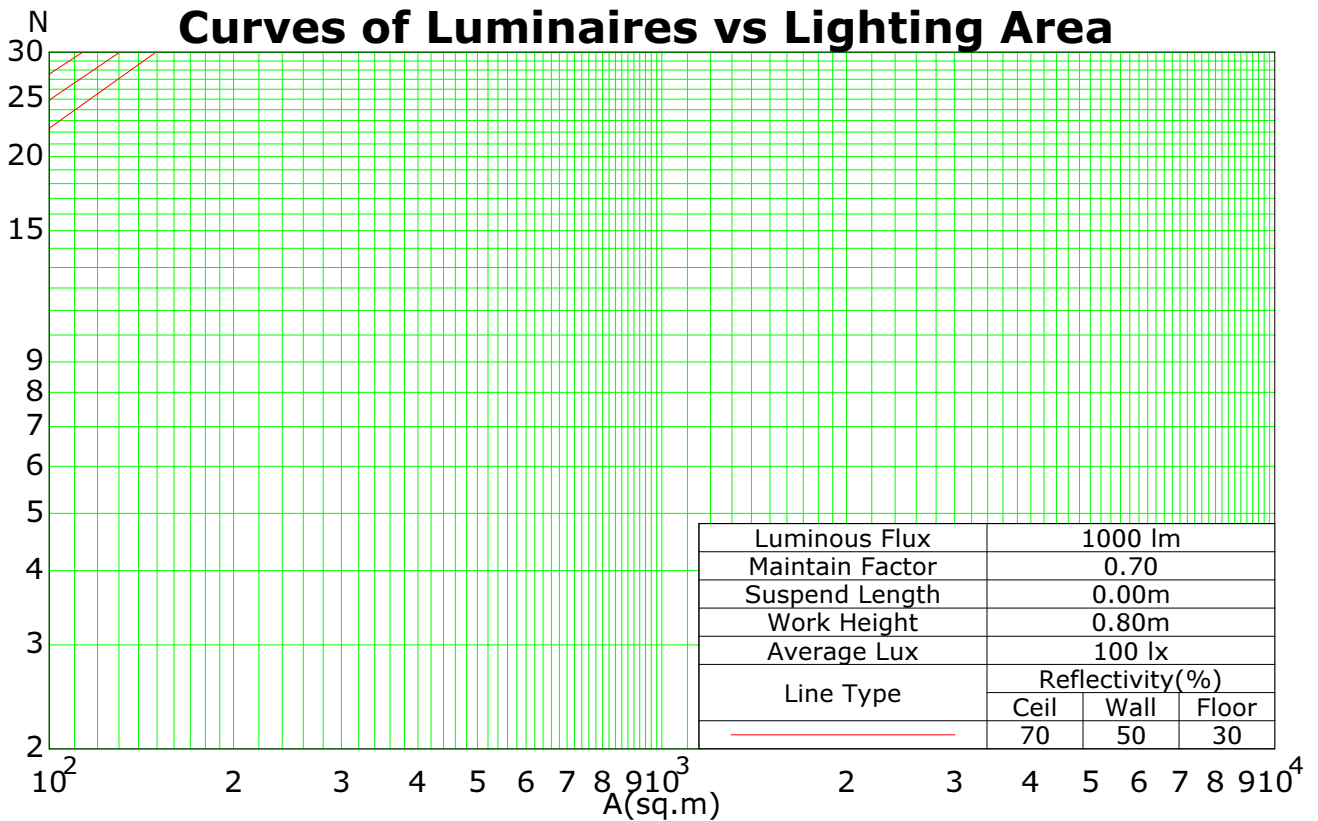

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

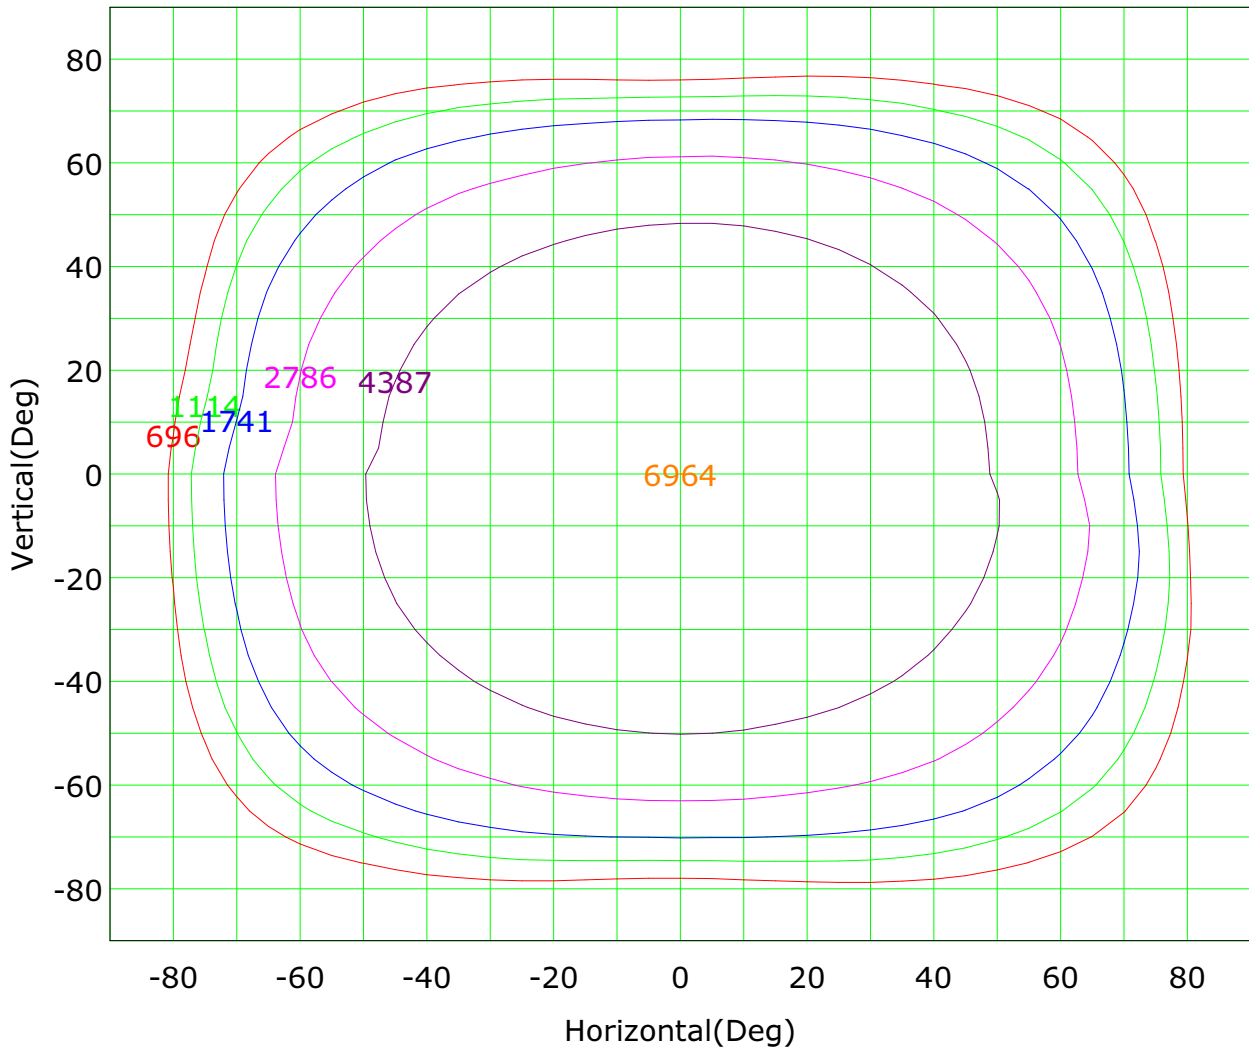

Imax (100%): 6964 cd

- | | |
|-------------------|-------------------|
| — (10%): 696 cd | — (16%): 1114 cd |
| — (25%): 1741 cd | — (40%): 2786 cd |
| — (63%): 4387 cd | — (100%): 6964 cd |

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Isocandela (sphere)

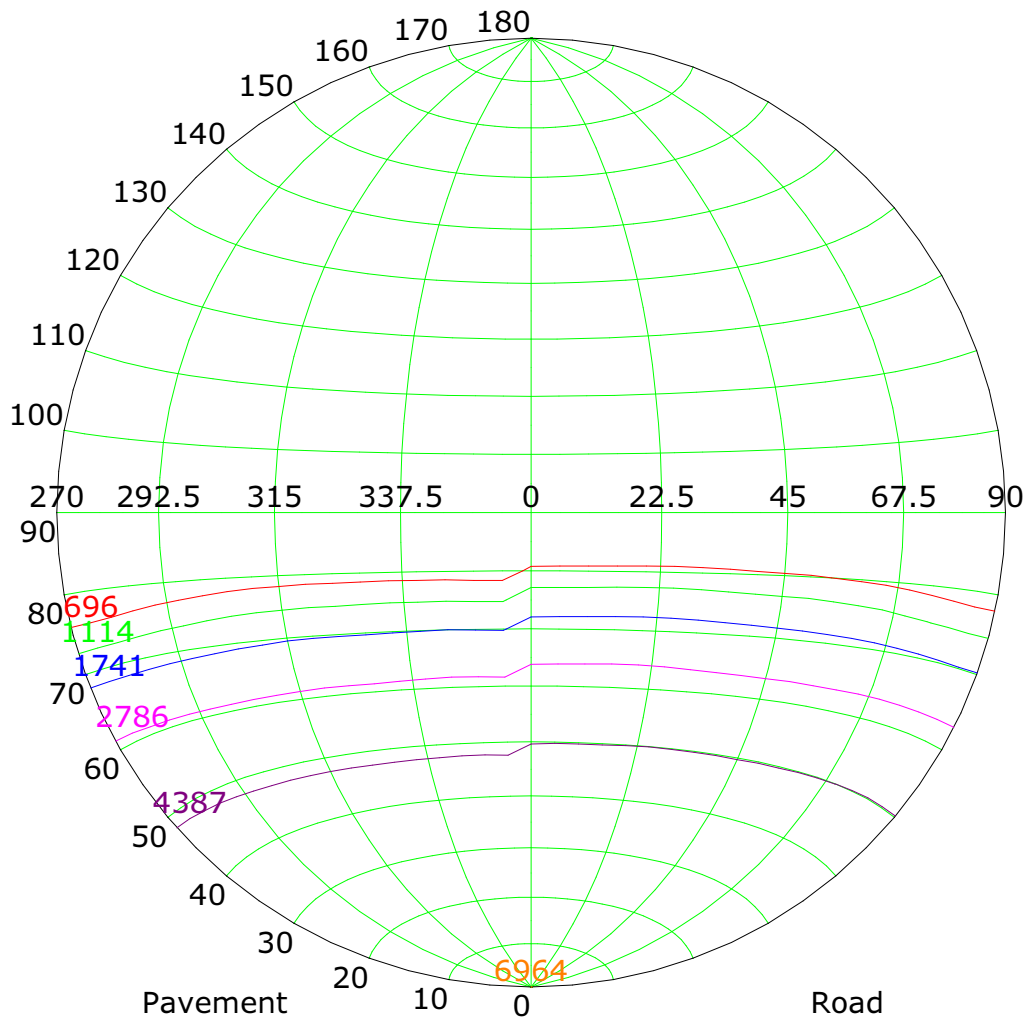

Imax (100%): 6964 cd

- | | |
|-------------------|-------------------|
| — (10%): 696 cd | — (16%): 1114 cd |
| — (25%): 1741 cd | — (40%): 2786 cd |
| — (63%): 4387 cd | — (100%): 6964 cd |

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

IsoLux Plot

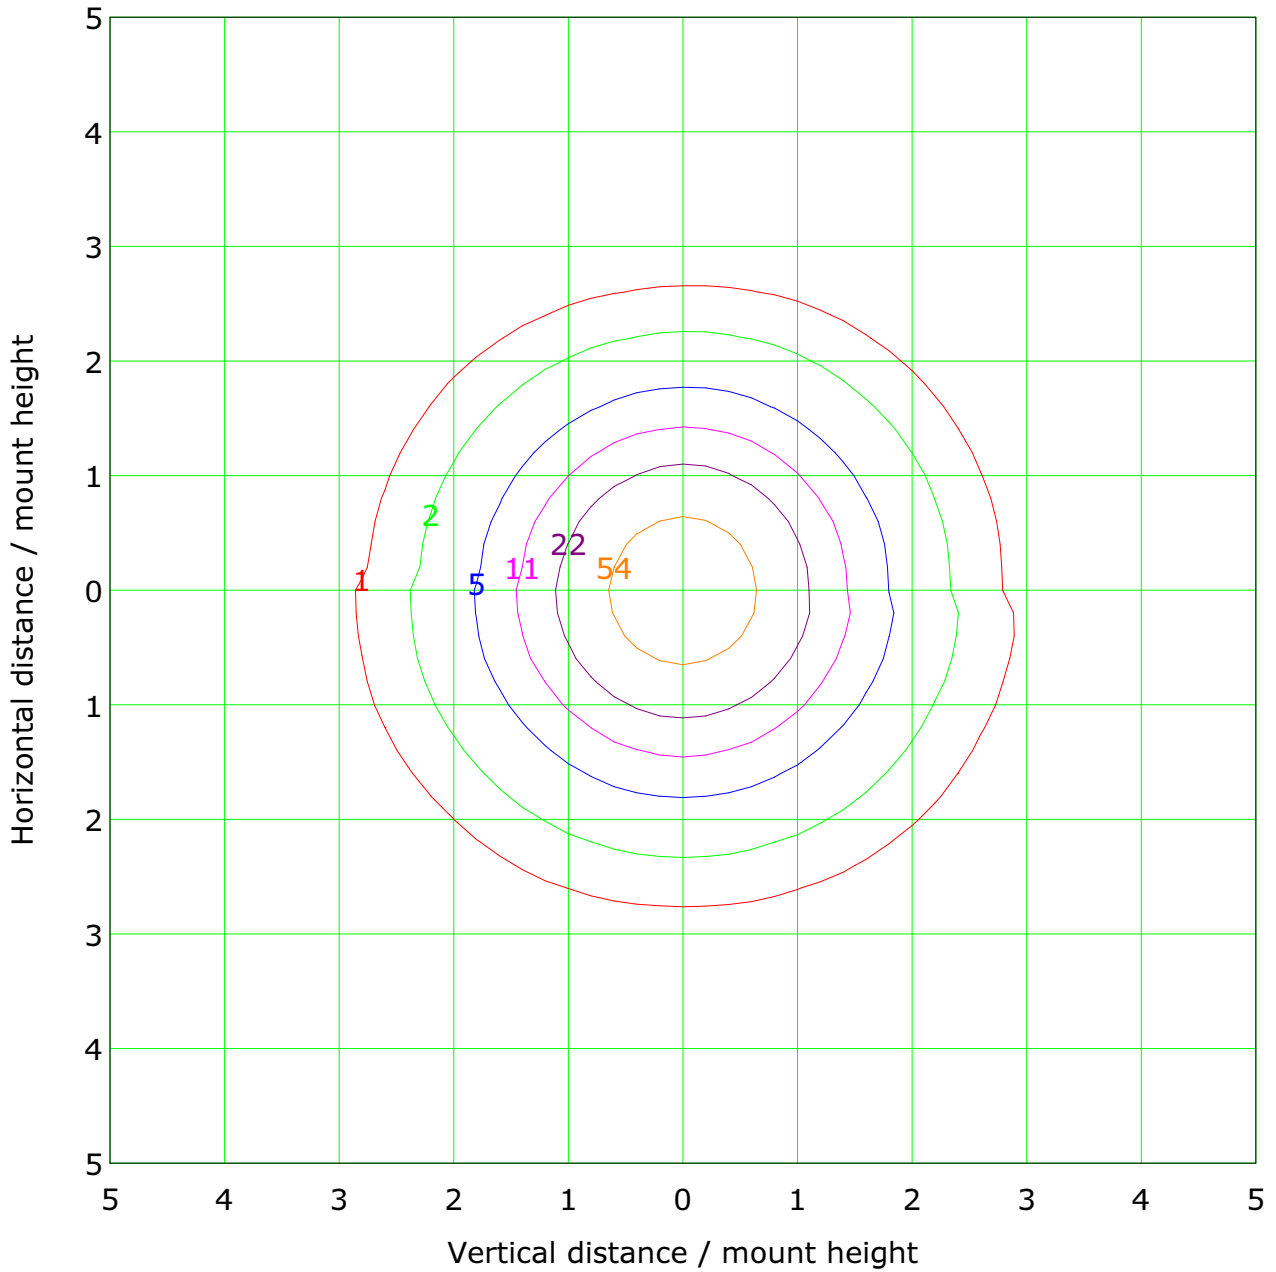

Mounting Height: 8.0m		Max Lux(100%): 108.8 lx	
— (1%):	1.1 lx	— (2%):	2.2 lx
— (5%):	5.4 lx	— (10%):	10.9 lx
— (20%):	21.8 lx	— (50%):	54.4 lx
— (100%):	108.8 lx		

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.000 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

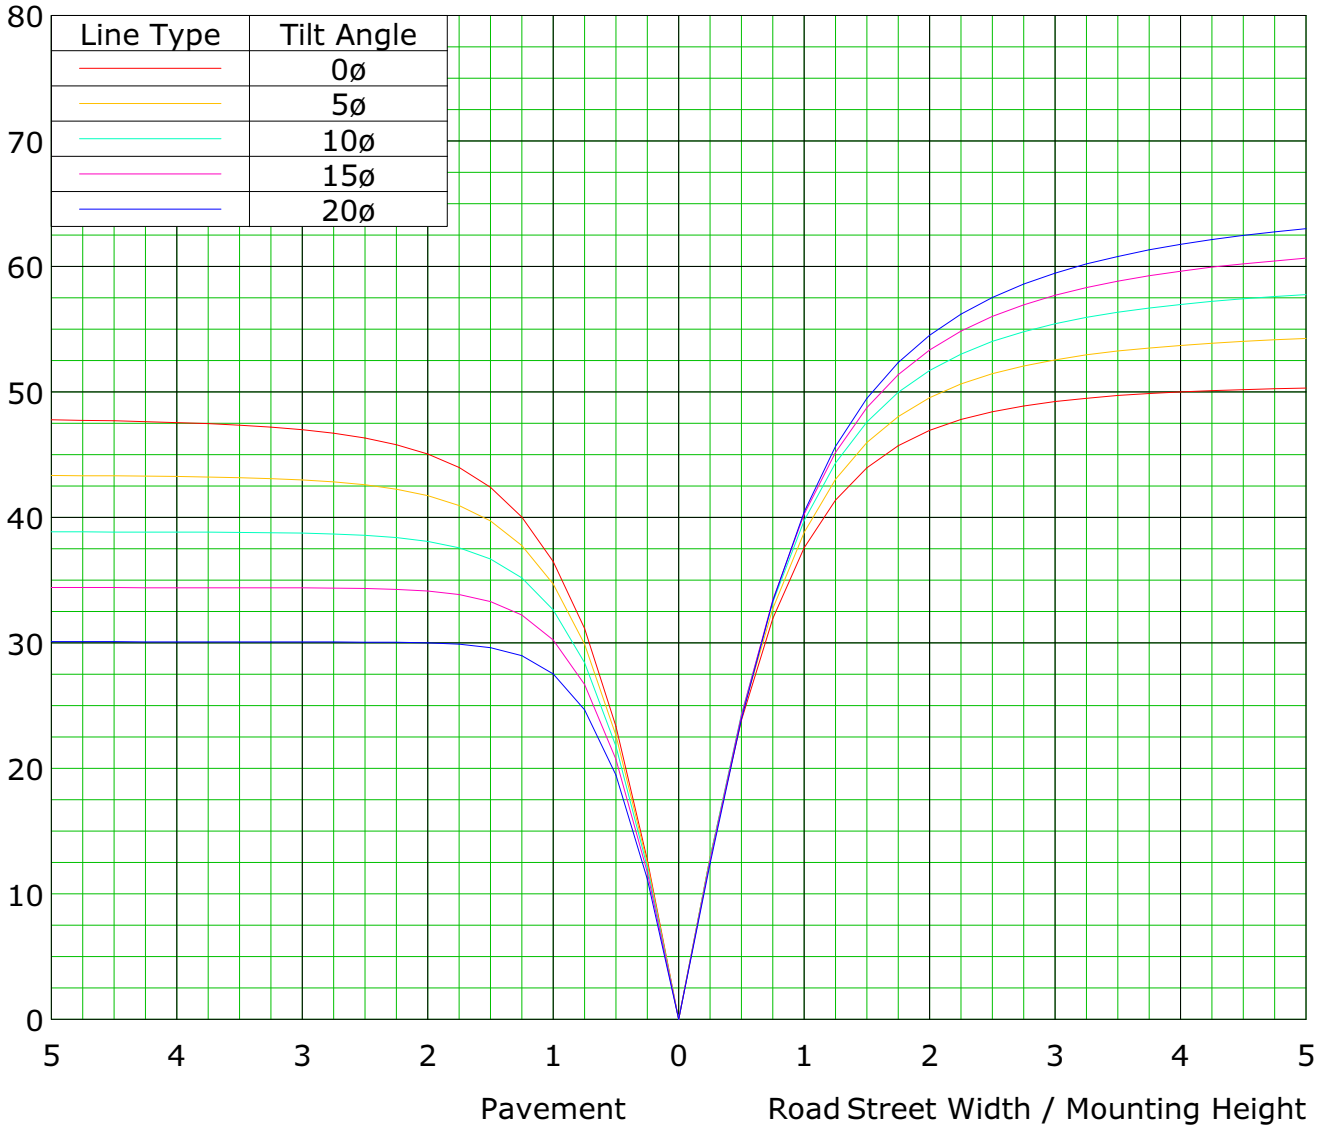

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A								
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

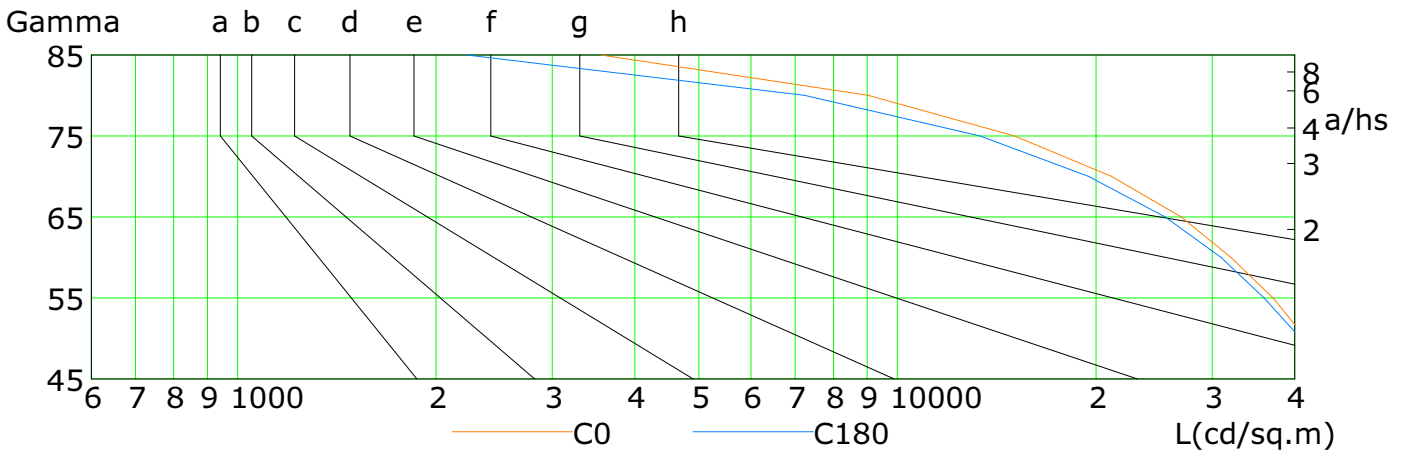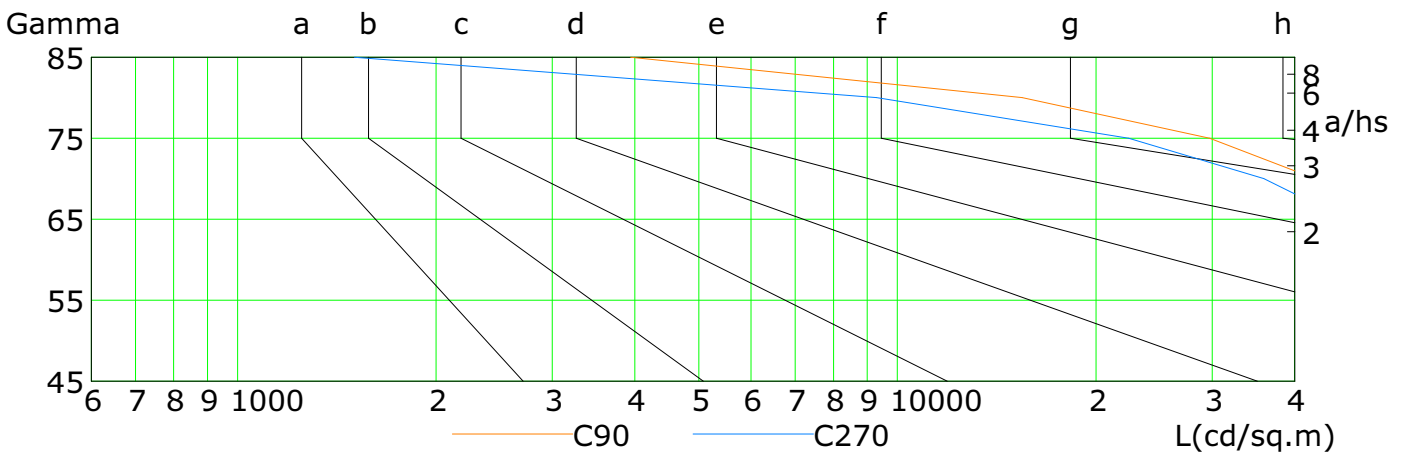

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	46349	41659	37096	32017	26908	21101	15052	9027	3555
C90	76210	72776	68203	62317	53861	42968	29740	15448	3944
C180	45563	40903	35963	30924	25452	19462	13355	7227	2225
C270	73708	69479	64151	57182	47831	35928	22428	9300	1504

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:


Illuminance at a Distance

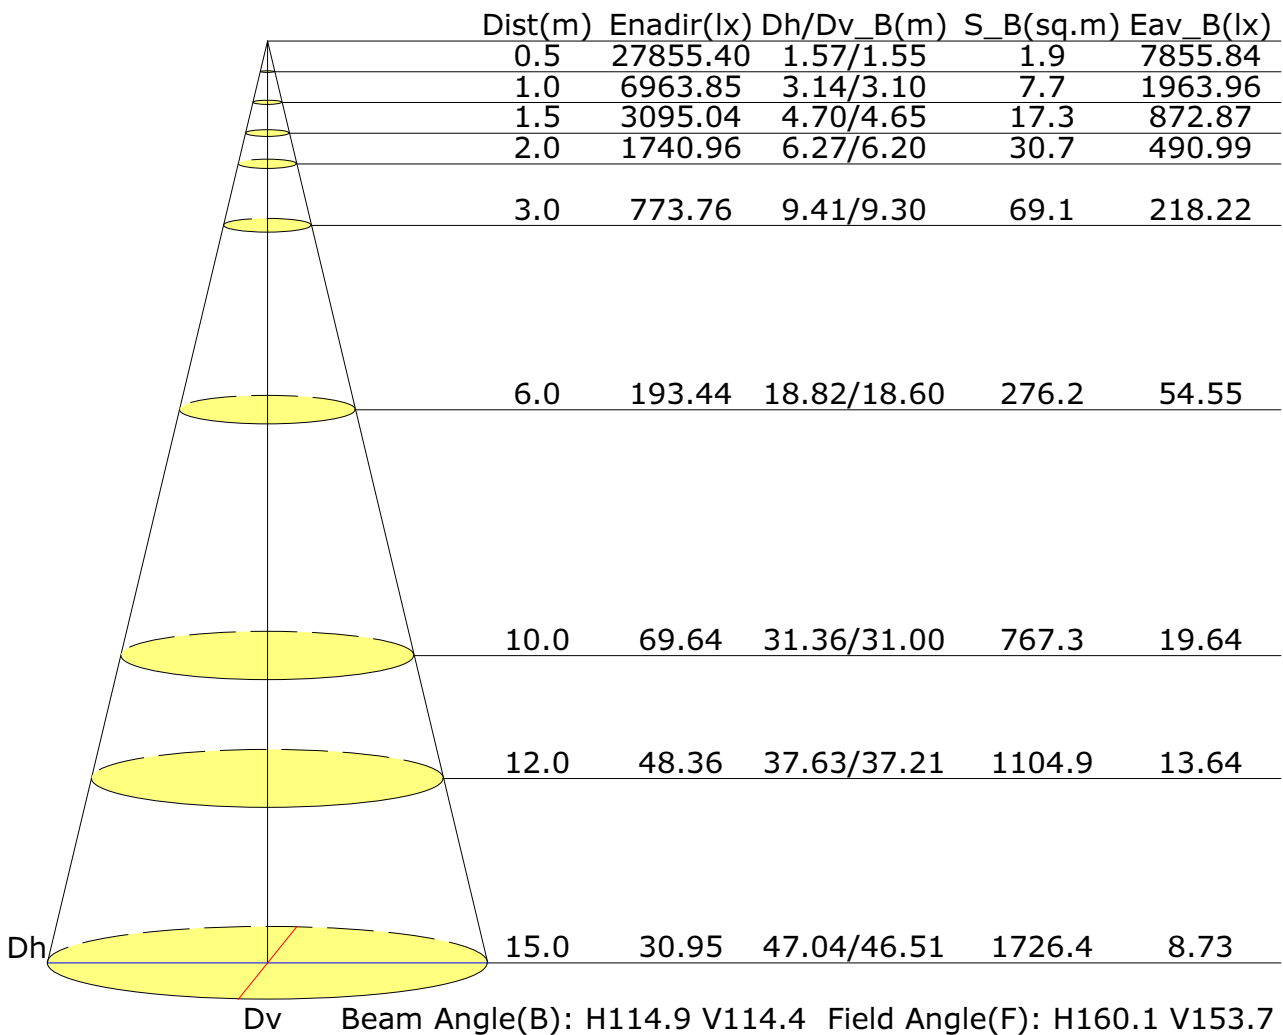

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Vertical IsoLux Plot

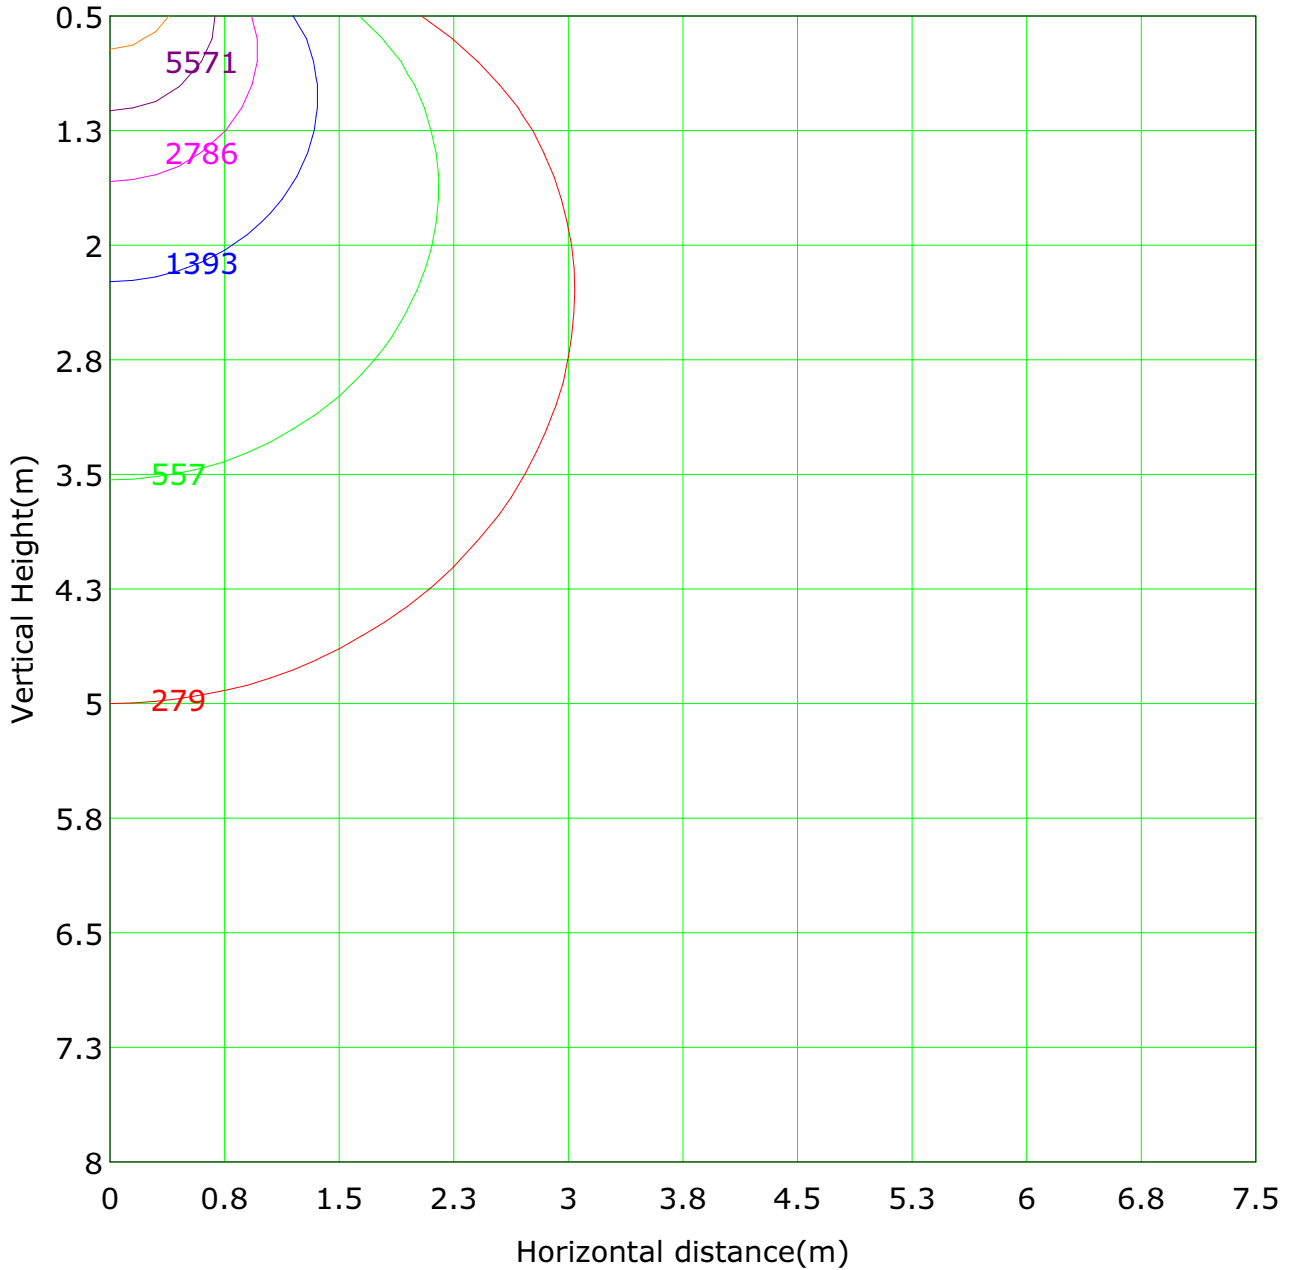

Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 27855.4 lx


— (1%): 278.6 lx	— (2%): 557.1 lx
— (5%): 1392.8 lx	— (10%): 2785.5 lx
— (20%): 5571.1 lx	— (50%): 13927.7 lx
— (100%): 27855.4 lx	

C Plane (°): 0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

The Average Illuminance Effective Figure

Flux Out: 19782.28lm

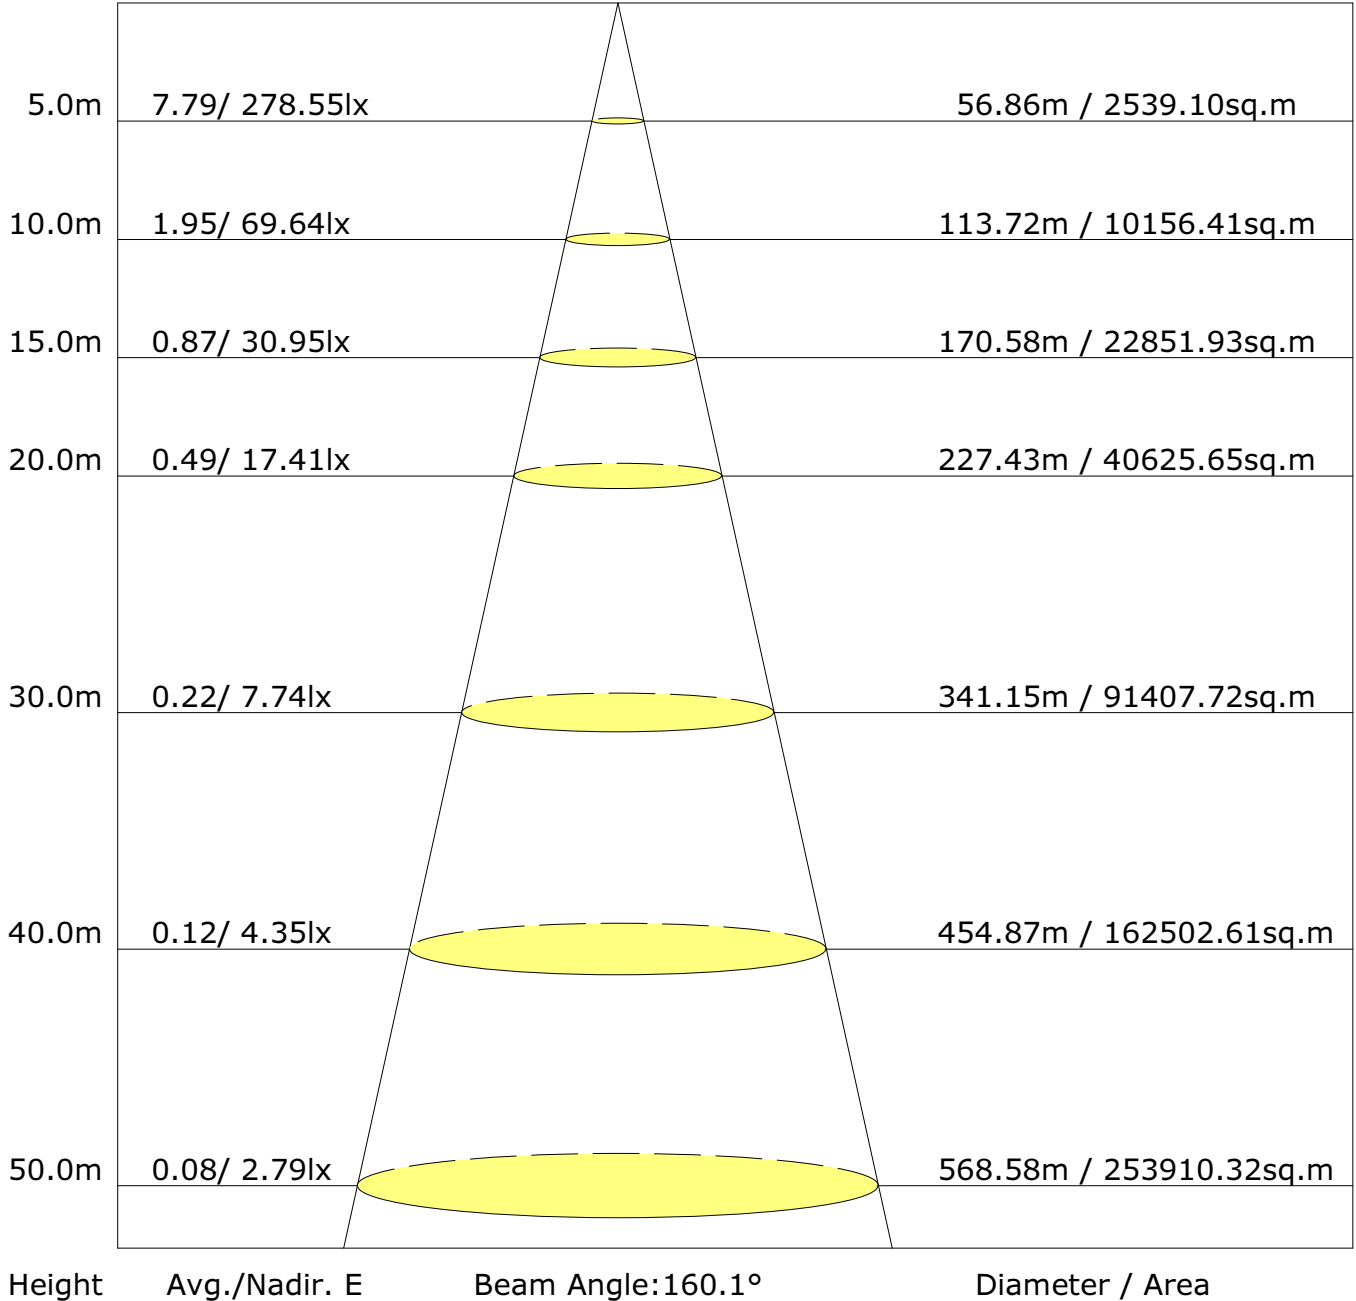

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	15.2	16.8	15.5	17.1	17.4	14.1	15.8	14.5	16.1	16.4
3H	16.7	18.2	17.1	18.5	18.9	15.3	16.8	15.7	17.1	17.5
4H	17.2	18.6	17.6	18.9	19.3	15.6	17.0	16.0	17.3	17.7
6H	17.5	18.7	17.9	19.1	19.5	15.7	16.9	16.1	17.3	17.7
8H	17.5	18.7	18.0	19.1	19.6	15.7	16.9	16.1	17.3	17.7
12H	17.5	18.7	18.0	19.1	19.5	15.6	16.8	16.1	17.2	17.6
X=4H Y=2H	15.5	16.9	15.9	17.2	17.6	14.7	16.1	15.1	16.5	16.9
3H	17.2	18.4	17.6	18.8	19.2	16.1	17.2	16.5	17.7	18.1
4H	17.8	18.8	18.2	19.2	19.7	16.4	17.5	16.9	17.9	18.4
6H	18.1	19.0	18.6	19.5	20.0	16.6	17.5	17.1	17.9	18.4
8H	18.2	19.0	18.7	19.5	20.0	16.6	17.4	17.1	17.9	18.4
12H	18.2	19.0	18.7	19.5	20.0	16.6	17.3	17.1	17.8	18.3
X=8H Y=4H	17.9	18.7	18.3	19.2	19.6	16.7	17.5	17.2	18.0	18.5
6H	18.2	18.9	18.7	19.4	19.9	16.9	17.6	17.4	18.1	18.6
8H	18.3	19.0	18.9	19.5	20.0	16.9	17.5	17.4	18.0	18.6
12H	18.4	18.9	18.9	19.4	20.0	16.9	17.4	17.4	18.0	18.5
X=12H Y=4H	17.8	18.6	18.3	19.1	19.6	16.7	17.5	17.2	18.0	18.4
6H	18.2	18.9	18.8	19.3	19.9	16.9	17.5	17.5	18.0	18.6
8H	18.3	18.9	18.9	19.4	20.0	17.0	17.5	17.5	18.0	18.6

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

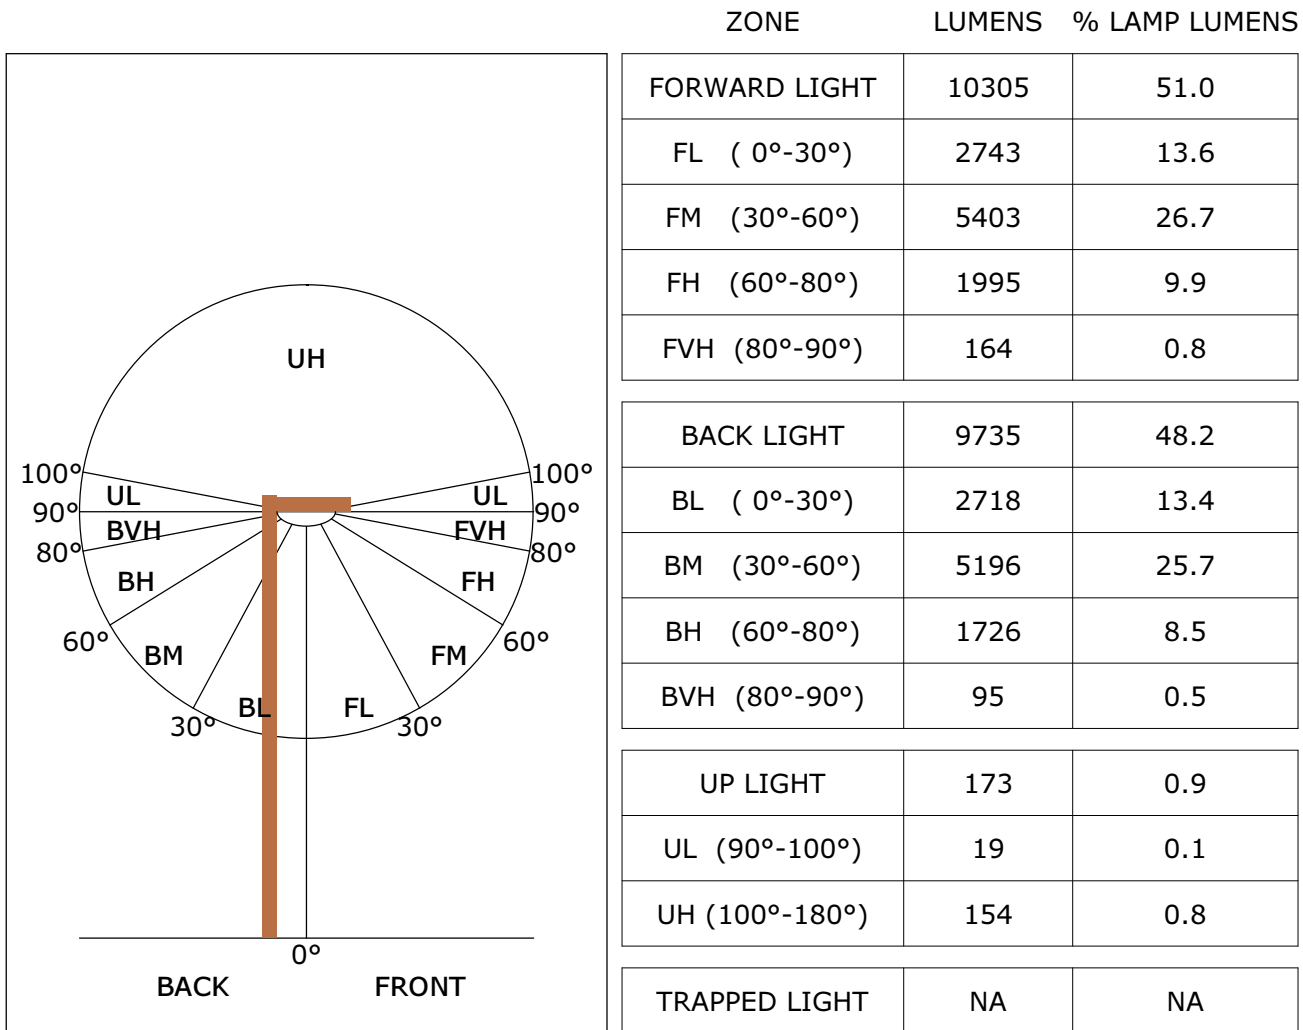


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B4 U5 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B4 U5 G2

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

LCS Graph

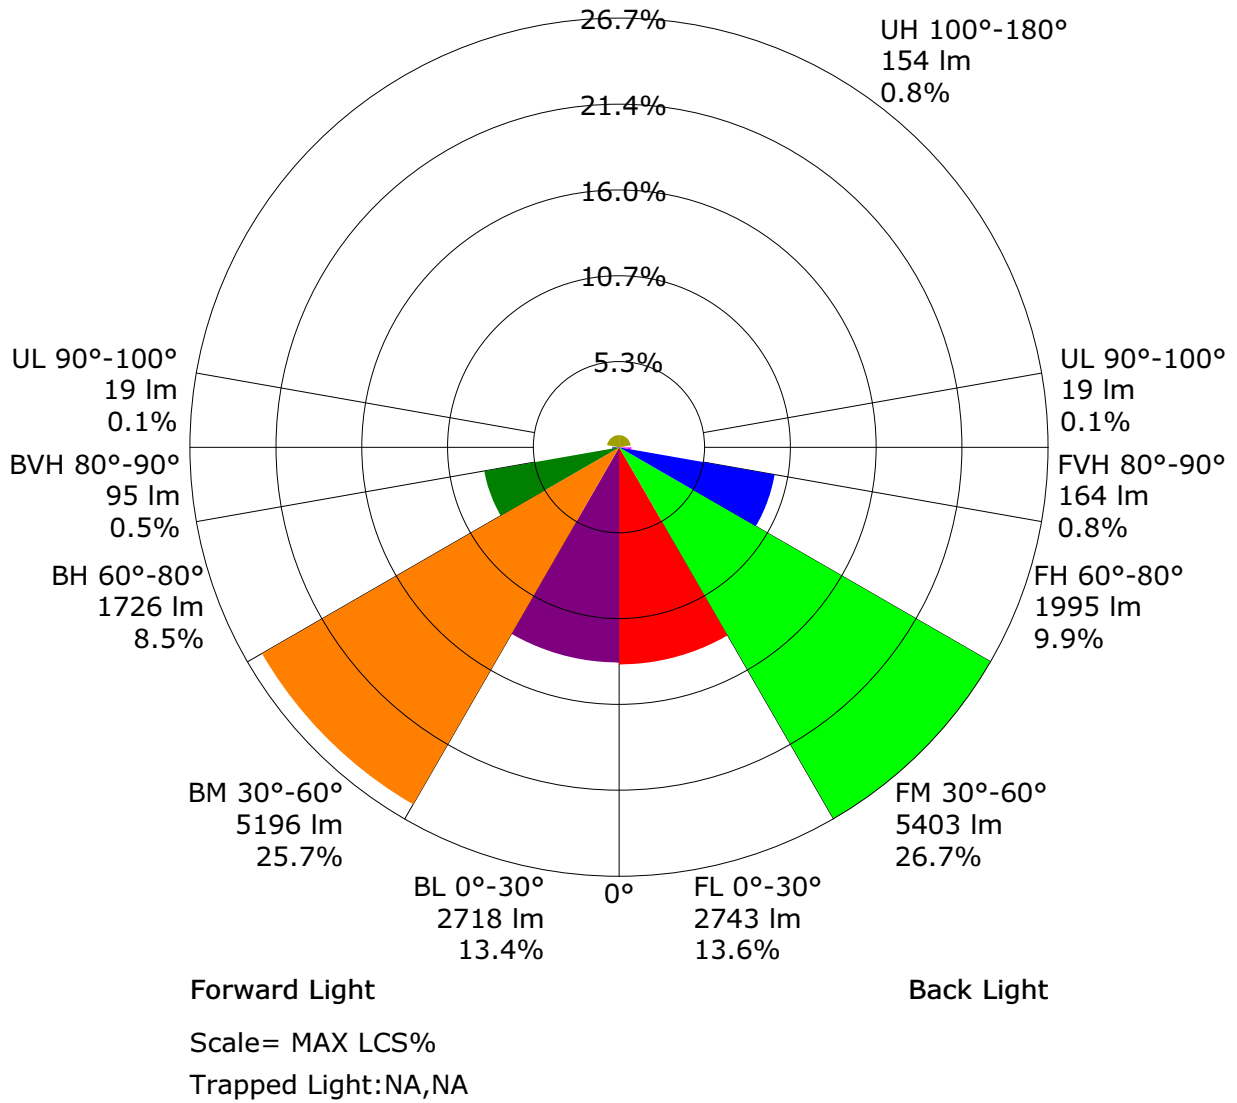

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	6940.0	6.6	6.6	0.03	0.03
1.0-2.0	6938.6	19.9	26.6	0.10	0.13
2.0-3.0	6935.2	33.2	59.7	0.16	0.30
3.0-4.0	6929.6	46.4	106.1	0.23	0.53
4.0-5.0	6921.9	59.6	165.7	0.29	0.82
5.0-6.0	6912.0	72.6	238.3	0.36	1.18
6.0-7.0	6900.4	85.7	324.0	0.42	1.60
7.0-8.0	6887.3	98.6	422.6	0.49	2.09
8.0-9.0	6872.4	111.4	534.0	0.55	2.64
9.0-10.0	6855.3	124.1	658.0	0.61	3.26
10.0-11.0	6835.7	136.6	794.6	0.68	3.93
11.0-12.0	6813.5	149.0	943.6	0.74	4.67
12.0-13.0	6789.0	161.1	1104.7	0.80	5.47
13.0-14.0	6762.4	173.1	1277.9	0.86	6.32
14.0-15.0	6733.7	184.9	1462.7	0.91	7.24
15.0-16.0	6702.8	196.4	1659.2	0.97	8.21
16.0-17.0	6669.4	207.7	1866.9	1.03	9.24
17.0-18.0	6634.0	218.8	2085.7	1.08	10.32
18.0-19.0	6597.0	229.5	2315.2	1.14	11.45
19.0-20.0	6557.2	240.0	2555.2	1.19	12.64
20.0-21.0	6515.3	250.2	2805.5	1.24	13.88
21.0-22.0	6471.3	260.1	3065.5	1.29	15.17
22.0-23.0	6425.5	269.6	3335.2	1.33	16.50
23.0-24.0	6378.0	278.9	3614.1	1.38	17.88
24.0-25.0	6328.6	287.8	3901.9	1.42	19.30
25.0-26.0	6276.6	296.3	4198.2	1.47	20.77
26.0-27.0	6221.8	304.4	4502.6	1.51	22.28
27.0-28.0	6165.3	312.2	4814.8	1.54	23.82
28.0-29.0	6106.8	319.5	5134.4	1.58	25.40
29.0-30.0	6045.6	326.5	5460.8	1.62	27.02
30.0-31.0	5982.0	332.9	5793.8	1.65	28.66
31.0-32.0	5916.5	339.0	6132.8	1.68	30.34
32.0-33.0	5849.0	344.6	6477.4	1.71	32.05
33.0-34.0	5779.1	349.8	6827.2	1.73	33.78
34.0-35.0	5706.8	354.5	7181.6	1.75	35.53
35.0-36.0	5632.4	358.7	7540.3	1.77	37.30

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	5555.6	362.4	7902.7	1.79	39.10
37.0-38.0	5476.5	365.6	8268.3	1.81	40.91
38.0-39.0	5395.6	368.3	8636.6	1.82	42.73
39.0-40.0	5312.4	370.6	9007.2	1.83	44.56
40.0-41.0	5226.7	372.2	9379.4	1.84	46.40
41.0-42.0	5138.5	373.4	9752.8	1.85	48.25
42.0-43.0	5048.3	374.0	10126.8	1.85	50.10
43.0-44.0	4956.6	374.2	10501.0	1.85	51.95
44.0-45.0	4862.3	373.7	10874.7	1.85	53.80
45.0-46.0	4765.6	372.7	11247.4	1.84	55.65
46.0-47.0	4666.7	371.2	11618.7	1.84	57.48
47.0-48.0	4565.5	369.1	11987.8	1.83	59.31
48.0-49.0	4462.4	366.5	12354.3	1.81	61.12
49.0-50.0	4357.8	363.4	12717.7	1.80	62.92
50.0-51.0	4250.7	359.7	13077.4	1.78	64.70
51.0-52.0	4141.9	355.5	13432.8	1.76	66.46
52.0-53.0	4031.6	350.7	13783.6	1.74	68.19
53.0-54.0	3919.0	345.5	14129.0	1.71	69.90
54.0-55.0	3804.0	339.6	14468.6	1.68	71.58
55.0-56.0	3686.9	333.2	14801.8	1.65	73.23
56.0-57.0	3568.4	326.3	15128.1	1.61	74.84
57.0-58.0	3447.8	318.9	15447.0	1.58	76.42
58.0-59.0	3325.0	310.9	15757.9	1.54	77.96
59.0-60.0	3201.2	302.5	16060.4	1.50	79.46
60.0-61.0	3076.2	293.6	16354.0	1.45	80.91
61.0-62.0	2949.5	284.3	16638.2	1.41	82.32
62.0-63.0	2821.6	274.5	16912.7	1.36	83.67
63.0-64.0	2692.4	264.2	17176.9	1.31	84.98
64.0-65.0	2562.4	253.6	17430.5	1.25	86.24
65.0-66.0	2430.5	242.5	17673.1	1.20	87.44
66.0-67.0	2297.3	231.0	17904.1	1.14	88.58
67.0-68.0	2163.3	219.2	18123.3	1.08	89.66
68.0-69.0	2028.3	207.0	18330.2	1.02	90.69
69.0-70.0	1894.4	194.6	18524.8	0.96	91.65
70.0-71.0	1761.6	182.1	18706.9	0.90	92.55
71.0-72.0	1628.8	169.4	18876.3	0.84	93.39

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	1497.1	156.6	19032.9	0.77	94.16
73.0-74.0	1367.4	143.8	19176.6	0.71	94.87
74.0-75.0	1240.1	131.0	19307.7	0.65	95.52
75.0-76.0	1117.3	118.6	19426.3	0.59	96.11
76.0-77.0	997.3	106.3	19532.7	0.53	96.64
77.0-78.0	880.2	94.2	19626.9	0.47	97.10
78.0-79.0	767.8	82.5	19709.4	0.41	97.51
79.0-80.0	660.6	71.2	19780.6	0.35	97.86
80.0-81.0	559.1	60.5	19841.1	0.30	98.16
81.0-82.0	464.2	50.3	19891.4	0.25	98.41
82.0-83.0	377.1	41.0	19932.4	0.20	98.61
83.0-84.0	298.5	32.5	19965.0	0.16	98.77
84.0-85.0	229.4	25.0	19990.0	0.12	98.90
85.0-86.0	169.7	18.6	20008.6	0.09	98.99
86.0-87.0	119.8	13.1	20021.7	0.06	99.06
87.0-88.0	80.1	8.8	20030.5	0.04	99.10
88.0-89.0	51.6	5.7	20036.1	0.03	99.13
89.0-90.0	33.3	3.6	20039.8	0.02	99.14
90.0-91.0	22.8	2.5	20042.3	0.01	99.16
91.0-92.0	18.6	2.0	20044.3	0.01	99.17
92.0-93.0	17.6	1.9	20046.2	0.01	99.18
93.0-94.0	16.9	1.8	20048.1	0.01	99.19
94.0-95.0	16.4	1.8	20049.9	0.01	99.19
95.0-96.0	16.1	1.8	20051.6	0.01	99.20
96.0-97.0	15.9	1.7	20053.4	0.01	99.21
97.0-98.0	15.7	1.7	20055.1	0.01	99.22
98.0-99.0	15.7	1.7	20056.8	0.01	99.23
99.0-100.0	15.7	1.7	20058.5	0.01	99.24
100.0-101.0	15.7	1.7	20060.2	0.01	99.25
101.0-102.0	15.8	1.7	20061.9	0.01	99.25
102.0-103.0	16.0	1.7	20063.6	0.01	99.26
103.0-104.0	16.2	1.7	20065.3	0.01	99.27
104.0-105.0	16.5	1.8	20067.1	0.01	99.28
105.0-106.0	16.8	1.8	20068.8	0.01	99.29
106.0-107.0	17.2	1.8	20070.6	0.01	99.30
107.0-108.0	17.6	1.8	20072.5	0.01	99.31

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	18.0	1.9	20074.4	0.01	99.32
109.0-110.0	18.5	1.9	20076.3	0.01	99.33
110.0-111.0	19.0	2.0	20078.2	0.01	99.33
111.0-112.0	19.6	2.0	20080.2	0.01	99.34
112.0-113.0	20.1	2.0	20082.3	0.01	99.35
113.0-114.0	20.7	2.1	20084.3	0.01	99.37
114.0-115.0	21.3	2.1	20086.5	0.01	99.38
115.0-116.0	21.9	2.2	20088.6	0.01	99.39
116.0-117.0	22.5	2.2	20090.8	0.01	99.40
117.0-118.0	23.2	2.3	20093.1	0.01	99.41
118.0-119.0	23.8	2.3	20095.4	0.01	99.42
119.0-120.0	24.5	2.3	20097.7	0.01	99.43
120.0-121.0	25.1	2.4	20100.1	0.01	99.44
121.0-122.0	25.8	2.4	20102.5	0.01	99.46
122.0-123.0	26.4	2.4	20105.0	0.01	99.47
123.0-124.0	27.1	2.5	20107.4	0.01	99.48
124.0-125.0	27.7	2.5	20109.9	0.01	99.49
125.0-126.0	28.3	2.5	20112.5	0.01	99.50
126.0-127.0	29.0	2.6	20115.0	0.01	99.52
127.0-128.0	29.6	2.6	20117.6	0.01	99.53
128.0-129.0	30.2	2.6	20120.2	0.01	99.54
129.0-130.0	30.9	2.6	20122.8	0.01	99.56
130.0-131.0	31.5	2.6	20125.4	0.01	99.57
131.0-132.0	32.1	2.6	20128.1	0.01	99.58
132.0-133.0	32.7	2.6	20130.7	0.01	99.59
133.0-134.0	33.3	2.6	20133.4	0.01	99.61
134.0-135.0	33.9	2.6	20136.0	0.01	99.62
135.0-136.0	34.5	2.6	20138.7	0.01	99.63
136.0-137.0	35.0	2.6	20141.3	0.01	99.65
137.0-138.0	35.6	2.6	20143.9	0.01	99.66
138.0-139.0	36.2	2.6	20146.6	0.01	99.67
139.0-140.0	36.7	2.6	20149.2	0.01	99.69
140.0-141.0	37.3	2.6	20151.8	0.01	99.70
141.0-142.0	37.8	2.6	20154.4	0.01	99.71
142.0-143.0	38.3	2.6	20156.9	0.01	99.72
143.0-144.0	38.8	2.5	20159.5	0.01	99.74

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	39.3	2.5	20162.0	0.01	99.75
145.0-146.0	39.9	2.5	20164.4	0.01	99.76
146.0-147.0	40.3	2.4	20166.9	0.01	99.77
147.0-148.0	40.8	2.4	20169.3	0.01	99.79
148.0-149.0	41.3	2.4	20171.7	0.01	99.80
149.0-150.0	41.8	2.3	20174.0	0.01	99.81
150.0-151.0	42.2	2.3	20176.3	0.01	99.82
151.0-152.0	42.7	2.2	20178.5	0.01	99.83
152.0-153.0	43.1	2.2	20180.7	0.01	99.84
153.0-154.0	43.5	2.1	20182.8	0.01	99.85
154.0-155.0	44.0	2.1	20184.9	0.01	99.86
155.0-156.0	44.4	2.0	20186.9	0.01	99.87
156.0-157.0	44.8	2.0	20188.9	0.01	99.88
157.0-158.0	45.2	1.9	20190.8	0.01	99.89
158.0-159.0	45.6	1.8	20192.6	0.01	99.90
159.0-160.0	46.0	1.8	20194.4	0.01	99.91
160.0-161.0	46.4	1.7	20196.1	0.01	99.92
161.0-162.0	46.8	1.6	20197.7	0.01	99.93
162.0-163.0	47.1	1.6	20199.2	0.01	99.93
163.0-164.0	47.5	1.5	20200.7	0.01	99.94
164.0-165.0	47.8	1.4	20202.1	0.01	99.95
165.0-166.0	48.1	1.3	20203.4	0.01	99.95
166.0-167.0	48.5	1.2	20204.7	0.01	99.96
167.0-168.0	48.8	1.2	20205.8	0.01	99.97
168.0-169.0	49.0	1.1	20206.9	0.01	99.97
169.0-170.0	49.3	1.0	20207.9	0.00	99.98
170.0-171.0	49.5	0.9	20208.8	0.00	99.98
171.0-172.0	49.8	0.8	20209.6	0.00	99.98
172.0-173.0	50.0	0.7	20210.3	0.00	99.99
173.0-174.0	50.2	0.6	20210.9	0.00	99.99
174.0-175.0	50.3	0.5	20211.5	0.00	99.99
175.0-176.0	50.5	0.4	20211.9	0.00	100.00
176.0-177.0	50.6	0.3	20212.2	0.00	100.00
177.0-178.0	50.7	0.2	20212.5	0.00	100.00
178.0-179.0	50.7	0.1	20212.6	0.00	100.00
179.0-180.0	50.8	0.0	20212.7	0.00	100.00

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	6963.9	6956.0	6954.3	6959.4	6951.3	6953.4	6958.0	6953.6	6946.7	6945.5
G1.0	6962.2	6955.3	6951.5	6957.1	6950.9	6949.7	6958.7	6950.9	6948.3	6948.8
G2.0	6958.5	6948.1	6952.3	6953.2	6956.7	6948.3	6955.3	6951.1	6955.3	6952.3
G3.0	6951.3	6941.8	6948.1	6950.2	6955.3	6948.3	6951.5	6942.3	6949.9	6952.3
G4.0	6942.7	6937.6	6943.0	6942.0	6945.5	6946.2	6947.1	6936.0	6943.7	6940.4
G5.0	6934.4	6931.6	6933.0	6931.6	6935.8	6933.7	6934.6	6925.6	6928.8	6929.3
G6.0	6920.2	6924.2	6920.7	6920.7	6923.5	6920.9	6924.9	6914.4	6915.4	6916.8
G7.0	6907.7	6916.3	6906.3	6906.5	6909.6	6906.3	6913.7	6906.3	6910.3	6906.3
G8.0	6894.0	6902.4	6893.8	6894.5	6893.8	6892.2	6899.6	6895.4	6900.5	6893.5
G9.0	6878.9	6883.6	6877.3	6878.5	6880.6	6878.7	6882.4	6890.5	6884.7	6882.4
G10.0	6871.5	6861.3	6861.8	6858.5	6866.4	6867.1	6865.3	6864.8	6862.5	6865.0
G11.0	6844.4	6839.0	6838.3	6836.0	6845.3	6846.0	6842.0	6843.7	6838.8	6844.1
G12.0	6822.1	6811.0	6811.2	6810.3	6820.9	6815.8	6820.5	6820.2	6813.5	6821.6
G13.0	6796.1	6786.1	6784.7	6785.2	6789.8	6791.0	6795.0	6791.5	6794.7	6792.4
G14.0	6768.0	6761.8	6755.5	6754.4	6759.2	6760.4	6765.5	6761.3	6772.7	6764.1
G15.0	6734.4	6732.3	6730.7	6725.1	6730.2	6729.5	6732.8	6733.2	6740.2	6740.9
G16.0	6701.0	6702.6	6696.8	6693.8	6694.3	6705.2	6704.7	6698.7	6704.7	6713.3
G17.0	6663.6	6666.4	6659.2	6661.5	6667.4	6673.8	6670.8	6668.5	6669.9	6680.1
G18.0	6621.4	6628.4	6623.7	6621.6	6635.6	6635.3	6635.1	6638.6	6640.7	6640.7
G19.0	6582.7	6588.5	6586.6	6588.0	6592.4	6593.1	6595.0	6602.9	6605.2	6599.1
G20.0	6540.4	6546.5	6546.0	6547.2	6549.7	6550.2	6553.2	6560.9	6561.3	6556.2
G21.0	6502.2	6498.2	6498.9	6510.7	6506.6	6502.6	6511.7	6515.4	6515.6	6519.1
G22.0	6454.6	6452.0	6455.1	6462.3	6459.5	6461.8	6466.2	6469.5	6468.5	6478.7
G23.0	6410.8	6406.6	6407.0	6418.2	6416.5	6426.1	6419.6	6422.1	6420.3	6432.1
G24.0	6364.1	6363.2	6359.2	6367.4	6370.4	6374.1	6372.2	6371.1	6377.3	6380.4
G25.0	6317.7	6317.5	6310.1	6317.7	6319.8	6322.6	6319.3	6319.8	6330.5	6327.2
G26.0	6263.7	6261.8	6252.8	6265.3	6266.0	6267.4	6264.1	6261.6	6272.5	6272.9
G27.0	6205.9	6210.1	6201.3	6208.2	6211.5	6211.2	6213.1	6206.4	6219.6	6220.3
G28.0	6149.7	6149.0	6144.2	6153.2	6151.8	6152.5	6153.0	6155.1	6156.9	6171.5
G29.0	6090.1	6088.3	6089.6	6093.4	6092.4	6098.0	6095.5	6099.4	6105.7	6113.1
G30.0	6022.4	6024.7	6024.0	6032.8	6037.0	6040.7	6037.2	6042.8	6042.8	6046.5
G31.0	5956.5	5964.8	5961.4	5965.1	5976.9	5978.3	5984.3	5979.0	5979.5	5979.7
G32.0	5888.3	5899.6	5890.8	5899.4	5905.0	5908.5	5917.7	5915.2	5910.5	5914.0
G33.0	5827.3	5828.0	5824.7	5830.7	5834.7	5836.5	5850.0	5848.1	5843.0	5850.0
G34.0	5760.7	5759.3	5753.7	5765.1	5763.2	5766.0	5779.0	5777.4	5783.6	5783.6
G35.0	5692.9	5685.3	5685.5	5690.4	5695.7	5701.3	5704.8	5705.5	5710.1	5712.6
G36.0	5615.2	5606.4	5609.4	5619.1	5626.6	5629.6	5629.8	5624.0	5636.3	5637.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	5534.9	5540.3	5538.9	5542.1	5551.9	5554.6	5554.6	5550.5	5554.9	5561.6
G38.0	5450.0	5454.2	5454.2	5462.1	5472.8	5478.8	5475.3	5472.3	5473.7	5480.6
G39.0	5367.9	5376.9	5371.1	5380.4	5382.7	5396.2	5397.6	5397.8	5398.0	5404.1
G40.0	5282.5	5291.6	5288.5	5290.6	5293.4	5309.7	5312.7	5313.6	5314.8	5318.9
G41.0	5201.1	5205.5	5209.9	5214.8	5213.6	5219.9	5228.2	5229.6	5226.8	5229.1
G42.0	5116.4	5117.6	5122.0	5129.9	5134.7	5134.0	5136.8	5140.1	5135.2	5139.6
G43.0	5028.9	5032.4	5043.1	5043.5	5048.0	5053.5	5048.0	5048.0	5048.9	5047.7
G44.0	4940.1	4948.9	4948.7	4954.2	4958.6	4965.1	4954.2	4949.1	4958.4	4960.3
G45.0	4857.0	4852.8	4858.4	4865.8	4866.5	4874.0	4864.7	4856.1	4864.9	4874.4
G46.0	4758.2	4758.2	4762.6	4773.3	4773.0	4782.8	4773.7	4763.3	4761.2	4774.9
G47.0	4656.6	4657.3	4671.2	4674.2	4684.9	4681.6	4678.8	4674.0	4662.8	4674.2
G48.0	4554.9	4554.5	4564.2	4571.0	4581.4	4583.0	4579.5	4574.9	4562.8	4563.5
G49.0	4453.3	4455.2	4463.8	4467.9	4476.3	4487.2	4476.1	4474.2	4464.2	4457.0
G50.0	4348.9	4361.7	4361.0	4364.0	4374.7	4383.7	4378.2	4372.1	4367.3	4356.8
G51.0	4246.8	4260.1	4258.9	4259.1	4268.6	4276.5	4271.4	4260.1	4258.7	4258.0
G52.0	4144.8	4151.3	4156.4	4159.6	4166.6	4169.6	4161.7	4149.2	4149.4	4147.8
G53.0	4043.6	4045.9	4052.9	4057.1	4063.6	4059.9	4049.4	4036.6	4034.6	4034.8
G54.0	3934.3	3936.2	3947.1	3956.4	3963.6	3952.2	3939.9	3922.5	3919.3	3923.0
G55.0	3828.3	3827.4	3833.6	3844.1	3856.8	3844.6	3828.5	3808.6	3806.7	3807.2
G56.0	3713.0	3716.0	3722.7	3742.2	3741.1	3736.4	3718.3	3696.3	3689.8	3692.6
G57.0	3594.7	3600.7	3607.0	3623.4	3630.4	3626.9	3607.9	3585.6	3571.5	3572.6
G58.0	3477.5	3479.6	3487.5	3505.8	3511.4	3511.6	3493.8	3473.8	3452.5	3450.6
G59.0	3361.1	3362.7	3364.3	3387.0	3389.6	3389.4	3371.3	3355.5	3334.1	3325.3
G60.0	3240.9	3242.3	3252.9	3269.4	3278.2	3267.1	3255.9	3239.0	3224.6	3204.9
G61.0	3122.3	3132.3	3136.5	3152.9	3152.3	3145.8	3125.8	3109.1	3103.8	3090.3
G62.0	3007.7	3014.4	3017.7	3034.2	3033.7	3021.4	3004.7	2985.2	2975.5	2970.6
G63.0	2886.6	2894.0	2899.6	2917.0	2911.2	2901.9	2879.4	2856.7	2847.2	2846.7
G64.0	2766.9	2775.0	2782.2	2798.4	2794.7	2781.3	2759.9	2730.7	2718.6	2715.6
G65.0	2649.7	2655.8	2663.2	2679.2	2676.4	2664.1	2635.1	2605.6	2592.6	2587.3
G66.0	2530.7	2530.5	2545.6	2559.0	2560.9	2544.9	2515.6	2484.8	2469.5	2459.3
G67.0	2398.9	2401.3	2414.5	2434.0	2436.5	2426.3	2392.9	2360.6	2344.4	2332.1
G68.0	2272.3	2272.9	2287.8	2301.9	2307.8	2299.4	2271.6	2240.0	2220.3	2200.8
G69.0	2136.3	2144.4	2155.1	2167.4	2172.9	2170.2	2143.0	2121.2	2096.4	2068.8
G70.0	2004.1	2010.3	2022.6	2037.7	2041.6	2035.6	2016.6	1996.9	1972.0	1946.5
G71.0	1873.0	1880.6	1892.2	1902.7	1910.3	1910.8	1882.5	1865.8	1846.3	1819.6
G72.0	1747.7	1749.8	1760.9	1774.8	1779.5	1769.5	1752.6	1731.9	1715.9	1701.5
G73.0	1618.9	1626.3	1631.0	1647.7	1648.6	1646.8	1624.0	1601.8	1583.7	1572.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	1494.8	1498.8	1506.9	1518.7	1521.3	1517.1	1499.7	1473.0	1452.1	1443.1
G75.0	1366.0	1375.3	1375.8	1389.2	1393.4	1394.1	1376.3	1345.9	1324.5	1311.8
G76.0	1245.9	1249.6	1255.1	1271.6	1273.5	1273.7	1254.2	1226.8	1207.3	1189.0
G77.0	1122.2	1130.6	1132.2	1141.9	1148.0	1148.9	1133.8	1104.3	1086.5	1070.0
G78.0	1003.0	1007.8	1012.9	1022.0	1029.6	1028.0	1012.5	986.3	969.5	955.2
G79.0	890.4	892.1	896.2	903.7	908.1	910.4	893.7	870.9	853.5	839.6
G80.0	774.9	778.6	779.8	789.0	792.1	794.6	780.5	764.7	744.0	731.3
G81.0	666.1	667.2	670.0	674.2	679.5	681.4	671.9	654.5	636.4	624.6
G82.0	561.2	563.3	564.9	570.3	572.6	578.6	566.3	553.6	539.6	525.3
G83.0	460.1	460.5	463.3	465.9	471.2	473.3	470.0	457.3	443.6	430.4
G84.0	370.5	370.7	372.8	372.4	377.5	381.9	376.5	368.7	356.4	347.3
G85.0	285.4	287.5	288.6	289.5	292.3	294.9	293.0	286.8	277.7	270.3
G86.0	210.7	214.1	212.8	214.8	216.9	219.5	218.1	214.6	208.8	201.4
G87.0	147.3	149.2	148.9	150.6	151.5	155.0	153.4	150.6	146.2	142.2
G88.0	93.7	95.6	96.5	97.9	98.6	101.6	101.6	99.1	97.4	94.2
G89.0	52.4	54.8	54.8	55.0	56.6	59.9	59.6	58.2	57.3	55.9
G90.0	24.4	25.3	25.1	25.1	26.5	28.1	28.8	28.1	28.1	28.3
G91.0	18.6	18.8	19.3	19.7	20.6	21.3	21.8	22.0	22.0	21.8
G92.0	17.6	17.9	18.3	18.6	19.3	20.0	20.4	20.6	20.4	20.4
G93.0	16.7	16.9	17.2	17.6	18.1	18.6	19.0	19.3	19.0	18.8
G94.0	16.0	16.0	16.2	16.5	17.2	17.6	18.3	18.3	18.3	18.1
G95.0	16.0	16.0	16.2	16.5	16.9	17.4	18.1	18.1	17.9	17.6
G96.0	16.0	16.2	16.2	16.5	16.9	17.4	17.9	17.9	17.6	17.4
G97.0	16.0	16.2	16.2	16.5	16.7	17.2	17.6	17.6	17.4	16.7
G98.0	16.2	16.2	16.5	16.5	16.9	17.2	17.6	17.4	16.9	16.0
G99.0	16.5	16.7	16.7	16.7	16.9	17.2	17.2	16.9	16.2	15.5
G100.0	16.5	16.7	16.7	16.7	16.7	16.9	16.9	16.5	15.8	15.1
G101.0	16.5	16.7	16.7	16.5	16.5	16.7	16.5	16.0	15.3	14.6
G102.0	16.5	16.5	16.5	16.2	16.2	16.2	16.2	15.5	15.1	14.6
G103.0	16.5	16.5	16.2	16.2	16.2	16.2	16.0	15.5	15.1	14.4
G104.0	16.5	16.5	16.2	16.2	16.2	16.0	15.8	15.5	15.1	14.6
G105.0	16.5	16.5	16.5	16.5	16.2	16.2	16.0	15.8	15.3	14.9
G106.0	16.7	16.7	16.7	16.5	16.5	16.5	16.2	16.0	15.5	15.1
G107.0	17.2	16.9	16.9	16.7	16.7	16.5	16.5	16.0	15.8	15.3
G108.0	17.4	17.2	17.2	17.2	16.9	16.9	16.7	16.5	16.0	15.8
G109.0	17.6	17.6	17.6	17.4	17.4	17.2	16.9	16.7	16.5	16.2
G110.0	17.9	17.9	17.9	17.9	17.6	17.6	17.4	17.2	16.9	16.7

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	18.3	18.3	18.3	18.3	18.1	18.1	17.6	17.4	17.4	17.2
G112.0	18.8	18.6	18.8	18.6	18.3	18.3	18.3	18.1	18.1	17.9
G113.0	19.0	19.0	19.0	19.0	19.0	18.8	18.6	18.6	18.6	18.6
G114.0	19.7	19.5	19.5	19.5	19.5	19.3	19.5	19.3	19.3	19.0
G115.0	20.2	20.0	20.0	20.0	20.0	20.0	20.0	19.7	19.7	19.7
G116.0	20.6	20.6	20.4	20.6	20.6	20.4	20.4	20.4	20.4	20.4
G117.0	21.3	21.3	21.1	21.1	21.3	21.1	21.1	21.1	20.9	20.9
G118.0	22.0	21.8	22.0	21.8	21.8	21.6	21.8	21.8	21.6	21.6
G119.0	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.3	22.3
G120.0	23.4	23.2	23.2	23.0	23.2	23.0	23.2	23.0	23.0	23.0
G121.0	23.9	23.9	23.9	23.7	23.9	23.7	23.7	23.7	23.7	23.7
G122.0	24.6	24.6	24.6	24.4	24.4	24.4	24.4	24.4	24.1	24.4
G123.0	25.3	25.1	25.1	25.1	25.1	25.1	24.8	24.8	24.8	25.1
G124.0	26.0	25.8	25.8	25.8	25.5	25.5	25.5	25.5	25.5	25.5
G125.0	26.5	26.5	26.2	26.5	26.2	26.2	26.2	26.2	26.2	26.2
G126.0	26.9	27.1	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9
G127.0	27.6	27.8	27.6	27.6	27.6	27.4	27.4	27.6	27.4	27.4
G128.0	28.3	28.3	28.3	28.3	28.1	28.1	28.3	28.3	28.1	28.1
G129.0	29.0	29.0	29.0	29.0	28.8	28.8	28.8	28.8	28.8	28.8
G130.0	29.5	29.5	29.5	29.5	29.5	29.2	29.5	29.2	29.5	29.2
G131.0	30.2	30.2	30.2	30.2	30.2	29.9	29.9	30.2	29.9	29.9
G132.0	30.9	30.6	30.6	30.6	30.9	30.6	30.6	30.6	30.6	30.6
G133.0	31.3	31.3	31.3	31.1	31.3	31.3	31.3	31.3	31.1	31.1
G134.0	32.0	32.0	32.0	32.0	31.8	31.8	31.8	31.8	31.8	31.8
G135.0	32.5	32.5	32.7	32.5	32.5	32.5	32.5	32.5	32.3	32.3
G136.0	33.4	33.2	33.2	32.9	33.2	32.9	33.2	33.2	33.2	33.2
G137.0	33.6	33.9	33.6	33.6	33.6	33.6	33.6	33.9	33.6	33.6
G138.0	34.3	34.3	34.3	34.1	34.3	34.1	34.1	34.1	34.3	34.3
G139.0	35.0	35.0	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8
G140.0	35.5	35.5	35.3	35.3	35.3	35.3	35.3	35.3	35.5	35.5
G141.0	36.0	36.0	36.0	36.0	36.0	35.7	36.0	36.2	36.0	36.0
G142.0	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.7
G143.0	37.1	37.1	37.1	36.9	36.9	36.9	37.1	37.1	36.9	37.1
G144.0	37.6	37.6	37.3	37.3	37.3	37.3	37.6	37.6	37.6	37.6
G145.0	38.0	38.0	38.0	38.0	38.0	37.8	38.0	38.0	38.0	38.3
G146.0	38.5	38.5	38.5	38.5	38.5	38.5	38.3	38.5	38.7	38.7
G147.0	39.0	39.0	39.0	39.0	39.0	38.7	39.0	39.0	39.0	39.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	39.4	39.4	39.4	39.4	39.4	39.4	39.4	39.4	39.7	39.7
G149.0	39.9	39.9	39.9	39.9	39.9	39.9	39.9	39.9	40.1	40.4
G150.0	40.4	40.4	40.4	40.4	40.4	40.4	40.4	40.4	40.6	40.8
G151.0	40.8	40.8	40.8	40.8	40.8	40.6	40.8	41.1	41.1	41.3
G152.0	41.1	41.3	41.1	41.3	41.3	41.3	41.3	41.5	41.5	41.8
G153.0	41.5	41.8	41.5	41.8	41.8	41.8	41.8	42.0	42.0	42.2
G154.0	42.0	42.0	42.2	42.0	42.2	42.0	42.2	42.5	42.5	42.7
G155.0	42.5	42.5	42.5	42.7	42.7	42.7	42.7	42.9	43.2	43.2
G156.0	42.9	42.9	42.9	42.9	42.9	43.2	43.2	43.4	43.4	43.6
G157.0	43.4	43.4	43.4	43.4	43.6	43.6	43.6	43.8	43.8	44.1
G158.0	43.6	43.6	43.8	43.8	44.1	43.8	44.1	44.3	44.3	44.5
G159.0	44.3	44.1	44.1	44.3	44.3	44.3	44.5	44.8	44.5	45.0
G160.0	44.5	44.5	44.5	44.8	44.8	44.8	45.0	45.0	45.2	45.2
G161.0	45.0	45.0	45.0	45.2	45.2	45.2	45.5	45.5	45.5	45.7
G162.0	45.5	45.5	45.5	45.5	45.7	45.7	45.7	45.9	45.9	46.2
G163.0	45.9	45.7	45.9	45.9	45.9	45.9	46.2	46.2	46.2	46.4
G164.0	46.2	46.2	46.2	46.2	46.4	46.4	46.6	46.9	46.6	46.9
G165.0	46.6	46.6	46.6	46.6	46.9	46.9	47.1	46.9	47.1	47.3
G166.0	47.1	46.9	47.1	47.1	47.1	47.1	47.3	47.3	47.6	47.6
G167.0	47.3	47.3	47.3	47.6	47.6	47.6	47.8	47.8	47.8	47.8
G168.0	47.8	47.8	47.8	47.8	48.0	47.8	48.0	48.0	48.3	48.3
G169.0	48.3	48.0	48.0	48.3	48.3	48.3	48.3	48.5	48.5	48.5
G170.0	48.5	48.5	48.3	48.5	48.5	48.5	48.7	48.7	48.7	48.7
G171.0	49.0	48.7	48.7	48.7	48.7	49.0	49.0	49.0	49.0	49.0
G172.0	49.4	49.0	49.0	49.2	49.0	49.0	49.0	49.2	49.2	49.2
G173.0	49.7	49.4	49.2	49.4	49.2	49.4	49.4	49.4	49.4	49.7
G174.0	50.1	49.4	49.4	49.7	49.4	49.7	49.4	49.7	49.7	49.7
G175.0	50.3	49.9	49.7	49.7	49.7	49.7	49.9	49.9	49.9	50.1
G176.0	50.8	50.1	49.9	49.9	49.9	49.9	50.1	50.1	50.1	50.1
G177.0	51.0	50.3	50.1	50.1	50.1	50.1	50.1	50.1	50.1	50.3
G178.0	51.0	50.6	50.3	50.3	50.3	50.3	50.3	50.1	50.3	50.3
G179.0	51.5	50.8	50.6	50.6	50.3	50.3	50.3	50.3	50.3	50.6
G180.0	51.5	51.0	50.8	50.8	50.6	50.6	50.6	50.6	50.3	50.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	6947.6	6944.8	6946.2	6946.2	6945.5	6935.5	6930.0	6928.1	6921.6	6915.4
G1.0	6949.5	6945.5	6943.9	6945.5	6944.6	6939.3	6931.4	6928.4	6921.6	6920.9
G2.0	6952.3	6944.4	6940.9	6943.7	6941.6	6934.6	6932.5	6920.7	6925.8	6918.6
G3.0	6945.1	6943.0	6933.5	6937.4	6934.1	6931.6	6930.9	6919.8	6923.5	6915.4
G4.0	6937.2	6942.3	6933.5	6930.7	6929.0	6924.6	6922.1	6910.7	6913.7	6906.1
G5.0	6924.6	6929.5	6932.8	6923.0	6920.5	6917.2	6916.0	6905.9	6902.4	6894.3
G6.0	6913.0	6921.4	6920.0	6911.4	6909.8	6906.3	6904.5	6896.6	6896.3	6888.7
G7.0	6911.2	6904.2	6905.9	6901.2	6896.3	6894.0	6893.5	6883.6	6883.8	6890.5
G8.0	6899.8	6886.8	6890.1	6888.0	6884.0	6880.6	6879.6	6872.4	6868.7	6875.9
G9.0	6882.2	6869.6	6878.9	6873.8	6869.2	6866.4	6862.7	6859.9	6853.4	6854.3
G10.0	6859.2	6863.9	6865.3	6865.0	6853.2	6852.5	6844.1	6845.1	6844.6	6836.3
G11.0	6839.0	6843.7	6842.7	6844.6	6831.6	6836.7	6826.3	6834.6	6826.3	6817.5
G12.0	6820.0	6823.5	6817.7	6821.6	6815.1	6813.3	6804.5	6810.5	6804.9	6798.0
G13.0	6804.7	6795.4	6786.4	6798.0	6792.6	6788.5	6783.8	6785.4	6784.7	6779.9
G14.0	6773.1	6769.7	6759.9	6764.3	6765.7	6761.1	6760.6	6756.2	6753.9	6749.9
G15.0	6740.2	6734.9	6742.0	6737.6	6735.3	6732.3	6737.9	6728.1	6728.6	6719.8
G16.0	6707.0	6703.5	6713.3	6705.4	6704.2	6696.4	6707.0	6701.0	6696.4	6685.7
G17.0	6670.1	6678.5	6676.2	6669.9	6670.4	6658.8	6672.2	6668.3	6665.3	6657.8
G18.0	6646.7	6640.9	6636.3	6636.5	6632.1	6629.5	6635.6	6634.2	6629.5	6631.1
G19.0	6606.6	6599.8	6600.8	6605.6	6596.1	6599.8	6599.4	6595.7	6596.8	6599.1
G20.0	6564.3	6559.9	6566.9	6571.3	6557.6	6563.9	6560.9	6555.3	6551.8	6553.9
G21.0	6522.3	6517.2	6530.5	6531.9	6518.9	6525.1	6518.9	6515.6	6515.4	6514.0
G22.0	6475.5	6475.7	6483.1	6486.9	6476.2	6481.5	6476.9	6467.6	6473.6	6469.7
G23.0	6433.0	6440.2	6434.2	6440.2	6437.4	6435.8	6428.4	6425.6	6435.1	6425.6
G24.0	6393.1	6390.3	6383.4	6391.7	6395.2	6388.5	6383.1	6381.3	6389.2	6383.4
G25.0	6340.7	6339.8	6343.5	6342.8	6347.4	6337.0	6333.0	6337.2	6338.8	6336.7
G26.0	6283.8	6283.4	6289.9	6287.1	6292.7	6281.8	6285.7	6285.7	6287.1	6283.6
G27.0	6223.5	6226.8	6233.0	6231.2	6237.4	6235.4	6237.4	6236.0	6231.9	6224.0
G28.0	6166.0	6172.3	6172.7	6182.2	6178.7	6183.9	6181.1	6179.4	6173.9	6179.2
G29.0	6112.9	6119.4	6114.9	6128.2	6123.1	6129.1	6124.2	6123.8	6114.5	6125.6
G30.0	6054.2	6050.2	6058.6	6069.9	6061.8	6066.0	6063.7	6061.8	6055.5	6060.9
G31.0	5988.3	5983.6	6000.1	6005.0	5997.3	6005.7	5998.9	6000.3	5998.2	5995.9
G32.0	5923.5	5930.7	5929.3	5939.1	5932.8	5937.5	5935.4	5934.4	5942.3	5929.3
G33.0	5852.5	5858.6	5858.6	5872.7	5873.4	5866.9	5867.9	5870.0	5877.8	5874.1
G34.0	5791.5	5783.6	5785.3	5799.2	5806.6	5797.6	5802.4	5799.9	5808.0	5805.5
G35.0	5717.1	5711.5	5724.3	5727.7	5732.1	5733.5	5729.8	5728.9	5734.0	5732.4
G36.0	5638.6	5645.1	5647.7	5651.2	5659.5	5663.5	5655.1	5651.6	5661.1	5660.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	5560.7	5562.3	5570.0	5582.0	5586.0	5589.5	5582.0	5582.0	5587.8	5581.8
G38.0	5478.8	5479.3	5489.0	5502.7	5504.3	5509.2	5507.8	5507.1	5505.5	5507.3
G39.0	5409.6	5396.7	5410.1	5421.3	5421.3	5428.4	5437.5	5435.2	5432.4	5432.4
G40.0	5326.8	5318.9	5331.0	5334.3	5340.0	5343.8	5354.4	5353.5	5354.9	5347.0
G41.0	5239.4	5240.8	5240.5	5250.7	5251.9	5260.9	5270.0	5271.4	5271.1	5263.3
G42.0	5148.2	5151.7	5148.4	5159.8	5165.6	5174.4	5180.2	5182.3	5180.2	5174.4
G43.0	5053.3	5062.8	5068.4	5070.5	5083.7	5091.1	5094.1	5091.1	5090.2	5089.0
G44.0	4965.8	4964.0	4976.0	4980.9	4987.6	4995.1	5002.0	4999.5	4995.3	5001.8
G45.0	4868.9	4870.7	4881.8	4896.7	4893.2	4901.8	4905.3	4907.4	4903.9	4906.0
G46.0	4771.9	4777.2	4784.4	4795.5	4795.3	4807.8	4807.8	4809.7	4808.8	4809.5
G47.0	4678.4	4675.4	4690.9	4698.1	4700.0	4709.7	4716.4	4713.9	4713.6	4710.6
G48.0	4581.4	4573.7	4593.9	4594.1	4601.1	4608.5	4614.8	4615.3	4614.8	4606.9
G49.0	4476.5	4468.9	4484.2	4490.5	4494.2	4501.1	4516.7	4511.3	4514.6	4507.1
G50.0	4364.9	4363.3	4372.4	4381.4	4386.3	4396.7	4407.9	4402.0	4408.5	4407.4
G51.0	4253.1	4266.1	4262.2	4280.5	4278.2	4291.4	4301.4	4292.3	4302.5	4300.4
G52.0	4145.5	4153.6	4164.7	4178.2	4177.2	4181.6	4190.7	4183.3	4188.6	4189.8
G53.0	4037.1	4038.7	4048.7	4068.7	4065.2	4069.1	4079.3	4070.3	4075.6	4076.1
G54.0	3921.1	3921.6	3938.0	3949.9	3947.1	3955.4	3958.7	3953.8	3958.9	3958.2
G55.0	3812.3	3803.7	3819.3	3831.8	3833.2	3837.1	3839.9	3836.9	3842.9	3836.9
G56.0	3694.4	3691.4	3703.3	3708.1	3714.9	3717.6	3719.5	3718.8	3722.7	3720.4
G57.0	3582.6	3571.9	3584.2	3590.0	3594.4	3595.6	3601.9	3599.3	3604.4	3596.3
G58.0	3462.2	3453.2	3461.5	3468.0	3477.1	3473.3	3481.9	3479.1	3478.9	3480.3
G59.0	3334.8	3330.9	3332.1	3347.4	3348.3	3344.6	3355.9	3349.4	3351.8	3349.7
G60.0	3206.5	3209.1	3209.6	3226.5	3221.1	3220.7	3223.7	3222.5	3220.9	3222.8
G61.0	3087.8	3092.4	3089.6	3097.3	3085.4	3085.7	3094.0	3087.5	3088.4	3089.1
G62.0	2964.3	2955.5	2966.6	2964.8	2952.3	2951.1	2954.4	2954.8	2948.3	2952.3
G63.0	2839.7	2824.7	2833.5	2828.1	2817.0	2813.8	2812.8	2814.0	2808.2	2811.9
G64.0	2708.4	2697.8	2698.4	2692.9	2688.9	2675.5	2673.4	2673.2	2663.9	2666.0
G65.0	2588.7	2562.9	2562.5	2561.3	2550.2	2534.9	2523.3	2515.9	2511.7	2513.8
G66.0	2463.2	2439.1	2432.8	2424.9	2407.1	2393.4	2374.3	2364.4	2362.5	2367.4
G67.0	2329.3	2313.6	2295.7	2299.4	2271.3	2247.4	2234.0	2220.1	2222.1	2218.2
G68.0	2193.8	2180.6	2163.9	2154.9	2122.1	2097.1	2076.7	2073.0	2067.4	2070.2
G69.0	2060.4	2049.1	2030.5	2013.6	1982.3	1953.5	1936.5	1915.4	1919.4	1918.2
G70.0	1932.1	1913.1	1900.8	1874.6	1847.0	1814.3	1785.7	1765.8	1771.3	1772.3
G71.0	1808.9	1778.8	1770.0	1740.5	1707.6	1672.1	1647.7	1623.3	1624.7	1631.2
G72.0	1681.1	1646.5	1632.4	1605.2	1565.8	1531.2	1505.3	1477.6	1478.1	1488.8
G73.0	1555.6	1521.9	1501.1	1476.7	1426.8	1389.7	1368.6	1342.8	1334.0	1347.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	1431.5	1403.4	1369.3	1345.9	1293.2	1251.7	1221.3	1199.7	1192.3	1200.4
G75.0	1306.4	1279.0	1244.2	1215.5	1163.5	1120.3	1087.2	1055.8	1055.8	1060.0
G76.0	1182.3	1160.0	1127.3	1090.2	1045.2	997.4	956.5	927.3	927.1	938.0
G77.0	1060.3	1033.3	1007.6	970.5	922.9	870.3	832.9	797.6	796.2	809.2
G78.0	938.0	915.0	892.1	856.6	804.4	753.5	713.7	682.1	675.1	689.3
G79.0	827.8	797.6	775.4	743.3	694.4	645.0	599.7	564.5	560.3	574.4
G80.0	718.5	690.9	666.3	637.8	592.3	544.0	495.8	462.6	455.9	471.4
G81.0	611.1	585.6	563.8	536.4	493.9	445.2	402.3	368.7	359.4	377.2
G82.0	513.0	491.6	470.3	440.6	404.4	360.8	318.1	283.3	275.2	291.9
G83.0	419.2	400.2	381.6	356.8	321.8	284.9	245.2	213.4	204.4	217.6
G84.0	334.8	320.6	302.5	280.7	251.0	219.2	184.9	150.8	140.8	156.8
G85.0	261.0	246.2	232.7	214.6	189.6	161.2	130.9	100.2	91.9	106.0
G86.0	195.1	181.7	172.4	157.5	137.8	115.8	89.6	65.0	56.6	68.2
G87.0	137.4	127.6	122.3	111.4	95.3	78.7	59.9	42.0	34.6	44.8
G88.0	91.6	85.6	81.0	73.8	63.3	51.3	39.2	25.3	19.3	27.8
G89.0	55.0	51.5	49.2	45.2	39.7	32.3	24.6	14.9	11.4	16.9
G90.0	29.2	28.1	28.5	26.9	23.7	20.2	15.5	10.0	8.8	11.4
G91.0	21.3	20.4	19.0	17.4	15.5	13.2	10.9	8.4	6.0	9.1
G92.0	19.7	18.8	17.6	16.0	13.7	11.8	9.5	7.4	6.3	8.1
G93.0	18.1	17.4	16.2	14.9	12.8	10.7	8.6	7.0	6.7	7.4
G94.0	17.6	16.7	15.5	13.7	11.6	9.7	8.1	7.2	7.2	7.4
G95.0	16.9	16.0	14.6	12.8	10.7	8.8	7.9	7.7	7.7	7.7
G96.0	16.5	15.3	13.7	11.8	10.2	8.6	8.1	8.1	8.1	8.1
G97.0	15.8	14.4	13.0	11.4	9.7	8.8	8.6	8.6	8.6	8.6
G98.0	15.1	13.7	12.3	11.1	10.0	9.3	9.1	9.1	9.1	9.1
G99.0	14.4	13.2	12.1	11.1	10.2	9.7	9.7	9.7	9.7	9.5
G100.0	13.9	13.0	12.1	11.1	10.4	10.2	10.2	10.2	10.2	10.2
G101.0	13.7	13.0	12.3	11.4	11.1	10.9	10.7	10.7	10.7	10.7
G102.0	13.7	13.0	12.3	11.6	11.4	11.4	11.4	11.4	11.4	11.4
G103.0	13.9	13.2	12.5	12.3	12.1	11.8	11.8	11.8	11.8	11.8
G104.0	13.9	13.5	13.0	12.8	12.8	12.5	12.5	12.5	12.5	12.3
G105.0	14.4	13.7	13.5	13.2	13.2	13.2	13.0	13.2	13.0	13.2
G106.0	14.6	14.4	14.1	13.9	13.9	13.7	13.7	13.7	13.7	13.7
G107.0	14.9	14.6	14.6	14.4	14.4	14.4	14.4	14.4	14.4	14.4
G108.0	15.5	15.3	15.1	15.1	15.1	15.1	14.9	15.1	14.9	14.9
G109.0	16.0	15.8	15.8	15.5	15.5	15.5	15.5	15.5	15.8	15.5
G110.0	16.5	16.5	16.2	16.2	16.2	16.2	16.2	16.2	16.2	16.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	17.2	17.2	16.9	16.9	16.9	16.7	16.9	16.9	16.9	16.9
G112.0	17.6	17.6	17.6	17.6	17.4	17.4	17.6	17.6	17.6	17.6
G113.0	18.3	18.1	18.3	18.1	18.1	18.3	18.1	18.3	18.3	18.1
G114.0	18.8	19.0	18.8	18.8	18.8	18.8	18.8	19.0	18.8	18.8
G115.0	19.7	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
G116.0	20.2	20.2	20.2	20.0	20.0	20.2	20.2	20.2	20.2	20.2
G117.0	20.9	20.9	20.9	20.9	20.6	20.9	20.9	20.9	20.9	20.9
G118.0	21.3	21.6	21.6	21.3	21.3	21.6	21.6	21.6	21.6	21.6
G119.0	22.0	22.3	22.0	22.0	22.0	22.3	22.3	22.3	22.3	22.3
G120.0	22.7	22.7	22.7	22.7	22.7	22.7	23.0	23.0	23.0	22.7
G121.0	23.7	23.4	23.4	23.4	23.4	23.4	23.7	23.7	23.7	23.7
G122.0	24.1	24.1	24.1	23.9	24.1	24.1	24.1	24.1	24.4	24.1
G123.0	24.8	24.8	24.6	24.6	24.8	24.8	24.8	25.1	24.8	24.8
G124.0	25.5	25.5	25.3	25.3	25.3	25.5	25.5	25.5	25.5	25.5
G125.0	26.0	26.0	26.0	25.8	26.0	26.2	26.2	26.2	26.2	26.2
G126.0	26.7	26.7	26.7	26.5	26.7	26.7	26.9	26.9	26.9	26.7
G127.0	27.4	27.1	27.1	27.1	27.1	27.4	27.4	27.4	27.6	27.4
G128.0	27.8	28.1	27.8	27.8	28.1	28.1	28.1	28.3	28.1	28.1
G129.0	28.5	28.5	28.5	28.5	28.5	28.8	28.8	28.8	28.8	28.8
G130.0	29.2	29.2	29.2	29.2	29.2	29.5	29.5	29.5	29.5	29.5
G131.0	29.7	29.7	29.7	29.7	29.9	29.9	30.2	30.2	30.2	29.9
G132.0	30.4	30.4	30.4	30.2	30.4	30.6	30.6	30.6	30.6	30.6
G133.0	31.1	31.1	30.9	30.9	31.1	31.3	31.3	31.3	31.3	31.1
G134.0	31.8	31.8	31.5	31.5	31.8	31.8	32.0	31.8	31.8	32.0
G135.0	32.5	32.3	32.3	32.3	32.3	32.5	32.7	32.7	32.7	32.5
G136.0	32.9	32.9	32.9	32.9	32.9	33.2	33.4	33.2	33.2	32.9
G137.0	33.4	33.6	33.4	33.6	33.6	33.6	33.9	33.9	33.9	33.6
G138.0	34.1	34.1	33.9	34.1	34.1	34.3	34.3	34.3	34.3	34.3
G139.0	34.8	34.8	34.8	34.8	34.8	35.0	35.0	35.0	35.0	34.8
G140.0	35.5	35.3	35.5	35.3	35.5	35.5	35.5	35.5	35.5	35.5
G141.0	36.0	36.0	36.0	36.0	36.2	36.2	36.2	36.2	36.2	36.0
G142.0	36.4	36.7	36.4	36.7	36.4	36.7	36.7	36.7	36.7	36.7
G143.0	37.1	37.1	37.1	37.1	37.1	37.3	37.3	37.3	37.3	37.1
G144.0	37.8	37.8	37.6	37.8	37.8	37.8	37.8	37.8	37.8	37.8
G145.0	38.3	38.3	38.3	38.3	38.5	38.3	38.5	38.5	38.3	38.3
G146.0	38.7	39.0	39.0	39.0	39.0	39.0	38.7	39.0	39.0	39.0
G147.0	39.2	39.4	39.4	39.7	39.4	39.4	39.4	39.4	39.4	39.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	39.9	39.9	40.1	40.1	39.9	39.9	39.9	40.1	39.9	39.9
G149.0	40.4	40.4	40.4	40.6	40.6	40.6	40.4	40.4	40.4	40.4
G150.0	40.8	41.1	41.1	41.1	41.1	41.1	40.8	40.8	41.1	41.1
G151.0	41.3	41.5	41.5	41.8	41.8	41.5	41.5	41.5	41.3	41.5
G152.0	42.0	42.0	42.2	42.2	42.2	42.0	42.0	41.8	42.0	41.8
G153.0	42.2	42.5	42.7	42.7	42.7	42.7	42.5	42.5	42.5	42.2
G154.0	42.7	43.2	43.2	43.2	43.2	42.9	42.9	42.9	42.9	42.7
G155.0	43.2	43.6	43.6	43.6	43.6	43.4	43.4	43.4	43.2	43.2
G156.0	43.6	44.1	43.8	44.1	44.1	43.8	43.8	43.8	43.6	43.8
G157.0	44.1	44.3	44.5	44.5	44.5	44.5	44.3	44.3	44.1	44.1
G158.0	44.5	44.8	45.0	45.0	45.0	45.0	44.5	44.8	44.5	44.5
G159.0	45.0	45.0	45.2	45.5	45.5	45.5	45.0	45.2	44.8	44.8
G160.0	45.2	45.5	45.7	45.9	45.7	45.9	45.5	45.5	45.5	45.2
G161.0	45.7	45.9	45.9	46.2	46.2	46.4	45.9	45.7	45.7	45.7
G162.0	46.2	46.2	46.4	46.6	46.6	46.6	46.4	46.2	46.2	46.2
G163.0	46.4	46.6	46.6	46.9	47.1	47.1	46.9	46.6	46.4	46.4
G164.0	46.9	46.9	46.9	47.1	47.3	47.3	47.3	47.1	46.9	46.6
G165.0	47.3	47.1	47.3	47.6	47.6	47.8	47.6	47.3	47.1	47.1
G166.0	47.6	47.6	47.6	47.8	48.0	48.0	48.0	47.8	47.6	47.3
G167.0	47.8	47.8	48.0	48.3	48.3	48.5	48.3	48.0	48.0	47.8
G168.0	48.3	48.0	48.3	48.5	48.7	48.7	48.7	48.5	48.3	48.0
G169.0	48.5	48.3	48.5	48.7	49.0	49.0	49.0	48.7	48.5	48.3
G170.0	48.7	48.7	48.7	49.0	49.2	49.2	49.2	49.2	49.0	48.7
G171.0	49.0	49.2	49.0	49.2	49.4	49.4	49.4	49.4	49.2	49.0
G172.0	49.2	49.2	49.2	49.4	49.7	49.9	49.9	49.7	49.4	49.2
G173.0	49.4	49.4	49.7	49.7	49.9	49.9	50.1	49.9	49.7	49.4
G174.0	49.7	49.7	49.9	49.9	49.9	50.1	50.1	50.1	49.9	49.7
G175.0	49.9	49.9	49.9	50.1	50.1	50.3	50.3	50.3	50.1	49.9
G176.0	50.1	50.1	50.1	50.1	50.3	50.6	50.6	50.3	50.3	50.1
G177.0	50.3	50.1	50.1	50.3	50.3	50.6	50.6	50.6	50.6	50.3
G178.0	50.3	50.3	50.3	50.3	50.6	50.8	50.8	50.8	50.6	50.3
G179.0	50.6	50.6	50.6	50.6	50.6	50.8	50.8	50.8	51.0	50.6
G180.0	50.6	50.3	50.6	50.6	50.8	50.8	50.8	51.0	51.0	50.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	6917.7	6915.4	6908.9	6912.8	6911.9	6931.8	6920.9	6929.7	6934.1	6936.0
G1.0	6917.0	6912.3	6909.8	6915.6	6910.3	6923.5	6922.5	6934.4	6933.9	6935.5
G2.0	6917.2	6912.6	6910.5	6914.9	6911.9	6920.9	6924.6	6929.5	6933.5	6937.4
G3.0	6912.3	6908.6	6910.0	6909.6	6912.3	6914.7	6926.3	6926.0	6934.9	6934.9
G4.0	6913.3	6903.1	6908.2	6909.3	6908.9	6909.6	6921.6	6922.8	6927.2	6931.4
G5.0	6903.5	6892.4	6902.4	6902.6	6903.1	6908.9	6917.9	6917.2	6927.9	6924.4
G6.0	6891.5	6885.2	6894.7	6895.6	6898.4	6904.2	6912.1	6910.0	6916.5	6916.0
G7.0	6884.7	6877.1	6884.7	6885.0	6887.5	6892.2	6894.7	6898.2	6909.3	6905.4
G8.0	6872.4	6865.3	6873.4	6875.0	6878.5	6880.3	6883.1	6882.4	6895.9	6898.2
G9.0	6861.3	6849.0	6857.4	6862.0	6863.2	6863.9	6869.4	6870.6	6881.7	6881.3
G10.0	6840.6	6832.5	6839.3	6848.3	6842.5	6843.9	6849.7	6852.3	6865.3	6862.0
G11.0	6820.9	6815.4	6821.9	6828.8	6820.9	6823.5	6833.2	6833.9	6849.2	6845.8
G12.0	6801.4	6794.3	6798.4	6806.5	6801.9	6809.1	6810.3	6815.4	6827.4	6827.4
G13.0	6774.1	6770.8	6772.2	6784.7	6777.5	6793.8	6787.1	6792.9	6805.2	6808.4
G14.0	6747.9	6744.4	6751.1	6755.5	6755.7	6770.4	6765.7	6770.8	6780.1	6779.9
G15.0	6724.2	6716.1	6722.1	6725.1	6730.7	6735.6	6743.4	6742.8	6754.4	6751.8
G16.0	6696.8	6686.1	6690.5	6697.5	6700.5	6704.7	6711.7	6710.5	6722.1	6725.1
G17.0	6663.6	6656.4	6655.0	6661.3	6671.1	6669.4	6679.6	6679.0	6688.9	6693.8
G18.0	6635.8	6626.0	6622.8	6627.9	6638.8	6638.4	6645.3	6651.3	6654.6	6662.0
G19.0	6601.5	6594.5	6587.3	6594.5	6604.9	6609.3	6611.7	6615.6	6620.3	6626.8
G20.0	6559.9	6549.7	6550.2	6558.1	6567.1	6567.6	6572.2	6582.7	6578.3	6586.1
G21.0	6520.0	6509.4	6514.2	6516.8	6529.3	6525.8	6532.5	6543.0	6534.9	6543.9
G22.0	6475.3	6469.5	6467.6	6477.8	6486.9	6480.6	6492.4	6498.5	6491.7	6503.1
G23.0	6433.7	6426.1	6428.9	6432.6	6437.7	6439.0	6446.3	6453.7	6446.3	6460.6
G24.0	6385.7	6379.9	6382.4	6385.9	6389.6	6395.4	6401.2	6404.7	6403.6	6412.4
G25.0	6334.4	6330.5	6337.9	6339.1	6340.0	6353.4	6352.5	6356.7	6357.6	6364.8
G26.0	6285.0	6278.3	6291.0	6285.5	6287.8	6301.7	6299.4	6306.4	6311.2	6313.8
G27.0	6233.7	6231.0	6240.0	6231.0	6234.7	6243.9	6244.2	6251.4	6258.5	6261.6
G28.0	6180.1	6176.0	6182.5	6177.6	6180.1	6186.2	6192.2	6198.0	6206.1	6208.2
G29.0	6121.4	6118.0	6124.7	6121.7	6127.7	6127.9	6133.0	6138.6	6148.1	6150.7
G30.0	6060.6	6058.6	6063.0	6063.2	6067.1	6071.3	6072.3	6080.1	6086.9	6091.7
G31.0	6000.1	6004.7	6002.0	6002.9	6005.0	6014.3	6009.1	6019.1	6023.8	6032.1
G32.0	5937.9	5936.5	5933.8	5937.0	5941.6	5948.1	5946.5	5954.9	5958.8	5969.9
G33.0	5871.8	5875.5	5865.8	5874.4	5875.5	5879.5	5880.9	5891.3	5892.7	5905.0
G34.0	5805.2	5806.1	5797.1	5803.6	5812.2	5808.5	5811.7	5822.6	5825.4	5837.2
G35.0	5734.5	5739.8	5728.2	5730.3	5733.5	5746.3	5740.7	5752.1	5754.4	5766.5
G36.0	5664.4	5659.3	5656.0	5657.7	5663.0	5674.1	5670.0	5679.7	5680.6	5692.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	5586.9	5587.4	5585.7	5585.7	5588.3	5594.8	5591.8	5612.4	5606.6	5612.4
G38.0	5509.2	5510.6	5513.6	5505.0	5507.1	5514.3	5521.5	5533.1	5531.5	5536.3
G39.0	5431.7	5436.3	5430.5	5427.5	5431.9	5431.7	5445.6	5450.0	5451.6	5459.3
G40.0	5348.2	5353.3	5345.9	5341.9	5347.0	5349.3	5361.4	5363.0	5369.3	5380.6
G41.0	5269.8	5264.9	5261.4	5261.2	5267.0	5271.1	5278.3	5276.3	5285.1	5296.7
G42.0	5182.0	5176.7	5169.5	5173.9	5175.1	5189.3	5191.8	5188.5	5196.7	5211.8
G43.0	5095.3	5091.3	5081.1	5082.1	5087.9	5101.1	5100.6	5099.9	5112.5	5119.0
G44.0	5003.0	4999.0	4986.5	4991.4	4993.0	5005.0	5009.0	5012.2	5020.4	5026.4
G45.0	4909.7	4906.0	4892.5	4899.2	4900.4	4911.5	4918.0	4919.9	4922.2	4931.7
G46.0	4811.1	4810.4	4796.0	4803.6	4811.1	4810.4	4821.8	4829.4	4825.0	4839.6
G47.0	4715.0	4716.0	4706.2	4707.8	4714.8	4720.6	4727.8	4733.1	4731.7	4745.9
G48.0	4615.5	4612.5	4600.0	4606.0	4612.7	4619.2	4630.6	4635.0	4632.9	4645.2
G49.0	4514.8	4507.1	4504.4	4506.0	4511.6	4517.6	4526.4	4534.1	4536.1	4545.7
G50.0	4409.0	4402.5	4404.4	4404.4	4401.4	4411.6	4417.4	4429.4	4435.0	4446.6
G51.0	4300.4	4295.6	4294.9	4301.6	4296.0	4306.2	4308.3	4326.9	4333.4	4342.0
G52.0	4189.5	4183.7	4179.3	4190.5	4186.1	4200.9	4201.8	4216.9	4226.9	4237.6
G53.0	4076.1	4068.0	4066.6	4080.5	4078.4	4093.3	4090.7	4112.3	4118.1	4126.7
G54.0	3960.6	3954.5	3953.4	3962.4	3966.8	3975.2	3978.9	3999.8	4001.6	4014.4
G55.0	3847.3	3838.5	3836.0	3846.2	3855.9	3856.1	3866.4	3889.1	3887.0	3900.0
G56.0	3727.6	3723.2	3716.5	3728.8	3738.3	3742.2	3755.9	3769.1	3773.3	3788.9
G57.0	3608.6	3599.8	3598.2	3607.7	3619.0	3623.4	3643.6	3654.1	3663.6	3676.8
G58.0	3484.2	3476.8	3477.1	3488.0	3491.2	3512.1	3524.8	3531.3	3548.7	3561.0
G59.0	3358.0	3347.8	3349.2	3364.5	3371.7	3387.5	3400.9	3414.4	3429.9	3451.3
G60.0	3223.0	3225.3	3218.8	3247.4	3248.3	3272.0	3275.4	3297.0	3314.4	3331.6
G61.0	3091.5	3091.2	3093.8	3113.5	3127.2	3146.2	3152.0	3178.7	3196.8	3212.3
G62.0	2952.7	2959.4	2963.9	2979.6	2999.4	3016.3	3031.6	3060.6	3073.6	3083.6
G63.0	2818.2	2821.4	2832.1	2840.7	2875.7	2882.7	2908.9	2937.6	2943.9	2961.5
G64.0	2679.9	2686.6	2700.1	2712.1	2741.4	2765.5	2786.6	2815.6	2819.6	2834.4
G65.0	2536.5	2544.6	2566.7	2579.7	2605.9	2632.1	2663.9	2688.2	2687.5	2711.7
G66.0	2381.8	2398.0	2419.6	2448.6	2470.9	2500.3	2538.4	2554.4	2569.7	2585.7
G67.0	2242.8	2249.8	2279.0	2313.8	2343.9	2374.1	2409.1	2428.9	2449.0	2465.3
G68.0	2094.1	2112.2	2140.7	2179.0	2207.8	2250.4	2274.3	2303.3	2325.9	2344.2
G69.0	1946.3	1968.1	1995.0	2036.3	2076.7	2114.5	2139.6	2176.0	2197.3	2222.1
G70.0	1802.9	1829.1	1858.8	1901.7	1949.1	1981.1	2014.0	2046.7	2081.1	2093.4
G71.0	1658.6	1685.1	1725.9	1767.6	1816.6	1850.7	1886.7	1921.7	1950.2	1965.1
G72.0	1518.7	1547.5	1589.0	1636.1	1679.3	1718.7	1760.2	1797.6	1818.0	1827.0
G73.0	1375.3	1402.2	1444.2	1507.1	1549.1	1592.5	1638.7	1669.3	1685.3	1700.1

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	1233.8	1268.4	1313.8	1373.0	1416.6	1467.0	1506.4	1535.6	1548.9	1574.2
G75.0	1098.3	1136.4	1185.5	1239.4	1294.6	1343.1	1379.3	1409.7	1423.6	1448.9
G76.0	976.5	1018.7	1066.3	1118.3	1175.8	1223.4	1254.2	1284.6	1302.9	1326.4
G77.0	852.8	891.6	945.7	999.9	1057.9	1097.8	1133.1	1162.1	1179.7	1201.1
G78.0	725.3	775.8	828.3	887.0	938.5	979.8	1012.5	1043.1	1062.6	1080.9
G79.0	617.1	665.8	713.7	777.0	825.0	859.8	896.5	927.8	945.9	966.8
G80.0	512.0	563.1	615.0	669.3	711.8	753.5	790.0	816.7	831.0	848.4
G81.0	418.3	461.5	518.5	563.1	609.2	644.5	679.1	704.8	721.3	738.7
G82.0	332.9	375.9	426.7	471.7	513.4	546.6	579.8	604.8	617.8	633.6
G83.0	258.7	300.0	341.7	384.7	422.5	455.2	484.9	505.1	519.5	530.8
G84.0	195.1	233.4	270.0	307.9	342.7	372.4	394.2	413.9	425.0	437.8
G85.0	142.4	175.2	206.5	239.2	268.2	295.1	313.2	329.7	341.3	350.1
G86.0	98.6	126.4	154.1	181.9	205.1	224.4	239.9	254.3	264.3	272.6
G87.0	66.1	89.3	109.5	129.7	148.3	163.8	178.4	187.0	192.8	199.8
G88.0	43.6	59.6	74.0	89.1	102.6	113.0	123.2	130.6	135.3	140.4
G89.0	27.8	37.8	47.3	57.1	65.2	72.8	78.2	84.0	88.4	92.1
G90.0	17.9	23.2	28.3	33.2	37.6	42.0	45.5	48.0	50.6	53.1
G91.0	12.1	15.3	17.6	20.0	21.8	23.2	24.4	25.3	26.0	26.9
G92.0	10.7	13.7	16.2	18.6	20.4	21.8	22.7	23.2	23.7	23.7
G93.0	9.7	12.5	15.1	17.4	19.3	20.4	21.3	22.0	22.3	22.3
G94.0	8.8	11.1	13.9	16.2	18.1	19.3	20.4	21.1	21.3	21.3
G95.0	8.1	10.4	13.0	15.3	17.2	18.3	19.3	20.0	20.2	20.4
G96.0	8.1	9.7	12.1	14.6	16.2	17.9	18.6	19.3	19.7	19.7
G97.0	8.4	9.5	11.4	13.5	15.5	16.9	18.1	18.8	19.0	19.3
G98.0	9.1	9.7	10.9	12.8	14.6	16.5	17.6	18.3	18.8	19.0
G99.0	9.5	10.0	10.9	12.3	14.1	15.8	16.9	17.9	18.3	18.6
G100.0	10.2	10.2	10.9	12.1	13.5	15.1	16.5	17.4	18.1	18.3
G101.0	10.7	10.7	11.1	12.1	13.2	14.4	15.8	16.9	17.6	18.1
G102.0	11.1	11.4	11.6	12.1	13.0	14.1	15.3	16.5	17.2	17.6
G103.0	11.8	11.8	11.8	12.3	13.0	14.1	15.1	16.0	16.9	17.4
G104.0	12.5	12.5	12.5	12.8	13.2	14.1	14.9	15.8	16.5	16.9
G105.0	13.0	13.0	13.0	13.2	13.5	14.1	14.9	15.8	16.2	16.9
G106.0	13.7	13.7	13.7	13.7	13.7	14.4	15.1	15.5	16.2	16.7
G107.0	14.1	14.4	14.1	14.1	14.4	14.6	15.3	15.8	16.2	16.7
G108.0	14.9	14.9	14.9	14.9	14.9	14.9	15.5	16.0	16.5	16.9
G109.0	15.5	15.5	15.3	15.3	15.5	15.5	15.8	16.2	16.7	16.9
G110.0	16.0	16.0	16.0	16.0	16.0	16.0	16.2	16.5	16.9	17.4

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	16.7	16.7	16.7	16.7	16.5	16.5	16.7	16.9	17.4	17.6
G112.0	17.2	17.4	17.4	17.4	17.2	17.2	17.2	17.4	17.6	17.9
G113.0	17.9	18.1	17.9	17.9	17.9	17.9	17.6	17.9	17.9	18.1
G114.0	18.8	18.6	18.6	18.3	18.3	18.3	18.3	18.3	18.6	18.6
G115.0	19.3	19.3	19.3	19.0	19.0	19.0	19.0	19.0	19.0	19.0
G116.0	20.0	20.0	20.0	19.7	19.7	19.7	19.7	19.5	19.7	19.5
G117.0	20.4	20.4	20.4	20.4	20.2	20.2	20.2	20.2	20.4	20.4
G118.0	21.1	21.1	21.1	21.1	21.1	20.9	20.9	20.9	20.9	20.9
G119.0	22.0	21.8	21.8	21.8	21.6	21.6	21.6	21.3	21.6	21.3
G120.0	22.5	22.5	22.5	22.3	22.3	22.0	22.3	22.0	22.3	22.0
G121.0	23.2	23.2	23.2	23.0	22.7	22.7	22.7	22.7	22.7	22.7
G122.0	23.9	23.7	23.7	23.7	23.4	23.4	23.4	23.4	23.4	23.4
G123.0	24.6	24.4	24.4	24.4	24.1	24.1	24.1	24.1	24.1	23.9
G124.0	25.3	25.1	25.1	24.8	24.8	24.8	24.6	24.8	24.6	24.6
G125.0	26.0	25.8	25.5	25.5	25.5	25.5	25.3	25.3	25.3	25.3
G126.0	26.7	26.5	26.2	26.2	26.2	26.0	26.0	25.8	26.0	25.8
G127.0	27.1	27.1	26.9	26.7	26.7	26.7	26.7	26.5	26.5	26.5
G128.0	27.8	27.6	27.6	27.4	27.4	27.1	27.1	27.1	27.1	26.9
G129.0	28.5	28.3	28.1	27.8	27.8	27.8	27.8	27.6	27.6	27.8
G130.0	29.0	29.0	28.8	28.8	28.5	28.5	28.3	28.3	28.5	28.3
G131.0	29.7	29.5	29.5	29.2	29.2	29.0	29.0	29.0	29.0	29.0
G132.0	30.4	30.2	29.9	29.9	29.7	29.7	29.7	29.7	29.5	29.5
G133.0	31.1	30.9	30.6	30.4	30.4	30.2	30.4	30.2	30.2	30.2
G134.0	31.5	31.3	31.1	31.1	31.1	30.9	30.9	30.9	30.9	30.9
G135.0	32.3	32.0	31.8	31.8	31.5	31.3	31.3	31.3	31.5	31.5
G136.0	32.7	32.5	32.5	32.3	32.3	31.8	32.0	32.0	32.0	32.0
G137.0	33.4	33.2	32.9	32.9	32.7	32.5	32.5	32.5	32.7	32.5
G138.0	34.1	33.9	33.6	33.4	33.4	33.2	33.2	32.9	33.2	33.2
G139.0	34.6	34.3	34.3	34.1	33.9	33.9	33.9	33.6	33.6	33.6
G140.0	35.3	35.0	34.8	34.6	34.3	34.3	34.3	34.3	34.3	34.1
G141.0	36.0	35.5	35.5	35.3	35.0	35.0	34.8	34.8	34.8	34.8
G142.0	36.2	36.2	36.0	35.7	35.7	35.5	35.3	35.5	35.5	35.3
G143.0	36.9	36.9	36.4	36.4	36.2	36.0	36.0	35.7	36.0	36.0
G144.0	37.6	37.3	37.1	36.9	36.7	36.4	36.4	36.4	36.4	36.4
G145.0	38.0	37.8	37.6	37.3	37.3	37.1	36.9	37.1	36.9	36.9
G146.0	38.5	38.5	38.0	38.0	37.8	37.6	37.6	37.3	37.6	37.6
G147.0	39.2	39.0	38.7	38.5	38.5	38.0	37.8	38.0	38.0	37.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	39.7	39.7	39.2	39.2	39.0	38.7	38.5	38.5	38.5	38.5
G149.0	40.1	40.1	39.9	39.7	39.4	39.2	39.0	39.0	39.0	39.0
G150.0	40.8	40.6	40.4	40.1	39.9	39.7	39.4	39.4	39.4	39.4
G151.0	41.3	41.1	40.8	40.6	40.6	40.4	40.1	39.9	39.9	39.9
G152.0	41.8	41.8	41.3	41.1	40.8	40.8	40.6	40.4	40.4	40.4
G153.0	42.2	42.2	42.0	41.8	41.3	41.3	41.1	41.1	41.1	41.1
G154.0	42.7	42.7	42.5	42.2	42.0	41.8	41.8	41.5	41.5	41.5
G155.0	43.2	42.9	42.9	42.7	42.5	42.5	42.0	42.0	42.0	41.8
G156.0	43.6	43.6	43.4	43.2	42.9	42.9	42.5	42.5	42.5	42.5
G157.0	43.8	43.8	43.8	43.6	43.4	43.4	43.2	43.2	42.9	42.9
G158.0	44.3	44.3	44.3	44.1	43.8	43.8	43.6	43.6	43.4	43.4
G159.0	44.8	44.8	44.5	44.3	44.3	44.3	44.1	43.8	43.8	43.8
G160.0	45.2	45.2	45.0	45.0	44.8	44.8	44.5	44.3	44.3	44.3
G161.0	45.5	45.2	45.5	45.2	45.2	45.2	45.0	45.0	44.8	44.8
G162.0	45.9	45.7	45.7	45.7	45.7	45.7	45.5	45.5	45.2	45.2
G163.0	46.4	46.2	46.2	45.9	45.9	46.2	45.9	45.9	45.7	45.7
G164.0	46.6	46.4	46.4	46.4	46.4	46.4	46.2	46.2	46.2	46.2
G165.0	46.9	46.9	46.9	46.9	46.9	46.9	46.6	46.6	46.6	46.6
G166.0	47.3	47.3	47.1	47.1	47.1	47.1	47.1	47.1	46.9	47.1
G167.0	47.8	47.6	47.6	47.3	47.6	47.6	47.6	47.3	47.3	47.6
G168.0	48.0	47.8	47.8	47.8	47.8	47.8	47.8	47.8	47.8	47.8
G169.0	48.3	48.3	48.3	48.0	48.3	48.0	48.0	48.0	48.3	48.3
G170.0	48.5	48.5	48.5	48.5	48.3	48.3	48.3	48.5	48.5	48.5
G171.0	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	49.0
G172.0	49.0	49.2	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.2
G173.0	49.2	49.4	49.4	49.4	49.2	49.2	49.2	49.2	49.4	49.4
G174.0	49.4	49.7	49.4	49.4	49.4	49.7	49.4	49.7	49.7	49.9
G175.0	49.7	49.7	49.9	49.7	49.7	49.7	49.9	49.7	49.7	49.9
G176.0	49.9	50.1	49.9	49.9	49.9	49.9	49.9	49.9	49.9	50.1
G177.0	50.1	50.1	50.1	50.1	50.1	50.1	50.1	50.1	50.1	50.1
G178.0	50.3	50.1	50.3	50.3	50.1	50.3	50.1	50.3	50.1	50.3
G179.0	50.3	50.3	50.3	50.3	50.6	50.3	50.6	50.6	50.3	50.3
G180.0	50.6	50.3	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	6949.0	6954.8	6959.7	6960.8	6954.1	6953.2	6963.9	6956.0	6954.3	6959.4
G1.0	6949.2	6951.1	6960.8	6961.5	6952.0	6950.2	6961.5	6959.7	6956.4	6959.0
G2.0	6948.8	6952.3	6958.3	6959.0	6952.9	6955.3	6962.2	6957.1	6954.6	6958.3
G3.0	6948.5	6948.5	6955.3	6956.7	6952.5	6949.0	6953.4	6955.0	6948.3	6954.6
G4.0	6944.6	6946.2	6951.3	6954.1	6947.1	6946.7	6941.1	6946.9	6941.8	6944.6
G5.0	6938.6	6936.7	6943.2	6949.7	6945.5	6940.0	6932.1	6931.8	6933.0	6932.1
G6.0	6929.3	6928.8	6931.4	6938.1	6933.9	6933.2	6920.7	6919.8	6921.9	6920.5
G7.0	6914.7	6917.5	6921.4	6927.0	6923.9	6922.3	6907.9	6907.5	6908.2	6904.5
G8.0	6901.7	6904.2	6911.2	6913.5	6912.3	6908.9	6891.7	6893.8	6896.8	6892.4
G9.0	6886.1	6895.9	6901.9	6899.4	6898.6	6901.0	6877.8	6874.3	6879.2	6872.9
G10.0	6871.0	6880.1	6885.9	6884.5	6885.7	6880.6	6856.9	6855.3	6857.4	6853.2
G11.0	6849.5	6864.3	6868.7	6864.1	6864.5	6862.5	6837.4	6832.1	6833.2	6831.8
G12.0	6830.0	6841.1	6845.1	6841.4	6841.4	6838.3	6811.6	6808.9	6811.2	6806.3
G13.0	6807.5	6814.4	6813.0	6814.2	6817.0	6813.3	6787.8	6781.5	6785.4	6782.9
G14.0	6780.6	6788.7	6787.3	6789.8	6791.5	6791.7	6762.9	6757.4	6759.0	6752.7
G15.0	6759.2	6760.4	6757.8	6763.2	6768.7	6763.4	6732.3	6731.8	6728.6	6725.6
G16.0	6732.1	6728.6	6741.8	6733.2	6740.9	6734.2	6698.2	6695.0	6694.3	6688.7
G17.0	6704.0	6696.8	6710.5	6699.8	6705.4	6700.5	6658.5	6659.9	6656.0	6652.5
G18.0	6668.5	6662.7	6675.0	6666.6	6671.5	6666.4	6619.1	6614.5	6621.9	6617.0
G19.0	6633.2	6629.5	6634.9	6634.6	6635.1	6632.3	6578.7	6574.1	6579.0	6579.9
G20.0	6591.3	6594.5	6598.0	6600.1	6600.5	6594.7	6538.6	6529.8	6538.6	6536.3
G21.0	6549.0	6556.9	6554.8	6560.9	6560.2	6553.7	6492.6	6483.1	6495.4	6496.1
G22.0	6504.9	6516.5	6511.0	6518.4	6517.5	6512.6	6445.8	6436.3	6449.0	6451.6
G23.0	6461.1	6472.0	6467.4	6474.1	6472.9	6468.3	6397.8	6393.4	6400.5	6400.5
G24.0	6417.5	6426.3	6427.2	6428.4	6426.5	6423.0	6347.4	6338.8	6345.1	6346.7
G25.0	6375.5	6375.7	6382.2	6379.9	6380.6	6372.5	6298.5	6288.3	6299.6	6291.5
G26.0	6321.7	6323.3	6327.9	6326.3	6327.5	6322.8	6246.3	6238.8	6241.9	6235.1
G27.0	6268.1	6270.4	6274.3	6276.0	6278.7	6272.2	6189.2	6182.2	6186.6	6181.1
G28.0	6211.2	6211.7	6221.0	6224.7	6223.1	6221.9	6126.5	6123.8	6124.7	6121.2
G29.0	6150.7	6157.6	6163.4	6168.8	6170.4	6163.7	6064.8	6059.3	6061.1	6058.3
G30.0	6089.0	6098.2	6105.7	6108.7	6110.8	6101.0	5998.9	5994.3	5992.9	5991.3
G31.0	6030.7	6038.9	6047.9	6047.4	6046.5	6039.3	5934.7	5925.4	5930.7	5927.5
G32.0	5972.3	5979.5	5989.9	5980.6	5981.3	5974.4	5866.0	5854.9	5864.4	5859.7
G33.0	5912.6	5911.5	5918.9	5915.0	5919.6	5909.4	5802.7	5783.6	5795.9	5795.7
G34.0	5842.1	5844.9	5851.1	5847.7	5832.1	5841.6	5727.5	5711.3	5721.0	5719.1
G35.0	5770.2	5776.7	5778.5	5778.3	5778.5	5776.9	5647.7	5631.9	5645.6	5653.7
G36.0	5696.9	5703.6	5706.4	5709.9	5708.2	5707.8	5563.7	5556.5	5565.3	5574.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	5620.1	5628.9	5634.5	5637.3	5637.9	5632.1	5481.1	5481.1	5486.2	5493.6
G38.0	5543.3	5554.6	5562.8	5557.7	5558.8	5550.5	5399.2	5397.6	5405.2	5413.6
G39.0	5470.0	5473.9	5483.0	5477.6	5478.8	5472.3	5317.1	5314.5	5323.1	5330.8
G40.0	5387.6	5389.9	5398.5	5396.9	5397.1	5390.4	5228.9	5233.3	5235.0	5245.6
G41.0	5306.2	5303.6	5313.1	5315.5	5317.3	5312.0	5144.7	5143.5	5149.8	5157.2
G42.0	5215.9	5215.2	5222.9	5229.9	5233.3	5224.3	5058.6	5056.5	5057.2	5067.0
G43.0	5127.8	5128.0	5148.2	5149.6	5151.0	5141.5	4969.3	4966.3	4966.5	4975.6
G44.0	5032.2	5035.7	5061.0	5058.9	5063.3	5054.9	4874.2	4866.5	4877.0	4883.2
G45.0	4936.6	4949.1	4969.8	4973.3	4977.9	4967.9	4774.6	4763.0	4776.7	4787.4
G46.0	4841.9	4860.7	4879.1	4885.1	4888.8	4874.9	4673.5	4661.4	4676.8	4687.4
G47.0	4749.8	4777.2	4786.3	4795.8	4793.9	4782.1	4573.7	4561.9	4572.4	4587.9
G48.0	4649.4	4677.0	4683.7	4694.6	4694.1	4682.1	4474.7	4459.1	4472.4	4491.4
G49.0	4554.9	4570.7	4587.9	4589.8	4596.7	4582.5	4373.5	4361.5	4375.6	4383.0
G50.0	4458.4	4468.4	4484.2	4490.2	4496.0	4485.1	4270.0	4260.8	4270.3	4281.2
G51.0	4348.2	4358.2	4379.8	4390.2	4393.9	4383.5	4160.5	4153.8	4168.4	4178.2
G52.0	4238.0	4251.5	4274.7	4287.7	4292.8	4283.7	4058.0	4050.6	4060.8	4078.6
G53.0	4126.2	4143.6	4169.1	4187.0	4190.2	4183.0	3937.6	3940.6	3949.2	3967.1
G54.0	4016.2	4036.4	4060.8	4084.2	4087.2	4080.0	3830.4	3829.9	3843.9	3860.1
G55.0	3906.0	3927.4	3954.8	3979.1	3979.3	3971.9	3711.4	3710.9	3724.4	3742.5
G56.0	3802.3	3819.3	3853.1	3869.8	3868.2	3861.5	3591.7	3591.0	3605.4	3621.8
G57.0	3687.5	3708.6	3739.2	3756.1	3758.7	3746.2	3480.1	3471.3	3487.3	3500.5
G58.0	3578.9	3591.0	3619.0	3637.6	3637.4	3628.8	3361.3	3348.8	3373.6	3384.7
G59.0	3457.8	3473.8	3502.3	3515.3	3521.8	3511.4	3242.5	3232.1	3250.1	3266.2
G60.0	3337.1	3355.7	3380.3	3398.6	3405.6	3401.2	3130.2	3116.3	3138.1	3150.2
G61.0	3208.2	3231.8	3259.9	3281.2	3292.4	3282.6	3007.9	2999.1	3018.6	3027.9
G62.0	3085.9	3111.4	3138.6	3163.6	3175.7	3166.9	2885.9	2877.6	2897.7	2909.3
G63.0	2963.2	2989.4	3021.4	3045.3	3058.1	3048.1	2762.7	2757.1	2774.5	2784.8
G64.0	2839.5	2867.3	2901.9	2930.0	2938.8	2937.2	2635.3	2633.9	2653.0	2666.2
G65.0	2725.6	2742.8	2782.9	2808.2	2822.6	2813.1	2506.3	2505.6	2524.9	2536.3
G66.0	2600.3	2624.0	2661.8	2688.2	2697.3	2691.7	2371.1	2368.8	2389.9	2402.9
G67.0	2479.0	2502.2	2537.7	2559.7	2570.8	2562.7	2239.5	2236.1	2256.0	2268.8
G68.0	2356.5	2374.6	2406.4	2428.9	2435.4	2430.0	2109.1	2103.8	2123.1	2135.1
G69.0	2227.5	2242.8	2271.6	2290.1	2302.2	2296.1	1976.2	1973.4	1990.8	2001.3
G70.0	2099.6	2112.9	2139.8	2160.9	2168.1	2166.0	1848.4	1841.7	1862.5	1871.3
G71.0	1965.3	1983.6	2011.9	2027.3	2040.0	2034.2	1719.8	1717.3	1734.0	1739.3
G72.0	1831.4	1852.8	1877.6	1898.0	1907.1	1907.5	1593.2	1587.6	1605.2	1610.1
G73.0	1702.9	1724.7	1751.9	1767.6	1778.8	1777.2	1463.0	1459.3	1473.7	1481.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	1582.7	1596.0	1625.2	1640.0	1647.9	1651.2	1337.3	1329.4	1347.7	1353.3
G75.0	1452.8	1471.1	1498.1	1511.5	1525.9	1522.9	1212.0	1207.3	1220.8	1227.3
G76.0	1332.2	1348.2	1374.9	1393.4	1399.4	1399.9	1090.9	1082.5	1099.7	1107.6
G77.0	1211.8	1226.4	1251.4	1262.1	1275.3	1273.5	969.5	964.7	974.7	986.0
G78.0	1096.0	1107.8	1127.3	1143.6	1152.6	1151.2	849.1	846.6	858.4	866.1
G79.0	975.8	987.9	1011.8	1020.6	1032.0	1032.7	733.6	731.0	739.4	748.7
G80.0	861.4	876.3	890.9	905.3	911.8	916.2	620.4	618.3	633.4	636.6
G81.0	748.5	761.2	776.3	788.6	794.4	795.1	519.2	517.1	527.1	532.5
G82.0	639.6	654.5	668.4	677.7	684.0	684.2	418.1	416.5	428.0	429.7
G83.0	539.2	550.1	561.9	570.0	575.1	576.5	331.3	329.9	334.8	339.9
G84.0	445.7	453.3	465.6	472.4	475.6	477.7	248.0	248.2	256.1	258.5
G85.0	355.0	365.2	373.8	381.4	381.4	382.1	178.6	179.3	184.4	184.7
G86.0	277.0	280.5	288.1	294.4	296.5	298.6	119.7	119.0	125.3	127.6
G87.0	202.8	208.8	212.3	217.6	220.9	220.6	72.4	72.8	76.8	77.9
G88.0	142.7	147.1	149.9	154.8	155.9	154.3	39.4	39.4	42.2	43.6
G89.0	93.5	95.3	97.4	99.5	101.2	100.7	22.5	22.7	23.4	24.4
G90.0	54.1	55.0	56.6	58.9	60.1	58.7	20.9	21.1	21.8	22.5
G91.0	26.9	26.9	28.5	29.0	29.5	29.2	20.2	20.4	20.9	21.3
G92.0	23.4	23.0	22.5	22.0	21.6	21.1	19.7	20.0	20.4	20.6
G93.0	22.0	21.6	21.1	20.9	20.2	19.7	19.7	19.7	20.2	20.4
G94.0	21.1	20.6	20.2	19.7	19.5	19.0	19.3	19.5	19.7	20.0
G95.0	20.4	20.0	19.7	19.3	18.8	18.6	19.0	19.3	19.3	19.5
G96.0	19.7	19.5	19.3	18.8	18.6	18.3	19.0	19.3	19.3	19.3
G97.0	19.0	18.8	18.6	18.3	18.1	18.1	19.0	19.3	19.3	19.5
G98.0	18.8	18.6	18.3	17.9	17.9	17.6	19.3	19.5	19.5	19.3
G99.0	18.8	18.6	18.1	17.9	17.6	17.6	19.5	19.5	19.5	19.5
G100.0	18.3	18.3	18.1	17.9	17.6	17.6	19.5	19.7	19.7	19.7
G101.0	18.3	18.3	18.1	17.9	17.6	17.6	19.7	20.0	19.7	19.7
G102.0	18.1	18.1	17.9	17.9	17.9	17.6	20.0	20.0	20.0	19.7
G103.0	17.9	18.1	17.9	17.9	17.9	17.9	19.7	20.0	19.7	19.5
G104.0	17.6	17.9	17.9	17.9	17.9	17.9	19.7	20.0	20.0	19.7
G105.0	17.4	17.6	17.6	17.9	17.9	17.9	20.0	20.0	19.7	19.7
G106.0	17.2	17.6	17.6	17.6	17.9	17.9	20.0	20.2	20.0	20.0
G107.0	17.2	17.6	17.6	17.9	17.9	17.9	20.2	20.2	20.2	20.2
G108.0	17.4	17.6	17.6	17.9	17.9	17.9	20.4	20.4	20.4	20.4
G109.0	17.4	17.6	17.9	18.1	18.1	18.1	20.6	20.9	20.9	20.6
G110.0	17.6	17.9	18.1	18.3	18.3	18.3	21.1	21.1	21.1	21.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	17.9	18.3	18.3	18.6	18.6	18.6	21.6	21.6	21.6	21.6
G112.0	18.1	18.6	18.6	18.8	18.8	19.0	22.0	22.0	22.0	22.0
G113.0	18.6	18.8	18.8	19.3	19.3	19.3	22.5	22.5	22.5	22.3
G114.0	19.0	19.0	19.5	19.5	19.5	19.7	22.7	23.0	22.7	22.7
G115.0	19.3	19.5	19.7	19.7	20.0	20.2	23.2	23.2	23.4	23.2
G116.0	19.7	20.0	20.2	20.2	20.4	20.4	23.7	23.7	23.9	23.7
G117.0	20.4	20.4	20.4	20.6	20.9	20.9	24.4	24.4	24.6	24.4
G118.0	20.9	20.9	20.9	21.1	21.1	21.1	25.1	25.1	25.1	25.1
G119.0	21.6	21.6	21.6	21.6	21.8	21.6	25.8	25.8	25.5	25.5
G120.0	22.3	22.3	22.0	22.3	22.3	22.3	26.2	26.2	26.2	26.2
G121.0	23.0	23.0	23.0	23.0	23.0	23.0	26.9	26.9	26.9	26.9
G122.0	23.4	23.4	23.4	23.4	23.7	23.4	27.6	27.8	27.6	27.6
G123.0	24.1	24.1	24.1	24.1	24.1	24.1	28.3	28.3	28.1	28.3
G124.0	24.8	24.6	24.6	24.8	24.8	24.8	29.0	29.0	29.0	28.8
G125.0	25.3	25.3	25.3	25.3	25.5	25.5	29.5	29.5	29.5	29.5
G126.0	26.0	25.8	26.0	26.0	26.0	26.0	30.2	30.2	30.2	30.2
G127.0	26.5	26.5	26.5	26.7	26.7	26.7	30.9	30.9	30.9	30.6
G128.0	27.1	27.1	27.1	27.4	27.4	27.4	31.5	31.5	31.3	31.3
G129.0	27.8	27.8	27.8	27.8	27.8	28.1	32.0	32.0	32.0	31.8
G130.0	28.3	28.3	28.3	28.5	28.5	28.5	32.7	32.7	32.7	32.5
G131.0	29.0	29.0	29.0	29.0	29.2	29.2	33.2	33.4	33.2	33.2
G132.0	29.5	29.7	29.7	29.7	29.7	29.9	33.9	33.9	33.6	33.6
G133.0	30.2	30.2	30.2	30.4	30.4	30.4	34.3	34.6	34.3	34.3
G134.0	30.9	30.9	30.9	30.9	31.1	30.9	35.0	35.0	34.8	34.8
G135.0	31.5	31.3	31.3	31.5	31.5	31.5	35.5	35.5	35.5	35.5
G136.0	32.0	32.0	32.0	32.0	32.0	32.3	36.2	36.0	36.0	36.0
G137.0	32.7	32.7	32.7	32.7	32.7	32.7	36.7	36.7	36.4	36.7
G138.0	33.2	33.2	33.2	33.2	33.4	33.4	37.3	37.1	37.1	37.1
G139.0	33.9	33.9	33.9	33.9	33.9	33.9	37.6	37.6	37.6	37.6
G140.0	34.3	34.3	34.3	34.3	34.6	34.6	38.3	38.3	38.3	38.0
G141.0	35.0	34.8	34.8	35.0	35.0	35.0	38.7	38.7	38.5	38.7
G142.0	35.5	35.5	35.5	35.5	35.7	35.5	39.2	39.2	39.2	39.2
G143.0	36.0	36.2	36.0	36.2	36.2	36.2	39.7	39.9	39.4	39.7
G144.0	36.4	36.4	36.7	36.7	36.7	36.9	40.1	40.1	40.1	40.1
G145.0	37.1	37.1	37.1	37.1	37.1	37.1	40.6	40.6	40.6	40.8
G146.0	37.6	37.6	37.8	37.8	37.8	37.8	41.1	41.1	41.1	41.3
G147.0	38.0	38.0	38.3	38.3	38.3	38.3	41.5	41.3	41.5	41.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	38.7	38.5	38.7	38.7	38.7	38.7	42.0	42.0	42.0	42.2
G149.0	39.2	39.0	39.2	39.2	39.2	39.2	42.2	42.2	42.5	42.5
G150.0	39.7	39.7	39.7	39.9	39.7	39.7	42.7	42.7	42.9	42.9
G151.0	40.1	40.1	40.1	40.1	40.1	40.1	42.9	43.2	43.4	43.4
G152.0	40.6	40.6	40.6	40.8	40.6	40.6	43.4	43.4	43.8	43.8
G153.0	41.1	41.1	41.1	41.3	41.1	41.1	43.6	43.8	44.1	44.1
G154.0	41.5	41.5	41.5	41.8	41.5	41.3	44.1	44.3	44.5	44.5
G155.0	42.0	42.0	42.0	42.2	42.0	42.0	44.5	44.8	45.0	45.0
G156.0	42.5	42.5	42.5	42.7	42.7	42.2	45.0	45.2	45.5	45.5
G157.0	42.9	42.9	42.9	43.2	43.2	42.9	45.5	45.7	45.9	45.7
G158.0	43.4	43.4	43.4	43.6	43.6	43.2	45.7	46.2	46.4	46.2
G159.0	43.8	43.8	43.8	44.1	44.1	43.6	46.2	46.6	46.6	46.6
G160.0	44.3	44.5	44.3	44.5	44.5	44.1	46.6	46.9	47.1	46.9
G161.0	44.8	45.0	45.0	45.0	45.0	44.8	46.9	47.3	47.3	47.3
G162.0	45.2	45.2	45.2	45.5	45.5	45.2	47.3	47.8	47.8	47.6
G163.0	45.7	45.9	45.7	45.9	45.9	45.7	47.6	48.0	48.3	48.0
G164.0	46.2	46.4	46.4	46.4	46.4	46.2	48.0	48.5	48.5	48.3
G165.0	46.6	46.6	46.9	46.9	46.9	46.6	48.3	49.0	48.7	48.7
G166.0	47.1	47.3	47.1	47.3	47.3	47.3	49.0	49.4	49.2	49.0
G167.0	47.6	47.6	47.6	47.8	47.8	47.6	49.2	49.7	49.4	49.4
G168.0	48.0	48.0	48.0	48.0	48.3	48.3	49.4	49.9	49.9	49.7
G169.0	48.3	48.5	48.5	48.5	48.5	48.5	49.9	50.3	50.1	49.9
G170.0	48.5	48.7	49.0	48.7	49.0	49.0	50.3	50.6	50.3	50.1
G171.0	49.0	49.2	49.2	49.2	49.4	49.4	50.6	50.8	50.3	50.6
G172.0	49.4	49.4	49.7	49.7	49.9	49.9	50.8	51.0	50.6	50.6
G173.0	49.7	49.7	49.9	50.1	50.1	50.3	51.0	51.0	50.8	50.8
G174.0	49.9	49.9	50.1	50.3	50.3	50.6	51.3	51.3	50.8	50.8
G175.0	50.1	50.3	50.3	50.6	50.6	50.8	51.5	51.3	50.8	50.8
G176.0	50.3	50.3	50.6	50.8	50.8	51.0	51.5	51.3	51.0	51.0
G177.0	50.3	50.6	50.8	51.0	51.0	51.3	51.7	51.3	51.0	51.0
G178.0	50.6	50.8	50.8	51.0	51.3	51.5	51.7	51.0	51.0	51.0
G179.0	50.6	50.8	51.0	51.3	51.3	51.5	51.7	51.0	51.0	50.8
G180.0	50.8	51.0	51.0	51.3	51.5	51.5	51.7	51.0	51.0	50.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	6951.3	6953.4	6958.0	6953.6	6946.7	6945.5	6947.6	6944.8	6946.2	6946.2
G1.0	6952.0	6959.0	6958.0	6959.4	6947.8	6946.9	6946.7	6946.5	6950.4	6946.2
G2.0	6953.2	6956.0	6956.2	6952.7	6950.2	6946.5	6948.3	6944.1	6937.4	6942.0
G3.0	6949.5	6952.7	6949.5	6942.7	6944.1	6944.6	6946.5	6941.3	6933.2	6938.3
G4.0	6941.6	6938.8	6947.4	6935.5	6942.3	6941.8	6940.0	6939.3	6928.8	6930.7
G5.0	6936.0	6924.9	6935.5	6925.1	6934.1	6930.4	6923.9	6929.7	6922.5	6917.2
G6.0	6927.0	6913.3	6924.4	6912.8	6920.5	6916.3	6907.9	6906.3	6916.5	6907.9
G7.0	6909.6	6905.6	6910.3	6905.1	6902.1	6898.6	6897.7	6894.0	6899.4	6893.3
G8.0	6896.1	6894.9	6894.0	6889.1	6889.1	6882.9	6886.4	6880.6	6878.0	6876.6
G9.0	6873.6	6877.3	6876.1	6873.8	6874.5	6868.5	6872.2	6865.9	6863.9	6858.3
G10.0	6854.8	6851.3	6858.3	6855.3	6856.0	6852.3	6853.6	6850.2	6844.6	6839.3
G11.0	6832.1	6827.7	6840.4	6836.9	6838.8	6836.5	6829.5	6829.3	6827.2	6820.2
G12.0	6808.4	6805.2	6811.9	6814.0	6815.1	6815.8	6803.5	6808.6	6801.4	6795.2
G13.0	6788.0	6778.7	6785.4	6784.3	6783.1	6789.1	6778.7	6782.2	6775.0	6769.7
G14.0	6761.5	6756.9	6756.7	6755.7	6752.0	6755.5	6753.9	6753.6	6742.0	6739.3
G15.0	6728.4	6726.3	6727.7	6722.1	6724.0	6722.1	6724.2	6716.5	6716.5	6711.2
G16.0	6691.2	6687.8	6695.9	6688.0	6692.2	6686.1	6695.2	6686.6	6685.4	6682.0
G17.0	6650.6	6648.5	6660.9	6652.3	6657.1	6651.8	6658.1	6650.6	6656.2	6645.5
G18.0	6609.6	6611.7	6624.2	6615.6	6624.7	6618.4	6611.7	6617.7	6616.8	6611.2
G19.0	6572.9	6575.7	6585.5	6574.8	6583.4	6582.9	6570.4	6579.2	6571.8	6575.9
G20.0	6531.4	6541.4	6541.6	6535.3	6534.2	6538.6	6529.8	6534.6	6528.8	6536.7
G21.0	6494.7	6492.4	6497.8	6488.9	6492.0	6497.3	6492.4	6494.7	6493.6	6491.3
G22.0	6449.3	6442.5	6450.6	6448.8	6443.5	6447.9	6449.0	6453.4	6448.1	6447.2
G23.0	6402.6	6396.6	6400.8	6402.4	6398.9	6394.3	6404.3	6402.6	6395.7	6398.9
G24.0	6352.0	6347.6	6351.6	6350.9	6350.0	6346.5	6348.8	6350.2	6342.5	6348.1
G25.0	6297.8	6298.5	6304.0	6298.0	6302.9	6295.2	6292.0	6294.5	6296.6	6294.5
G26.0	6239.5	6239.3	6244.6	6242.3	6246.5	6243.0	6240.9	6238.8	6246.0	6235.6
G27.0	6185.5	6179.2	6189.0	6182.2	6186.6	6190.6	6183.4	6185.7	6192.7	6178.3
G28.0	6131.0	6124.2	6128.6	6124.0	6127.5	6133.7	6134.2	6124.7	6125.9	6116.3
G29.0	6067.6	6065.5	6073.2	6064.4	6064.8	6070.9	6073.6	6069.0	6059.3	6058.3
G30.0	6002.2	6008.5	6008.9	6004.7	6000.6	6005.0	6000.6	6004.5	6001.0	5994.8
G31.0	5934.4	5937.2	5944.9	5939.5	5937.9	5933.3	5930.3	5942.1	5934.4	5927.5
G32.0	5866.9	5862.3	5873.2	5874.8	5872.5	5862.8	5863.0	5871.1	5868.5	5859.7
G33.0	5800.3	5791.1	5799.6	5803.1	5808.0	5793.4	5795.0	5798.5	5795.7	5788.0
G34.0	5732.1	5724.3	5727.5	5725.6	5732.8	5721.7	5723.1	5726.1	5719.8	5719.8
G35.0	5660.0	5654.2	5657.7	5652.6	5656.5	5656.0	5647.7	5648.6	5651.6	5643.3
G36.0	5580.9	5580.9	5577.2	5580.9	5578.1	5582.7	5574.4	5570.2	5575.8	5562.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	5497.6	5495.7	5504.5	5500.4	5495.7	5502.5	5489.7	5494.1	5495.3	5489.7
G38.0	5411.5	5414.1	5424.3	5418.9	5411.3	5414.3	5407.8	5413.4	5407.6	5406.4
G39.0	5330.3	5333.5	5343.5	5335.9	5330.5	5324.5	5327.1	5330.8	5331.0	5321.7
G40.0	5246.1	5249.1	5253.5	5248.2	5246.5	5237.0	5242.1	5243.5	5244.2	5238.7
G41.0	5158.4	5162.3	5165.6	5159.3	5162.6	5150.3	5149.6	5158.2	5153.0	5148.9
G42.0	5069.3	5069.5	5073.2	5067.2	5068.1	5057.2	5058.2	5069.3	5052.8	5052.8
G43.0	4984.9	4979.5	4975.1	4966.3	4976.7	4966.3	4958.6	4971.2	4961.6	4965.6
G44.0	4893.9	4887.6	4885.3	4878.4	4878.4	4877.7	4861.6	4874.9	4871.2	4868.4
G45.0	4800.6	4796.5	4790.2	4778.8	4774.9	4777.2	4768.9	4773.0	4779.1	4768.6
G46.0	4701.1	4700.6	4688.8	4683.2	4666.8	4674.7	4671.4	4667.7	4674.9	4670.0
G47.0	4594.4	4592.5	4589.3	4582.1	4573.0	4567.9	4572.4	4563.3	4566.8	4560.7
G48.0	4491.6	4488.8	4493.2	4480.9	4468.6	4458.2	4465.9	4462.8	4456.1	4458.4
G49.0	4390.9	4385.6	4386.5	4376.3	4366.6	4356.1	4348.5	4358.9	4353.6	4354.0
G50.0	4283.7	4285.4	4277.2	4269.8	4263.8	4248.9	4242.0	4254.3	4241.0	4247.1
G51.0	4184.9	4174.7	4164.3	4153.3	4153.1	4136.4	4128.5	4137.6	4123.6	4134.5
G52.0	4078.6	4066.3	4055.9	4042.7	4038.3	4030.9	4016.7	4022.0	4021.6	4019.7
G53.0	3970.3	3958.7	3945.9	3926.7	3918.6	3915.5	3908.6	3904.2	3909.5	3895.4
G54.0	3867.3	3853.6	3838.8	3814.6	3797.9	3806.3	3787.0	3789.3	3792.4	3775.9
G55.0	3749.0	3739.7	3719.0	3697.2	3683.5	3680.3	3667.1	3667.8	3662.4	3654.5
G56.0	3628.3	3615.8	3607.2	3588.2	3569.2	3555.2	3548.1	3546.9	3540.6	3535.5
G57.0	3501.2	3496.3	3485.9	3469.9	3450.1	3430.2	3426.7	3423.7	3418.1	3411.9
G58.0	3382.6	3370.6	3368.7	3351.3	3332.5	3311.9	3297.9	3303.1	3288.0	3287.7
G59.0	3265.2	3251.3	3239.7	3220.7	3210.0	3187.5	3172.2	3175.4	3158.7	3155.7
G60.0	3147.1	3124.4	3113.5	3096.8	3083.1	3069.9	3045.5	3038.8	3037.4	3023.7
G61.0	3027.4	3004.7	2991.9	2966.4	2957.8	2947.9	2920.2	2907.5	2905.9	2882.9
G62.0	2906.6	2880.3	2868.7	2845.3	2828.1	2821.6	2789.6	2785.9	2773.6	2747.4
G63.0	2788.7	2764.6	2741.8	2714.0	2695.7	2691.7	2668.1	2653.9	2629.8	2615.6
G64.0	2666.2	2642.3	2622.4	2589.4	2573.6	2555.3	2539.3	2523.8	2497.5	2484.1
G65.0	2540.4	2521.4	2497.3	2469.9	2448.1	2424.2	2409.1	2388.7	2365.3	2342.6
G66.0	2405.4	2388.9	2375.0	2343.0	2321.2	2293.8	2268.1	2262.0	2227.7	2210.5
G67.0	2264.8	2257.6	2246.3	2219.1	2192.4	2164.8	2133.3	2124.5	2094.5	2070.6
G68.0	2131.9	2120.3	2113.3	2090.8	2072.5	2035.4	1992.7	1985.5	1962.5	1922.2
G69.0	1997.6	1986.9	1972.7	1952.6	1935.8	1904.5	1869.7	1849.1	1830.5	1786.2
G70.0	1870.9	1854.4	1842.1	1819.6	1804.5	1782.9	1744.9	1719.4	1697.6	1652.6
G71.0	1739.8	1722.9	1705.9	1686.9	1666.7	1650.9	1617.3	1592.7	1556.8	1521.9
G72.0	1610.1	1591.6	1580.9	1557.4	1537.7	1516.2	1491.1	1465.3	1424.7	1389.9
G73.0	1481.8	1466.5	1452.8	1427.3	1402.0	1383.0	1364.2	1341.7	1293.2	1255.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	1356.3	1337.3	1328.2	1302.0	1280.2	1255.4	1229.2	1221.7	1173.7	1119.4
G75.0	1226.1	1215.5	1201.1	1178.1	1156.3	1131.9	1106.2	1086.9	1051.9	998.8
G76.0	1103.7	1091.1	1084.6	1058.6	1039.6	1016.9	987.4	963.8	935.2	883.9
G77.0	980.5	972.6	963.0	940.3	920.1	897.6	873.5	845.0	813.2	774.4
G78.0	865.4	855.6	848.7	826.4	809.2	787.0	760.5	734.3	703.4	664.0
G79.0	749.6	741.0	736.2	713.7	700.2	683.3	656.6	632.7	594.6	559.8
G80.0	637.5	631.0	626.9	612.7	598.1	579.5	553.3	531.8	502.1	464.7
G81.0	531.8	526.4	524.1	510.0	497.2	479.8	461.9	442.4	413.9	381.0
G82.0	433.9	429.9	427.1	417.8	406.7	395.3	372.8	357.5	330.6	302.8
G83.0	342.4	339.2	339.9	330.6	320.6	309.0	294.6	282.6	260.1	235.7
G84.0	260.8	257.5	259.4	253.6	247.8	239.0	225.0	214.6	197.4	175.6
G85.0	190.2	187.7	192.1	185.4	181.0	174.7	165.2	157.8	143.6	126.9
G86.0	129.7	129.2	132.2	129.2	126.7	120.9	114.2	108.8	100.5	88.4
G87.0	81.0	81.0	83.8	82.4	81.4	78.2	74.2	71.0	65.2	57.5
G88.0	44.8	45.9	48.5	47.3	46.4	45.7	44.1	43.6	39.4	35.3
G89.0	25.3	26.0	26.7	26.7	26.7	26.5	26.0	25.3	23.9	22.0
G90.0	23.2	24.1	24.6	24.8	24.8	24.8	24.4	23.7	22.3	20.4
G91.0	22.0	22.7	23.4	23.7	23.7	23.7	23.2	22.3	21.1	19.0
G92.0	21.3	22.0	22.5	22.7	23.0	22.7	22.0	21.3	20.0	18.1
G93.0	20.9	21.6	21.8	22.3	22.3	22.0	21.3	20.4	19.0	17.2
G94.0	20.2	20.9	21.3	21.6	21.6	21.3	20.6	19.7	18.3	16.2
G95.0	20.0	20.4	21.1	21.3	21.1	20.9	20.2	19.0	17.4	15.3
G96.0	19.7	20.2	20.9	21.1	20.6	20.4	19.7	18.3	16.5	14.6
G97.0	19.7	20.2	20.6	20.9	20.6	20.0	19.0	17.4	15.8	14.1
G98.0	19.7	20.2	20.6	20.4	20.2	19.5	18.3	16.9	15.3	13.9
G99.0	19.7	20.2	20.4	20.4	19.7	19.0	17.6	16.5	15.3	14.1
G100.0	20.0	20.2	20.4	20.0	19.3	18.6	17.4	16.2	15.3	14.4
G101.0	19.7	20.0	20.0	19.7	19.0	18.1	17.2	16.2	15.5	14.6
G102.0	19.7	19.7	19.7	19.3	18.6	18.1	17.2	16.5	15.5	15.1
G103.0	19.7	19.5	19.5	19.0	18.6	17.9	17.4	16.5	16.0	15.8
G104.0	19.7	19.5	19.5	19.0	18.6	18.1	17.4	16.9	16.5	16.5
G105.0	19.7	19.7	19.5	19.0	18.8	18.3	17.9	17.2	16.9	16.9
G106.0	20.0	19.7	19.7	19.3	18.8	18.6	18.1	17.6	17.4	17.6
G107.0	20.2	20.0	19.7	19.5	19.3	18.8	18.3	18.1	18.1	18.1
G108.0	20.4	20.2	20.0	19.7	19.5	19.3	19.0	18.8	18.8	19.0
G109.0	20.6	20.6	20.4	20.2	20.0	19.5	19.5	19.5	19.5	19.5
G110.0	21.1	20.9	20.9	20.6	20.2	20.2	20.2	20.0	20.2	20.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	21.6	21.3	21.1	21.1	20.6	20.9	20.9	20.6	20.6	20.9
G112.0	21.8	21.8	21.6	21.6	21.1	21.3	21.3	21.3	21.3	21.6
G113.0	22.3	22.0	22.0	22.0	21.8	22.0	22.0	22.0	22.0	22.0
G114.0	22.5	22.5	22.5	22.5	22.5	22.5	22.7	22.7	22.7	23.0
G115.0	23.2	23.2	23.0	23.2	23.2	23.4	23.4	23.4	23.4	23.4
G116.0	23.9	23.9	23.7	23.9	23.7	23.9	24.1	24.1	24.4	24.1
G117.0	24.4	24.4	24.4	24.4	24.4	24.6	24.8	24.8	24.8	25.1
G118.0	25.1	25.1	25.1	25.3	25.1	25.3	25.3	25.3	25.5	25.5
G119.0	25.8	25.8	25.8	25.8	25.8	26.0	26.0	26.0	26.2	26.2
G120.0	26.5	26.2	26.5	26.5	26.5	26.7	26.7	26.7	26.9	26.9
G121.0	26.9	26.9	26.9	27.1	27.1	27.4	27.4	27.4	27.4	27.6
G122.0	27.6	27.6	27.6	27.6	27.8	27.8	27.8	28.1	28.3	28.3
G123.0	28.3	28.1	28.3	28.3	28.3	28.5	28.5	28.8	28.8	29.0
G124.0	29.0	28.8	29.0	29.0	29.0	29.2	29.2	29.5	29.5	29.5
G125.0	29.5	29.5	29.5	29.7	29.7	29.7	29.9	29.9	30.2	30.2
G126.0	30.2	29.9	30.2	30.2	30.2	30.6	30.6	30.6	30.9	30.9
G127.0	30.9	30.6	30.6	30.9	30.9	31.1	31.3	31.5	31.3	31.5
G128.0	31.3	31.3	31.5	31.5	31.5	31.8	31.8	31.8	32.0	32.0
G129.0	32.0	32.0	32.0	32.3	32.3	32.5	32.5	32.5	32.7	32.7
G130.0	32.5	32.7	32.7	32.7	32.7	32.9	32.9	33.2	33.2	33.4
G131.0	33.2	33.2	33.4	33.4	33.4	33.6	33.6	33.6	33.9	33.9
G132.0	33.9	33.9	33.9	33.9	33.9	34.1	34.3	34.3	34.6	34.6
G133.0	34.3	34.6	34.6	34.6	34.6	34.6	34.8	35.0	35.0	35.3
G134.0	35.0	35.0	35.0	35.0	35.0	35.3	35.3	35.5	35.5	35.7
G135.0	35.5	35.5	35.5	35.7	35.7	36.0	36.0	36.0	36.2	36.4
G136.0	36.0	36.2	36.2	36.2	36.2	36.4	36.4	36.7	36.7	36.7
G137.0	36.7	36.7	36.7	36.9	36.7	36.9	37.1	37.1	37.1	37.3
G138.0	37.3	37.1	37.1	37.3	37.3	37.6	37.6	37.8	37.8	38.0
G139.0	37.8	37.8	37.8	37.8	37.8	37.8	38.0	38.3	38.3	38.5
G140.0	38.3	38.3	38.3	38.3	38.3	38.5	38.7	38.7	39.0	39.0
G141.0	38.7	38.7	38.7	38.7	38.7	39.0	39.0	39.2	39.4	39.7
G142.0	39.2	39.2	39.2	39.2	39.2	39.4	39.7	39.7	39.9	40.1
G143.0	39.7	39.7	39.9	39.9	39.9	39.9	40.1	40.1	40.6	40.6
G144.0	40.4	40.1	40.1	40.1	40.4	40.4	40.6	40.6	40.8	41.3
G145.0	40.8	40.6	40.6	40.8	40.6	40.8	41.1	41.3	41.5	41.8
G146.0	41.1	41.1	41.1	41.1	41.1	41.3	41.5	41.8	42.0	42.0
G147.0	41.5	41.5	41.5	41.5	41.5	42.0	42.0	42.2	42.5	42.7

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	42.0	42.0	42.0	42.0	42.0	42.2	42.7	42.7	42.9	43.2
G149.0	42.7	42.5	42.5	42.5	42.5	42.7	42.9	43.2	43.4	43.6
G150.0	42.9	42.9	42.9	42.9	42.9	43.2	43.4	43.6	43.8	44.1
G151.0	43.2	43.4	43.2	43.4	43.4	43.6	44.1	44.1	44.1	44.3
G152.0	43.6	43.6	43.6	43.8	43.8	44.1	44.3	44.5	44.5	44.8
G153.0	44.1	44.3	44.1	44.3	44.3	44.5	44.8	45.0	45.0	45.2
G154.0	44.5	44.5	44.5	44.8	44.8	45.0	45.0	45.5	45.2	45.5
G155.0	45.0	45.0	45.0	45.0	45.0	45.5	45.5	45.7	45.7	45.9
G156.0	45.5	45.2	45.5	45.5	45.7	45.7	45.9	46.2	46.2	46.2
G157.0	45.7	45.7	45.9	45.9	45.9	46.2	46.4	46.4	46.6	46.6
G158.0	46.2	46.2	46.2	46.4	46.4	46.6	46.6	46.6	46.9	46.9
G159.0	46.4	46.6	46.6	46.9	46.9	47.1	46.9	47.1	47.3	47.3
G160.0	46.9	46.9	47.1	47.1	47.1	47.3	47.6	47.3	47.6	47.6
G161.0	47.3	47.3	47.6	47.3	47.3	47.6	47.8	47.8	47.8	47.8
G162.0	47.6	47.8	47.8	47.8	47.6	48.0	48.0	48.0	48.0	48.3
G163.0	48.0	48.0	48.0	48.0	48.3	48.3	48.5	48.3	48.5	48.5
G164.0	48.5	48.5	48.3	48.5	48.5	48.7	48.5	48.7	48.7	48.7
G165.0	48.7	48.7	48.7	48.7	48.7	49.0	49.0	49.0	48.7	49.0
G166.0	49.0	49.0	49.0	49.2	49.2	49.2	49.2	49.2	49.2	49.2
G167.0	49.4	49.4	49.4	49.4	49.4	49.2	49.4	49.4	49.2	49.4
G168.0	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7
G169.0	49.9	49.9	49.9	49.9	49.7	49.9	49.7	49.9	49.9	49.7
G170.0	50.1	50.1	50.1	50.1	49.9	50.1	50.1	50.1	49.9	50.1
G171.0	50.3	50.3	50.1	50.3	50.1	50.1	50.1	50.1	50.1	50.1
G172.0	50.6	50.6	50.3	50.3	50.3	50.3	50.3	50.1	50.3	50.3
G173.0	50.8	50.6	50.6	50.6	50.3	50.3	50.3	50.3	50.3	50.3
G174.0	50.8	50.6	50.3	50.3	50.6	50.6	50.6	50.3	50.6	50.6
G175.0	50.8	50.8	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6
G176.0	50.8	50.8	50.6	50.6	50.6	50.8	50.8	50.6	50.8	50.8
G177.0	51.0	50.8	50.6	50.6	50.6	50.8	50.8	50.6	50.8	50.6
G178.0	50.8	50.8	50.8	50.6	50.8	50.8	50.8	50.8	50.6	50.8
G179.0	50.8	50.6	50.6	50.6	50.6	50.6	50.6	50.8	50.8	50.6
G180.0	50.6	50.3	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	6945.5	6935.5	6930.0	6928.1	6921.6	6915.4	6917.7	6915.4	6908.9	6912.8
G1.0	6936.7	6929.0	6925.3	6926.3	6916.0	6910.3	6914.2	6916.3	6907.9	6911.4
G2.0	6931.1	6924.6	6919.5	6924.2	6913.0	6909.3	6914.4	6911.4	6903.5	6909.3
G3.0	6925.6	6919.1	6912.8	6920.0	6906.3	6907.5	6909.1	6907.5	6898.9	6899.1
G4.0	6918.8	6911.6	6910.5	6909.1	6901.9	6901.4	6901.2	6900.7	6890.1	6891.5
G5.0	6911.0	6908.4	6903.3	6898.9	6894.9	6897.7	6889.4	6892.4	6883.8	6884.3
G6.0	6900.7	6897.0	6892.4	6886.4	6884.7	6874.3	6876.9	6881.0	6871.0	6869.6
G7.0	6888.5	6885.0	6882.6	6871.5	6872.2	6858.5	6866.4	6865.9	6856.2	6856.2
G8.0	6872.7	6868.7	6865.7	6854.6	6856.7	6845.3	6851.1	6856.2	6844.1	6843.0
G9.0	6858.3	6854.3	6855.3	6839.5	6843.0	6833.7	6833.2	6829.8	6827.4	6824.2
G10.0	6837.6	6834.4	6831.8	6819.1	6827.4	6813.0	6814.7	6807.9	6806.5	6803.8
G11.0	6817.0	6813.3	6812.8	6795.2	6803.3	6795.6	6787.3	6785.7	6781.7	6783.1
G12.0	6795.4	6787.8	6786.6	6772.4	6773.1	6768.7	6761.5	6756.0	6753.0	6761.5
G13.0	6768.0	6766.2	6757.4	6750.4	6741.6	6734.2	6727.9	6733.2	6726.5	6733.9
G14.0	6741.6	6737.4	6731.8	6721.2	6713.3	6706.3	6704.0	6703.3	6699.6	6703.5
G15.0	6709.8	6703.1	6701.7	6692.9	6680.6	6679.9	6672.9	6673.4	6671.8	6678.0
G16.0	6680.3	6670.1	6670.6	6662.9	6649.3	6648.1	6642.8	6637.9	6639.5	6643.2
G17.0	6643.5	6634.4	6637.0	6628.1	6618.6	6617.9	6610.7	6602.1	6606.3	6604.2
G18.0	6603.3	6596.8	6595.2	6593.3	6583.1	6582.2	6571.5	6566.0	6567.8	6564.8
G19.0	6563.6	6559.5	6555.5	6553.9	6545.1	6542.3	6530.2	6529.1	6528.4	6524.4
G20.0	6523.0	6518.6	6508.9	6509.8	6500.5	6492.6	6485.7	6485.0	6488.9	6482.4
G21.0	6479.9	6473.6	6464.3	6459.5	6459.2	6446.9	6441.6	6438.6	6442.1	6437.9
G22.0	6433.0	6428.6	6419.3	6411.4	6414.2	6401.7	6395.9	6393.1	6397.1	6387.1
G23.0	6386.2	6382.4	6369.9	6365.5	6367.4	6357.9	6347.9	6348.3	6348.8	6340.2
G24.0	6337.4	6334.6	6322.6	6317.3	6316.3	6309.6	6299.9	6296.8	6299.1	6287.3
G25.0	6289.0	6283.8	6273.2	6267.6	6261.1	6260.2	6249.0	6247.9	6248.4	6233.7
G26.0	6236.0	6230.0	6220.5	6213.5	6205.9	6206.8	6195.5	6193.6	6193.6	6178.0
G27.0	6184.8	6176.4	6164.1	6156.7	6147.7	6146.7	6136.3	6138.8	6135.4	6120.7
G28.0	6122.1	6121.9	6102.2	6097.8	6089.6	6080.8	6074.8	6073.2	6076.9	6062.3
G29.0	6062.7	6062.0	6042.6	6037.9	6024.2	6021.7	6013.1	6015.6	6013.3	6003.1
G30.0	6000.1	5995.5	5980.6	5976.2	5966.7	5958.3	5951.1	5947.7	5948.4	5941.6
G31.0	5933.8	5931.4	5918.4	5911.0	5899.4	5895.0	5883.4	5882.5	5882.9	5875.5
G32.0	5864.4	5859.5	5853.0	5845.4	5831.0	5829.8	5818.4	5815.7	5812.2	5807.3
G33.0	5790.1	5788.0	5781.8	5781.5	5766.5	5764.6	5745.4	5743.0	5742.3	5736.5
G34.0	5715.9	5712.4	5711.3	5707.3	5699.0	5685.0	5673.4	5667.2	5666.0	5656.7
G35.0	5644.0	5639.1	5633.5	5628.4	5621.5	5606.4	5594.6	5591.8	5587.8	5580.9
G36.0	5567.9	5559.5	5557.4	5550.5	5543.8	5523.1	5517.8	5512.4	5506.2	5495.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	5489.2	5482.7	5477.4	5467.6	5459.3	5447.5	5437.3	5435.2	5426.1	5421.0
G38.0	5410.8	5399.9	5395.5	5387.8	5373.7	5369.7	5358.6	5352.1	5342.4	5333.5
G39.0	5325.9	5319.6	5310.8	5303.9	5293.6	5289.9	5276.3	5264.9	5253.0	5250.0
G40.0	5241.7	5230.5	5225.9	5216.2	5206.2	5201.5	5189.3	5183.0	5164.2	5161.4
G41.0	5152.6	5144.9	5136.1	5127.1	5118.3	5112.7	5097.4	5094.6	5071.9	5069.1
G42.0	5061.6	5053.3	5048.4	5034.0	5029.2	5016.6	5006.2	4997.4	4975.3	4973.9
G43.0	4965.1	4962.8	4952.6	4941.5	4932.2	4918.3	4909.9	4905.0	4883.7	4876.5
G44.0	4866.1	4869.5	4856.8	4848.7	4839.1	4822.0	4813.9	4809.2	4790.9	4780.2
G45.0	4765.6	4767.9	4764.7	4748.2	4742.9	4724.1	4715.0	4707.1	4688.4	4676.3
G46.0	4665.6	4670.7	4663.3	4648.2	4644.5	4625.7	4614.6	4607.1	4588.6	4573.5
G47.0	4558.7	4567.0	4557.3	4541.7	4536.9	4521.5	4507.6	4495.5	4482.8	4465.2
G48.0	4458.2	4461.5	4451.7	4440.6	4425.5	4415.7	4399.0	4392.1	4374.7	4361.5
G49.0	4352.9	4351.0	4343.8	4330.1	4316.2	4308.3	4289.8	4280.3	4265.4	4256.1
G50.0	4246.6	4236.4	4235.9	4221.5	4208.8	4200.0	4179.1	4168.7	4157.3	4145.5
G51.0	4127.8	4122.3	4117.4	4107.6	4096.0	4081.7	4065.6	4048.5	4036.6	4029.4
G52.0	4015.3	4010.2	4000.7	3992.8	3977.3	3962.6	3956.1	3939.4	3925.5	3910.2
G53.0	3898.8	3894.4	3882.4	3875.2	3865.0	3845.7	3836.7	3819.9	3803.3	3793.3
G54.0	3780.5	3776.8	3765.9	3755.2	3742.9	3726.5	3717.4	3703.9	3687.7	3677.3
G55.0	3660.3	3648.0	3642.7	3632.3	3614.6	3602.6	3589.8	3576.6	3568.9	3555.9
G56.0	3542.0	3526.0	3516.5	3505.4	3488.9	3481.5	3463.6	3452.7	3441.8	3436.4
G57.0	3411.4	3399.1	3390.5	3376.4	3364.1	3352.9	3332.7	3315.8	3308.6	3311.2
G58.0	3284.0	3272.4	3256.9	3252.2	3228.6	3223.0	3195.6	3189.8	3182.4	3185.2
G59.0	3149.9	3140.9	3127.4	3117.4	3093.6	3089.6	3065.7	3055.7	3051.1	3048.5
G60.0	3018.6	3007.5	2986.4	2981.7	2955.5	2952.5	2924.6	2926.7	2922.1	2916.5
G61.0	2882.4	2861.5	2848.6	2841.6	2817.0	2807.9	2788.5	2785.0	2782.0	2776.2
G62.0	2746.9	2733.5	2708.0	2701.2	2674.1	2668.1	2650.2	2651.1	2651.6	2642.1
G63.0	2611.2	2594.5	2563.2	2550.2	2526.5	2520.7	2502.6	2511.4	2513.3	2510.5
G64.0	2467.4	2449.0	2415.6	2400.1	2374.6	2369.7	2355.8	2364.8	2371.1	2383.1
G65.0	2323.3	2297.5	2275.3	2253.2	2230.5	2221.2	2217.0	2216.3	2228.9	2243.0
G66.0	2182.2	2153.7	2119.8	2098.0	2077.1	2074.6	2061.8	2076.4	2091.8	2109.1
G67.0	2037.5	2003.6	1970.7	1944.9	1928.0	1919.8	1913.1	1928.0	1948.4	1965.8
G68.0	1895.9	1862.8	1823.8	1796.6	1775.8	1770.4	1768.8	1791.3	1812.9	1827.0
G69.0	1757.4	1726.1	1676.9	1645.4	1624.5	1625.2	1626.6	1645.4	1679.0	1690.6
G70.0	1625.2	1580.2	1529.6	1504.8	1481.1	1483.7	1483.4	1507.1	1540.5	1557.7
G71.0	1479.0	1432.6	1393.0	1361.6	1338.7	1342.2	1344.9	1360.5	1399.7	1432.9
G72.0	1342.8	1293.2	1249.8	1220.1	1196.0	1196.9	1198.5	1227.3	1262.1	1305.5
G73.0	1205.3	1156.1	1109.2	1083.2	1056.1	1055.8	1069.1	1100.6	1135.9	1171.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	1080.4	1029.9	974.9	943.1	917.6	922.7	937.8	971.4	1017.3	1044.0
G75.0	957.3	903.2	855.2	813.2	796.2	794.6	816.7	851.7	895.5	926.4
G76.0	841.5	785.1	729.4	696.9	669.8	679.1	699.3	733.1	782.1	818.5
G77.0	722.2	673.0	618.3	582.1	558.2	565.9	589.1	632.2	672.1	712.3
G78.0	622.2	568.2	512.0	476.3	452.4	463.3	488.1	532.7	572.4	610.6
G79.0	520.8	470.0	420.6	382.1	359.6	368.9	398.8	439.6	481.0	512.0
G80.0	434.3	381.4	331.3	296.3	274.5	288.4	314.4	355.0	393.0	422.9
G81.0	345.7	303.7	258.0	220.6	202.1	212.8	243.8	280.5	314.8	340.4
G82.0	272.8	236.4	192.6	157.3	142.0	152.2	181.4	216.2	242.7	268.4
G83.0	208.1	174.5	139.0	106.3	91.9	103.2	129.9	159.4	184.4	203.5
G84.0	153.4	126.7	96.3	69.8	55.9	67.3	90.0	113.2	134.1	151.7
G85.0	109.0	88.4	66.1	45.2	35.0	43.6	59.9	77.5	94.7	107.9
G86.0	76.1	61.0	43.8	27.8	19.0	26.7	39.4	51.7	63.1	71.7
G87.0	49.2	39.7	28.8	17.4	13.2	16.5	25.3	32.9	39.9	44.3
G88.0	30.9	25.5	18.6	12.5	9.7	12.1	16.0	20.2	23.4	25.1
G89.0	19.7	16.9	13.7	10.2	7.4	10.2	12.5	15.1	17.4	19.3
G90.0	18.1	15.5	12.3	9.3	7.9	9.3	11.4	13.9	16.0	17.6
G91.0	16.9	14.1	11.1	8.8	8.6	8.8	10.4	12.8	15.1	16.9
G92.0	15.8	13.0	10.2	9.1	9.1	9.1	9.7	11.6	13.9	16.0
G93.0	14.9	12.1	9.7	9.5	9.5	9.5	9.5	10.9	13.0	15.1
G94.0	13.9	11.4	10.2	10.2	10.0	10.2	10.2	10.4	12.3	14.1
G95.0	13.2	11.4	10.7	10.7	10.7	10.7	10.7	10.9	12.3	13.7
G96.0	12.8	11.8	11.1	11.1	11.4	11.4	11.4	11.4	12.3	13.5
G97.0	12.8	12.1	11.8	11.8	11.8	11.8	11.8	11.8	12.5	13.2
G98.0	13.0	12.5	12.3	12.5	12.5	12.5	12.5	12.5	12.8	13.5
G99.0	13.5	13.0	13.2	13.2	13.2	13.2	13.0	13.0	13.2	13.7
G100.0	13.9	13.7	13.7	13.7	13.7	13.9	13.7	13.7	13.7	14.1
G101.0	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.6
G102.0	15.1	14.9	15.1	15.1	15.1	15.1	15.1	15.1	15.1	15.1
G103.0	15.5	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.5	15.8
G104.0	16.2	16.2	16.2	16.2	16.5	16.5	16.5	16.2	16.2	16.2
G105.0	16.9	16.9	17.2	16.9	17.2	16.9	16.9	16.9	16.9	16.9
G106.0	17.6	17.6	17.6	17.9	17.9	17.6	17.9	17.6	17.6	17.6
G107.0	18.1	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3
G108.0	18.8	19.0	19.0	19.0	19.3	19.3	19.0	19.0	18.8	19.0
G109.0	19.5	19.5	19.7	19.7	20.0	20.0	19.7	19.7	19.7	19.5
G110.0	20.2	20.4	20.4	20.4	20.6	20.4	20.4	20.4	20.2	20.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	20.9	21.1	21.1	21.1	21.3	21.1	21.1	21.1	21.1	20.9
G112.0	21.6	21.6	21.8	21.8	21.8	21.8	21.8	21.8	21.6	21.6
G113.0	22.3	22.3	22.5	22.5	22.7	22.7	22.7	22.3	22.3	22.3
G114.0	23.0	23.2	23.2	23.4	23.4	23.4	23.2	23.0	23.0	23.0
G115.0	23.7	23.7	23.9	24.1	24.1	24.1	23.9	23.7	23.7	23.7
G116.0	24.4	24.4	24.6	24.8	24.8	24.8	24.6	24.4	24.4	24.4
G117.0	25.1	25.1	25.3	25.5	25.5	25.5	25.3	25.1	25.1	24.8
G118.0	25.5	25.8	26.0	26.2	26.2	26.0	26.0	25.8	25.5	25.8
G119.0	26.5	26.5	26.7	26.9	26.9	26.9	26.7	26.5	26.5	26.5
G120.0	27.1	27.1	27.4	27.4	27.6	27.6	27.4	27.1	26.9	27.1
G121.0	27.6	27.6	28.1	28.1	28.3	28.1	27.8	27.8	27.6	27.6
G122.0	28.3	28.5	28.8	29.0	28.8	28.8	28.5	28.3	28.3	28.3
G123.0	29.0	29.0	29.2	29.5	29.7	29.5	29.2	29.2	29.0	29.0
G124.0	29.7	29.9	29.9	30.2	30.2	30.2	29.9	29.7	29.7	29.7
G125.0	30.4	30.6	30.6	30.9	30.9	30.6	30.6	30.4	30.4	30.2
G126.0	31.1	31.1	31.3	31.3	31.5	31.5	31.3	31.1	31.1	30.9
G127.0	31.5	31.8	32.0	32.3	32.3	32.3	32.0	31.5	31.8	31.5
G128.0	32.3	32.5	32.5	32.7	32.7	32.7	32.7	32.5	32.3	32.3
G129.0	32.9	32.9	33.2	33.2	33.4	33.4	33.2	32.9	32.9	32.7
G130.0	33.4	33.6	33.9	33.9	34.1	33.9	33.9	33.6	33.4	33.4
G131.0	34.1	34.3	34.6	34.6	34.8	34.6	34.6	34.3	34.1	33.9
G132.0	34.8	35.0	35.3	35.3	35.3	35.3	35.0	34.8	34.8	34.6
G133.0	35.3	35.5	35.7	35.7	36.0	35.7	35.7	35.5	35.5	35.3
G134.0	35.7	36.2	36.4	36.2	36.4	36.4	36.4	36.2	36.0	35.7
G135.0	36.4	36.7	37.1	37.1	37.1	36.9	36.9	36.7	36.4	36.4
G136.0	37.1	37.3	37.3	37.3	37.6	37.6	37.3	37.1	37.1	37.1
G137.0	37.6	37.8	38.0	38.0	38.0	38.0	38.0	37.8	37.8	37.6
G138.0	38.3	38.3	38.5	38.5	38.7	38.7	38.5	38.5	38.3	38.0
G139.0	38.7	39.0	39.2	39.2	39.2	39.2	39.0	39.0	39.0	38.7
G140.0	39.2	39.4	39.7	39.7	39.7	39.7	39.7	39.7	39.4	39.2
G141.0	39.9	40.1	40.1	40.4	40.4	40.1	40.1	40.1	39.9	39.9
G142.0	40.4	40.6	40.8	40.8	40.8	40.8	40.6	40.6	40.4	40.4
G143.0	40.8	41.1	41.3	41.3	41.3	41.1	41.1	41.1	41.1	41.1
G144.0	41.3	41.5	41.5	41.8	42.0	41.8	41.5	41.5	41.5	41.3
G145.0	41.8	42.0	42.2	42.2	42.2	42.2	42.0	42.0	42.0	42.0
G146.0	42.2	42.7	42.7	42.7	42.7	42.7	42.5	42.7	42.5	42.5
G147.0	42.7	43.2	43.2	43.2	43.2	43.2	42.9	43.2	43.2	42.9

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	43.4	43.4	43.6	43.6	43.6	43.6	43.4	43.4	43.4	43.4
G149.0	43.6	43.8	44.1	44.1	44.1	43.8	43.8	43.8	43.8	43.8
G150.0	44.1	44.3	44.3	44.3	44.5	44.3	44.3	44.3	44.3	44.3
G151.0	44.5	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.5
G152.0	45.0	45.0	45.0	45.2	45.2	45.2	45.2	45.0	45.2	45.0
G153.0	45.2	45.5	45.5	45.5	45.5	45.5	45.7	45.5	45.5	45.5
G154.0	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9
G155.0	46.2	46.2	46.2	46.4	46.2	46.4	46.4	46.2	46.4	46.2
G156.0	46.4	46.4	46.6	46.6	46.6	46.6	46.6	46.6	46.6	46.6
G157.0	46.6	46.6	46.9	46.9	46.9	47.1	47.1	46.9	47.1	46.9
G158.0	47.1	47.3	47.1	47.3	47.3	47.3	47.6	47.3	47.3	47.3
G159.0	47.3	47.6	47.6	47.3	47.6	47.6	47.8	47.8	47.6	47.6
G160.0	47.8	47.8	47.8	47.8	47.8	48.0	48.0	48.0	48.0	47.8
G161.0	48.0	48.0	48.0	48.0	48.3	48.3	48.5	48.3	48.3	48.3
G162.0	48.3	48.3	48.3	48.3	48.5	48.7	48.7	48.7	48.5	48.5
G163.0	48.5	48.5	48.5	48.5	48.7	49.0	49.0	48.7	48.7	48.7
G164.0	48.7	48.7	48.7	49.0	49.0	49.2	49.2	49.0	49.0	49.0
G165.0	49.0	49.0	49.2	49.2	49.2	49.4	49.4	49.4	49.2	49.2
G166.0	49.2	49.2	49.2	49.4	49.7	49.7	49.7	49.4	49.4	49.4
G167.0	49.4	49.7	49.4	49.7	49.9	50.1	49.9	49.7	49.7	49.4
G168.0	49.7	49.7	49.7	49.9	50.1	50.1	50.1	49.9	49.7	49.7
G169.0	49.9	49.9	49.9	50.1	50.3	50.3	50.3	50.1	49.9	49.9
G170.0	49.9	50.1	50.1	50.3	50.3	50.6	50.3	50.1	50.1	49.9
G171.0	50.3	50.1	50.3	50.3	50.6	50.8	50.6	50.3	50.1	50.3
G172.0	50.3	50.3	50.3	50.6	50.8	50.8	50.6	50.3	50.3	50.3
G173.0	50.6	50.6	50.6	50.8	50.8	50.8	50.8	50.6	50.3	50.3
G174.0	50.6	50.6	50.8	50.8	50.8	51.0	50.6	50.6	50.6	50.6
G175.0	50.6	50.8	50.8	50.8	51.0	51.0	50.8	50.6	50.6	50.6
G176.0	50.6	50.8	50.8	51.0	51.3	51.0	50.8	50.6	50.6	50.8
G177.0	50.6	50.8	51.0	51.0	51.0	51.0	50.6	50.6	50.6	50.8
G178.0	50.8	51.0	51.0	51.0	51.3	51.0	50.8	50.6	50.6	50.6
G179.0	50.8	51.0	51.0	51.0	51.3	51.0	50.6	50.8	50.6	50.6
G180.0	50.8	50.8	50.8	51.0	51.0	50.8	50.6	50.6	50.6	50.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	6911.9	6931.8	6920.9	6929.7	6934.1	6936.0	6949.0	6954.8	6959.7	6960.8
G1.0	6909.8	6928.4	6920.5	6929.3	6930.4	6934.6	6948.5	6954.8	6946.5	6958.7
G2.0	6913.5	6912.6	6913.7	6924.4	6926.7	6929.3	6940.6	6947.4	6941.8	6951.8
G3.0	6910.3	6904.2	6905.9	6917.0	6918.1	6921.2	6931.4	6939.0	6931.8	6945.3
G4.0	6902.8	6896.3	6898.9	6905.9	6906.5	6912.6	6917.9	6920.5	6926.0	6932.8
G5.0	6891.5	6891.0	6891.7	6899.1	6895.4	6899.4	6903.3	6907.0	6915.1	6920.7
G6.0	6875.0	6882.0	6881.0	6887.0	6885.0	6886.8	6891.5	6896.6	6902.6	6907.9
G7.0	6861.8	6870.8	6865.0	6870.8	6871.7	6872.7	6878.9	6880.1	6890.1	6895.4
G8.0	6845.1	6848.8	6848.8	6856.2	6854.8	6856.2	6863.2	6865.5	6873.6	6878.9
G9.0	6821.6	6825.8	6833.9	6836.7	6836.5	6840.6	6843.9	6847.4	6850.4	6855.7
G10.0	6799.8	6805.9	6812.6	6817.0	6815.6	6821.9	6821.2	6828.6	6824.2	6834.6
G11.0	6779.4	6784.3	6792.2	6792.6	6791.5	6797.3	6800.5	6803.5	6801.2	6807.2
G12.0	6757.8	6762.9	6770.6	6767.1	6766.6	6775.2	6771.3	6777.1	6774.3	6782.4
G13.0	6735.1	6744.1	6743.9	6741.1	6738.8	6746.2	6742.5	6753.2	6746.7	6754.8
G14.0	6707.7	6709.6	6711.0	6709.6	6708.0	6715.6	6716.5	6723.3	6714.9	6723.5
G15.0	6674.1	6669.0	6675.9	6677.8	6675.2	6685.4	6684.0	6687.1	6685.7	6687.5
G16.0	6640.4	6635.6	6640.0	6644.1	6642.5	6651.1	6649.0	6649.5	6650.4	6648.5
G17.0	6600.3	6601.5	6598.0	6605.4	6604.7	6614.2	6612.1	6608.2	6611.4	6608.2
G18.0	6562.3	6565.5	6561.3	6567.8	6566.0	6576.4	6572.0	6565.3	6574.8	6568.7
G19.0	6514.5	6523.5	6525.4	6525.1	6523.0	6532.3	6527.0	6524.0	6528.6	6527.7
G20.0	6477.3	6486.6	6478.7	6482.9	6477.3	6485.9	6482.9	6479.4	6483.1	6483.4
G21.0	6431.6	6439.3	6435.3	6436.3	6432.3	6440.7	6441.4	6438.6	6431.6	6439.8
G22.0	6386.6	6388.7	6388.0	6388.5	6384.8	6389.9	6385.7	6389.4	6383.4	6391.3
G23.0	6343.0	6339.8	6337.2	6333.7	6333.7	6340.5	6343.2	6338.8	6331.2	6342.1
G24.0	6291.5	6285.5	6284.1	6277.8	6280.8	6284.3	6287.1	6285.0	6279.4	6289.6
G25.0	6239.1	6240.7	6231.9	6228.2	6226.5	6230.5	6237.0	6236.3	6226.3	6234.9
G26.0	6183.9	6179.7	6174.8	6174.6	6167.6	6177.4	6179.2	6176.4	6173.4	6176.7
G27.0	6118.2	6123.1	6118.0	6111.9	6111.2	6115.6	6118.9	6121.4	6114.9	6120.5
G28.0	6059.7	6062.7	6056.3	6049.8	6050.2	6055.1	6059.0	6061.1	6054.4	6058.8
G29.0	5993.4	5994.8	5995.2	5985.5	5986.6	5992.2	5993.6	5995.7	5988.5	5994.3
G30.0	5926.8	5922.4	5928.6	5916.6	5921.5	5922.6	5928.0	5926.6	5922.4	5923.5
G31.0	5858.8	5856.0	5860.4	5849.8	5851.6	5856.5	5857.6	5850.7	5852.8	5856.5
G32.0	5792.0	5781.8	5792.0	5782.5	5782.3	5789.2	5782.0	5778.1	5786.2	5788.5
G33.0	5719.8	5718.2	5719.4	5708.7	5711.0	5714.3	5706.1	5707.5	5712.6	5715.4
G34.0	5647.0	5642.1	5639.8	5637.5	5637.3	5634.9	5630.0	5632.4	5636.3	5641.2
G35.0	5567.0	5566.3	5558.6	5557.7	5558.6	5553.5	5553.0	5560.9	5556.7	5563.9
G36.0	5484.4	5491.5	5477.9	5479.0	5476.0	5475.3	5475.5	5483.2	5476.2	5485.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	5408.7	5406.6	5402.7	5393.2	5395.3	5395.0	5397.1	5402.0	5392.0	5401.1
G38.0	5319.4	5325.9	5320.6	5313.1	5310.4	5315.5	5310.8	5313.8	5310.6	5315.7
G39.0	5231.2	5240.5	5238.4	5222.2	5226.1	5226.6	5224.5	5228.0	5226.1	5235.6
G40.0	5146.8	5150.7	5148.0	5132.2	5140.3	5138.0	5131.0	5135.6	5138.0	5145.9
G41.0	5056.1	5064.9	5055.6	5043.3	5051.2	5043.8	5041.2	5044.0	5049.1	5057.0
G42.0	4967.0	4969.8	4959.1	4954.9	4956.8	4946.3	4942.9	4950.3	4960.3	4969.1
G43.0	4871.2	4870.2	4865.1	4859.1	4857.7	4851.0	4852.6	4856.5	4871.4	4874.9
G44.0	4777.0	4767.7	4768.2	4761.4	4759.3	4753.8	4757.0	4766.1	4775.6	4778.6
G45.0	4672.8	4663.3	4666.5	4660.7	4657.7	4655.4	4655.9	4667.5	4674.4	4674.2
G46.0	4571.0	4564.9	4562.8	4556.3	4555.4	4558.0	4560.5	4573.0	4569.8	4571.0
G47.0	4458.2	4460.0	4457.5	4452.9	4452.2	4451.9	4456.8	4461.5	4460.3	4469.8
G48.0	4350.8	4358.4	4349.4	4350.1	4349.9	4350.5	4349.2	4358.7	4351.0	4365.9
G49.0	4239.4	4254.5	4242.9	4245.0	4245.9	4237.1	4242.4	4247.3	4244.1	4265.2
G50.0	4132.0	4142.7	4131.8	4138.0	4137.1	4128.3	4135.3	4134.3	4139.0	4156.4
G51.0	4017.6	4022.3	4021.3	4028.3	4023.9	4015.3	4018.6	4021.8	4031.3	4055.0
G52.0	3909.3	3905.3	3912.8	3916.7	3908.4	3901.2	3907.4	3916.7	3924.8	3950.8
G53.0	3793.0	3791.2	3802.6	3797.4	3792.1	3789.8	3794.0	3804.2	3817.6	3835.3
G54.0	3672.6	3672.2	3684.0	3681.0	3677.3	3673.6	3681.9	3695.1	3706.0	3724.4
G55.0	3546.4	3555.5	3562.7	3561.7	3556.9	3560.8	3563.1	3581.4	3590.3	3603.5
G56.0	3419.5	3438.1	3439.7	3436.0	3443.2	3442.7	3448.5	3463.8	3471.3	3485.4
G57.0	3293.1	3313.9	3310.9	3318.6	3323.9	3328.8	3331.6	3340.4	3350.6	3360.4
G58.0	3168.9	3188.9	3191.0	3195.9	3206.5	3199.8	3206.3	3212.3	3225.1	3239.5
G59.0	3042.5	3058.8	3061.5	3074.1	3086.1	3081.0	3081.9	3084.7	3106.8	3121.6
G60.0	2917.2	2924.6	2939.5	2951.3	2962.0	2954.4	2951.8	2968.0	2983.4	3007.9
G61.0	2790.6	2794.3	2813.1	2828.8	2835.1	2824.2	2829.8	2843.2	2862.0	2881.5
G62.0	2652.5	2668.1	2691.9	2700.1	2705.9	2705.4	2709.1	2724.7	2740.2	2764.3
G63.0	2515.9	2533.3	2563.6	2572.0	2576.4	2575.0	2584.8	2601.5	2619.3	2650.4
G64.0	2379.0	2406.4	2437.2	2439.8	2452.5	2453.7	2461.1	2484.1	2498.5	2526.8
G65.0	2249.8	2282.2	2297.5	2313.8	2326.8	2334.0	2343.9	2365.8	2380.6	2398.7
G66.0	2111.9	2152.5	2164.1	2182.0	2204.7	2211.0	2221.9	2236.8	2247.7	2265.3
G67.0	1984.1	2014.7	2031.4	2055.6	2079.0	2088.5	2094.3	2105.0	2118.4	2130.0
G68.0	1854.6	1880.2	1903.1	1924.7	1956.5	1958.6	1965.1	1973.7	1982.9	2000.1
G69.0	1721.2	1744.4	1777.2	1803.6	1827.5	1828.4	1832.6	1841.0	1852.3	1864.6
G70.0	1590.4	1621.3	1648.9	1682.7	1696.7	1695.9	1701.1	1715.7	1723.3	1741.0
G71.0	1455.1	1498.1	1531.2	1552.1	1563.0	1567.9	1576.2	1589.2	1597.3	1606.4
G72.0	1323.3	1371.6	1409.0	1419.2	1436.8	1438.4	1450.7	1461.6	1469.3	1481.1
G73.0	1205.5	1247.3	1282.5	1293.4	1306.2	1316.6	1325.2	1339.1	1344.9	1351.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	1083.5	1131.7	1158.4	1168.1	1184.8	1190.7	1205.0	1215.5	1216.9	1225.0
G75.0	972.1	1010.2	1037.8	1048.7	1068.8	1068.8	1085.8	1094.8	1092.3	1103.9
G76.0	858.4	895.1	921.3	935.0	953.1	957.0	968.6	978.4	975.1	983.9
G77.0	743.1	780.0	810.2	822.0	836.8	841.7	852.2	855.6	860.5	864.7
G78.0	638.5	672.8	699.0	716.7	729.7	728.5	741.7	748.0	745.0	748.2
G79.0	540.1	572.6	597.9	612.5	622.0	624.8	630.6	633.1	634.1	636.6
G80.0	448.5	481.2	502.8	512.7	524.3	524.6	530.6	534.8	529.2	530.8
G81.0	364.9	391.9	408.8	419.7	430.1	431.5	432.2	435.2	432.0	432.9
G82.0	288.6	313.4	327.8	333.9	345.2	341.3	344.5	346.1	336.2	340.1
G83.0	222.7	240.6	250.8	258.2	264.3	265.2	265.0	263.6	258.9	256.8
G84.0	164.3	178.6	188.9	190.2	195.6	192.8	193.0	191.4	185.1	185.8
G85.0	116.2	125.8	131.8	134.6	135.9	135.3	134.1	131.8	126.2	125.3
G86.0	76.6	83.8	87.5	87.2	88.4	85.4	84.7	82.4	77.7	77.7
G87.0	46.2	49.7	50.6	50.8	51.0	48.3	46.6	45.0	41.5	40.6
G88.0	24.6	25.8	25.5	25.3	25.1	24.6	24.4	23.9	23.0	22.3
G89.0	20.6	21.8	22.5	23.0	23.2	23.0	22.7	22.3	21.6	20.9
G90.0	19.3	20.6	21.6	21.8	21.8	21.8	21.6	20.9	20.4	19.7
G91.0	18.3	19.3	20.0	20.2	20.4	20.2	20.2	19.7	19.3	18.6
G92.0	17.6	18.8	19.5	20.0	20.2	20.0	19.7	19.5	18.8	18.3
G93.0	16.9	18.1	19.0	19.5	20.0	20.0	19.7	19.5	19.0	18.3
G94.0	16.0	17.4	18.3	19.3	19.5	19.7	19.7	19.3	18.8	18.3
G95.0	15.1	16.5	17.6	18.6	19.3	19.5	19.5	19.3	18.8	18.3
G96.0	14.6	15.8	16.9	17.9	18.8	19.3	19.3	19.3	19.0	18.6
G97.0	14.1	15.3	16.2	17.4	18.1	18.8	19.0	19.0	19.0	18.6
G98.0	14.4	15.1	16.0	16.9	17.6	18.1	18.6	18.8	18.8	18.6
G99.0	14.4	15.1	16.0	16.5	17.4	17.9	18.3	18.6	18.6	18.6
G100.0	14.4	15.3	16.0	16.7	17.2	17.9	18.1	18.3	18.3	18.3
G101.0	14.9	15.3	16.2	16.7	17.4	17.9	18.1	18.3	18.3	18.3
G102.0	15.3	15.8	16.5	16.9	17.4	17.9	18.3	18.3	18.3	18.3
G103.0	15.8	16.0	16.7	17.2	17.6	18.1	18.3	18.6	18.6	18.6
G104.0	16.5	16.5	16.9	17.4	17.9	18.3	18.6	18.8	19.0	19.0
G105.0	17.2	17.2	17.4	17.9	18.1	18.6	18.8	19.0	19.3	19.3
G106.0	17.6	17.9	17.9	18.1	18.6	19.0	19.3	19.3	19.5	19.5
G107.0	18.3	18.3	18.6	18.8	18.8	19.3	19.5	19.7	20.0	20.0
G108.0	19.0	19.0	19.0	19.3	19.5	19.7	20.0	20.0	20.2	20.2
G109.0	19.7	19.5	19.7	20.0	20.0	20.2	20.2	20.4	20.4	20.6
G110.0	20.2	20.2	20.4	20.4	20.6	20.6	20.6	20.9	20.9	21.1

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	20.9	20.9	20.9	21.1	21.3	21.3	21.3	21.3	21.3	21.6
G112.0	21.6	21.6	21.8	21.8	22.0	22.0	22.0	22.0	22.0	22.0
G113.0	22.3	22.3	22.3	22.3	22.5	22.7	22.7	22.7	22.7	22.7
G114.0	23.0	23.0	23.0	23.2	23.2	23.2	23.4	23.4	23.2	23.4
G115.0	23.7	23.7	23.7	23.7	23.9	23.9	23.9	23.9	24.1	23.9
G116.0	24.4	24.4	24.4	24.6	24.4	24.6	24.6	24.6	24.6	24.8
G117.0	24.8	25.1	25.1	25.1	25.1	25.3	25.3	25.3	25.5	25.3
G118.0	25.8	25.8	25.8	25.8	25.8	26.0	26.0	26.0	26.0	26.0
G119.0	26.2	26.2	26.2	26.5	26.5	26.7	26.5	26.7	26.7	26.7
G120.0	26.9	26.9	26.9	27.1	27.1	27.1	27.1	27.4	27.4	27.4
G121.0	27.6	27.6	27.6	27.8	27.8	27.8	28.1	27.8	27.8	27.8
G122.0	28.3	28.3	28.3	28.3	28.5	28.5	28.5	28.5	28.5	28.5
G123.0	29.0	28.8	29.0	29.0	29.2	29.0	29.2	29.2	29.2	29.5
G124.0	29.7	29.5	29.7	29.7	29.9	29.7	29.9	29.9	29.9	29.9
G125.0	30.2	30.2	30.2	30.4	30.4	30.4	30.6	30.4	30.6	30.6
G126.0	30.9	30.9	30.9	31.1	30.9	31.1	31.1	31.3	31.3	31.1
G127.0	31.5	31.5	31.5	31.5	31.8	31.8	31.8	31.8	32.0	31.8
G128.0	32.3	32.3	32.3	32.3	32.3	32.3	32.5	32.5	32.5	32.5
G129.0	32.9	32.7	32.7	32.9	32.9	32.9	32.9	32.9	33.2	33.2
G130.0	33.4	33.4	33.4	33.6	33.4	33.6	33.6	33.6	33.9	33.6
G131.0	34.1	33.9	34.1	34.3	34.1	34.3	34.1	34.3	34.3	34.3
G132.0	34.6	34.6	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8
G133.0	35.0	35.0	35.3	35.3	35.3	35.5	35.3	35.5	35.5	35.5
G134.0	35.7	35.7	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.2
G135.0	36.4	36.4	36.4	36.4	36.7	36.4	36.4	36.7	36.4	36.7
G136.0	36.9	36.9	36.9	37.1	37.1	36.9	37.1	37.1	37.1	37.1
G137.0	37.6	37.6	37.6	37.6	37.6	37.6	37.6	37.6	37.6	37.8
G138.0	38.0	38.0	38.0	38.3	38.3	38.3	38.0	38.0	38.0	38.3
G139.0	38.7	38.7	38.7	38.7	38.7	38.7	38.5	38.7	38.5	38.7
G140.0	39.2	39.2	39.2	39.2	39.2	39.2	39.2	39.0	39.0	39.2
G141.0	39.9	39.7	39.7	39.7	39.7	39.7	39.7	39.4	39.7	39.7
G142.0	40.4	40.4	40.4	40.1	40.1	40.1	39.9	40.1	40.1	40.1
G143.0	40.8	40.8	40.8	40.6	40.6	40.6	40.6	40.6	40.6	40.6
G144.0	41.3	41.3	41.1	41.1	41.1	41.1	40.8	41.1	41.1	41.1
G145.0	41.8	41.8	41.5	41.5	41.5	41.5	41.3	41.5	41.5	41.5
G146.0	42.5	42.2	42.0	42.0	41.8	41.8	41.8	41.8	42.0	42.0
G147.0	42.9	42.7	42.5	42.7	42.5	42.5	42.2	42.2	42.5	42.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	43.2	43.2	43.2	43.2	42.9	42.7	42.7	42.5	42.7	42.7
G149.0	43.6	43.6	43.4	43.4	43.4	43.2	43.2	43.2	43.2	43.2
G150.0	44.1	43.8	43.8	43.8	43.8	43.6	43.6	43.6	43.4	43.6
G151.0	44.5	44.3	44.3	44.3	44.1	44.1	43.8	43.8	43.8	44.1
G152.0	45.0	45.0	44.8	44.8	44.5	44.3	44.3	44.3	44.3	44.3
G153.0	45.2	45.2	45.0	45.2	45.0	44.8	44.8	44.8	44.5	44.5
G154.0	45.7	45.7	45.5	45.5	45.2	45.2	45.0	45.2	45.2	45.2
G155.0	46.2	45.9	45.9	45.7	45.7	45.7	45.5	45.5	45.5	45.5
G156.0	46.4	46.4	46.2	46.2	46.2	45.9	45.9	45.9	45.7	45.7
G157.0	46.9	46.6	46.6	46.6	46.4	46.4	46.4	46.4	46.2	46.4
G158.0	47.1	47.1	46.9	46.9	46.9	46.9	46.6	46.6	46.6	46.6
G159.0	47.3	47.3	47.3	47.3	47.1	47.1	47.1	46.9	46.9	47.1
G160.0	47.6	47.8	47.6	47.6	47.6	47.6	47.6	47.6	47.3	47.3
G161.0	48.0	47.8	48.0	47.8	48.0	47.8	47.8	47.8	47.8	47.8
G162.0	48.3	48.3	48.3	48.3	48.3	48.3	48.0	48.0	48.0	48.0
G163.0	48.5	48.5	48.5	48.5	48.5	48.3	48.3	48.5	48.5	48.3
G164.0	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7
G165.0	49.0	49.0	49.0	49.0	49.0	49.0	49.2	49.2	49.0	49.0
G166.0	49.2	49.2	49.2	49.4	49.4	49.2	49.4	49.4	49.2	49.4
G167.0	49.4	49.4	49.7	49.7	49.7	49.4	49.7	49.4	49.7	49.7
G168.0	49.7	49.4	49.7	49.7	49.7	49.7	49.9	49.9	49.9	49.9
G169.0	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	50.1
G170.0	49.9	50.1	50.1	49.9	49.9	50.1	50.1	50.1	50.3	50.3
G171.0	50.1	50.1	50.1	50.3	50.1	50.1	50.3	50.3	50.3	50.3
G172.0	50.3	50.3	50.3	50.3	50.3	50.6	50.3	50.3	50.6	50.6
G173.0	50.6	50.3	50.3	50.3	50.3	50.6	50.6	50.6	50.8	50.8
G174.0	50.6	50.6	50.6	50.6	50.6	50.6	50.8	50.6	50.8	51.0
G175.0	50.6	50.6	50.6	50.6	50.6	50.6	50.8	50.8	50.8	51.0
G176.0	50.6	50.6	50.8	50.6	50.8	50.6	50.8	50.8	51.0	51.3
G177.0	50.8	50.6	50.8	50.6	50.8	50.8	50.8	51.0	51.0	51.3
G178.0	50.6	50.8	50.8	50.8	50.6	50.6	50.8	50.8	51.0	51.3
G179.0	50.6	50.6	50.6	50.6	50.6	50.6	50.8	50.8	51.0	51.3
G180.0	50.3	50.6	50.6	50.6	50.6	50.6	50.8	51.0	51.0	51.3

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	6954.1	6953.2	6963.9						
G1.0	6951.3	6949.7	6962.2						
G2.0	6947.6	6948.3	6958.5						
G3.0	6936.9	6938.3	6951.3						
G4.0	6930.4	6933.5	6942.7						
G5.0	6916.3	6917.7	6934.4						
G6.0	6906.1	6905.6	6920.2						
G7.0	6893.3	6892.9	6907.7						
G8.0	6877.1	6875.7	6894.0						
G9.0	6856.9	6858.5	6878.9						
G10.0	6833.9	6834.2	6871.5						
G11.0	6809.1	6807.7	6844.4						
G12.0	6784.0	6780.3	6822.1						
G13.0	6752.3	6748.1	6796.1						
G14.0	6722.6	6717.0	6768.0						
G15.0	6685.9	6683.8	6734.4						
G16.0	6647.6	6644.4	6701.0						
G17.0	6608.0	6604.9	6663.6						
G18.0	6566.9	6566.7	6621.4						
G19.0	6522.6	6521.4	6582.7						
G20.0	6476.6	6475.5	6540.4						
G21.0	6430.5	6428.1	6502.2						
G22.0	6379.7	6380.1	6454.6						
G23.0	6329.3	6324.7	6410.8						
G24.0	6276.4	6273.6	6364.1						
G25.0	6221.2	6222.1	6317.7						
G26.0	6166.5	6162.5	6263.7						
G27.0	6107.0	6105.2	6205.9						
G28.0	6045.3	6041.9	6149.7						
G29.0	5978.3	5975.3	6090.1						
G30.0	5911.7	5908.0	6022.4						
G31.0	5842.6	5841.2	5956.5						
G32.0	5771.3	5772.3	5888.3						
G33.0	5701.5	5705.5	5827.3						
G34.0	5626.3	5624.7	5760.7						
G35.0	5548.6	5548.6	5692.9						
G36.0	5466.0	5465.3	5615.2						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	5382.5	5382.7	5534.9						
G38.0	5302.7	5299.7	5450.0						
G39.0	5216.9	5217.5	5367.9						
G40.0	5132.2	5133.6	5282.5						
G41.0	5044.9	5044.7	5201.1						
G42.0	4960.7	4948.7	5116.4						
G43.0	4865.6	4854.5	5028.9						
G44.0	4767.9	4759.3	4940.1						
G45.0	4671.2	4656.8	4857.0						
G46.0	4566.3	4552.9	4758.2						
G47.0	4463.5	4448.2	4656.6						
G48.0	4361.7	4344.0	4554.9						
G49.0	4259.6	4242.9	4453.3						
G50.0	4156.6	4139.4	4348.9						
G51.0	4050.1	4034.3	4246.8						
G52.0	3942.0	3927.8	4144.8						
G53.0	3830.4	3813.5	4043.6						
G54.0	3712.3	3698.9	3934.3						
G55.0	3596.5	3578.0	3828.3						
G56.0	3472.9	3459.2	3713.0						
G57.0	3350.8	3336.9	3594.7						
G58.0	3234.6	3219.1	3477.5						
G59.0	3115.6	3100.3	3361.1						
G60.0	2997.5	2987.1	3240.9						
G61.0	2879.6	2861.3	3122.3						
G62.0	2759.9	2747.2	3007.7						
G63.0	2641.6	2627.2	2886.6						
G64.0	2513.3	2498.9	2766.9						
G65.0	2384.1	2368.5	2649.7						
G66.0	2250.7	2234.2	2530.7						
G67.0	2114.7	2098.3	2398.9						
G68.0	1981.6	1970.7	2272.3						
G69.0	1853.7	1838.4	2136.3						
G70.0	1723.8	1710.3	2004.1						
G71.0	1597.1	1579.5	1873.0						
G72.0	1464.6	1449.6	1747.7						
G73.0	1336.1	1324.8	1618.9						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	1209.9	1201.3	1494.8						
G75.0	1087.9	1078.6	1366.0						
G76.0	965.1	959.1	1245.9						
G77.0	845.0	837.1	1122.2						
G78.0	729.4	725.0	1003.0						
G79.0	622.0	614.3	890.4						
G80.0	516.7	510.2	774.9						
G81.0	420.2	412.3	666.1						
G82.0	327.4	324.3	561.2						
G83.0	247.3	243.4	460.1						
G84.0	176.6	174.7	370.5						
G85.0	119.9	116.0	285.4						
G86.0	70.5	70.3	210.7						
G87.0	36.9	35.7	147.3						
G88.0	21.3	20.6	93.7						
G89.0	20.0	19.5	52.4						
G90.0	19.0	18.6	24.4						
G91.0	17.9	17.6	18.6						
G92.0	17.9	17.4	17.6						
G93.0	17.9	17.6	16.7						
G94.0	17.9	17.6	16.0						
G95.0	18.1	17.9	16.0						
G96.0	18.1	18.1	16.0						
G97.0	18.3	18.1	16.0						
G98.0	18.3	18.3	16.2						
G99.0	18.3	18.3	16.5						
G100.0	18.1	18.1	16.5						
G101.0	18.1	18.1	16.5						
G102.0	18.3	18.3	16.5						
G103.0	18.6	18.6	16.5						
G104.0	18.8	18.8	16.5						
G105.0	19.3	19.3	16.5						
G106.0	19.5	19.5	16.7						
G107.0	20.0	19.7	17.2						
G108.0	20.2	20.4	17.4						
G109.0	20.6	20.6	17.6						
G110.0	21.1	21.1	17.9						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G111.0	21.6	21.6	18.3						
G112.0	22.3	22.3	18.8						
G113.0	22.7	22.7	19.0						
G114.0	23.4	23.2	19.7						
G115.0	24.1	24.1	20.2						
G116.0	24.8	24.6	20.6						
G117.0	25.5	25.3	21.3						
G118.0	26.0	26.0	22.0						
G119.0	26.7	26.7	22.5						
G120.0	27.4	27.4	23.4						
G121.0	28.1	28.1	23.9						
G122.0	28.8	28.8	24.6						
G123.0	29.2	29.5	25.3						
G124.0	29.9	29.9	26.0						
G125.0	30.6	30.6	26.5						
G126.0	31.3	31.3	26.9						
G127.0	32.0	32.0	27.6						
G128.0	32.5	32.5	28.3						
G129.0	33.2	33.4	29.0						
G130.0	33.9	33.9	29.5						
G131.0	34.3	34.6	30.2						
G132.0	35.0	35.0	30.9						
G133.0	35.7	35.5	31.3						
G134.0	36.2	36.2	32.0						
G135.0	36.7	36.7	32.5						
G136.0	37.1	37.3	33.4						
G137.0	37.8	37.8	33.6						
G138.0	38.3	38.3	34.3						
G139.0	39.0	39.0	35.0						
G140.0	39.4	39.2	35.5						
G141.0	39.9	39.9	36.0						
G142.0	40.1	40.4	36.4						
G143.0	40.8	40.6	37.1						
G144.0	41.1	41.1	37.6						
G145.0	41.5	41.5	38.0						
G146.0	42.0	42.0	38.5						
G147.0	42.5	42.5	39.0						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	42.7	42.9	39.4							
G149.0	43.2	43.2	39.9							
G150.0	43.6	43.6	40.4							
G151.0	43.8	43.8	40.8							
G152.0	44.3	44.3	41.1							
G153.0	44.8	44.8	41.5							
G154.0	45.0	45.2	42.0							
G155.0	45.5	45.5	42.5							
G156.0	45.9	45.9	42.9							
G157.0	46.2	46.4	43.4							
G158.0	46.6	46.6	43.6							
G159.0	47.1	47.1	44.3							
G160.0	47.6	47.6	44.5							
G161.0	47.8	48.0	45.0							
G162.0	48.0	48.3	45.5							
G163.0	48.5	48.5	45.9							
G164.0	48.7	48.7	46.2							
G165.0	49.0	49.2	46.6							
G166.0	49.4	49.4	47.1							
G167.0	49.7	49.7	47.3							
G168.0	49.9	49.9	47.8							
G169.0	50.1	50.1	48.3							
G170.0	50.3	50.3	48.5							
G171.0	50.6	50.8	49.0							
G172.0	50.8	51.0	49.4							
G173.0	50.8	51.0	49.7							
G174.0	51.0	51.3	50.1							
G175.0	51.3	51.5	50.3							
G176.0	51.3	51.5	50.8							
G177.0	51.5	51.7	51.0							
G178.0	51.5	51.5	51.0							
G179.0	51.7	51.5	51.5							
G180.0	51.5	51.5	51.5							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector: