

Report No.:

Test Time: 2019-04-11 15:14

Luminaire Property

Luminaire Manufacturer:
Luminaire Description: EG50 MIN
Luminous Width (mm): 130
Voltage: 229.5 V
Power: 46.62 W

Luminous Length (mm): 250
Luminous Height (mm): 130
Current: 0.208 A
Power Factor: 0.973


Photometric Results

CIE Class: Direct
Measurement Flux: 6630 lm
Downward Ratio: 99%
Horizontal Diffuse Angle(50%): H116.1
Vertical Diffuse Angle(50%): V114.8
Luminaire Efficacy Rating (LER): 142
Max. Intensity: 2283.83 cd


Total Rated Lamp Lumens: 6630.0 lm
Efficiency: 100%
Upward Ratio: 1%

Central Intensity: 2283.4 cd
Pos of Max. Intensity: H175 V1

Picture Of Luminaire





Luminous Intensity Distribution Curve

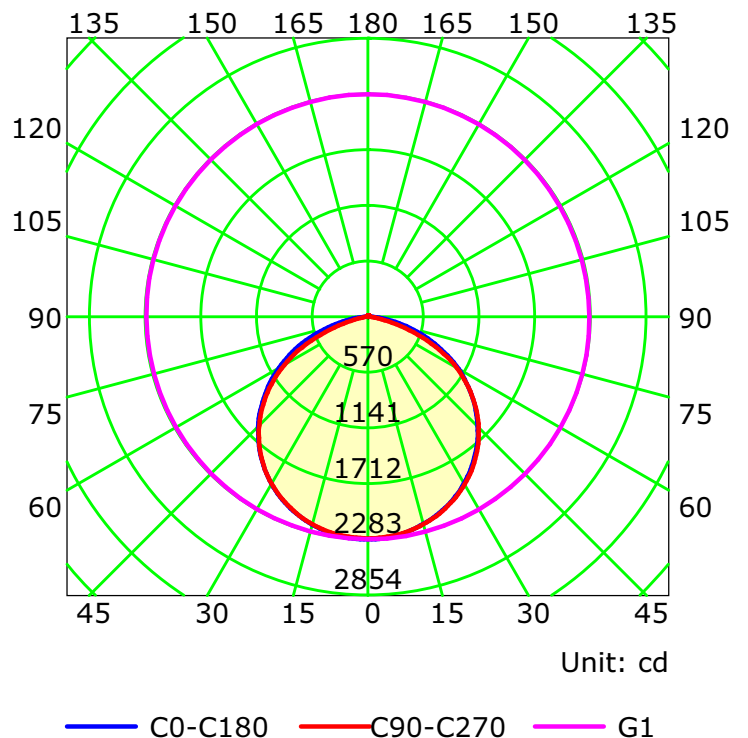

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve

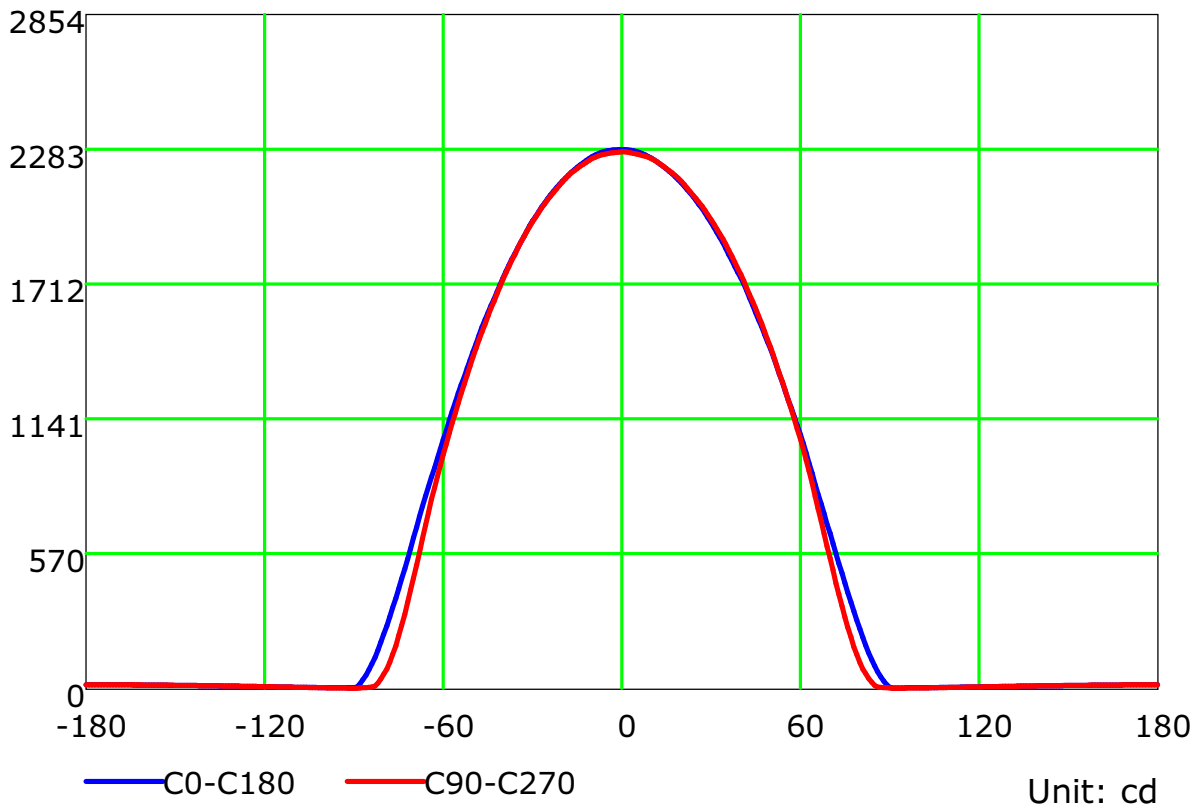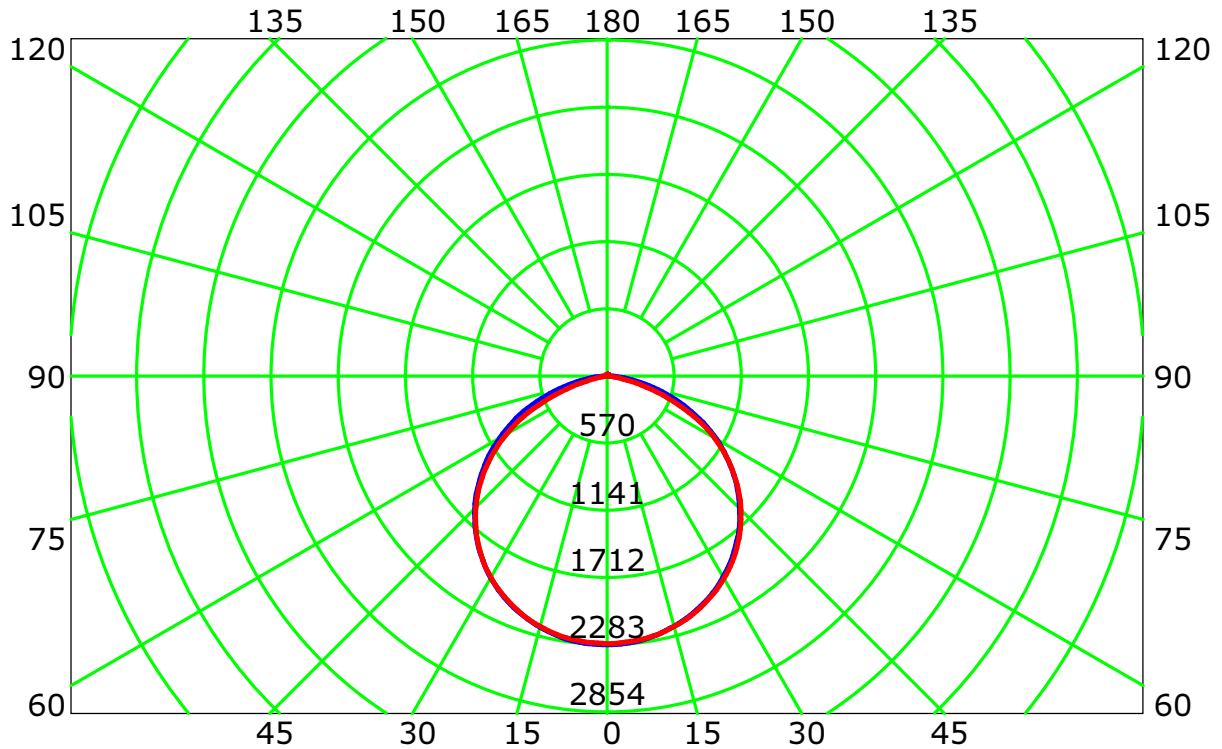

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Luminous Intensity Distribution Curve(cd/klm)

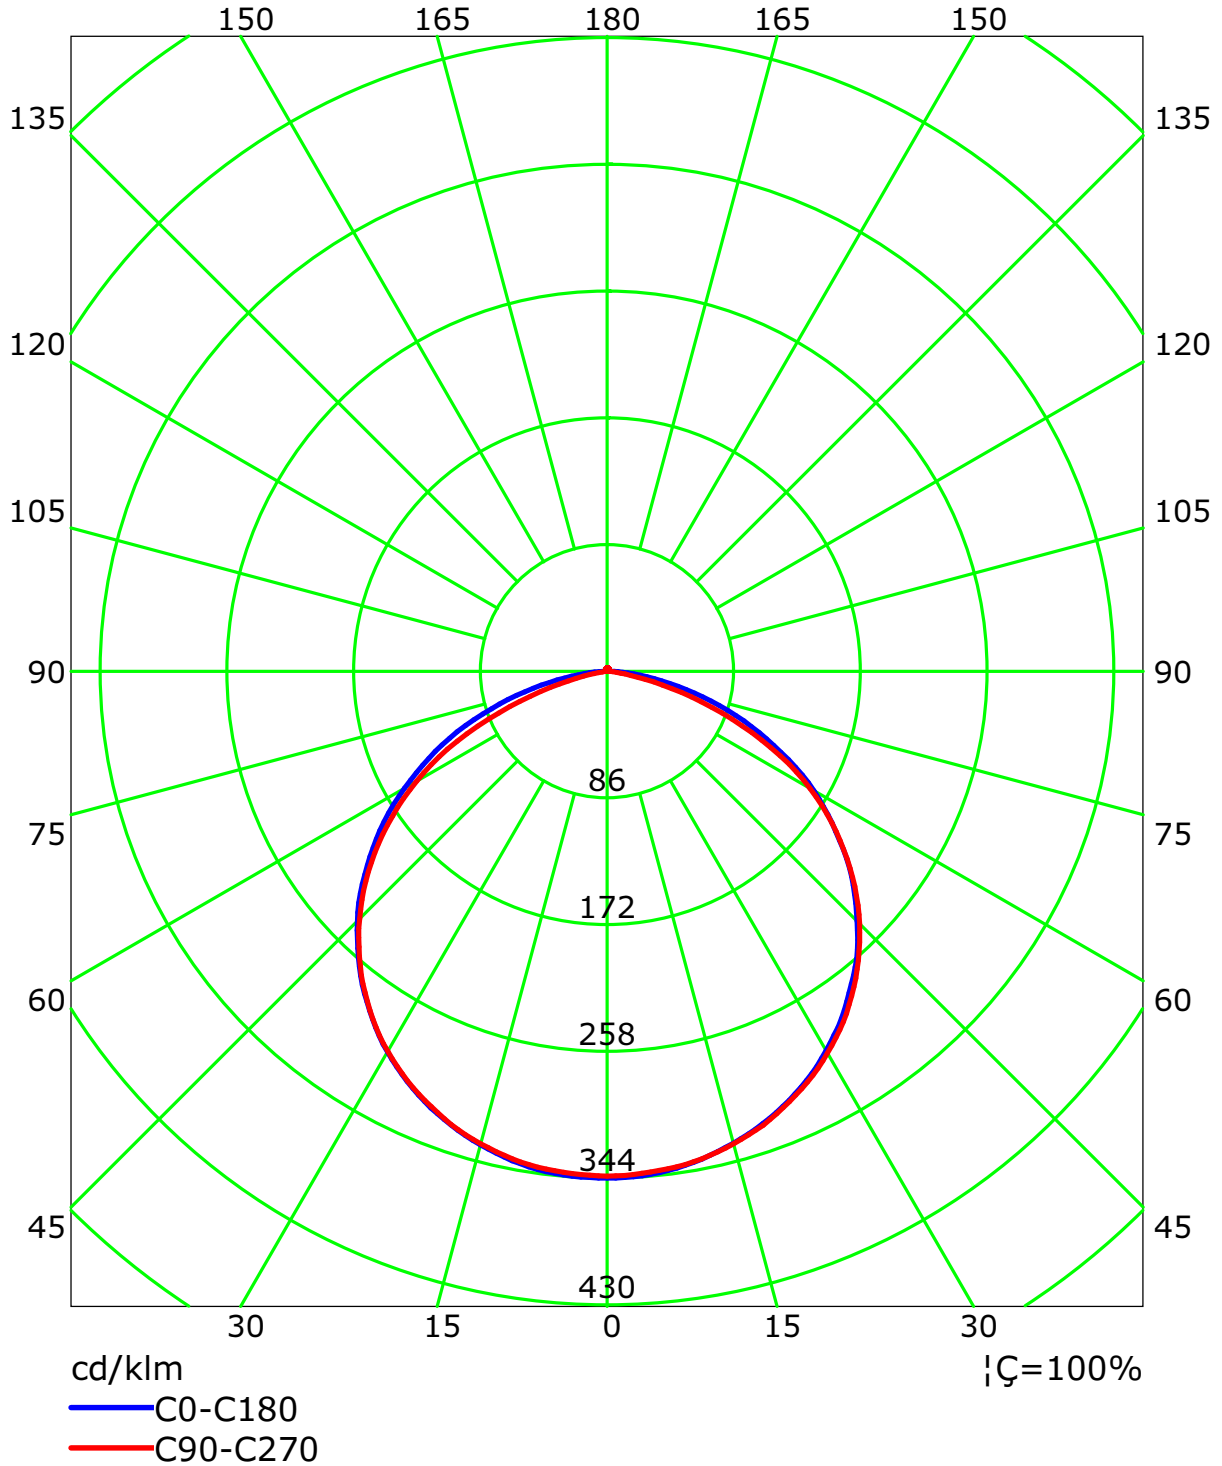

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40


Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	109	104	100	96	106	102	98	95	98	94	92	94	91	89	90	88	86	84
2	99	91	84	79	96	89	83	78	85	80	76	82	78	74	79	75	72	70
3	90	80	72	65	88	78	71	65	75	69	63	72	67	62	70	65	61	59
4	83	71	62	55	80	69	61	55	67	60	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	47	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	45	40	38
7	65	51	43	36	63	51	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	52	39	31	26	38	31	26	37	31	26	36	30	26	24

Spacing Criteria (0-180): 1.29
 Spacing Criteria (90-270): 1.29
 Spacing Criteria (Diagonal): 1.40


Curves of Luminaires vs Lighting Area

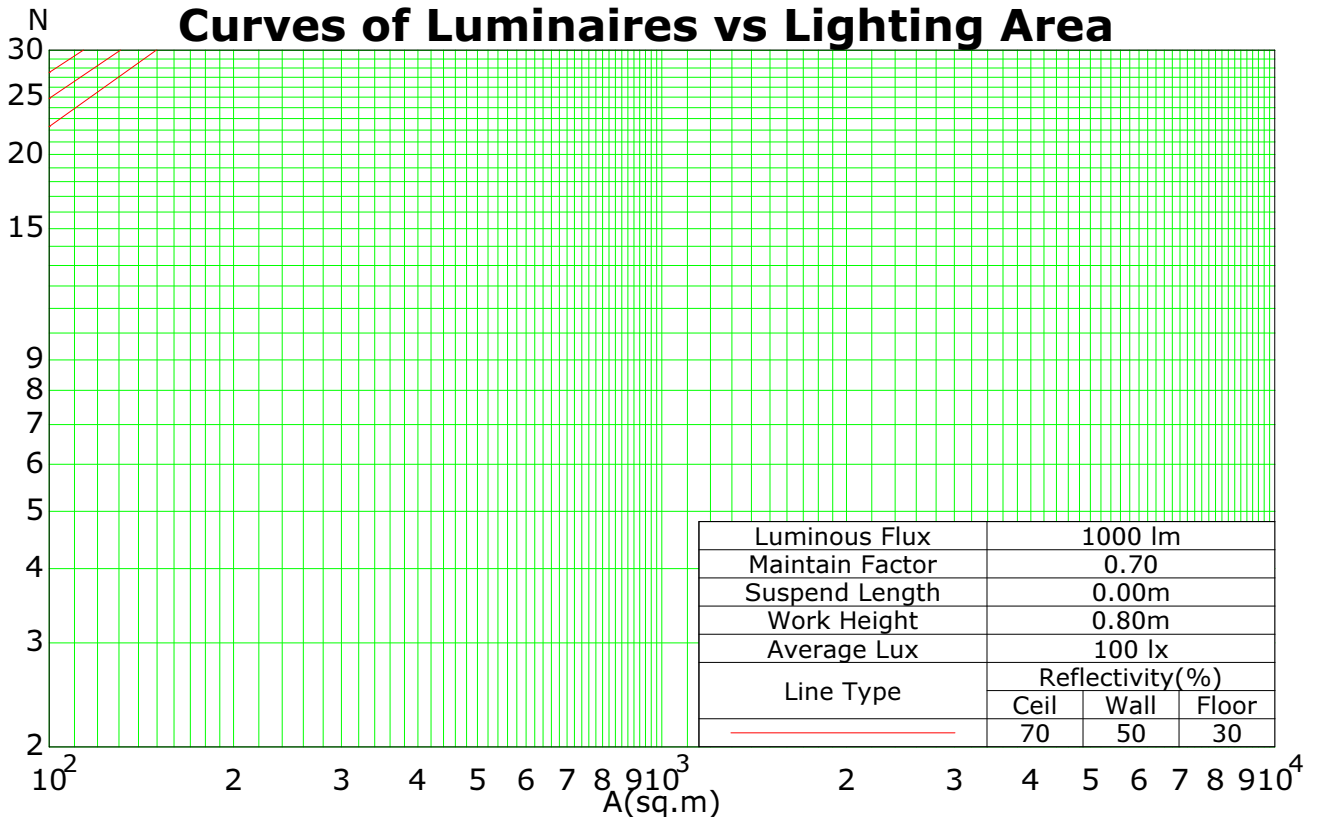

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

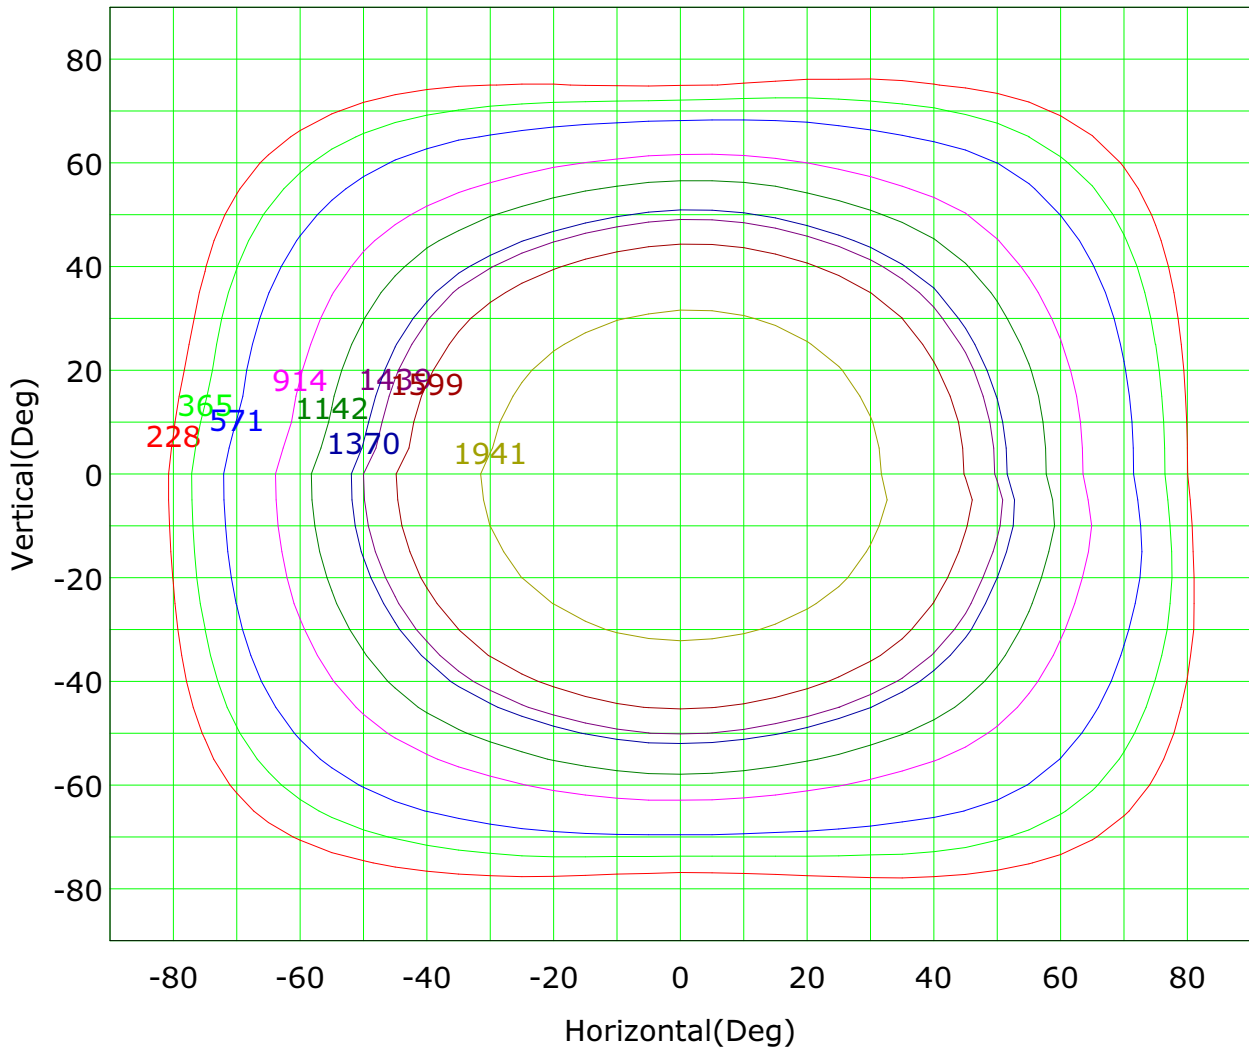

Imax (100%): 2284 cd

— (10%): 228 cd	— (16%): 365 cd
— (25%): 571 cd	— (40%): 914 cd
— (63%): 1439 cd	— (100%): 2284 cd
— (50%): 1142 cd	— (60%): 1370 cd
— (70%): 1599 cd	— (85%): 1941 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Isocandela (sphere)

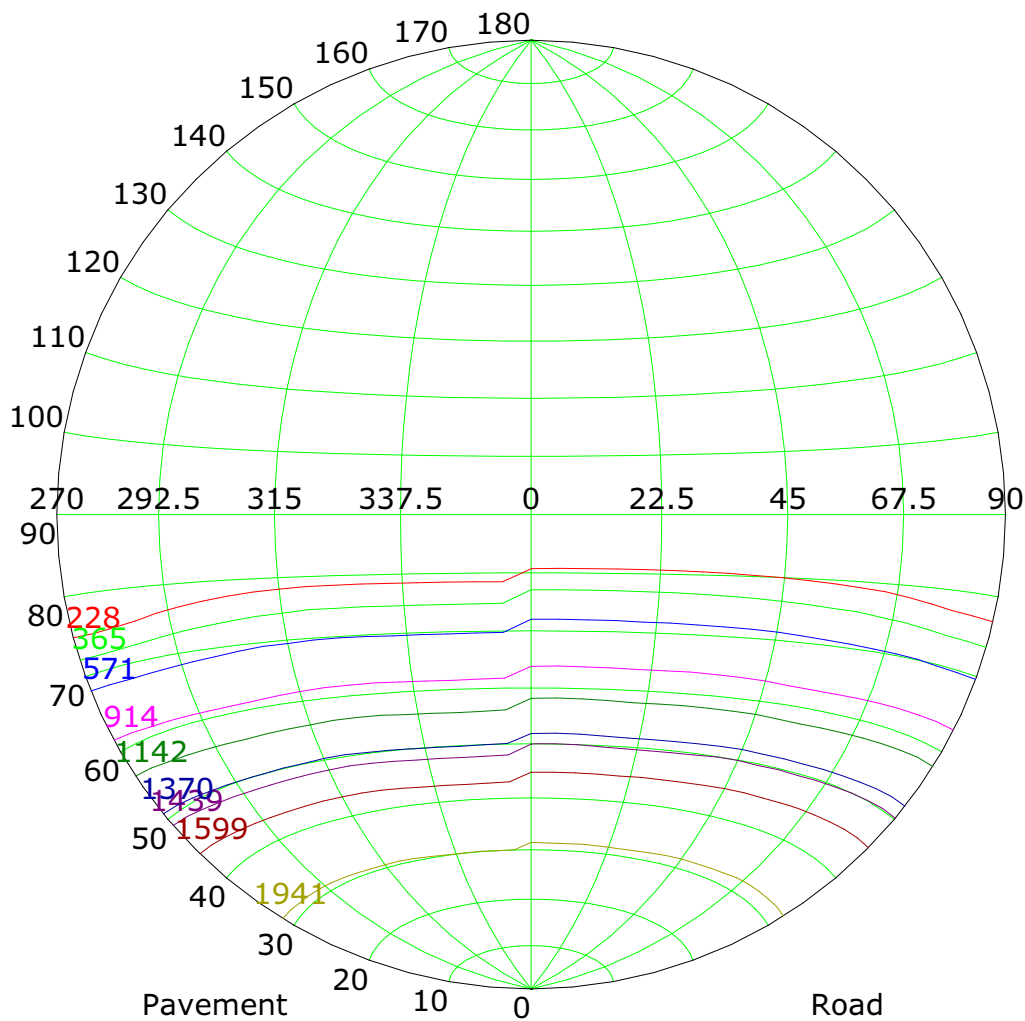


Imax (100%): 2284 cd

- | | |
|-------------------|-------------------|
| — (10%): 228 cd | — (16%): 365 cd |
| — (25%): 571 cd | — (40%): 914 cd |
| — (63%): 1439 cd | — (100%): 2284 cd |
| — (50%): 1142 cd | — (60%): 1370 cd |
| — (70%): 1599 cd | — (85%): 1941 cd |

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

IsoLux Plot

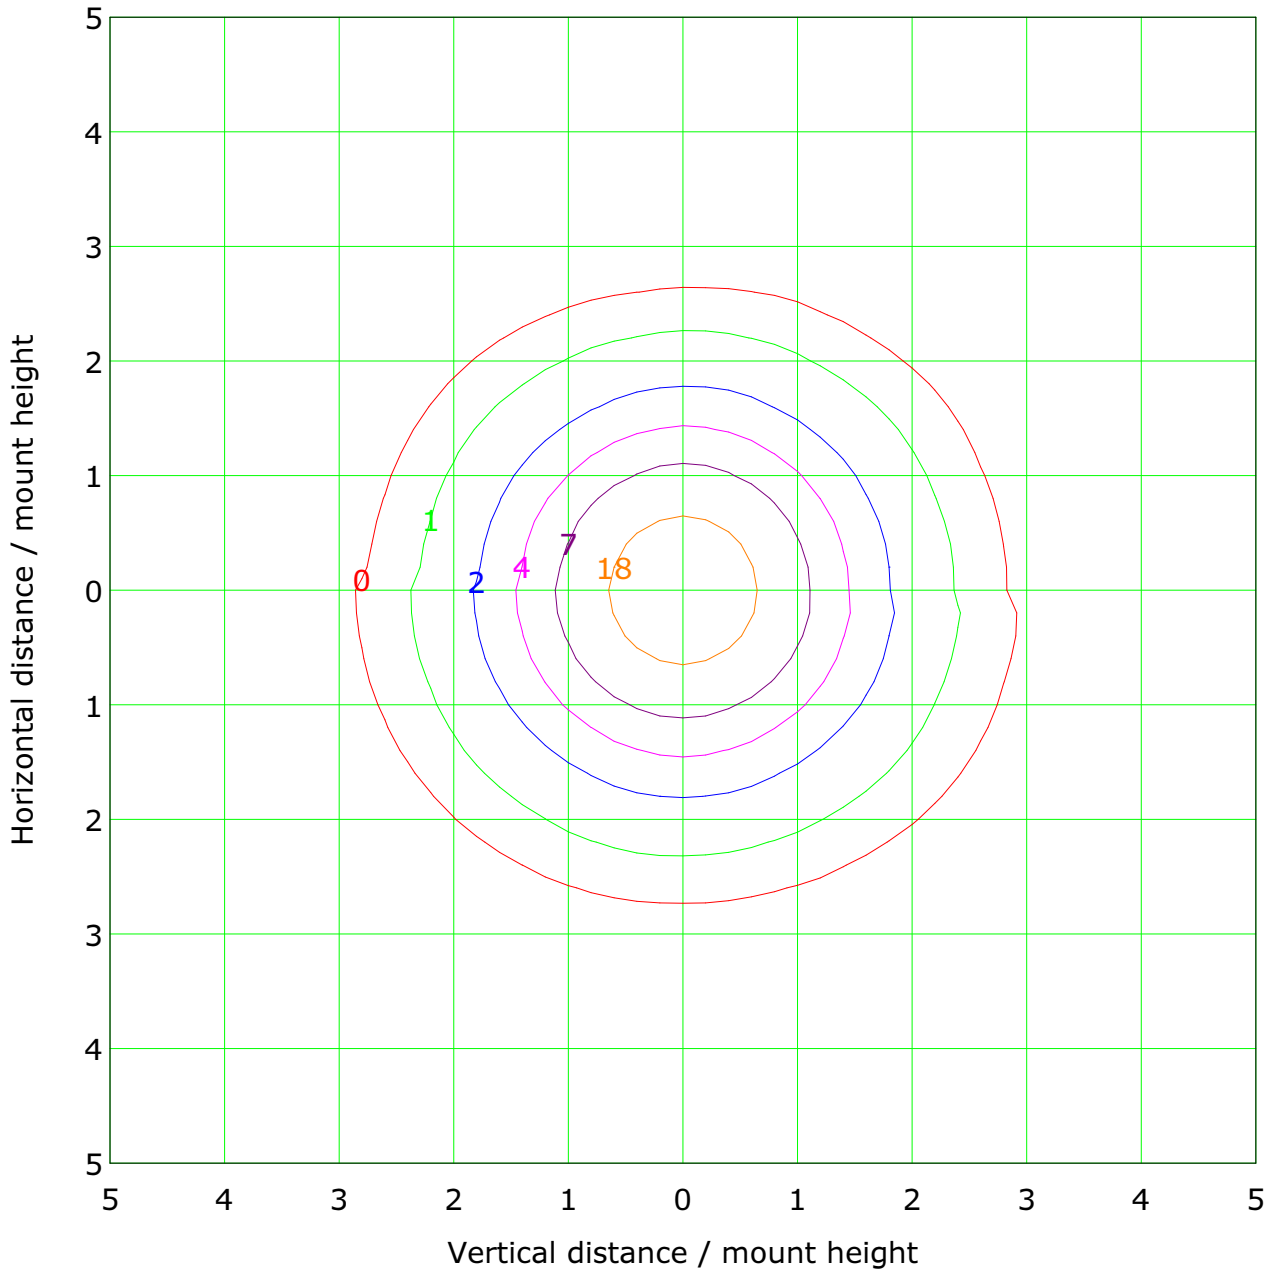

Mounting Height: 8.0m		Max Lux(100%): 35.7 lx
— (1%): 0.4 lx	— (2%): 0.7 lx	
— (5%): 1.8 lx	— (10%): 3.6 lx	
— (20%): 7.1 lx	— (50%): 17.8 lx	
— (100%): 35.7 lx	— (200%): 71.4 lx	
— (300%): 107.0 lx	— (500%): 178.4 lx	

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.000 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

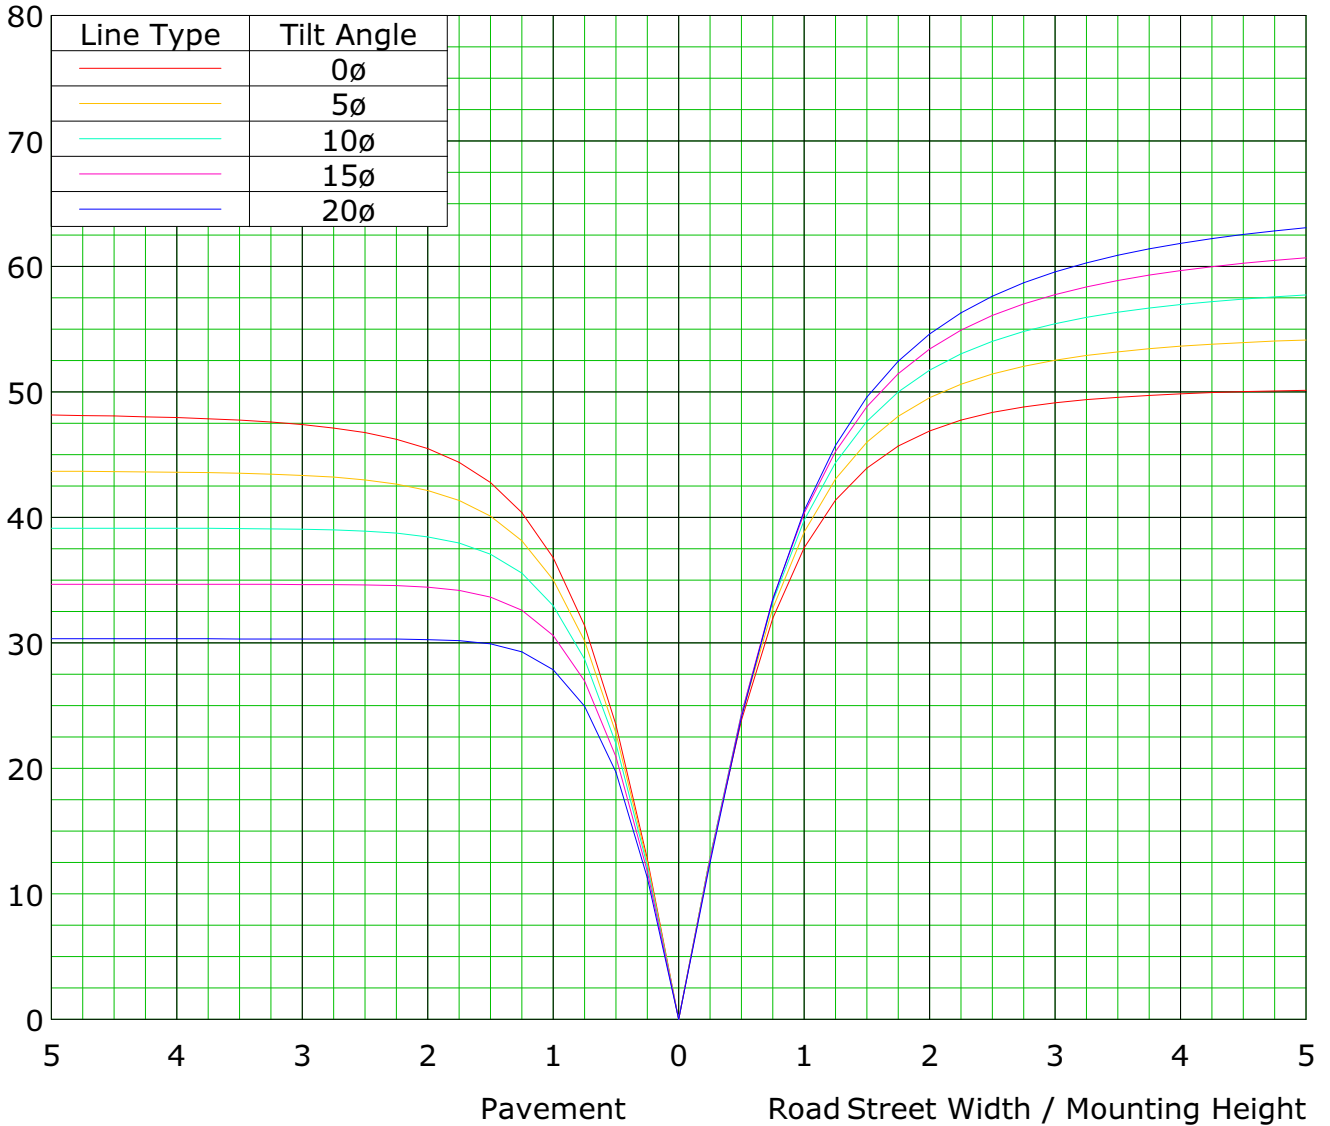

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

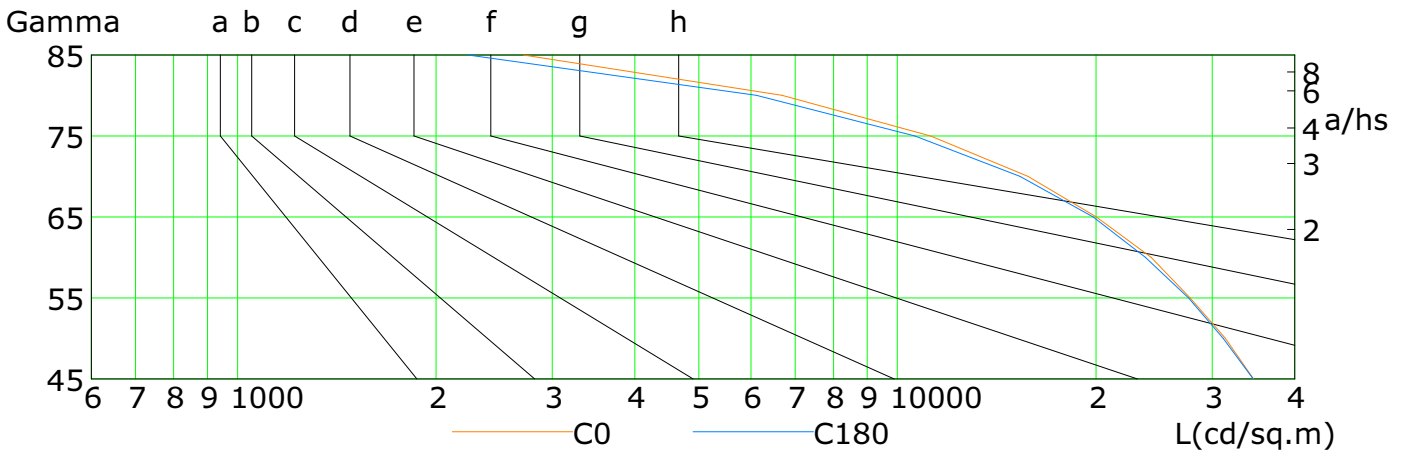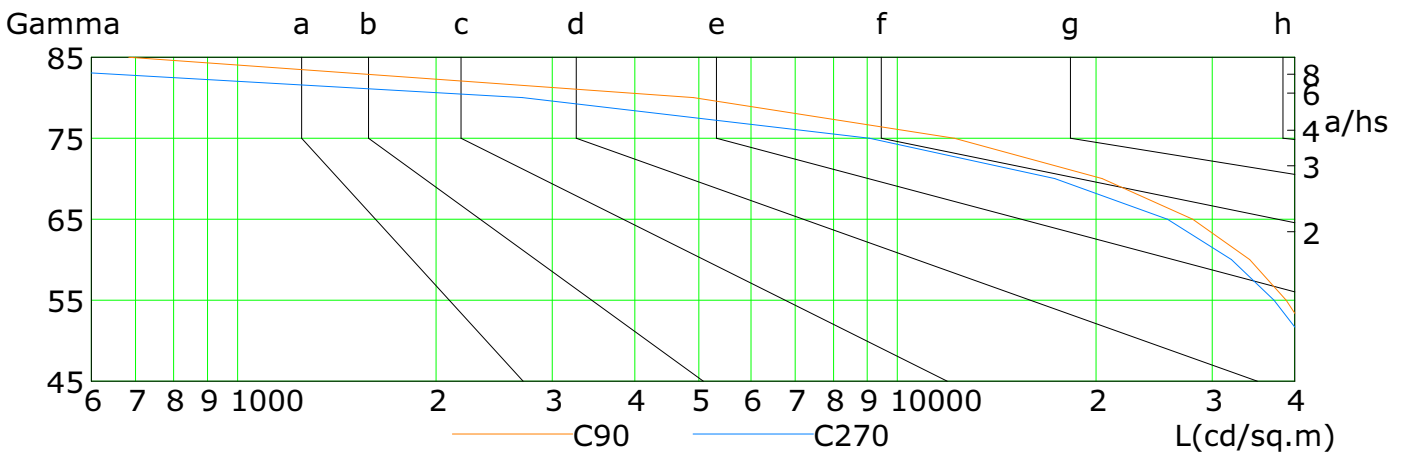

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	34661	31417	27791	24241	20029	15765	11225	6683	2712
C90	46085	42704	38831	34208	28028	20426	12197	4905	684
C180	34632	31151	27632	23745	19806	15325	10626	6115	2236
C270	45163	41518	37216	32095	25671	17312	9067	2703	230

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Illuminance at a Distance

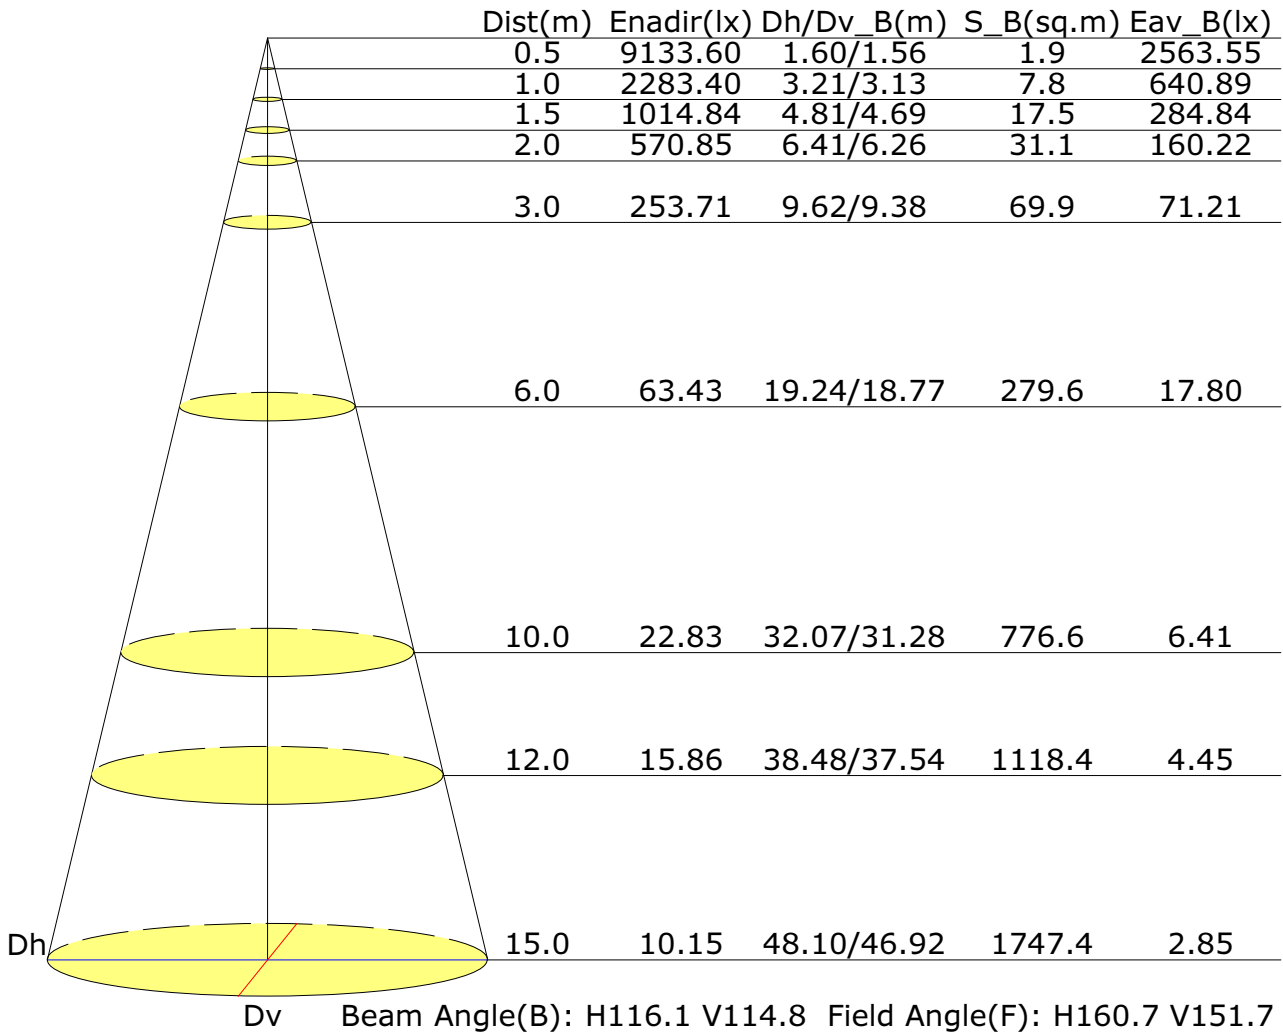

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Vertical IsoLux Plot

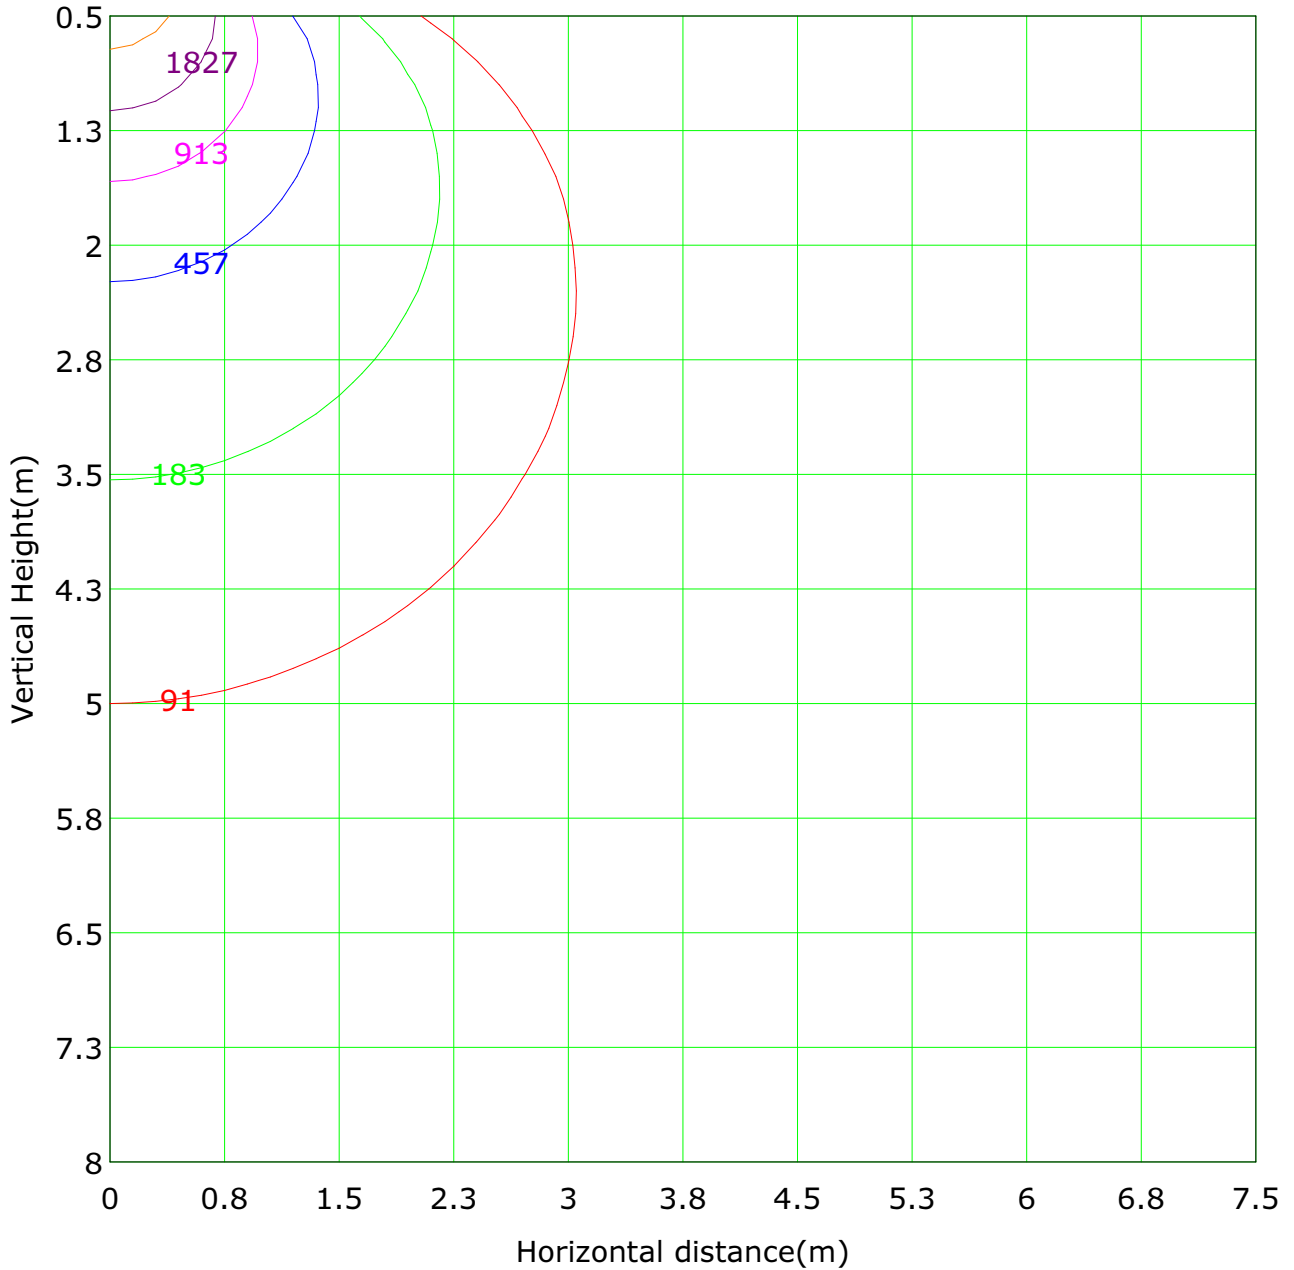


Lowest(m): 0.5m	Highest(m): 8.0m	Max Lux: 9133.6 lx
— (1%): 91.3 lx	— (2%): 182.7 lx	
— (5%): 456.7 lx	— (10%): 913.4 lx	
— (20%): 1826.7 lx	— (50%): 4566.8 lx	
— (100%): 9133.6 lx	— (200%): 18267.2 lx	
— (300%): 27400.8 lx	— (500%): 45668.0 lx	

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

The Average Illuminance Effective Figure

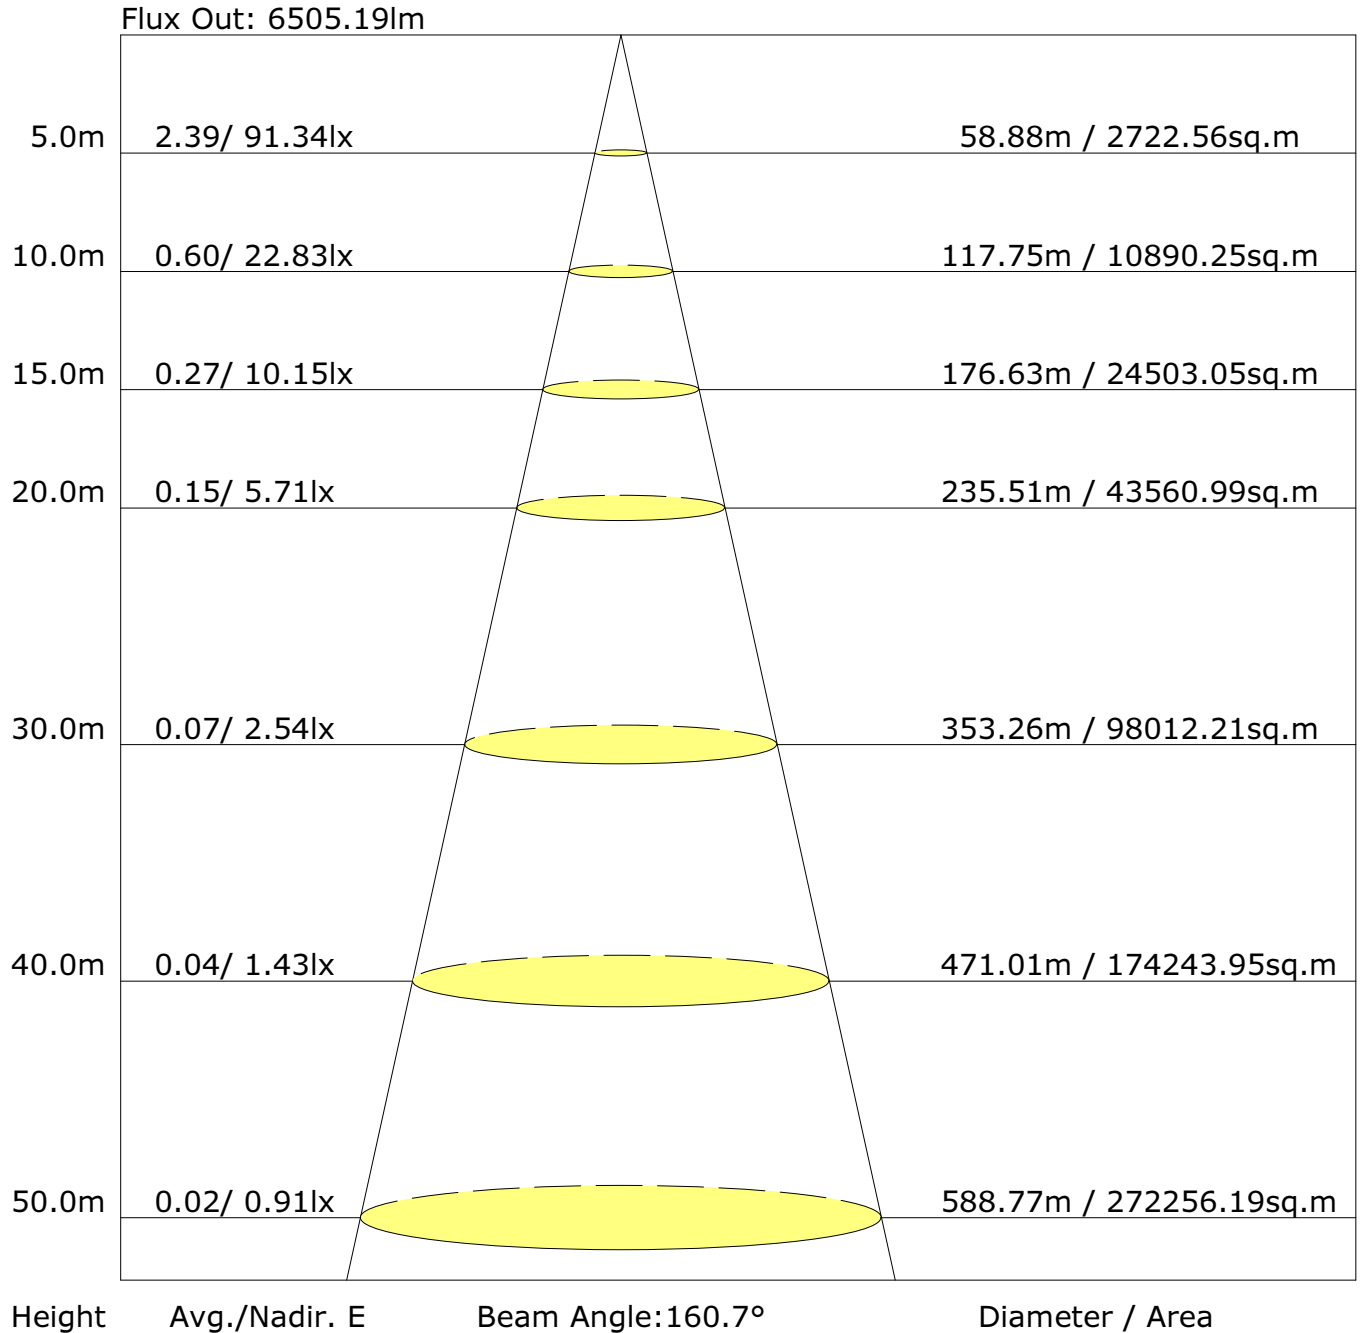

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	17.3	18.9	17.6	19.2	19.5	16.8	18.4	17.1	18.7	19.0
3H	18.7	20.1	19.1	20.5	20.9	17.9	19.4	18.3	19.7	20.1
4H	19.1	20.5	19.5	20.8	21.2	18.1	19.5	18.5	19.9	20.3
6H	19.3	20.6	19.7	21.0	21.4	18.2	19.4	18.6	19.8	20.2
8H	19.4	20.6	19.8	21.0	21.4	18.1	19.4	18.6	19.8	20.2
12H	19.4	20.5	19.8	20.9	21.4	18.1	19.3	18.6	19.7	20.1
X=4H Y=2H	17.6	19.0	18.0	19.4	19.8	17.3	18.7	17.7	19.0	19.4
3H	19.2	20.3	19.6	20.8	21.2	18.6	19.7	19.0	20.2	20.6
4H	19.7	20.7	20.2	21.2	21.6	18.9	19.9	19.3	20.4	20.8
6H	20.0	20.9	20.5	21.4	21.8	19.0	19.9	19.5	20.3	20.8
8H	20.1	20.9	20.5	21.4	21.8	19.0	19.8	19.4	20.3	20.7
12H	20.1	20.8	20.6	21.3	21.8	18.9	19.7	19.4	20.2	20.7
X=8H Y=4H	19.8	20.6	20.3	21.1	21.6	19.1	19.9	19.6	20.4	20.9
6H	20.1	20.8	20.6	21.3	21.8	19.2	19.9	19.7	20.4	20.9
8H	20.2	20.8	20.7	21.3	21.8	19.2	19.9	19.8	20.4	20.9
12H	20.2	20.8	20.8	21.3	21.9	19.2	19.8	19.7	20.3	20.9
X=12H Y=4H	19.8	20.5	20.3	21.0	21.5	19.1	19.9	19.6	20.4	20.8
6H	20.1	20.7	20.6	21.2	21.8	19.3	19.9	19.8	20.4	20.9
8H	20.2	20.8	20.7	21.3	21.8	19.3	19.8	19.8	20.3	20.9

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

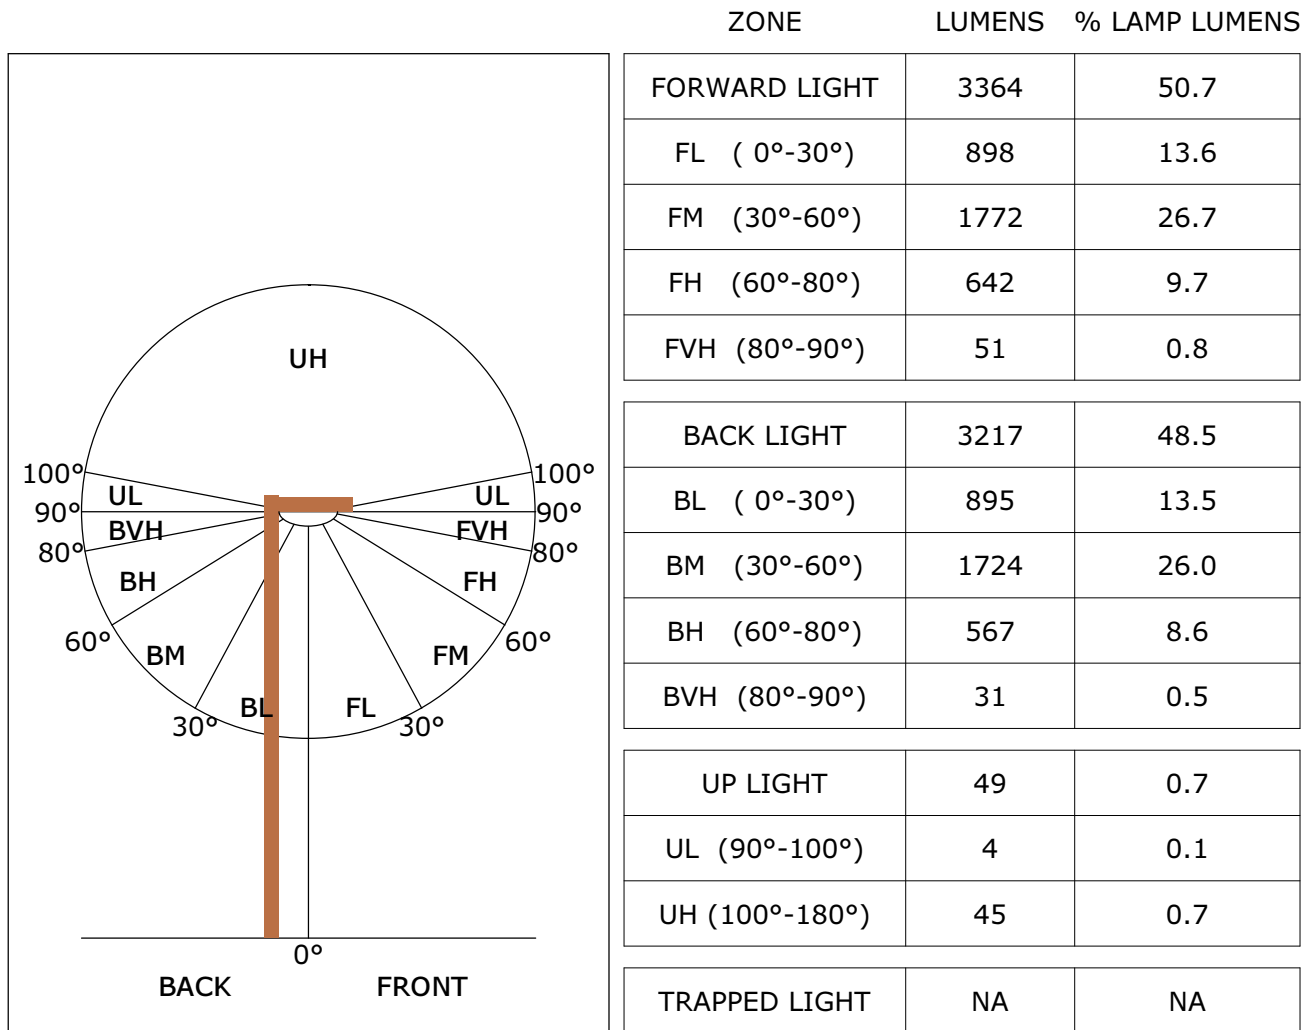


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U2 G2
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U2 G1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

LCS Graph

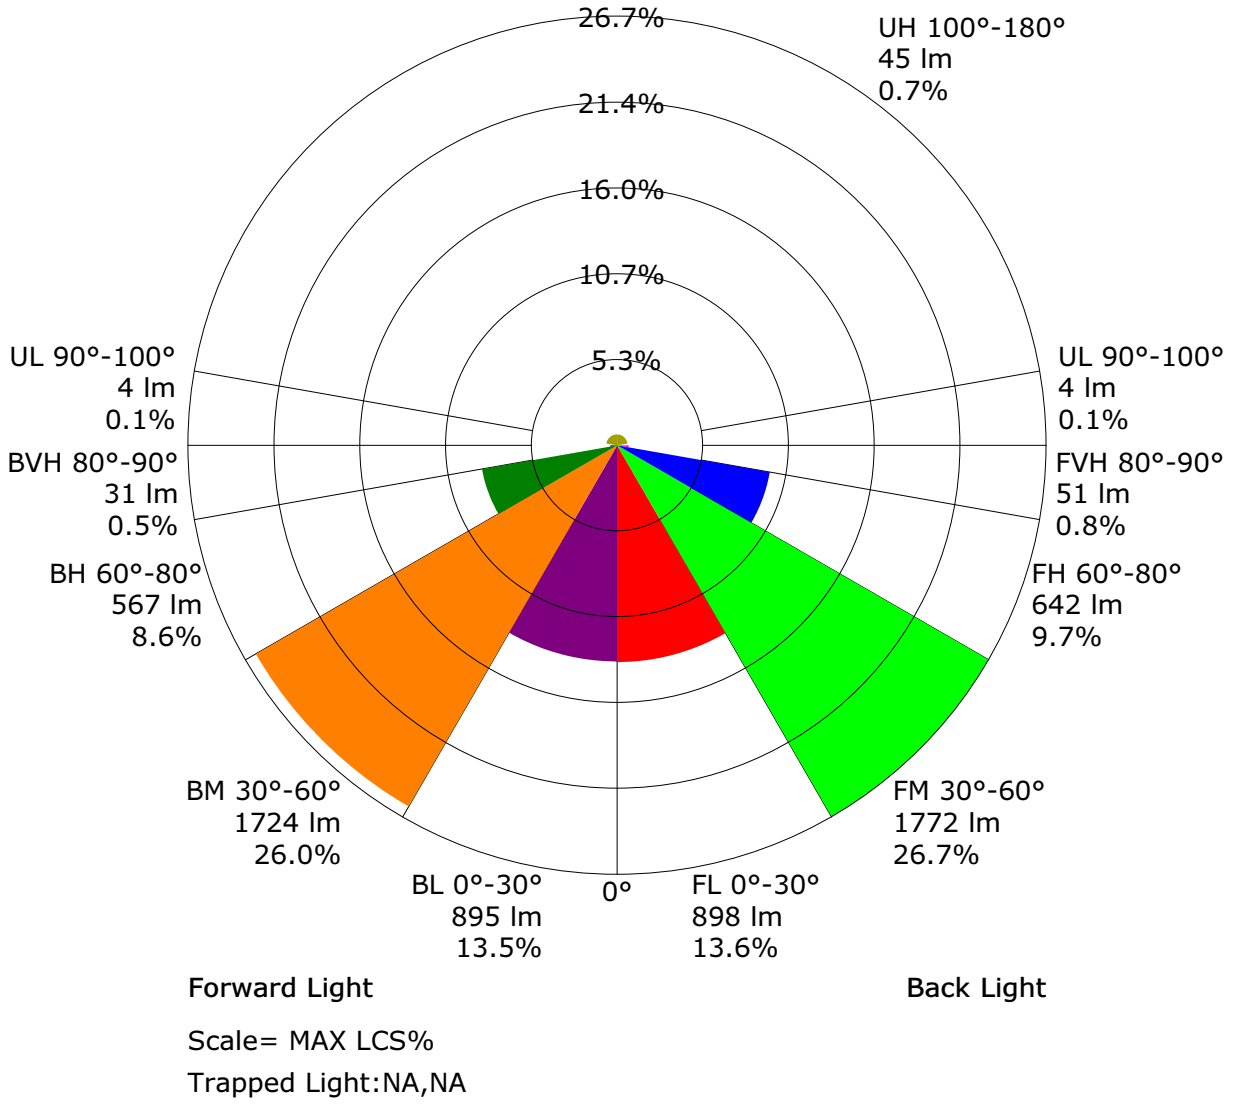

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	2278.6	2.2	2.2	0.03	0.03
1.0-2.0	2277.7	6.5	8.7	0.10	0.13
2.0-3.0	2276.1	10.9	19.6	0.16	0.30
3.0-4.0	2274.0	15.2	34.8	0.23	0.53
4.0-5.0	2271.4	19.5	54.4	0.29	0.82
5.0-6.0	2268.2	23.8	78.2	0.36	1.18
6.0-7.0	2264.4	28.1	106.3	0.42	1.60
7.0-8.0	2260.0	32.3	138.7	0.49	2.09
8.0-9.0	2255.0	36.6	175.2	0.55	2.64
9.0-10.0	2249.1	40.7	215.9	0.61	3.26
10.0-11.0	2242.5	44.8	260.7	0.68	3.93
11.0-12.0	2235.0	48.9	309.6	0.74	4.67
12.0-13.0	2226.8	52.9	362.5	0.80	5.47
13.0-14.0	2217.9	56.8	419.2	0.86	6.32
14.0-15.0	2208.6	60.6	479.9	0.91	7.24
15.0-16.0	2198.7	64.4	544.3	0.97	8.21
16.0-17.0	2188.2	68.2	612.5	1.03	9.24
17.0-18.0	2177.2	71.8	684.3	1.08	10.32
18.0-19.0	2165.4	75.3	759.6	1.14	11.46
19.0-20.0	2152.9	78.8	838.4	1.19	12.65
20.0-21.0	2139.5	82.2	920.6	1.24	13.89
21.0-22.0	2125.4	85.4	1006.0	1.29	15.17
22.0-23.0	2110.5	88.6	1094.6	1.34	16.51
23.0-24.0	2095.0	91.6	1186.2	1.38	17.89
24.0-25.0	2079.0	94.5	1280.7	1.43	19.32
25.0-26.0	2062.3	97.4	1378.1	1.47	20.79
26.0-27.0	2044.8	100.1	1478.1	1.51	22.29
27.0-28.0	2026.5	102.6	1580.8	1.55	23.84
28.0-29.0	2007.5	105.0	1685.8	1.58	25.43
29.0-30.0	1987.8	107.3	1793.1	1.62	27.05
30.0-31.0	1967.4	109.5	1902.6	1.65	28.70
31.0-32.0	1946.4	111.5	2014.2	1.68	30.38
32.0-33.0	1924.7	113.4	2127.6	1.71	32.09
33.0-34.0	1902.2	115.1	2242.7	1.74	33.83
34.0-35.0	1878.9	116.7	2359.4	1.76	35.59
35.0-36.0	1854.6	118.1	2477.5	1.78	37.37

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1829.8	119.4	2596.9	1.80	39.17
37.0-38.0	1804.3	120.5	2717.3	1.82	40.98
38.0-39.0	1778.1	121.4	2838.7	1.83	42.82
39.0-40.0	1751.2	122.2	2960.8	1.84	44.66
40.0-41.0	1723.5	122.7	3083.6	1.85	46.51
41.0-42.0	1694.8	123.2	3206.7	1.86	48.37
42.0-43.0	1665.3	123.4	3330.1	1.86	50.23
43.0-44.0	1635.0	123.4	3453.5	1.86	52.09
44.0-45.0	1604.0	123.3	3576.8	1.86	53.95
45.0-46.0	1572.5	123.0	3699.8	1.86	55.80
46.0-47.0	1540.4	122.5	3822.4	1.85	57.65
47.0-48.0	1507.5	121.9	3944.2	1.84	59.49
48.0-49.0	1473.7	121.0	4065.3	1.83	61.32
49.0-50.0	1439.3	120.0	4185.3	1.81	63.13
50.0-51.0	1404.0	118.8	4304.1	1.79	64.92
51.0-52.0	1367.9	117.4	4421.5	1.77	66.69
52.0-53.0	1331.2	115.8	4537.3	1.75	68.44
53.0-54.0	1293.7	114.0	4651.3	1.72	70.16
54.0-55.0	1255.7	112.1	4763.4	1.69	71.85
55.0-56.0	1217.1	110.0	4873.4	1.66	73.51
56.0-57.0	1178.0	107.7	4981.2	1.62	75.13
57.0-58.0	1138.2	105.3	5086.4	1.59	76.72
58.0-59.0	1097.8	102.6	5189.1	1.55	78.27
59.0-60.0	1057.0	99.9	5289.0	1.51	79.77
60.0-61.0	1015.7	96.9	5385.9	1.46	81.23
61.0-62.0	973.5	93.8	5479.7	1.41	82.65
62.0-63.0	930.4	90.5	5570.2	1.36	84.01
63.0-64.0	886.4	87.0	5657.2	1.31	85.33
64.0-65.0	841.7	83.3	5740.5	1.26	86.58
65.0-66.0	797.0	79.5	5820.0	1.20	87.78
66.0-67.0	752.2	75.6	5895.7	1.14	88.92
67.0-68.0	706.8	71.6	5967.3	1.08	90.00
68.0-69.0	661.3	67.5	6034.8	1.02	91.02
69.0-70.0	615.8	63.3	6098.0	0.95	91.98
70.0-71.0	570.4	59.0	6157.0	0.89	92.86
71.0-72.0	525.4	54.6	6211.6	0.82	93.69

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	481.0	50.3	6261.9	0.76	94.45
73.0-74.0	437.3	46.0	6307.9	0.69	95.14
74.0-75.0	394.7	41.7	6349.6	0.63	95.77
75.0-76.0	353.6	37.5	6387.1	0.57	96.34
76.0-77.0	313.9	33.5	6420.6	0.50	96.84
77.0-78.0	275.7	29.5	6450.1	0.45	97.29
78.0-79.0	239.5	25.7	6475.9	0.39	97.67
79.0-80.0	205.5	22.2	6498.0	0.33	98.01
80.0-81.0	173.9	18.8	6516.8	0.28	98.29
81.0-82.0	145.0	15.7	6532.6	0.24	98.53
82.0-83.0	118.6	12.9	6545.4	0.19	98.72
83.0-84.0	94.9	10.3	6555.8	0.16	98.88
84.0-85.0	74.3	8.1	6563.9	0.12	99.00
85.0-86.0	56.1	6.1	6570.0	0.09	99.10
86.0-87.0	40.5	4.4	6574.5	0.07	99.16
87.0-88.0	27.5	3.0	6577.5	0.05	99.21
88.0-89.0	17.6	1.9	6579.4	0.03	99.24
89.0-90.0	10.8	1.2	6580.6	0.02	99.25
90.0-91.0	6.7	0.7	6581.3	0.01	99.27
91.0-92.0	4.7	0.5	6581.8	0.01	99.27
92.0-93.0	4.0	0.4	6582.3	0.01	99.28
93.0-94.0	3.8	0.4	6582.7	0.01	99.29
94.0-95.0	3.7	0.4	6583.1	0.01	99.29
95.0-96.0	3.5	0.4	6583.5	0.01	99.30
96.0-97.0	3.4	0.4	6583.9	0.01	99.30
97.0-98.0	3.4	0.4	6584.2	0.01	99.31
98.0-99.0	3.4	0.4	6584.6	0.01	99.31
99.0-100.0	3.4	0.4	6585.0	0.01	99.32
100.0-101.0	3.5	0.4	6585.4	0.01	99.33
101.0-102.0	3.6	0.4	6585.7	0.01	99.33
102.0-103.0	3.7	0.4	6586.1	0.01	99.34
103.0-104.0	3.8	0.4	6586.5	0.01	99.34
104.0-105.0	4.0	0.4	6587.0	0.01	99.35
105.0-106.0	4.1	0.4	6587.4	0.01	99.36
106.0-107.0	4.3	0.5	6587.9	0.01	99.36
107.0-108.0	4.5	0.5	6588.3	0.01	99.37

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	4.6	0.5	6588.8	0.01	99.38
109.0-110.0	4.8	0.5	6589.3	0.01	99.39
110.0-111.0	5.0	0.5	6589.8	0.01	99.39
111.0-112.0	5.2	0.5	6590.4	0.01	99.40
112.0-113.0	5.4	0.6	6590.9	0.01	99.41
113.0-114.0	5.6	0.6	6591.5	0.01	99.42
114.0-115.0	5.9	0.6	6592.1	0.01	99.43
115.0-116.0	6.1	0.6	6592.7	0.01	99.44
116.0-117.0	6.3	0.6	6593.3	0.01	99.45
117.0-118.0	6.5	0.6	6593.9	0.01	99.46
118.0-119.0	6.7	0.6	6594.6	0.01	99.46
119.0-120.0	7.0	0.7	6595.2	0.01	99.48
120.0-121.0	7.2	0.7	6595.9	0.01	99.49
121.0-122.0	7.4	0.7	6596.6	0.01	99.50
122.0-123.0	7.6	0.7	6597.3	0.01	99.51
123.0-124.0	7.8	0.7	6598.0	0.01	99.52
124.0-125.0	8.1	0.7	6598.7	0.01	99.53
125.0-126.0	8.3	0.7	6599.5	0.01	99.54
126.0-127.0	8.5	0.7	6600.2	0.01	99.55
127.0-128.0	8.7	0.8	6601.0	0.01	99.56
128.0-129.0	8.9	0.8	6601.8	0.01	99.57
129.0-130.0	9.2	0.8	6602.5	0.01	99.59
130.0-131.0	9.4	0.8	6603.3	0.01	99.60
131.0-132.0	9.6	0.8	6604.1	0.01	99.61
132.0-133.0	9.8	0.8	6604.9	0.01	99.62
133.0-134.0	10.0	0.8	6605.7	0.01	99.63
134.0-135.0	10.2	0.8	6606.5	0.01	99.64
135.0-136.0	10.4	0.8	6607.3	0.01	99.66
136.0-137.0	10.6	0.8	6608.1	0.01	99.67
137.0-138.0	10.8	0.8	6608.9	0.01	99.68
138.0-139.0	11.0	0.8	6609.7	0.01	99.69
139.0-140.0	11.2	0.8	6610.5	0.01	99.71
140.0-141.0	11.4	0.8	6611.3	0.01	99.72
141.0-142.0	11.5	0.8	6612.1	0.01	99.73
142.0-143.0	11.7	0.8	6612.8	0.01	99.74
143.0-144.0	11.9	0.8	6613.6	0.01	99.75

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	12.1	0.8	6614.4	0.01	99.76
145.0-146.0	12.2	0.8	6615.1	0.01	99.78
146.0-147.0	12.4	0.8	6615.9	0.01	99.79
147.0-148.0	12.5	0.7	6616.6	0.01	99.80
148.0-149.0	12.7	0.7	6617.4	0.01	99.81
149.0-150.0	12.9	0.7	6618.1	0.01	99.82
150.0-151.0	13.0	0.7	6618.8	0.01	99.83
151.0-152.0	13.2	0.7	6619.5	0.01	99.84
152.0-153.0	13.3	0.7	6620.1	0.01	99.85
153.0-154.0	13.4	0.7	6620.8	0.01	99.86
154.0-155.0	13.6	0.6	6621.4	0.01	99.87
155.0-156.0	13.7	0.6	6622.1	0.01	99.88
156.0-157.0	13.8	0.6	6622.7	0.01	99.89
157.0-158.0	14.0	0.6	6623.2	0.01	99.90
158.0-159.0	14.1	0.6	6623.8	0.01	99.91
159.0-160.0	14.2	0.5	6624.4	0.01	99.91
160.0-161.0	14.3	0.5	6624.9	0.01	99.92
161.0-162.0	14.5	0.5	6625.4	0.01	99.93
162.0-163.0	14.6	0.5	6625.9	0.01	99.94
163.0-164.0	14.7	0.5	6626.3	0.01	99.94
164.0-165.0	14.8	0.4	6626.8	0.01	99.95
165.0-166.0	14.9	0.4	6627.2	0.01	99.96
166.0-167.0	15.0	0.4	6627.6	0.01	99.96
167.0-168.0	15.1	0.4	6627.9	0.01	99.97
168.0-169.0	15.2	0.3	6628.2	0.01	99.97
169.0-170.0	15.3	0.3	6628.5	0.00	99.98
170.0-171.0	15.3	0.3	6628.8	0.00	99.98
171.0-172.0	15.4	0.3	6629.1	0.00	99.99
172.0-173.0	15.5	0.2	6629.3	0.00	99.99
173.0-174.0	15.6	0.2	6629.5	0.00	99.99
174.0-175.0	15.6	0.2	6629.7	0.00	99.99
175.0-176.0	15.7	0.1	6629.8	0.00	100.00
176.0-177.0	15.7	0.1	6629.9	0.00	100.00
177.0-178.0	15.7	0.1	6630.0	0.00	100.00
178.0-179.0	15.8	0.0	6630.0	0.00	100.00
179.0-180.0	15.8	0.0	6630.0	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	2283.4	2283.1	2283.1	2283.1	2282.9	2282.6	2283.3	2282.4	2282.5	2282.4
G1.0	2283.2	2282.9	2282.6	2282.8	2282.5	2282.5	2282.9	2282.0	2281.8	2282.3
G2.0	2282.3	2281.9	2281.5	2281.8	2280.8	2281.2	2281.4	2280.7	2280.6	2280.9
G3.0	2280.4	2280.1	2279.9	2279.6	2279.1	2279.1	2279.4	2278.4	2278.1	2278.1
G4.0	2277.9	2277.6	2277.5	2277.1	2276.6	2276.1	2276.4	2275.5	2274.8	2275.4
G5.0	2274.5	2274.3	2274.3	2273.8	2273.0	2272.8	2272.7	2271.8	2271.6	2271.9
G6.0	2270.9	2270.5	2270.5	2269.5	2268.9	2268.5	2268.4	2267.3	2267.0	2267.3
G7.0	2266.0	2266.0	2265.5	2264.9	2263.9	2263.2	2263.3	2262.2	2262.1	2262.7
G8.0	2260.0	2259.7	2259.2	2258.6	2257.4	2257.4	2257.4	2256.4	2256.8	2257.4
G9.0	2253.8	2252.8	2252.6	2251.6	2250.9	2250.5	2250.9	2249.8	2250.5	2251.4
G10.0	2246.4	2245.9	2244.9	2244.3	2243.3	2243.4	2243.5	2243.3	2243.8	2245.0
G11.0	2238.8	2237.9	2236.9	2236.4	2235.3	2235.3	2236.8	2236.3	2237.1	2238.4
G12.0	2230.1	2229.3	2228.3	2227.6	2226.6	2227.1	2228.5	2228.6	2229.7	2231.7
G13.0	2220.7	2220.0	2218.8	2217.9	2218.1	2218.5	2220.2	2220.6	2222.0	2223.6
G14.0	2210.7	2210.0	2208.9	2208.4	2208.3	2209.2	2210.9	2211.2	2213.6	2215.3
G15.0	2201.1	2199.9	2198.7	2198.9	2199.7	2199.6	2201.5	2202.7	2204.0	2205.5
G16.0	2190.5	2189.6	2188.1	2188.3	2187.7	2189.3	2191.5	2192.4	2193.6	2195.1
G17.0	2179.9	2178.9	2177.4	2177.0	2176.8	2179.0	2181.6	2181.8	2182.8	2183.4
G18.0	2168.2	2167.0	2165.2	2164.9	2165.5	2168.6	2170.6	2170.8	2170.8	2171.3
G19.0	2155.5	2154.5	2152.2	2152.4	2153.3	2156.3	2158.9	2159.0	2158.7	2158.7
G20.0	2142.5	2141.1	2138.9	2139.0	2139.9	2143.8	2146.1	2145.7	2145.3	2145.7
G21.0	2128.8	2127.3	2125.5	2125.5	2126.2	2129.0	2132.1	2131.6	2131.5	2131.7
G22.0	2114.2	2112.6	2111.1	2110.8	2111.3	2114.7	2116.6	2116.3	2116.9	2117.3
G23.0	2099.9	2097.5	2096.0	2095.7	2096.0	2099.5	2101.0	2100.6	2101.3	2102.3
G24.0	2084.0	2082.0	2079.6	2080.1	2080.4	2083.2	2084.6	2084.8	2085.6	2086.7
G25.0	2067.7	2065.4	2063.8	2063.3	2064.2	2065.8	2067.4	2068.2	2069.8	2071.4
G26.0	2050.3	2048.2	2045.7	2045.1	2045.8	2048.3	2049.6	2050.5	2052.0	2054.6
G27.0	2032.9	2031.2	2028.3	2026.8	2027.8	2029.4	2030.6	2032.8	2034.9	2037.6
G28.0	2014.9	2013.3	2009.9	2009.0	2009.0	2010.1	2011.0	2013.7	2017.0	2019.3
G29.0	1994.5	1993.0	1990.8	1990.4	1991.1	1990.3	1991.9	1994.5	1998.1	1999.1
G30.0	1973.4	1971.5	1970.0	1971.2	1971.2	1970.4	1970.9	1974.2	1977.2	1978.5
G31.0	1953.0	1951.5	1950.9	1952.2	1950.7	1949.4	1950.9	1955.0	1956.7	1958.1
G32.0	1931.4	1931.2	1931.3	1932.3	1929.0	1927.4	1929.8	1932.5	1933.5	1936.8
G33.0	1911.5	1910.7	1910.0	1911.4	1908.7	1906.1	1907.3	1911.3	1911.2	1914.4
G34.0	1888.5	1887.7	1888.5	1890.3	1886.7	1884.7	1884.4	1887.9	1889.8	1891.8
G35.0	1864.5	1864.3	1865.2	1867.6	1864.3	1862.1	1861.9	1863.1	1866.4	1869.1
G36.0	1837.9	1838.1	1839.1	1841.1	1840.0	1838.9	1838.5	1838.9	1842.5	1845.7

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	1813.6	1813.1	1813.5	1815.2	1814.8	1814.9	1814.2	1815.0	1817.6	1821.5
G38.0	1788.5	1788.2	1788.0	1788.6	1787.4	1787.5	1788.6	1790.2	1792.2	1795.0
G39.0	1764.2	1764.0	1763.5	1763.1	1760.5	1760.5	1762.6	1765.7	1766.9	1768.7
G40.0	1739.7	1738.0	1737.2	1736.7	1735.0	1733.7	1733.6	1738.4	1740.5	1741.4
G41.0	1714.8	1711.6	1711.2	1711.1	1708.9	1707.0	1706.4	1709.6	1713.8	1715.4
G42.0	1686.2	1683.8	1684.3	1683.4	1682.3	1679.8	1678.2	1678.7	1685.4	1687.8
G43.0	1655.9	1654.4	1655.9	1655.3	1654.7	1652.5	1649.7	1650.8	1656.0	1660.5
G44.0	1624.2	1623.1	1624.5	1624.1	1623.3	1623.5	1619.5	1621.8	1623.7	1629.5
G45.0	1593.1	1593.4	1594.0	1591.9	1590.2	1593.1	1591.4	1592.6	1594.1	1597.9
G46.0	1562.8	1563.2	1563.0	1560.0	1557.8	1560.6	1562.5	1562.8	1563.8	1564.8
G47.0	1533.1	1534.0	1532.3	1529.3	1525.8	1527.7	1530.8	1533.3	1533.9	1534.0
G48.0	1500.7	1502.6	1501.7	1496.5	1493.2	1493.5	1496.0	1499.3	1502.1	1501.8
G49.0	1469.2	1471.6	1469.8	1465.0	1460.4	1460.0	1462.0	1464.1	1470.5	1469.3
G50.0	1438.5	1440.0	1438.8	1431.2	1427.9	1426.9	1428.3	1430.1	1437.1	1436.9
G51.0	1404.7	1407.1	1405.5	1400.6	1395.4	1393.8	1393.8	1395.0	1400.4	1403.2
G52.0	1369.7	1372.2	1370.0	1365.4	1362.8	1359.7	1360.7	1360.8	1363.0	1366.6
G53.0	1332.4	1334.8	1333.2	1331.6	1326.0	1325.5	1325.6	1326.2	1326.3	1329.1
G54.0	1295.5	1298.5	1296.9	1292.9	1289.4	1289.5	1291.9	1291.8	1290.3	1288.7
G55.0	1257.9	1261.9	1259.9	1255.7	1250.4	1252.4	1255.8	1255.0	1251.9	1250.8
G56.0	1222.7	1225.7	1222.9	1218.1	1214.0	1214.4	1217.7	1218.2	1215.9	1211.1
G57.0	1186.7	1189.1	1185.3	1181.4	1175.6	1175.9	1179.8	1179.8	1179.3	1174.4
G58.0	1150.9	1152.8	1148.4	1144.0	1139.1	1136.8	1138.7	1140.4	1141.5	1135.0
G59.0	1114.7	1116.2	1111.2	1106.9	1099.4	1098.7	1099.7	1098.8	1100.2	1095.5
G60.0	1076.2	1078.1	1073.7	1069.6	1061.8	1061.6	1061.0	1059.6	1059.1	1055.1
G61.0	1037.6	1038.6	1033.6	1030.9	1024.4	1022.6	1022.1	1018.9	1016.6	1013.5
G62.0	997.6	997.7	994.4	990.3	985.2	982.9	982.7	980.2	976.0	971.1
G63.0	953.7	954.8	951.7	949.8	944.1	945.1	942.5	939.8	933.1	927.9
G64.0	910.7	910.3	908.6	905.8	903.1	902.3	903.1	899.8	892.0	883.1
G65.0	865.1	866.6	864.5	861.7	857.9	860.0	861.6	857.6	851.0	841.9
G66.0	823.8	824.2	822.1	818.9	815.1	817.0	818.6	816.5	812.9	799.3
G67.0	781.3	781.9	779.7	777.6	770.8	772.3	772.3	772.3	769.9	757.8
G68.0	741.1	740.7	737.8	733.8	729.4	730.5	729.9	727.9	727.4	715.0
G69.0	697.0	697.8	696.2	694.8	687.9	686.6	683.2	682.1	681.1	672.9
G70.0	656.7	656.3	654.0	651.7	646.1	645.2	641.0	638.3	633.5	628.7
G71.0	613.5	614.2	612.7	610.0	603.5	603.0	598.7	594.0	586.6	583.9
G72.0	572.2	572.7	571.0	568.3	563.7	560.5	557.2	553.5	543.6	538.1
G73.0	530.1	530.3	528.0	525.9	520.1	520.1	516.0	510.1	502.7	495.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	488.8	487.6	486.9	484.9	480.8	477.4	474.2	467.0	462.5	452.2
G75.0	446.8	447.3	445.5	444.8	439.0	439.0	432.7	426.6	421.1	411.1
G76.0	406.6	408.2	406.0	405.0	400.8	397.8	394.0	387.3	381.8	371.0
G77.0	366.1	366.9	365.4	365.1	360.4	360.9	354.6	347.8	341.9	335.4
G78.0	328.1	327.8	326.6	325.4	323.2	320.0	315.6	311.7	303.9	298.4
G79.0	289.3	288.9	288.9	288.7	285.1	284.0	277.9	274.7	265.9	262.6
G80.0	251.6	252.2	252.4	251.8	249.5	247.5	242.6	239.6	232.1	227.3
G81.0	216.7	218.0	216.5	216.4	214.4	212.7	208.5	204.8	200.1	192.2
G82.0	182.3	183.5	183.9	184.0	181.8	181.4	177.1	173.9	170.5	162.5
G83.0	151.6	151.4	151.2	151.7	150.6	150.3	146.9	142.9	140.7	134.9
G84.0	121.8	122.2	122.9	123.7	122.9	122.5	120.5	117.1	114.1	110.1
G85.0	95.5	95.5	96.4	97.4	97.0	96.9	95.3	93.4	89.6	87.7
G86.0	71.3	71.7	72.4	73.5	73.3	74.1	72.9	71.4	69.3	66.5
G87.0	49.4	50.3	50.9	52.3	53.1	53.0	52.5	51.8	49.7	48.0
G88.0	31.8	32.4	33.3	34.5	35.1	35.6	35.5	35.0	33.5	32.5
G89.0	16.6	17.1	17.9	18.7	19.3	20.1	20.3	20.2	19.5	19.8
G90.0	4.4	4.8	5.5	5.8	6.4	7.4	7.7	8.3	8.6	9.3
G91.0	2.6	2.8	3.2	3.5	4.0	4.5	5.0	5.4	5.7	5.9
G92.0	2.5	2.7	3.1	3.4	3.8	4.3	4.7	5.1	5.3	5.4
G93.0	2.5	2.7	3.0	3.4	3.8	4.3	4.6	4.9	5.2	5.2
G94.0	2.7	2.8	3.1	3.4	3.8	4.2	4.6	4.8	5.0	5.1
G95.0	2.7	2.9	3.2	3.4	3.8	4.2	4.5	4.7	4.8	4.8
G96.0	2.8	2.9	3.2	3.5	3.8	4.1	4.3	4.5	4.5	4.3
G97.0	2.9	2.9	3.3	3.5	3.8	4.1	4.3	4.4	4.3	4.0
G98.0	2.9	3.1	3.3	3.5	3.8	4.0	4.3	4.3	4.1	3.8
G99.0	3.0	3.1	3.3	3.6	3.8	4.0	4.1	4.2	3.9	3.6
G100.0	3.2	3.2	3.4	3.6	3.8	4.0	4.1	4.1	3.8	3.4
G101.0	3.3	3.3	3.4	3.6	3.8	4.0	4.1	4.0	3.8	3.5
G102.0	3.3	3.4	3.6	3.7	3.8	4.0	4.0	4.0	3.8	3.4
G103.0	3.5	3.5	3.6	3.8	3.9	4.0	4.1	4.0	3.8	3.5
G104.0	3.6	3.7	3.8	3.9	4.0	4.1	4.1	4.1	3.9	3.6
G105.0	3.8	3.8	3.8	4.0	4.1	4.2	4.2	4.2	4.0	3.8
G106.0	3.9	4.0	4.0	4.1	4.2	4.3	4.3	4.3	4.2	3.9
G107.0	4.1	4.2	4.2	4.3	4.3	4.4	4.4	4.3	4.3	4.0
G108.0	4.3	4.3	4.4	4.4	4.5	4.5	4.5	4.5	4.4	4.2
G109.0	4.5	4.5	4.5	4.6	4.6	4.6	4.7	4.6	4.5	4.4
G110.0	4.7	4.7	4.7	4.7	4.8	4.8	4.8	4.7	4.7	4.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	4.9	4.9	4.8	4.9	4.9	4.9	4.9	4.9	4.8	4.7
G112.0	5.1	5.0	5.1	5.1	5.1	5.1	5.1	5.1	5.0	4.9
G113.0	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.2	5.1
G114.0	5.5	5.5	5.5	5.4	5.5	5.5	5.4	5.4	5.4	5.3
G115.0	5.7	5.7	5.8	5.7	5.7	5.7	5.7	5.6	5.6	5.5
G116.0	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.8	5.9	5.8
G117.0	6.2	6.1	6.1	6.1	6.1	6.1	6.1	6.0	6.0	6.0
G118.0	6.3	6.3	6.4	6.3	6.3	6.3	6.3	6.3	6.2	6.2
G119.0	6.6	6.6	6.6	6.5	6.5	6.5	6.5	6.4	6.4	6.4
G120.0	6.8	6.8	6.7	6.7	6.7	6.7	6.6	6.7	6.6	6.6
G121.0	7.1	7.1	7.0	6.9	7.0	6.9	6.9	6.9	6.9	6.9
G122.0	7.3	7.3	7.2	7.1	7.1	7.1	7.1	7.1	7.1	7.1
G123.0	7.5	7.4	7.4	7.3	7.4	7.3	7.4	7.3	7.3	7.3
G124.0	7.7	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.5
G125.0	7.9	7.8	7.8	7.8	7.8	7.8	7.8	7.7	7.8	7.7
G126.0	8.1	8.1	8.0	8.1	8.0	8.0	7.9	8.0	8.0	7.9
G127.0	8.4	8.3	8.2	8.2	8.2	8.2	8.1	8.2	8.2	8.1
G128.0	8.5	8.6	8.5	8.5	8.5	8.4	8.5	8.4	8.4	8.4
G129.0	8.8	8.7	8.7	8.6	8.6	8.6	8.6	8.6	8.6	8.6
G130.0	9.0	9.0	9.0	8.9	8.9	8.8	8.8	8.8	8.8	8.8
G131.0	9.2	9.1	9.1	9.1	9.1	9.1	9.0	9.1	9.0	9.0
G132.0	9.3	9.4	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.3
G133.0	9.5	9.5	9.5	9.5	9.5	9.5	9.4	9.5	9.4	9.5
G134.0	9.8	9.7	9.8	9.7	9.7	9.7	9.7	9.7	9.7	9.7
G135.0	9.9	9.9	9.9	9.8	9.9	9.9	9.8	9.9	9.9	9.9
G136.0	10.2	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1
G137.0	10.4	10.3	10.3	10.3	10.3	10.3	10.3	10.3	10.3	10.3
G138.0	10.5	10.6	10.5	10.5	10.5	10.4	10.4	10.5	10.5	10.5
G139.0	10.7	10.8	10.7	10.7	10.7	10.6	10.7	10.7	10.7	10.7
G140.0	10.9	10.9	10.9	10.9	10.9	10.9	10.8	10.9	10.9	10.9
G141.0	11.1	11.1	11.1	11.0	11.1	11.0	11.0	11.0	11.0	11.1
G142.0	11.3	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.3
G143.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4
G144.0	11.6	11.6	11.6	11.5	11.6	11.5	11.6	11.5	11.6	11.6
G145.0	11.8	11.7	11.8	11.7	11.7	11.7	11.7	11.8	11.8	11.8
G146.0	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	12.0
G147.0	12.1	12.1	12.1	12.0	12.0	12.0	12.0	12.1	12.1	12.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	12.2	12.2	12.2	12.2	12.2	12.2	12.1	12.2	12.3	12.3
G149.0	12.4	12.4	12.4	12.4	12.3	12.3	12.4	12.4	12.4	12.4
G150.0	12.5	12.5	12.5	12.5	12.4	12.5	12.4	12.5	12.5	12.6
G151.0	12.6	12.7	12.7	12.6	12.6	12.6	12.6	12.6	12.7	12.8
G152.0	12.9	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.9	12.9
G153.0	12.9	12.9	12.9	12.9	12.9	12.9	12.9	13.0	13.1	13.1
G154.0	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.2	13.2
G155.0	13.2	13.2	13.3	13.2	13.2	13.2	13.3	13.2	13.3	13.3
G156.0	13.3	13.4	13.3	13.3	13.3	13.4	13.4	13.4	13.5	13.4
G157.0	13.5	13.5	13.6	13.5	13.5	13.5	13.5	13.6	13.6	13.6
G158.0	13.6	13.6	13.6	13.6	13.6	13.6	13.7	13.6	13.7	13.7
G159.0	13.8	13.8	13.8	13.8	13.7	13.8	13.8	13.8	13.8	13.9
G160.0	13.9	13.9	13.9	13.9	13.9	13.9	14.0	14.0	14.0	14.0
G161.0	14.0	14.1	14.1	14.0	14.1	14.0	14.1	14.1	14.1	14.1
G162.0	14.1	14.2	14.1	14.1	14.1	14.2	14.1	14.2	14.2	14.3
G163.0	14.3	14.3	14.3	14.2	14.3	14.3	14.3	14.4	14.3	14.4
G164.0	14.4	14.4	14.3	14.4	14.4	14.4	14.4	14.4	14.5	14.6
G165.0	14.5	14.5	14.5	14.5	14.5	14.5	14.6	14.6	14.6	14.7
G166.0	14.6	14.6	14.6	14.5	14.6	14.6	14.6	14.7	14.7	14.8
G167.0	14.7	14.7	14.7	14.6	14.7	14.7	14.8	14.7	14.9	14.8
G168.0	14.9	14.8	14.7	14.8	14.8	14.8	14.9	14.9	14.9	15.0
G169.0	15.0	14.9	14.9	14.9	14.9	15.0	15.0	15.0	15.0	15.1
G170.0	15.1	15.0	15.0	15.0	15.0	15.1	15.1	15.1	15.1	15.1
G171.0	15.2	15.1	15.1	15.1	15.1	15.1	15.2	15.2	15.2	15.3
G172.0	15.3	15.2	15.2	15.2	15.2	15.2	15.2	15.3	15.4	15.4
G173.0	15.5	15.2	15.2	15.2	15.3	15.4	15.4	15.4	15.4	15.4
G174.0	15.6	15.3	15.4	15.3	15.4	15.4	15.5	15.5	15.5	15.5
G175.0	15.6	15.5	15.4	15.4	15.5	15.5	15.5	15.5	15.5	15.6
G176.0	15.8	15.6	15.5	15.6	15.5	15.6	15.6	15.6	15.6	15.7
G177.0	15.8	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.7	15.7
G178.0	15.9	15.6	15.6	15.6	15.6	15.6	15.6	15.7	15.7	15.8
G179.0	16.0	15.7	15.7	15.8	15.7	15.7	15.7	15.8	15.8	15.8
G180.0	16.0	15.8	15.7	15.7	15.8	15.8	15.8	15.8	15.8	15.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	2281.0	2281.5	2280.3	2279.9	2278.6	2277.5	2277.2	2275.2	2274.0	2272.1
G1.0	2280.8	2281.2	2280.2	2279.3	2278.3	2277.6	2276.2	2274.9	2273.7	2272.1
G2.0	2280.6	2279.9	2278.5	2277.9	2276.7	2275.9	2275.1	2273.3	2272.4	2270.7
G3.0	2276.6	2277.1	2275.9	2275.1	2274.3	2273.5	2272.5	2271.0	2269.9	2268.7
G4.0	2271.8	2274.4	2272.8	2272.3	2271.1	2270.5	2270.0	2268.6	2267.3	2266.1
G5.0	2272.5	2270.7	2269.2	2269.1	2268.4	2267.7	2267.2	2265.7	2264.6	2263.2
G6.0	2266.3	2267.1	2265.5	2265.2	2264.8	2263.7	2263.9	2262.7	2261.3	2260.8
G7.0	2260.9	2262.5	2261.2	2261.1	2260.8	2260.4	2260.4	2259.3	2258.0	2257.6
G8.0	2256.6	2257.4	2255.9	2256.9	2256.6	2256.0	2256.3	2255.5	2254.3	2253.6
G9.0	2253.0	2251.4	2250.6	2251.7	2251.4	2251.4	2252.0	2250.9	2249.9	2249.6
G10.0	2244.5	2245.2	2244.3	2245.9	2245.6	2245.7	2246.2	2245.7	2244.2	2244.2
G11.0	2237.7	2239.1	2238.0	2238.9	2239.2	2239.2	2239.6	2239.1	2238.0	2237.7
G12.0	2231.9	2232.1	2230.1	2231.5	2231.4	2231.0	2231.4	2231.1	2230.1	2229.9
G13.0	2224.7	2223.6	2221.8	2222.5	2222.4	2222.3	2222.9	2222.2	2221.9	2221.2
G14.0	2213.9	2214.2	2212.5	2213.1	2212.8	2213.2	2213.4	2213.2	2212.7	2212.4
G15.0	2203.9	2204.5	2202.3	2203.4	2203.3	2203.4	2204.4	2203.9	2203.5	2203.4
G16.0	2194.6	2193.6	2192.1	2193.1	2193.1	2193.9	2195.4	2194.4	2193.9	2193.5
G17.0	2183.9	2182.5	2180.9	2182.1	2183.0	2183.9	2185.2	2184.7	2184.6	2184.1
G18.0	2170.1	2170.4	2170.1	2172.0	2172.1	2173.6	2175.1	2174.5	2173.6	2173.2
G19.0	2156.8	2158.1	2157.6	2159.9	2161.6	2162.5	2163.8	2163.6	2162.5	2161.8
G20.0	2142.4	2144.9	2145.4	2149.0	2149.3	2150.4	2151.0	2151.2	2149.2	2149.4
G21.0	2132.0	2131.9	2132.7	2135.6	2136.8	2137.1	2137.5	2137.6	2135.9	2135.5
G22.0	2116.0	2118.2	2118.5	2121.7	2121.7	2122.4	2122.7	2122.4	2120.4	2120.7
G23.0	2100.7	2103.6	2103.2	2106.3	2106.6	2107.1	2107.5	2107.0	2106.1	2105.9
G24.0	2086.1	2087.1	2087.4	2090.0	2090.8	2091.5	2091.5	2091.7	2089.8	2090.5
G25.0	2072.7	2070.6	2071.1	2073.8	2075.6	2076.3	2076.1	2075.5	2075.1	2074.9
G26.0	2053.6	2053.9	2053.8	2056.4	2058.5	2059.2	2059.2	2059.5	2059.2	2058.9
G27.0	2035.0	2036.1	2036.3	2039.0	2041.7	2042.6	2043.1	2042.0	2042.4	2042.4
G28.0	2015.1	2017.2	2018.3	2022.0	2024.3	2025.2	2024.8	2025.3	2025.1	2024.6
G29.0	1998.7	1998.4	2000.2	2003.6	2006.3	2006.7	2006.0	2006.7	2006.5	2006.2
G30.0	1978.1	1978.6	1980.9	1985.1	1986.8	1986.6	1985.7	1987.4	1986.6	1988.0
G31.0	1956.9	1959.1	1961.6	1964.8	1966.2	1966.9	1966.3	1967.3	1967.0	1967.8
G32.0	1934.1	1938.0	1940.7	1944.0	1944.0	1943.7	1944.8	1946.7	1946.2	1947.0
G33.0	1914.2	1916.8	1918.0	1922.0	1921.3	1921.9	1923.1	1925.7	1926.5	1926.4
G34.0	1894.7	1893.7	1896.1	1899.7	1899.1	1900.3	1901.8	1904.5	1905.0	1903.9
G35.0	1870.0	1870.8	1872.1	1876.3	1876.7	1877.6	1879.4	1881.9	1881.7	1881.7
G36.0	1844.8	1845.5	1848.1	1852.7	1852.4	1853.7	1855.3	1858.0	1856.7	1857.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	1817.9	1821.6	1823.9	1827.9	1828.0	1829.3	1831.2	1833.6	1831.9	1832.7
G38.0	1795.8	1795.9	1798.3	1803.1	1802.7	1802.8	1805.6	1808.1	1805.7	1806.7
G39.0	1770.5	1769.7	1772.3	1776.1	1776.0	1776.0	1779.2	1782.4	1780.3	1780.4
G40.0	1741.5	1742.4	1745.1	1747.9	1748.7	1750.0	1752.8	1755.4	1753.9	1754.4
G41.0	1713.3	1715.1	1717.6	1720.8	1720.9	1722.2	1726.3	1728.7	1726.7	1727.0
G42.0	1686.3	1686.4	1687.4	1692.2	1692.4	1694.8	1697.9	1699.3	1697.6	1698.7
G43.0	1658.4	1658.2	1657.7	1663.1	1664.0	1665.4	1669.8	1669.9	1668.4	1669.3
G44.0	1627.2	1626.5	1628.4	1632.6	1633.2	1635.4	1639.4	1639.4	1639.1	1638.8
G45.0	1598.4	1595.4	1597.2	1601.1	1601.9	1604.4	1608.2	1609.9	1609.8	1609.3
G46.0	1566.6	1565.5	1565.6	1568.2	1568.8	1573.3	1576.3	1579.1	1579.0	1577.6
G47.0	1536.3	1534.5	1533.5	1536.4	1537.2	1541.2	1544.4	1548.6	1547.2	1547.4
G48.0	1500.7	1500.4	1499.2	1500.9	1504.7	1508.8	1510.9	1513.9	1512.9	1512.7
G49.0	1464.2	1466.8	1462.6	1467.1	1469.5	1473.3	1476.7	1480.3	1478.7	1478.7
G50.0	1430.6	1432.6	1429.0	1432.0	1433.8	1437.7	1442.0	1446.0	1445.0	1444.7
G51.0	1396.1	1395.1	1392.8	1396.7	1397.5	1401.9	1405.9	1412.0	1409.5	1409.3
G52.0	1361.8	1355.7	1357.2	1358.5	1361.3	1365.7	1369.9	1374.5	1372.4	1374.2
G53.0	1325.3	1317.9	1319.9	1322.0	1325.2	1329.1	1334.2	1337.0	1335.1	1336.1
G54.0	1287.0	1280.6	1282.0	1282.8	1286.9	1291.2	1296.1	1300.6	1299.0	1298.6
G55.0	1247.5	1242.0	1242.5	1244.9	1248.3	1251.4	1257.1	1263.4	1261.4	1260.2
G56.0	1208.7	1204.4	1201.6	1207.6	1209.1	1214.5	1218.8	1222.1	1221.4	1220.3
G57.0	1166.1	1164.3	1161.7	1168.2	1170.3	1174.8	1178.6	1182.3	1181.2	1181.1
G58.0	1125.7	1124.5	1120.8	1127.8	1128.9	1134.8	1139.0	1142.1	1141.3	1140.6
G59.0	1084.0	1082.9	1080.6	1086.3	1088.0	1092.2	1096.8	1099.9	1099.7	1097.3
G60.0	1044.5	1040.4	1041.9	1043.2	1047.1	1052.2	1054.9	1058.7	1056.5	1056.4
G61.0	1004.0	996.0	999.3	1002.4	1005.0	1008.6	1012.4	1016.2	1013.8	1012.7
G62.0	964.3	954.3	955.3	956.2	959.6	962.8	967.7	970.8	967.5	968.9
G63.0	918.7	912.3	907.7	912.3	916.5	912.3	917.5	924.1	921.3	919.9
G64.0	875.1	867.8	862.7	869.3	868.5	867.4	867.1	866.4	868.9	870.0
G65.0	829.7	824.8	819.7	822.0	821.5	822.3	818.5	819.0	814.3	816.1
G66.0	785.9	784.7	776.5	779.9	776.8	773.3	771.2	769.7	762.6	763.1
G67.0	742.8	738.3	731.3	734.1	731.5	721.0	717.1	716.1	708.4	706.3
G68.0	700.7	691.2	691.8	686.7	680.0	673.1	667.4	663.2	656.1	654.3
G69.0	658.0	648.0	644.4	637.1	630.3	623.8	614.3	609.4	603.3	606.3
G70.0	615.7	604.3	596.6	589.2	583.5	574.9	560.1	553.8	551.4	552.9
G71.0	573.0	560.0	550.8	543.5	536.8	522.1	512.0	508.0	500.5	502.0
G72.0	529.6	521.0	505.9	500.8	489.6	474.0	463.5	454.7	446.1	449.2
G73.0	483.5	480.1	462.9	459.5	438.4	426.7	415.7	403.5	398.9	398.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	441.4	436.7	422.8	412.6	395.5	382.9	363.7	355.8	349.7	351.6
G75.0	401.6	391.0	385.5	368.5	355.4	334.6	316.7	308.8	301.7	305.5
G76.0	362.3	347.4	348.4	328.6	312.8	291.8	274.9	265.4	258.1	259.7
G77.0	323.3	311.6	303.0	291.6	271.0	248.6	237.4	220.0	217.3	221.4
G78.0	284.2	277.0	262.4	253.9	234.1	213.6	192.5	186.9	175.9	180.5
G79.0	249.4	241.1	228.5	217.0	195.1	178.4	159.7	146.3	143.8	147.2
G80.0	216.8	206.5	194.2	184.8	165.2	146.3	128.8	116.4	109.3	110.1
G81.0	186.0	176.4	164.1	151.1	136.0	116.6	101.9	91.6	82.7	84.2
G82.0	155.3	149.4	137.6	123.8	110.1	94.3	80.5	69.5	63.0	63.3
G83.0	128.4	119.5	112.5	99.5	86.8	73.1	58.4	46.6	43.3	45.4
G84.0	104.4	97.6	89.3	80.0	68.9	56.0	41.1	30.9	26.8	29.3
G85.0	83.3	77.7	69.7	62.3	51.3	39.4	27.5	18.3	13.5	16.7
G86.0	62.9	58.8	52.3	46.5	37.9	27.4	17.5	11.0	6.7	9.3
G87.0	44.9	42.6	38.2	33.6	26.2	18.0	11.7	7.0	4.5	5.9
G88.0	30.6	29.5	26.3	22.7	17.6	12.0	7.8	4.6	3.8	4.3
G89.0	19.0	18.1	16.6	14.6	11.4	8.1	5.3	3.3	3.2	3.3
G90.0	9.8	10.0	9.8	9.1	7.5	5.6	3.8	2.5	2.0	2.5
G91.0	5.9	5.9	5.7	5.5	4.9	4.0	2.9	2.0	0.9	1.9
G92.0	5.5	5.4	5.2	4.9	4.3	3.4	2.4	1.5	0.9	1.3
G93.0	5.2	5.1	4.8	4.4	3.8	3.0	2.1	1.2	1.0	1.1
G94.0	4.9	4.7	4.3	3.9	3.3	2.6	1.9	1.1	1.1	1.1
G95.0	4.5	4.2	3.8	3.4	2.9	2.3	1.7	1.3	1.3	1.3
G96.0	4.1	3.7	3.3	2.9	2.5	2.1	1.6	1.4	1.5	1.4
G97.0	3.8	3.3	2.9	2.6	2.2	2.0	1.7	1.6	1.6	1.6
G98.0	3.4	2.9	2.6	2.2	2.1	1.9	1.8	1.8	1.8	1.8
G99.0	3.3	2.8	2.4	2.2	2.1	2.0	2.0	2.0	2.0	1.9
G100.0	3.1	2.7	2.4	2.3	2.3	2.2	2.2	2.2	2.2	2.2
G101.0	3.0	2.7	2.6	2.4	2.4	2.4	2.3	2.3	2.4	2.4
G102.0	3.2	2.8	2.7	2.6	2.6	2.6	2.6	2.6	2.6	2.5
G103.0	3.3	3.0	2.9	2.9	2.8	2.8	2.8	2.8	2.7	2.7
G104.0	3.4	3.2	3.1	3.1	3.0	3.0	3.0	2.9	3.0	2.9
G105.0	3.6	3.4	3.3	3.3	3.3	3.2	3.2	3.1	3.2	3.1
G106.0	3.8	3.6	3.5	3.4	3.4	3.4	3.3	3.4	3.4	3.4
G107.0	3.9	3.8	3.7	3.7	3.6	3.6	3.6	3.6	3.6	3.6
G108.0	4.0	3.9	3.9	3.9	3.9	3.8	3.8	3.8	3.8	3.8
G109.0	4.2	4.2	4.2	4.1	4.1	4.1	4.1	4.0	4.0	4.0
G110.0	4.4	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.2	4.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	4.6	4.6	4.6	4.5	4.5	4.5	4.5	4.4	4.4	4.4
G112.0	4.8	4.8	4.8	4.7	4.8	4.7	4.7	4.7	4.8	4.7
G113.0	5.0	5.0	5.0	4.9	4.9	4.9	4.9	4.9	4.9	4.9
G114.0	5.3	5.3	5.2	5.1	5.1	5.1	5.2	5.2	5.2	5.1
G115.0	5.5	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4
G116.0	5.7	5.7	5.6	5.6	5.6	5.6	5.5	5.6	5.6	5.6
G117.0	5.9	5.9	5.9	5.9	5.8	5.9	5.9	5.8	5.9	5.8
G118.0	6.1	6.1	6.1	6.1	6.1	6.0	6.1	6.1	6.0	6.0
G119.0	6.4	6.4	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
G120.0	6.6	6.6	6.5	6.5	6.5	6.6	6.6	6.6	6.6	6.6
G121.0	6.8	6.8	6.7	6.8	6.7	6.7	6.8	6.7	6.8	6.8
G122.0	7.0	7.1	7.0	7.0	7.0	7.0	6.9	7.0	7.0	7.0
G123.0	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
G124.0	7.5	7.5	7.5	7.4	7.4	7.4	7.5	7.4	7.5	7.4
G125.0	7.7	7.7	7.7	7.6	7.6	7.6	7.6	7.6	7.6	7.6
G126.0	7.9	7.9	7.9	7.9	7.8	7.9	7.9	7.9	7.9	7.9
G127.0	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1
G128.0	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.4
G129.0	8.6	8.6	8.5	8.6	8.5	8.6	8.5	8.6	8.6	8.6
G130.0	8.8	8.8	8.7	8.7	8.7	8.8	8.8	8.7	8.8	8.8
G131.0	9.1	9.0	9.0	9.0	9.0	8.9	9.0	9.0	9.0	9.0
G132.0	9.2	9.2	9.2	9.2	9.2	9.1	9.2	9.2	9.3	9.2
G133.0	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
G134.0	9.7	9.6	9.7	9.6	9.7	9.6	9.6	9.6	9.6	9.7
G135.0	9.9	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.9
G136.0	10.1	10.1	10.1	10.0	10.1	10.0	10.0	10.1	10.1	10.0
G137.0	10.3	10.3	10.2	10.3	10.3	10.2	10.3	10.2	10.3	10.3
G138.0	10.5	10.5	10.4	10.4	10.4	10.4	10.4	10.5	10.5	10.5
G139.0	10.7	10.7	10.6	10.6	10.6	10.6	10.6	10.6	10.7	10.7
G140.0	10.9	10.9	10.8	10.9	10.8	10.9	10.9	10.9	10.9	10.9
G141.0	11.1	11.1	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1
G142.0	11.3	11.3	11.2	11.2	11.3	11.2	11.2	11.2	11.3	11.3
G143.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.5	11.5	11.4
G144.0	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.7	11.7	11.6
G145.0	11.8	11.8	11.9	11.8	11.8	11.8	11.8	11.9	11.9	11.8
G146.0	12.0	12.0	11.9	12.0	11.9	11.9	11.9	12.0	12.0	11.9
G147.0	12.2	12.2	12.2	12.1	12.1	12.1	12.1	12.1	12.2	12.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	12.3	12.3	12.4	12.3	12.3	12.3	12.2	12.3	12.4	12.3
G149.0	12.4	12.5	12.5	12.4	12.4	12.4	12.5	12.4	12.5	12.4
G150.0	12.6	12.7	12.7	12.6	12.6	12.6	12.6	12.7	12.6	12.6
G151.0	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.8
G152.0	12.9	13.0	13.0	13.0	12.9	12.9	12.9	13.0	12.9	12.9
G153.0	13.1	13.1	13.2	13.1	13.1	13.1	13.1	13.1	13.1	13.1
G154.0	13.2	13.3	13.3	13.3	13.3	13.3	13.2	13.2	13.2	13.3
G155.0	13.4	13.4	13.4	13.5	13.5	13.4	13.4	13.4	13.4	13.4
G156.0	13.5	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.5	13.5
G157.0	13.6	13.7	13.7	13.7	13.7	13.7	13.6	13.7	13.7	13.6
G158.0	13.8	13.8	13.9	13.9	13.9	13.9	13.9	13.8	13.8	13.8
G159.0	13.9	14.0	14.0	14.1	14.0	14.1	14.0	13.9	13.9	13.9
G160.0	14.1	14.1	14.1	14.2	14.1	14.2	14.1	14.1	14.1	14.0
G161.0	14.2	14.2	14.2	14.3	14.3	14.3	14.3	14.2	14.2	14.1
G162.0	14.3	14.4	14.4	14.4	14.4	14.5	14.4	14.3	14.3	14.3
G163.0	14.4	14.5	14.5	14.5	14.6	14.6	14.5	14.5	14.5	14.4
G164.0	14.6	14.6	14.6	14.6	14.7	14.7	14.7	14.6	14.6	14.5
G165.0	14.6	14.7	14.7	14.7	14.8	14.8	14.8	14.7	14.6	14.6
G166.0	14.7	14.8	14.9	14.9	14.9	15.0	14.9	14.8	14.7	14.7
G167.0	14.9	14.9	15.0	15.0	15.1	15.1	15.1	15.0	14.9	14.8
G168.0	15.0	15.1	15.1	15.1	15.1	15.2	15.1	15.1	15.0	14.9
G169.0	15.1	15.1	15.1	15.1	15.2	15.3	15.2	15.1	15.1	15.1
G170.0	15.2	15.2	15.2	15.3	15.3	15.4	15.4	15.3	15.1	15.1
G171.0	15.3	15.3	15.4	15.4	15.4	15.4	15.4	15.4	15.3	15.2
G172.0	15.4	15.4	15.4	15.5	15.5	15.5	15.6	15.6	15.4	15.3
G173.0	15.5	15.5	15.5	15.5	15.5	15.6	15.6	15.6	15.5	15.4
G174.0	15.6	15.6	15.6	15.6	15.6	15.7	15.6	15.6	15.6	15.5
G175.0	15.6	15.6	15.6	15.6	15.6	15.7	15.8	15.7	15.6	15.5
G176.0	15.6	15.6	15.6	15.7	15.7	15.8	15.8	15.8	15.8	15.6
G177.0	15.7	15.6	15.7	15.7	15.8	15.8	15.8	15.8	15.8	15.7
G178.0	15.8	15.8	15.8	15.8	15.8	15.8	15.9	15.8	15.8	15.8
G179.0	15.8	15.8	15.8	15.8	15.8	15.9	15.9	15.9	15.9	15.8
G180.0	15.8	15.9	15.9	15.8	15.9	15.9	15.9	15.9	16.0	15.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	2271.8	2271.4	2271.8	2272.6	2273.2	2273.8	2275.7	2276.6	2277.5	2278.6
G1.0	2271.7	2271.4	2271.2	2272.5	2273.2	2273.5	2275.9	2276.1	2277.7	2278.6
G2.0	2270.6	2270.4	2270.4	2271.6	2272.4	2272.8	2275.1	2275.5	2276.7	2277.8
G3.0	2268.5	2268.2	2268.4	2269.6	2270.6	2271.1	2273.5	2274.2	2274.8	2276.8
G4.0	2266.0	2265.6	2265.6	2267.4	2268.3	2269.2	2271.4	2272.1	2273.4	2275.2
G5.0	2263.4	2263.4	2263.6	2264.7	2265.7	2267.0	2268.9	2269.8	2270.1	2272.4
G6.0	2261.1	2260.8	2260.9	2262.3	2262.9	2264.1	2266.1	2266.8	2267.5	2269.1
G7.0	2257.7	2257.8	2257.7	2259.1	2259.8	2260.6	2262.2	2263.4	2263.9	2265.9
G8.0	2253.9	2254.0	2254.2	2255.0	2256.1	2257.0	2258.4	2259.5	2259.7	2261.8
G9.0	2249.7	2249.4	2249.9	2250.5	2251.7	2252.1	2253.4	2254.3	2255.0	2257.2
G10.0	2244.6	2244.2	2244.9	2245.5	2246.7	2246.6	2248.1	2249.3	2249.5	2251.8
G11.0	2238.1	2238.4	2238.9	2239.9	2240.6	2240.6	2242.4	2243.2	2243.3	2245.6
G12.0	2230.7	2230.4	2231.2	2232.8	2233.8	2233.6	2235.4	2236.4	2236.3	2238.3
G13.0	2222.2	2222.2	2222.6	2223.9	2225.2	2226.0	2227.6	2228.6	2228.7	2230.7
G14.0	2212.9	2212.7	2212.9	2214.7	2216.0	2216.8	2219.1	2220.9	2221.1	2222.8
G15.0	2204.3	2203.9	2204.1	2205.3	2206.7	2207.5	2210.0	2212.0	2212.9	2214.7
G16.0	2194.4	2194.1	2194.0	2195.4	2196.4	2197.3	2199.7	2202.5	2203.4	2205.6
G17.0	2184.5	2184.5	2183.9	2185.4	2185.9	2186.7	2189.3	2191.5	2193.6	2195.8
G18.0	2173.6	2173.9	2174.0	2175.4	2175.6	2175.9	2177.7	2180.3	2182.1	2184.6
G19.0	2162.6	2163.6	2163.3	2164.4	2164.9	2164.3	2165.8	2167.8	2169.4	2173.2
G20.0	2150.3	2151.0	2151.2	2152.2	2153.1	2151.9	2153.3	2155.0	2156.9	2160.5
G21.0	2136.8	2138.2	2138.4	2140.1	2140.4	2139.2	2139.8	2142.0	2142.7	2147.9
G22.0	2122.4	2123.1	2124.3	2126.4	2126.9	2125.8	2125.6	2127.9	2129.0	2133.6
G23.0	2107.5	2108.1	2109.8	2111.5	2111.9	2111.3	2112.0	2113.5	2114.9	2119.3
G24.0	2092.1	2093.4	2094.9	2095.9	2097.2	2095.8	2097.4	2099.0	2099.2	2103.6
G25.0	2076.2	2077.6	2079.0	2079.5	2079.5	2079.9	2081.6	2084.1	2084.3	2087.5
G26.0	2060.2	2060.4	2061.9	2062.4	2062.6	2063.0	2065.7	2068.3	2067.9	2070.6
G27.0	2043.4	2043.6	2044.7	2045.2	2045.4	2045.8	2048.2	2050.7	2051.9	2054.1
G28.0	2026.8	2025.7	2027.4	2027.7	2027.9	2027.3	2030.4	2032.9	2034.3	2036.6
G29.0	2007.1	2008.0	2008.3	2009.6	2008.7	2008.9	2011.2	2014.5	2016.4	2018.5
G30.0	1987.6	1987.4	1989.2	1990.4	1990.0	1989.2	1991.3	1995.8	1997.1	1999.1
G31.0	1967.6	1967.8	1968.9	1970.9	1970.9	1970.9	1971.8	1975.7	1977.6	1980.2
G32.0	1946.9	1946.0	1947.7	1949.2	1951.2	1949.5	1951.4	1954.6	1956.4	1959.4
G33.0	1926.2	1925.3	1926.6	1928.4	1929.7	1928.8	1930.5	1932.9	1935.8	1937.9
G34.0	1904.8	1903.2	1903.5	1905.2	1907.7	1906.5	1908.5	1911.7	1912.6	1915.2
G35.0	1882.3	1880.7	1880.3	1882.5	1884.3	1884.3	1885.4	1888.5	1890.0	1891.8
G36.0	1857.7	1856.9	1855.6	1857.8	1859.4	1859.7	1861.1	1864.3	1865.1	1868.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	1832.5	1831.3	1831.4	1833.9	1835.2	1834.6	1837.2	1840.8	1841.0	1844.3
G38.0	1806.2	1805.5	1804.5	1807.7	1810.6	1809.1	1810.8	1814.9	1816.3	1819.5
G39.0	1781.0	1779.3	1778.7	1781.5	1783.5	1783.0	1785.1	1789.6	1792.3	1794.4
G40.0	1754.5	1752.4	1750.6	1754.3	1755.6	1755.9	1758.8	1762.2	1766.6	1767.2
G41.0	1727.2	1724.7	1722.9	1725.8	1728.4	1729.3	1731.4	1735.6	1738.8	1740.2
G42.0	1698.8	1695.8	1694.6	1696.0	1699.7	1700.6	1702.3	1708.3	1709.2	1712.9
G43.0	1668.7	1667.8	1665.0	1666.7	1670.4	1671.4	1674.0	1681.7	1680.9	1685.4
G44.0	1637.7	1636.1	1635.3	1635.7	1639.7	1639.5	1645.5	1650.9	1652.3	1656.8
G45.0	1607.0	1605.3	1604.7	1605.7	1608.8	1608.7	1615.5	1620.3	1622.9	1628.2
G46.0	1576.3	1574.7	1573.8	1574.2	1577.1	1577.5	1584.0	1589.8	1593.5	1597.4
G47.0	1545.1	1543.6	1541.7	1543.0	1545.5	1546.4	1552.4	1559.6	1565.0	1567.1
G48.0	1511.3	1509.0	1507.7	1508.8	1512.3	1514.6	1518.6	1527.4	1534.6	1535.1
G49.0	1477.9	1474.3	1473.1	1473.6	1477.3	1481.5	1485.7	1495.6	1500.1	1500.6
G50.0	1443.2	1438.8	1438.0	1438.8	1441.8	1445.3	1452.3	1462.9	1465.4	1468.2
G51.0	1408.4	1403.3	1401.8	1401.8	1406.3	1409.9	1417.7	1429.3	1430.0	1435.4
G52.0	1372.7	1367.7	1365.9	1366.2	1370.4	1372.2	1382.7	1392.3	1395.3	1402.5
G53.0	1334.0	1329.9	1328.0	1327.8	1334.1	1336.8	1346.8	1354.9	1360.3	1369.0
G54.0	1296.2	1291.0	1289.9	1289.9	1295.2	1298.2	1310.2	1317.0	1325.5	1335.8
G55.0	1259.3	1253.2	1249.8	1252.1	1254.8	1261.3	1270.1	1281.0	1292.1	1299.6
G56.0	1219.9	1214.7	1211.8	1214.1	1216.5	1223.1	1231.4	1243.8	1256.3	1262.1
G57.0	1178.8	1174.5	1170.9	1174.4	1178.1	1184.4	1190.7	1207.2	1219.0	1222.8
G58.0	1137.1	1134.1	1129.9	1132.8	1138.9	1143.4	1151.4	1168.1	1178.3	1183.3
G59.0	1096.6	1090.7	1090.2	1089.9	1097.7	1100.7	1111.2	1130.2	1136.1	1143.9
G60.0	1054.3	1051.2	1047.5	1048.5	1055.3	1059.0	1073.3	1089.4	1094.9	1107.1
G61.0	1010.6	1008.5	1005.8	1005.2	1014.0	1017.6	1032.9	1046.2	1055.3	1068.7
G62.0	966.3	963.0	962.5	963.7	969.7	976.8	991.3	1002.7	1016.2	1029.4
G63.0	922.2	918.0	917.9	920.0	925.9	936.8	947.2	961.7	975.4	990.2
G64.0	868.9	864.3	868.2	875.0	878.7	894.5	903.8	920.5	936.0	950.1
G65.0	817.6	813.6	815.2	828.0	834.3	847.2	859.8	880.2	895.8	907.4
G66.0	765.8	767.9	771.2	778.5	790.6	800.3	816.6	840.3	854.6	865.3
G67.0	715.4	722.5	727.3	730.7	749.4	755.3	773.6	802.6	810.4	823.1
G68.0	660.5	668.4	678.0	685.5	700.6	710.1	733.2	753.8	768.8	781.1
G69.0	608.5	617.4	631.6	639.0	653.5	667.2	692.5	709.9	725.9	738.9
G70.0	556.5	563.9	579.8	593.9	605.5	624.0	647.2	667.2	682.4	699.2
G71.0	509.5	512.1	529.9	549.9	560.5	579.6	602.6	625.5	641.0	659.3
G72.0	454.6	465.5	479.7	502.3	518.0	536.4	558.8	581.5	601.9	619.5
G73.0	407.2	419.5	433.5	453.4	478.0	492.8	512.8	542.3	563.3	578.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	363.1	372.0	388.3	406.5	437.4	450.7	472.8	502.2	523.3	534.0
G75.0	314.6	329.8	348.0	364.5	393.7	410.9	433.5	463.7	479.2	487.7
G76.0	270.8	285.0	307.1	326.3	347.6	372.1	397.9	422.6	433.4	443.9
G77.0	229.2	243.2	265.8	289.7	308.7	336.9	361.1	379.8	388.3	401.3
G78.0	192.7	207.5	225.2	253.0	272.0	301.8	319.8	334.2	346.9	361.5
G79.0	155.4	171.5	191.4	217.1	240.6	259.3	280.5	295.9	307.5	322.3
G80.0	125.7	139.6	160.9	181.7	207.6	221.0	245.1	257.7	271.3	283.9
G81.0	97.4	111.9	132.0	152.6	175.9	189.2	209.1	223.5	235.5	247.0
G82.0	76.5	90.1	104.6	126.8	146.6	160.3	176.5	192.4	202.4	212.3
G83.0	55.3	68.1	84.4	101.8	115.9	132.3	147.3	163.1	169.9	178.7
G84.0	38.5	51.0	68.5	81.3	94.9	109.7	122.3	135.8	140.8	149.4
G85.0	25.0	37.5	51.1	61.9	75.6	89.0	98.7	109.2	115.1	122.9
G86.0	16.1	25.9	37.5	48.8	59.6	68.0	76.8	86.1	91.5	98.5
G87.0	10.6	17.4	26.5	35.6	45.0	51.4	58.7	66.0	70.9	75.3
G88.0	7.3	12.0	18.5	25.6	32.0	37.3	43.9	48.6	52.1	55.5
G89.0	5.0	8.2	12.2	17.1	21.8	25.0	29.4	33.0	35.3	37.9
G90.0	3.7	5.9	8.4	11.3	14.2	16.1	18.4	20.1	21.4	23.4
G91.0	2.9	4.3	5.7	6.9	8.0	9.0	9.5	10.3	10.8	11.4
G92.0	2.4	3.4	4.5	5.0	5.4	5.6	5.7	5.8	5.7	5.6
G93.0	2.1	3.0	4.0	4.6	4.9	5.2	5.4	5.4	5.4	5.1
G94.0	1.8	2.6	3.5	4.2	4.6	5.0	5.2	5.2	5.2	5.0
G95.0	1.6	2.3	3.1	3.8	4.3	4.6	4.9	5.1	5.1	5.0
G96.0	1.6	2.1	2.7	3.3	3.9	4.2	4.6	4.8	4.8	4.8
G97.0	1.6	1.9	2.4	3.0	3.5	3.9	4.4	4.7	4.7	4.7
G98.0	1.8	1.9	2.2	2.7	3.2	3.7	4.2	4.5	4.6	4.7
G99.0	1.9	2.0	2.1	2.6	3.1	3.5	3.9	4.3	4.6	4.6
G100.0	2.2	2.2	2.2	2.4	2.9	3.3	3.7	4.1	4.4	4.5
G101.0	2.4	2.4	2.4	2.5	2.8	3.2	3.6	3.9	4.3	4.3
G102.0	2.6	2.6	2.6	2.7	2.9	3.2	3.5	3.8	4.1	4.2
G103.0	2.7	2.8	2.8	2.8	3.0	3.3	3.6	3.8	4.0	4.3
G104.0	3.0	2.9	2.9	3.1	3.2	3.4	3.7	3.8	4.0	4.1
G105.0	3.1	3.2	3.2	3.2	3.3	3.5	3.8	4.0	4.0	4.1
G106.0	3.3	3.4	3.4	3.4	3.5	3.6	3.8	4.0	4.2	4.3
G107.0	3.6	3.6	3.6	3.6	3.7	3.8	3.9	4.1	4.3	4.3
G108.0	3.8	3.8	3.8	3.8	3.8	4.0	4.2	4.3	4.3	4.4
G109.0	4.0	4.0	4.0	4.0	4.1	4.2	4.2	4.3	4.4	4.5
G110.0	4.2	4.2	4.2	4.3	4.2	4.3	4.4	4.5	4.5	4.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	4.5	4.4	4.4	4.4	4.5	4.5	4.6	4.7	4.7	4.8
G112.0	4.7	4.7	4.7	4.7	4.7	4.7	4.8	4.8	4.8	4.8
G113.0	4.9	4.9	4.9	4.9	4.8	4.8	4.9	4.9	5.0	5.0
G114.0	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.2	5.2	5.2
G115.0	5.4	5.4	5.4	5.3	5.3	5.4	5.3	5.4	5.4	5.4
G116.0	5.6	5.6	5.5	5.6	5.6	5.5	5.5	5.5	5.5	5.6
G117.0	5.8	5.8	5.7	5.8	5.7	5.7	5.8	5.8	5.8	5.8
G118.0	6.0	6.0	6.0	6.0	5.9	5.9	5.9	5.9	5.9	6.0
G119.0	6.3	6.2	6.2	6.2	6.2	6.2	6.2	6.1	6.2	6.2
G120.0	6.5	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
G121.0	6.7	6.7	6.6	6.7	6.6	6.6	6.6	6.6	6.6	6.6
G122.0	7.0	6.9	6.9	6.9	6.9	6.8	6.8	6.9	6.8	6.8
G123.0	7.2	7.1	7.1	7.1	7.1	7.1	7.1	7.0	7.0	7.1
G124.0	7.4	7.4	7.4	7.3	7.3	7.3	7.3	7.3	7.2	7.3
G125.0	7.6	7.6	7.6	7.6	7.6	7.6	7.5	7.5	7.5	7.5
G126.0	7.8	7.8	7.8	7.8	7.8	7.7	7.7	7.7	7.7	7.7
G127.0	8.1	8.1	8.1	8.0	8.0	8.0	8.0	8.0	7.9	7.9
G128.0	8.3	8.3	8.2	8.3	8.2	8.2	8.1	8.1	8.1	8.1
G129.0	8.5	8.5	8.5	8.5	8.4	8.4	8.4	8.3	8.4	8.3
G130.0	8.8	8.7	8.7	8.6	8.6	8.6	8.6	8.6	8.6	8.6
G131.0	9.0	8.9	8.9	8.9	8.9	8.8	8.8	8.7	8.8	8.8
G132.0	9.1	9.1	9.1	9.1	9.1	9.1	9.1	9.0	9.0	9.0
G133.0	9.4	9.3	9.3	9.3	9.3	9.3	9.2	9.2	9.2	9.1
G134.0	9.6	9.6	9.6	9.5	9.5	9.5	9.5	9.5	9.5	9.4
G135.0	9.8	9.8	9.7	9.8	9.7	9.7	9.6	9.7	9.6	9.6
G136.0	10.0	10.0	9.9	9.9	9.9	9.9	9.8	9.8	9.8	9.8
G137.0	10.3	10.2	10.1	10.1	10.1	10.1	10.0	10.0	10.0	10.0
G138.0	10.4	10.4	10.3	10.3	10.3	10.3	10.3	10.3	10.2	10.2
G139.0	10.6	10.6	10.6	10.5	10.5	10.5	10.5	10.4	10.4	10.4
G140.0	10.8	10.8	10.8	10.7	10.8	10.7	10.7	10.6	10.6	10.6
G141.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9	10.8	10.8	10.8
G142.0	11.2	11.2	11.1	11.2	11.1	11.1	11.0	11.0	11.0	11.0
G143.0	11.4	11.4	11.3	11.3	11.4	11.3	11.2	11.2	11.2	11.2
G144.0	11.5	11.5	11.5	11.4	11.4	11.4	11.4	11.4	11.3	11.3
G145.0	11.8	11.7	11.7	11.6	11.7	11.6	11.6	11.6	11.6	11.5
G146.0	11.9	11.9	11.9	11.8	11.8	11.8	11.8	11.7	11.8	11.7
G147.0	12.1	12.1	12.0	12.0	11.9	11.9	11.9	11.9	11.9	11.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	12.3	12.2	12.2	12.2	12.1	12.1	12.1	12.0	12.0	12.0
G149.0	12.4	12.4	12.4	12.4	12.3	12.3	12.2	12.3	12.2	12.2
G150.0	12.6	12.5	12.5	12.5	12.4	12.5	12.4	12.4	12.3	12.4
G151.0	12.8	12.7	12.7	12.7	12.7	12.6	12.5	12.6	12.5	12.5
G152.0	12.9	12.9	12.8	12.9	12.8	12.8	12.7	12.7	12.7	12.7
G153.0	13.1	13.0	13.0	12.9	12.9	12.9	12.9	12.8	12.8	12.8
G154.0	13.2	13.1	13.1	13.1	13.1	13.1	13.1	12.9	12.9	13.0
G155.0	13.3	13.3	13.3	13.2	13.2	13.2	13.1	13.1	13.1	13.1
G156.0	13.5	13.5	13.5	13.5	13.4	13.4	13.3	13.3	13.3	13.3
G157.0	13.6	13.6	13.6	13.6	13.6	13.5	13.5	13.4	13.4	13.4
G158.0	13.7	13.7	13.7	13.7	13.6	13.7	13.6	13.5	13.5	13.6
G159.0	13.9	13.9	13.9	13.9	13.8	13.7	13.7	13.7	13.7	13.6
G160.0	14.0	14.0	14.0	13.9	13.9	13.9	13.8	13.8	13.8	13.8
G161.0	14.1	14.1	14.1	14.1	14.1	14.1	14.0	13.9	13.9	13.9
G162.0	14.2	14.2	14.2	14.2	14.2	14.2	14.1	14.1	14.0	14.1
G163.0	14.3	14.3	14.3	14.4	14.3	14.3	14.3	14.2	14.2	14.2
G164.0	14.5	14.5	14.5	14.5	14.5	14.5	14.4	14.4	14.3	14.3
G165.0	14.6	14.6	14.6	14.6	14.6	14.5	14.5	14.4	14.4	14.5
G166.0	14.7	14.7	14.7	14.7	14.6	14.7	14.6	14.6	14.5	14.5
G167.0	14.8	14.8	14.8	14.8	14.7	14.8	14.7	14.7	14.7	14.6
G168.0	14.9	14.9	14.9	14.9	14.9	14.9	14.8	14.8	14.8	14.8
G169.0	15.0	15.0	15.1	15.0	15.0	15.0	15.0	14.9	14.9	14.9
G170.0	15.1	15.1	15.1	15.1	15.1	15.1	15.1	15.0	15.0	15.0
G171.0	15.2	15.2	15.2	15.2	15.2	15.2	15.1	15.1	15.1	15.1
G172.0	15.3	15.3	15.3	15.3	15.2	15.2	15.2	15.2	15.2	15.2
G173.0	15.4	15.4	15.3	15.4	15.3	15.4	15.3	15.3	15.3	15.3
G174.0	15.5	15.4	15.5	15.4	15.4	15.5	15.4	15.4	15.4	15.3
G175.0	15.6	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5
G176.0	15.5	15.6	15.6	15.6	15.5	15.6	15.6	15.5	15.5	15.5
G177.0	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6
G178.0	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6
G179.0	15.8	15.7	15.6	15.7	15.6	15.7	15.6	15.7	15.6	15.6
G180.0	15.8	15.7	15.7	15.7	15.7	15.8	15.8	15.7	15.6	15.6

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	2278.9	2280.6	2281.0	2281.7	2282.3	2283.5	2283.4	2283.1	2283.1	2283.1
G1.0	2278.9	2280.6	2280.6	2282.2	2282.4	2283.8	2283.0	2282.7	2282.7	2282.7
G2.0	2278.1	2279.8	2280.1	2281.6	2281.9	2283.6	2282.2	2281.6	2282.1	2281.9
G3.0	2276.8	2279.1	2279.1	2280.7	2281.3	2282.8	2281.3	2280.5	2280.8	2280.5
G4.0	2275.1	2277.1	2277.6	2279.4	2279.8	2281.9	2279.5	2279.1	2279.3	2278.7
G5.0	2272.5	2275.0	2275.8	2277.5	2277.8	2280.3	2277.2	2277.0	2276.9	2276.4
G6.0	2269.8	2272.2	2273.0	2275.0	2275.7	2277.8	2274.3	2273.8	2273.6	2273.3
G7.0	2266.4	2268.5	2269.4	2272.0	2272.6	2274.8	2270.6	2270.0	2269.9	2269.2
G8.0	2262.3	2264.7	2265.4	2268.3	2269.1	2271.1	2265.9	2264.9	2264.8	2265.0
G9.0	2257.6	2259.8	2260.5	2263.5	2264.4	2266.3	2260.3	2259.4	2259.5	2259.1
G10.0	2251.3	2254.2	2254.7	2257.1	2258.6	2261.2	2253.1	2253.2	2252.6	2252.1
G11.0	2245.2	2247.7	2248.2	2250.9	2251.8	2254.6	2245.8	2245.6	2244.8	2244.2
G12.0	2238.4	2240.3	2240.9	2243.0	2243.7	2246.7	2237.4	2236.6	2236.5	2236.3
G13.0	2229.9	2232.3	2232.4	2234.2	2235.3	2238.4	2228.2	2227.5	2227.0	2227.1
G14.0	2221.9	2223.6	2222.9	2224.8	2226.2	2229.1	2217.5	2217.6	2217.2	2217.2
G15.0	2213.3	2214.5	2213.5	2215.5	2216.7	2219.4	2208.2	2207.8	2207.3	2207.1
G16.0	2204.0	2205.3	2203.4	2205.2	2206.3	2209.3	2197.8	2196.8	2196.7	2196.5
G17.0	2195.1	2195.5	2193.6	2195.1	2195.9	2199.1	2186.3	2186.4	2185.8	2185.3
G18.0	2184.3	2185.1	2183.2	2183.9	2185.0	2188.4	2174.3	2174.7	2173.6	2173.9
G19.0	2172.8	2173.9	2172.0	2173.1	2173.7	2177.1	2162.0	2161.7	2161.6	2161.3
G20.0	2161.1	2162.5	2160.1	2161.0	2160.5	2164.8	2148.9	2148.7	2148.0	2148.1
G21.0	2148.2	2149.8	2147.4	2148.1	2147.8	2151.9	2135.5	2134.9	2134.1	2133.9
G22.0	2134.7	2136.5	2134.6	2134.4	2134.8	2137.9	2121.2	2120.3	2119.5	2120.1
G23.0	2120.9	2121.8	2120.4	2119.7	2120.3	2123.8	2106.5	2105.1	2103.7	2104.4
G24.0	2105.4	2107.0	2105.5	2104.3	2104.8	2109.1	2089.9	2089.2	2088.3	2089.0
G25.0	2089.3	2091.0	2089.9	2088.6	2089.4	2093.6	2074.1	2073.3	2072.1	2072.5
G26.0	2072.9	2074.5	2073.2	2071.5	2073.0	2078.0	2056.2	2055.8	2054.6	2055.8
G27.0	2054.4	2056.4	2055.4	2055.4	2056.7	2061.2	2038.6	2038.2	2036.7	2036.9
G28.0	2035.3	2038.1	2037.1	2037.6	2039.1	2044.0	2018.9	2018.0	2017.1	2018.7
G29.0	2016.1	2017.8	2018.4	2019.6	2020.2	2025.0	2000.0	1998.9	1998.5	1998.4
G30.0	1997.0	1997.9	1998.4	1999.3	2000.7	2006.3	1980.8	1979.8	1978.6	1979.6
G31.0	1977.7	1977.2	1978.2	1980.4	1981.9	1987.8	1959.8	1960.1	1959.5	1959.4
G32.0	1956.6	1955.9	1957.7	1960.4	1961.9	1969.3	1937.9	1937.6	1937.3	1938.9
G33.0	1934.8	1934.8	1937.6	1940.4	1942.9	1947.8	1914.2	1914.2	1914.8	1915.9
G34.0	1912.2	1913.9	1916.3	1919.0	1919.8	1925.7	1890.2	1889.9	1891.4	1892.2
G35.0	1891.3	1892.2	1893.5	1896.5	1898.0	1902.2	1866.3	1867.2	1868.7	1868.7
G36.0	1868.2	1868.0	1868.2	1872.6	1873.9	1878.0	1842.0	1843.5	1844.8	1845.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	1844.8	1843.9	1843.9	1849.1	1851.3	1855.0	1818.2	1820.6	1821.3	1820.9
G38.0	1817.5	1817.5	1819.2	1824.9	1827.0	1830.2	1792.3	1794.1	1796.4	1795.4
G39.0	1791.5	1792.6	1794.6	1799.7	1803.0	1806.9	1765.9	1767.9	1769.9	1769.7
G40.0	1764.0	1766.4	1769.2	1774.6	1776.8	1782.2	1736.6	1738.9	1741.5	1741.9
G41.0	1738.2	1741.0	1742.9	1747.3	1749.9	1756.0	1708.1	1710.4	1712.7	1711.2
G42.0	1710.6	1713.7	1714.8	1718.0	1721.3	1726.2	1679.7	1680.3	1682.2	1680.8
G43.0	1684.1	1687.8	1686.3	1688.7	1691.9	1697.4	1650.3	1651.4	1652.7	1650.6
G44.0	1656.2	1657.5	1655.3	1657.4	1661.9	1668.4	1621.9	1622.8	1623.5	1620.1
G45.0	1627.4	1626.7	1625.2	1627.8	1632.1	1639.9	1591.8	1593.3	1592.9	1589.7
G46.0	1596.6	1596.6	1595.0	1597.3	1602.3	1610.2	1563.1	1563.2	1563.9	1559.6
G47.0	1564.4	1564.8	1565.5	1567.5	1573.3	1581.7	1530.5	1531.3	1531.8	1527.5
G48.0	1531.9	1533.7	1534.0	1537.1	1542.6	1550.3	1497.1	1497.1	1498.5	1495.2
G49.0	1499.5	1502.3	1502.8	1505.4	1511.2	1520.2	1461.5	1461.1	1463.5	1460.8
G50.0	1468.2	1471.1	1470.8	1474.4	1478.0	1487.3	1426.3	1427.6	1426.0	1424.0
G51.0	1435.7	1439.2	1436.4	1439.1	1443.2	1452.4	1390.5	1391.7	1391.1	1385.6
G52.0	1404.7	1405.2	1400.9	1403.5	1407.6	1416.9	1356.3	1358.2	1355.7	1350.9
G53.0	1372.1	1369.9	1363.8	1365.1	1371.1	1381.4	1320.6	1323.1	1321.7	1314.8
G54.0	1337.1	1332.2	1328.3	1328.7	1336.4	1346.0	1285.7	1288.3	1285.3	1279.3
G55.0	1297.5	1296.3	1291.9	1293.3	1300.7	1312.6	1250.7	1251.3	1249.5	1242.5
G56.0	1260.1	1259.6	1256.2	1257.7	1266.0	1277.8	1213.5	1216.1	1213.9	1204.9
G57.0	1221.7	1224.1	1220.0	1221.5	1229.2	1242.6	1174.2	1177.1	1175.9	1168.3
G58.0	1185.5	1188.1	1184.6	1185.9	1192.3	1206.2	1135.7	1136.1	1135.4	1128.3
G59.0	1148.3	1152.4	1147.0	1148.3	1154.8	1170.2	1093.8	1095.7	1092.9	1088.1
G60.0	1111.2	1114.1	1110.1	1111.2	1117.6	1131.4	1054.2	1056.4	1053.7	1045.9
G61.0	1072.8	1076.7	1071.2	1070.8	1076.2	1091.9	1013.7	1015.7	1012.6	1004.6
G62.0	1035.8	1036.8	1032.1	1031.4	1038.2	1050.8	974.3	976.4	971.9	962.8
G63.0	996.3	995.3	989.9	990.3	997.4	1011.0	933.6	935.7	932.6	923.1
G64.0	954.0	953.3	951.0	950.6	957.8	971.2	894.9	898.6	893.1	882.7
G65.0	910.4	913.2	909.0	910.4	918.5	931.7	855.4	859.0	854.3	843.3
G66.0	869.1	870.7	870.0	872.6	879.5	893.2	815.4	819.3	814.9	803.0
G67.0	827.2	831.4	830.5	832.8	840.4	856.0	771.5	777.1	772.5	762.5
G68.0	788.0	791.7	789.9	794.9	800.8	817.4	729.5	735.2	729.4	721.7
G69.0	747.2	752.4	750.7	754.9	760.5	778.1	683.2	687.0	682.8	678.0
G70.0	707.1	712.1	712.3	715.6	720.8	735.4	638.4	641.2	637.8	630.8
G71.0	667.0	672.6	671.0	673.1	677.3	690.0	591.9	594.5	590.7	584.6
G72.0	626.8	628.9	626.9	628.6	633.0	643.4	548.8	549.5	547.0	540.8
G73.0	582.5	584.0	581.0	583.5	587.5	597.8	506.8	507.2	504.7	496.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	538.1	537.8	535.8	538.5	544.1	553.9	465.1	465.6	463.1	456.5
G75.0	491.5	493.2	493.1	497.2	502.8	511.8	423.0	424.1	420.5	415.6
G76.0	448.4	451.7	452.9	456.7	462.8	471.7	382.2	383.2	382.4	376.2
G77.0	405.7	412.2	411.8	416.5	422.9	432.4	342.2	343.0	340.8	337.4
G78.0	365.9	372.2	374.1	378.2	383.4	390.7	303.7	303.7	302.3	298.1
G79.0	326.7	333.6	335.2	339.1	344.1	352.3	265.8	266.5	265.7	260.7
G80.0	290.4	295.4	298.2	303.0	307.6	312.5	230.2	230.5	229.7	225.3
G81.0	253.6	258.7	261.4	265.0	269.3	275.3	195.4	195.5	195.0	191.7
G82.0	218.4	224.9	226.9	230.3	235.1	239.6	162.2	162.3	162.2	159.7
G83.0	186.1	190.8	193.5	197.3	201.3	204.4	131.5	132.2	132.2	130.2
G84.0	156.8	160.4	162.1	166.3	168.9	172.1	104.0	104.7	104.4	102.2
G85.0	128.3	131.8	134.3	137.1	139.0	142.3	78.7	78.8	78.8	78.4
G86.0	102.8	106.1	107.8	110.5	111.4	113.3	56.7	56.3	56.9	55.9
G87.0	79.2	82.3	83.4	84.7	86.2	87.1	36.7	37.2	37.4	37.0
G88.0	58.4	61.4	62.3	62.8	63.2	64.4	19.3	19.3	19.6	19.2
G89.0	40.2	42.4	43.1	43.2	43.6	44.1	6.2	6.6	6.8	7.0
G90.0	24.7	26.0	26.1	25.8	26.1	26.3	3.0	3.2	3.5	3.9
G91.0	11.4	12.2	11.3	11.3	10.9	10.9	2.9	3.1	3.4	3.8
G92.0	5.4	5.2	4.7	4.4	4.0	3.9	3.0	3.2	3.5	3.8
G93.0	4.9	4.5	4.1	3.7	3.3	3.0	3.1	3.3	3.6	4.0
G94.0	4.8	4.5	4.1	3.7	3.3	3.0	3.2	3.3	3.7	3.9
G95.0	4.8	4.5	4.1	3.7	3.4	3.1	3.3	3.5	3.8	4.0
G96.0	4.6	4.4	4.1	3.8	3.4	3.2	3.4	3.5	3.8	4.1
G97.0	4.6	4.4	4.1	3.8	3.5	3.3	3.5	3.6	3.9	4.1
G98.0	4.5	4.3	4.1	3.8	3.5	3.3	3.7	3.8	4.0	4.3
G99.0	4.5	4.3	4.1	3.8	3.6	3.3	3.8	3.9	4.0	4.2
G100.0	4.5	4.3	4.2	3.9	3.7	3.5	3.8	3.9	4.1	4.3
G101.0	4.3	4.3	4.2	3.9	3.8	3.5	3.9	4.0	4.2	4.4
G102.0	4.3	4.3	4.2	4.0	3.8	3.6	4.0	4.1	4.3	4.3
G103.0	4.2	4.2	4.1	4.0	3.8	3.7	4.2	4.2	4.3	4.5
G104.0	4.3	4.3	4.1	4.0	3.9	3.8	4.3	4.4	4.5	4.5
G105.0	4.3	4.3	4.2	4.1	3.9	3.8	4.5	4.5	4.6	4.8
G106.0	4.3	4.3	4.3	4.1	4.0	3.9	4.7	4.6	4.7	4.8
G107.0	4.4	4.3	4.3	4.2	4.1	4.0	4.8	4.8	4.9	5.0
G108.0	4.5	4.5	4.4	4.3	4.3	4.2	5.0	5.0	5.1	5.1
G109.0	4.5	4.5	4.5	4.5	4.3	4.3	5.2	5.2	5.3	5.3
G110.0	4.7	4.7	4.7	4.6	4.6	4.5	5.4	5.4	5.4	5.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	4.8	4.8	4.8	4.8	4.7	4.6	5.6	5.6	5.6	5.7
G112.0	4.9	5.0	4.9	4.9	4.8	4.8	5.9	5.9	5.8	5.9
G113.0	5.1	5.2	5.1	5.1	5.0	5.0	6.0	6.0	6.0	6.1
G114.0	5.3	5.3	5.3	5.3	5.3	5.2	6.3	6.2	6.3	6.2
G115.0	5.4	5.5	5.5	5.5	5.4	5.4	6.5	6.4	6.4	6.4
G116.0	5.7	5.6	5.7	5.7	5.6	5.6	6.7	6.7	6.7	6.6
G117.0	5.9	5.9	5.9	5.9	5.9	5.8	7.0	6.9	6.9	6.9
G118.0	6.0	6.1	6.1	6.1	6.0	6.0	7.2	7.1	7.1	7.1
G119.0	6.3	6.2	6.3	6.3	6.3	6.2	7.4	7.3	7.3	7.3
G120.0	6.4	6.4	6.4	6.5	6.5	6.4	7.6	7.6	7.6	7.5
G121.0	6.7	6.7	6.7	6.7	6.7	6.7	7.8	7.8	7.8	7.7
G122.0	6.9	6.8	6.9	6.9	6.9	6.9	8.1	8.1	8.0	8.0
G123.0	7.1	7.1	7.1	7.1	7.1	7.1	8.3	8.3	8.2	8.2
G124.0	7.3	7.3	7.3	7.3	7.3	7.3	8.5	8.5	8.4	8.4
G125.0	7.5	7.6	7.5	7.6	7.5	7.5	8.7	8.7	8.7	8.6
G126.0	7.7	7.7	7.7	7.7	7.8	7.7	8.9	8.9	8.9	8.8
G127.0	8.0	7.9	7.9	8.0	8.0	8.0	9.1	9.1	9.1	9.1
G128.0	8.1	8.1	8.1	8.2	8.1	8.2	9.4	9.3	9.3	9.3
G129.0	8.3	8.4	8.4	8.4	8.3	8.4	9.6	9.5	9.5	9.5
G130.0	8.6	8.6	8.6	8.6	8.6	8.6	9.8	9.8	9.7	9.7
G131.0	8.8	8.7	8.8	8.8	8.8	8.8	10.0	9.9	9.9	9.9
G132.0	9.0	9.0	9.0	9.0	9.1	9.0	10.2	10.2	10.1	10.1
G133.0	9.2	9.3	9.2	9.2	9.3	9.3	10.4	10.4	10.3	10.3
G134.0	9.4	9.4	9.4	9.4	9.4	9.4	10.6	10.5	10.6	10.5
G135.0	9.6	9.6	9.6	9.7	9.7	9.7	10.8	10.7	10.7	10.7
G136.0	9.8	9.8	9.8	9.8	9.8	9.8	11.0	11.0	10.9	10.9
G137.0	10.0	10.0	10.0	10.0	10.0	10.1	11.2	11.2	11.1	11.1
G138.0	10.3	10.3	10.2	10.2	10.2	10.3	11.4	11.4	11.3	11.3
G139.0	10.4	10.3	10.4	10.4	10.4	10.4	11.5	11.5	11.4	11.5
G140.0	10.6	10.6	10.6	10.5	10.6	10.6	11.7	11.6	11.6	11.7
G141.0	10.8	10.8	10.8	10.7	10.8	10.8	11.9	11.8	11.9	11.8
G142.0	11.0	10.9	10.9	11.0	10.9	10.9	12.1	12.0	12.0	12.0
G143.0	11.2	11.2	11.1	11.1	11.1	11.1	12.2	12.1	12.1	12.2
G144.0	11.4	11.3	11.3	11.4	11.3	11.3	12.4	12.4	12.4	12.4
G145.0	11.4	11.5	11.5	11.5	11.4	11.4	12.5	12.4	12.4	12.5
G146.0	11.7	11.6	11.7	11.6	11.6	11.6	12.7	12.7	12.7	12.7
G147.0	11.8	11.8	11.9	11.9	11.8	11.8	12.9	12.8	12.8	12.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	12.0	11.9	12.0	11.9	11.9	12.0	13.0	12.9	12.9	13.0
G149.0	12.1	12.2	12.1	12.1	12.1	12.1	13.1	13.1	13.2	13.2
G150.0	12.4	12.3	12.3	12.3	12.3	12.2	13.3	13.3	13.3	13.3
G151.0	12.4	12.5	12.4	12.4	12.4	12.4	13.4	13.4	13.4	13.5
G152.0	12.7	12.6	12.7	12.7	12.6	12.6	13.5	13.6	13.6	13.6
G153.0	12.8	12.8	12.8	12.8	12.7	12.7	13.6	13.6	13.7	13.7
G154.0	12.9	12.9	12.9	12.9	12.9	12.9	13.8	13.7	13.9	13.9
G155.0	13.1	13.1	13.1	13.1	13.1	12.9	13.9	13.9	14.1	14.0
G156.0	13.2	13.3	13.3	13.3	13.2	13.2	14.0	14.1	14.1	14.1
G157.0	13.4	13.4	13.4	13.5	13.4	13.3	14.1	14.2	14.3	14.2
G158.0	13.5	13.6	13.5	13.5	13.6	13.4	14.2	14.3	14.4	14.3
G159.0	13.7	13.7	13.7	13.7	13.7	13.6	14.4	14.5	14.6	14.5
G160.0	13.8	13.8	13.8	13.8	13.9	13.7	14.5	14.6	14.7	14.6
G161.0	13.9	14.0	13.9	14.0	14.0	14.0	14.6	14.6	14.8	14.6
G162.0	14.1	14.1	14.1	14.1	14.1	14.1	14.7	14.8	14.8	14.8
G163.0	14.2	14.2	14.2	14.2	14.3	14.2	14.8	14.9	14.9	14.9
G164.0	14.3	14.4	14.4	14.4	14.5	14.3	14.9	15.0	15.0	15.0
G165.0	14.4	14.5	14.5	14.5	14.6	14.5	15.0	15.1	15.1	15.1
G166.0	14.6	14.6	14.6	14.6	14.6	14.6	15.1	15.2	15.2	15.2
G167.0	14.6	14.7	14.7	14.7	14.8	14.8	15.2	15.4	15.3	15.3
G168.0	14.7	14.8	14.8	14.8	14.9	14.9	15.3	15.4	15.4	15.4
G169.0	14.9	14.9	15.0	15.0	15.1	15.1	15.4	15.5	15.4	15.4
G170.0	15.0	15.0	15.1	15.1	15.1	15.1	15.5	15.6	15.6	15.5
G171.0	15.1	15.1	15.1	15.2	15.3	15.3	15.6	15.7	15.6	15.5
G172.0	15.2	15.2	15.2	15.3	15.3	15.4	15.7	15.8	15.6	15.6
G173.0	15.3	15.3	15.3	15.3	15.5	15.5	15.8	15.8	15.6	15.6
G174.0	15.4	15.4	15.4	15.4	15.5	15.6	15.8	15.9	15.8	15.6
G175.0	15.4	15.5	15.5	15.5	15.5	15.6	15.8	15.9	15.8	15.8
G176.0	15.6	15.5	15.5	15.6	15.6	15.8	16.0	15.8	15.8	15.8
G177.0	15.6	15.6	15.6	15.6	15.7	15.8	16.0	15.8	15.8	15.8
G178.0	15.6	15.6	15.7	15.7	15.7	15.8	16.1	15.9	15.8	15.8
G179.0	15.6	15.6	15.6	15.7	15.8	15.8	16.0	15.9	15.8	15.8
G180.0	15.6	15.6	15.7	15.8	15.8	15.9	16.0	15.8	15.7	15.7

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	2282.9	2282.6	2283.3	2282.4	2282.5	2282.4	2281.0	2281.5	2280.3	2279.9
G1.0	2282.6	2281.9	2282.6	2281.9	2281.8	2281.8	2280.7	2281.0	2279.3	2278.6
G2.0	2281.4	2281.3	2281.5	2280.5	2280.5	2280.7	2280.9	2279.7	2278.2	2277.3
G3.0	2280.5	2280.4	2280.5	2279.1	2279.4	2279.6	2277.0	2278.1	2276.5	2275.8
G4.0	2278.6	2278.2	2278.6	2277.5	2278.1	2277.4	2276.4	2275.9	2274.8	2274.0
G5.0	2276.2	2275.7	2276.1	2275.1	2275.3	2275.0	2274.0	2273.9	2272.8	2272.0
G6.0	2272.6	2272.3	2272.8	2271.8	2272.3	2271.9	2270.8	2271.0	2270.0	2268.8
G7.0	2268.9	2268.5	2268.6	2267.6	2268.0	2267.8	2267.2	2267.3	2266.9	2265.9
G8.0	2263.7	2263.6	2263.8	2262.6	2263.1	2262.9	2262.9	2263.4	2263.1	2262.4
G9.0	2258.1	2257.9	2258.2	2257.3	2257.4	2257.6	2258.1	2258.4	2258.3	2257.8
G10.0	2251.6	2251.4	2251.4	2251.2	2251.7	2252.5	2252.5	2252.8	2252.4	2252.1
G11.0	2243.9	2243.9	2244.6	2244.9	2245.4	2245.8	2246.0	2246.2	2245.6	2245.1
G12.0	2235.3	2235.8	2237.0	2237.6	2238.6	2239.0	2238.6	2238.2	2237.6	2236.9
G13.0	2226.9	2227.5	2228.9	2229.8	2231.2	2231.0	2230.0	2230.0	2229.4	2227.6
G14.0	2217.4	2218.2	2220.6	2222.2	2222.9	2222.3	2221.7	2220.9	2219.8	2218.7
G15.0	2207.8	2209.3	2211.8	2213.7	2213.5	2212.9	2211.9	2210.7	2210.3	2208.9
G16.0	2197.2	2199.2	2201.2	2203.1	2202.8	2202.4	2201.6	2200.3	2200.1	2199.6
G17.0	2186.8	2188.6	2191.2	2192.0	2191.8	2190.9	2190.6	2189.3	2189.6	2189.1
G18.0	2175.2	2178.0	2180.7	2180.9	2179.8	2179.1	2178.4	2178.0	2178.6	2178.8
G19.0	2163.9	2167.0	2168.8	2168.3	2167.2	2166.0	2166.4	2166.2	2166.9	2167.1
G20.0	2150.9	2154.5	2156.2	2155.2	2153.9	2153.1	2153.0	2153.4	2154.6	2154.6
G21.0	2137.0	2140.5	2142.8	2141.8	2140.4	2139.5	2140.2	2140.4	2140.7	2140.7
G22.0	2123.0	2126.4	2128.1	2126.9	2126.3	2125.1	2125.8	2126.2	2126.5	2126.6
G23.0	2107.7	2110.7	2112.9	2112.1	2111.3	2110.8	2110.8	2110.7	2111.4	2110.4
G24.0	2091.4	2094.1	2096.3	2095.8	2095.5	2095.4	2095.3	2094.7	2094.5	2094.7
G25.0	2075.0	2077.1	2079.2	2080.0	2079.9	2079.2	2078.9	2078.3	2078.9	2078.8
G26.0	2057.3	2059.1	2061.5	2062.6	2063.6	2062.3	2061.8	2060.7	2061.4	2062.0
G27.0	2039.3	2040.2	2042.9	2045.8	2046.2	2044.2	2044.3	2042.7	2043.8	2045.0
G28.0	2019.4	2021.1	2023.4	2026.9	2027.5	2025.2	2024.3	2024.2	2025.1	2026.7
G29.0	1999.7	2000.5	2004.3	2007.6	2008.4	2006.3	2005.6	2005.7	2006.4	2006.4
G30.0	1979.5	1979.5	1982.9	1986.7	1988.0	1985.8	1985.0	1985.4	1987.1	1986.8
G31.0	1959.1	1957.4	1961.9	1965.6	1967.1	1963.9	1964.7	1964.9	1966.0	1964.6
G32.0	1938.1	1936.0	1939.7	1943.0	1944.0	1942.5	1943.0	1943.0	1944.0	1942.5
G33.0	1916.3	1914.8	1917.9	1919.6	1921.1	1920.2	1920.4	1920.6	1921.6	1918.5
G34.0	1892.1	1892.3	1895.6	1896.3	1896.3	1896.8	1896.7	1896.4	1897.9	1896.3
G35.0	1868.1	1866.7	1872.4	1873.2	1872.2	1872.7	1873.7	1872.1	1874.3	1872.6
G36.0	1842.8	1841.7	1846.4	1848.7	1848.3	1848.0	1848.1	1846.5	1849.0	1847.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	1818.5	1817.0	1820.3	1823.6	1825.3	1822.1	1823.3	1821.6	1824.5	1821.8
G38.0	1793.0	1792.4	1793.3	1795.6	1800.1	1796.5	1794.6	1795.5	1797.8	1794.4
G39.0	1767.0	1765.3	1766.4	1769.1	1773.1	1770.2	1767.7	1768.8	1771.5	1765.9
G40.0	1740.3	1740.1	1739.9	1742.3	1744.5	1743.4	1739.2	1741.4	1741.8	1737.8
G41.0	1711.8	1711.3	1711.5	1714.5	1715.0	1713.5	1712.3	1711.4	1711.4	1708.1
G42.0	1680.8	1680.1	1683.7	1685.8	1685.9	1684.0	1684.1	1679.7	1679.6	1678.7
G43.0	1648.3	1649.2	1652.7	1657.4	1656.3	1653.5	1654.4	1647.3	1648.3	1646.9
G44.0	1618.4	1618.0	1619.8	1626.7	1627.8	1622.6	1621.5	1617.5	1616.4	1615.6
G45.0	1588.6	1586.1	1587.7	1593.0	1597.1	1592.2	1588.1	1586.7	1583.9	1582.8
G46.0	1557.7	1555.4	1555.8	1560.2	1564.8	1559.7	1554.5	1553.8	1549.5	1549.4
G47.0	1526.8	1522.4	1523.5	1525.5	1529.4	1527.5	1522.6	1518.6	1515.1	1514.2
G48.0	1493.7	1490.3	1489.8	1493.3	1493.4	1494.6	1489.6	1481.8	1481.1	1479.4
G49.0	1458.3	1457.8	1458.2	1460.3	1458.5	1458.4	1454.5	1445.7	1446.1	1442.2
G50.0	1423.2	1422.8	1426.1	1426.3	1424.7	1420.3	1417.8	1410.3	1410.0	1405.9
G51.0	1384.6	1385.8	1390.4	1392.8	1388.0	1383.4	1381.3	1373.5	1371.0	1365.5
G52.0	1347.8	1347.6	1353.8	1357.7	1355.0	1347.3	1342.7	1337.0	1330.9	1328.5
G53.0	1309.6	1310.0	1314.7	1319.2	1320.1	1308.5	1301.8	1298.2	1293.2	1292.0
G54.0	1273.4	1272.4	1276.8	1279.1	1284.7	1273.0	1261.7	1259.1	1253.7	1253.5
G55.0	1237.4	1236.6	1238.6	1239.9	1243.8	1234.6	1222.1	1216.8	1214.5	1211.8
G56.0	1199.7	1197.9	1200.6	1201.0	1201.6	1195.8	1182.8	1173.5	1172.9	1169.8
G57.0	1162.0	1161.2	1162.6	1162.5	1159.9	1153.2	1142.9	1131.0	1132.0	1127.2
G58.0	1122.8	1122.9	1124.7	1125.0	1117.2	1109.2	1103.5	1089.3	1088.3	1084.4
G59.0	1084.1	1083.6	1086.8	1086.9	1078.8	1066.3	1060.4	1047.4	1042.9	1044.4
G60.0	1042.3	1041.6	1047.3	1048.0	1039.6	1024.2	1015.3	1007.1	999.3	1001.0
G61.0	1001.3	999.0	1006.8	1006.9	999.3	984.5	970.2	966.3	955.7	960.1
G62.0	959.7	956.6	962.0	963.8	960.0	942.4	927.0	922.1	912.3	912.3
G63.0	918.2	915.2	918.5	920.1	917.7	900.7	882.7	874.0	869.3	864.8
G64.0	877.3	874.2	876.5	876.2	872.6	858.4	839.3	827.8	830.0	819.0
G65.0	838.0	834.2	833.8	834.4	829.3	816.5	798.5	784.6	781.7	774.1
G66.0	799.3	793.8	794.5	791.4	784.0	772.2	755.3	738.7	733.3	727.1
G67.0	759.1	753.2	753.5	750.5	740.7	727.2	711.0	693.5	683.6	682.4
G68.0	718.2	712.2	714.0	709.0	698.9	682.2	665.1	651.6	637.9	633.0
G69.0	675.0	671.7	672.5	666.2	656.5	638.5	620.0	606.0	593.3	579.8
G70.0	628.8	626.6	630.7	625.2	616.6	594.0	577.3	561.3	545.7	531.3
G71.0	582.4	579.5	583.9	582.2	574.9	553.8	534.7	515.9	502.9	487.4
G72.0	535.7	533.2	536.2	537.0	534.9	513.8	492.0	469.0	460.0	445.9
G73.0	493.2	489.5	488.8	489.8	486.5	474.5	451.6	429.8	414.5	401.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	452.2	446.5	446.8	445.1	439.6	429.3	411.5	391.2	372.7	357.8
G75.0	412.6	406.9	404.0	401.4	393.6	384.3	371.8	352.6	335.3	313.1
G76.0	372.8	367.4	366.8	362.9	353.5	338.6	328.1	317.4	297.8	271.0
G77.0	333.0	328.4	325.3	321.2	314.8	298.2	285.4	278.2	258.1	236.8
G78.0	295.0	290.3	288.0	282.8	276.5	262.4	247.9	237.8	221.9	201.5
G79.0	258.1	253.7	251.4	246.4	238.5	226.5	214.2	200.7	186.4	172.4
G80.0	223.8	218.8	216.3	212.3	203.1	193.1	183.1	168.7	154.2	138.6
G81.0	189.9	185.5	184.1	179.3	170.9	161.9	154.3	139.6	128.6	111.0
G82.0	159.1	155.3	153.4	149.7	142.8	133.0	127.1	114.8	104.4	87.9
G83.0	128.9	127.3	124.6	121.3	115.9	108.3	101.1	90.7	82.2	69.5
G84.0	102.7	100.2	99.3	96.4	91.4	85.6	80.0	71.4	62.6	51.9
G85.0	78.8	77.4	75.9	72.8	69.0	65.1	60.1	53.9	46.4	38.2
G86.0	57.4	55.5	54.5	52.8	50.0	46.8	43.1	38.4	33.0	26.7
G87.0	37.3	37.1	36.4	35.0	33.0	30.5	28.1	25.2	21.6	16.9
G88.0	19.9	19.5	19.5	18.9	17.3	16.8	15.3	13.9	12.4	10.2
G89.0	7.6	7.5	7.7	7.7	7.6	7.3	7.1	6.8	6.6	6.2
G90.0	4.3	4.8	5.4	5.8	6.2	6.4	6.4	6.2	6.0	5.6
G91.0	4.3	4.8	5.3	5.7	6.0	6.1	6.2	5.9	5.6	5.1
G92.0	4.3	4.8	5.2	5.6	5.9	5.9	5.8	5.5	5.1	4.6
G93.0	4.3	4.8	5.2	5.5	5.6	5.7	5.5	5.2	4.7	4.0
G94.0	4.3	4.8	5.2	5.4	5.4	5.4	5.2	4.8	4.2	3.6
G95.0	4.4	4.7	5.1	5.3	5.3	5.3	5.0	4.4	3.8	3.2
G96.0	4.4	4.7	5.0	5.2	5.2	5.0	4.6	4.1	3.6	3.0
G97.0	4.4	4.8	4.9	5.1	5.0	4.8	4.3	3.8	3.4	2.8
G98.0	4.5	4.8	4.9	4.9	4.8	4.6	4.1	3.7	3.3	2.8
G99.0	4.5	4.7	4.8	4.8	4.7	4.4	4.0	3.7	3.2	2.9
G100.0	4.5	4.6	4.7	4.8	4.6	4.3	3.9	3.7	3.3	3.0
G101.0	4.5	4.6	4.7	4.7	4.5	4.3	4.0	3.7	3.3	3.2
G102.0	4.6	4.7	4.8	4.7	4.6	4.3	4.1	3.8	3.6	3.4
G103.0	4.7	4.8	4.7	4.7	4.6	4.4	4.2	3.9	3.7	3.6
G104.0	4.7	4.8	4.8	4.8	4.6	4.5	4.3	4.0	3.9	3.8
G105.0	4.8	4.9	4.9	4.8	4.8	4.6	4.4	4.2	4.1	4.0
G106.0	4.8	5.0	4.9	4.9	4.8	4.8	4.6	4.5	4.3	4.3
G107.0	5.0	5.1	5.0	5.1	5.0	4.9	4.7	4.6	4.5	4.5
G108.0	5.1	5.2	5.3	5.2	5.1	5.0	5.0	4.8	4.8	4.7
G109.0	5.4	5.4	5.4	5.4	5.3	5.2	5.1	5.0	5.0	5.0
G110.0	5.5	5.5	5.5	5.5	5.4	5.4	5.3	5.2	5.2	5.2

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	5.7	5.7	5.7	5.6	5.6	5.6	5.5	5.4	5.4	5.4
G112.0	5.9	5.9	5.9	5.9	5.8	5.8	5.7	5.7	5.7	5.7
G113.0	6.0	6.0	6.1	6.0	6.0	5.9	5.9	5.9	5.9	5.9
G114.0	6.3	6.2	6.3	6.3	6.2	6.1	6.2	6.1	6.1	6.1
G115.0	6.4	6.5	6.5	6.4	6.4	6.4	6.4	6.4	6.4	6.3
G116.0	6.6	6.7	6.7	6.6	6.6	6.6	6.6	6.6	6.6	6.6
G117.0	6.9	6.9	6.9	6.8	6.8	6.8	6.8	6.9	6.8	6.8
G118.0	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
G119.0	7.3	7.3	7.3	7.3	7.3	7.3	7.2	7.3	7.3	7.3
G120.0	7.5	7.6	7.5	7.5	7.5	7.5	7.6	7.5	7.5	7.6
G121.0	7.7	7.7	7.7	7.7	7.7	7.7	7.8	7.7	7.7	7.7
G122.0	7.9	8.0	7.9	7.9	7.9	8.0	8.0	8.0	8.0	8.0
G123.0	8.2	8.2	8.2	8.2	8.1	8.2	8.1	8.2	8.2	8.2
G124.0	8.4	8.4	8.4	8.4	8.4	8.4	8.5	8.4	8.4	8.4
G125.0	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.7	8.7	8.6
G126.0	8.8	8.8	8.8	8.9	8.8	8.8	8.9	8.9	8.9	8.9
G127.0	9.0	9.1	9.0	9.1	9.1	9.1	9.1	9.1	9.1	9.1
G128.0	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.3
G129.0	9.5	9.4	9.5	9.4	9.5	9.5	9.5	9.5	9.5	9.6
G130.0	9.7	9.7	9.7	9.7	9.7	9.8	9.8	9.8	9.8	9.8
G131.0	9.9	9.9	9.9	10.0	9.9	9.9	9.9	10.0	10.0	10.0
G132.0	10.1	10.1	10.1	10.1	10.1	10.1	10.2	10.2	10.2	10.2
G133.0	10.3	10.3	10.3	10.3	10.3	10.3	10.4	10.4	10.4	10.4
G134.0	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.6	10.6
G135.0	10.7	10.7	10.7	10.7	10.7	10.8	10.8	10.9	10.9	10.9
G136.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0
G137.0	11.1	11.1	11.1	11.1	11.1	11.1	11.2	11.2	11.2	11.2
G138.0	11.3	11.3	11.3	11.3	11.3	11.3	11.4	11.4	11.4	11.4
G139.0	11.5	11.4	11.4	11.4	11.4	11.5	11.5	11.6	11.6	11.6
G140.0	11.7	11.6	11.6	11.7	11.6	11.7	11.7	11.8	11.8	11.8
G141.0	11.9	11.9	11.8	11.9	11.9	11.9	11.9	11.9	12.0	12.0
G142.0	12.0	12.0	12.0	11.9	12.0	12.0	12.1	12.1	12.2	12.2
G143.0	12.2	12.2	12.2	12.1	12.2	12.3	12.2	12.3	12.3	12.3
G144.0	12.4	12.4	12.3	12.4	12.4	12.4	12.4	12.4	12.5	12.5
G145.0	12.5	12.5	12.5	12.4	12.5	12.5	12.6	12.6	12.6	12.7
G146.0	12.7	12.6	12.6	12.6	12.7	12.7	12.7	12.8	12.8	12.9
G147.0	12.8	12.8	12.8	12.9	12.9	12.9	12.9	12.9	12.9	13.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	12.9	13.0	12.9	12.9	12.9	13.0	13.1	13.1	13.1	13.2
G149.0	13.1	13.1	13.1	13.1	13.1	13.2	13.2	13.2	13.3	13.3
G150.0	13.3	13.2	13.2	13.2	13.3	13.3	13.4	13.4	13.4	13.5
G151.0	13.5	13.4	13.4	13.4	13.5	13.5	13.5	13.5	13.6	13.6
G152.0	13.6	13.5	13.6	13.5	13.6	13.6	13.6	13.6	13.7	13.7
G153.0	13.6	13.7	13.6	13.6	13.7	13.7	13.7	13.8	13.9	13.9
G154.0	13.8	13.8	13.8	13.8	13.8	13.9	13.9	13.9	14.0	14.0
G155.0	14.0	14.0	13.9	14.0	13.9	14.0	14.1	14.1	14.1	14.1
G156.0	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.2	14.2
G157.0	14.1	14.1	14.1	14.1	14.2	14.2	14.3	14.3	14.3	14.4
G158.0	14.3	14.3	14.3	14.3	14.3	14.4	14.4	14.4	14.4	14.5
G159.0	14.4	14.4	14.4	14.4	14.4	14.5	14.5	14.5	14.6	14.6
G160.0	14.5	14.6	14.5	14.5	14.5	14.6	14.6	14.6	14.6	14.7
G161.0	14.6	14.6	14.6	14.6	14.7	14.7	14.7	14.7	14.7	14.7
G162.0	14.7	14.7	14.7	14.7	14.7	14.8	14.8	14.8	14.9	14.9
G163.0	14.9	14.9	14.9	14.8	14.9	14.9	14.9	14.9	15.0	15.0
G164.0	15.0	14.9	14.9	15.0	15.0	15.0	15.1	15.0	15.1	15.1
G165.0	15.0	15.0	15.1	15.1	15.1	15.1	15.1	15.1	15.1	15.1
G166.0	15.1	15.1	15.1	15.1	15.2	15.2	15.2	15.2	15.2	15.2
G167.0	15.2	15.2	15.2	15.2	15.2	15.3	15.3	15.3	15.3	15.3
G168.0	15.3	15.3	15.3	15.3	15.4	15.3	15.4	15.4	15.4	15.4
G169.0	15.3	15.4	15.4	15.4	15.4	15.5	15.4	15.4	15.5	15.5
G170.0	15.4	15.5	15.4	15.5	15.5	15.5	15.5	15.5	15.6	15.6
G171.0	15.5	15.5	15.5	15.5	15.5	15.6	15.6	15.6	15.6	15.6
G172.0	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.7
G173.0	15.6	15.6	15.6	15.6	15.6	15.7	15.7	15.6	15.8	15.8
G174.0	15.6	15.6	15.7	15.6	15.6	15.8	15.7	15.7	15.7	15.8
G175.0	15.8	15.8	15.8	15.7	15.7	15.8	15.8	15.8	15.8	15.8
G176.0	15.8	15.7	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8
G177.0	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.9	15.8
G178.0	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8
G179.0	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.9	15.9	15.9
G180.0	15.7	15.7	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	2278.6	2277.5	2277.2	2275.2	2274.0	2272.1	2271.8	2271.4	2271.8	2272.6
G1.0	2277.6	2276.9	2276.0	2274.1	2272.9	2271.2	2270.8	2270.2	2270.4	2271.5
G2.0	2276.7	2275.4	2274.7	2272.5	2271.6	2269.5	2269.1	2268.5	2269.0	2269.8
G3.0	2274.8	2273.6	2272.8	2270.8	2269.9	2267.8	2267.3	2266.4	2266.6	2267.8
G4.0	2273.1	2271.8	2271.1	2268.9	2268.1	2265.3	2264.8	2264.4	2264.3	2265.0
G5.0	2270.5	2269.6	2268.6	2266.6	2265.4	2262.6	2262.1	2261.1	2261.6	2261.9
G6.0	2268.3	2267.3	2265.6	2263.6	2262.4	2260.1	2259.4	2258.1	2258.2	2258.0
G7.0	2265.2	2264.4	2263.3	2261.0	2259.4	2257.2	2255.8	2254.5	2254.4	2254.1
G8.0	2261.8	2260.7	2259.8	2257.4	2255.7	2253.5	2252.1	2250.2	2249.8	2249.0
G9.0	2256.7	2256.0	2254.9	2252.6	2250.7	2248.7	2247.1	2244.9	2244.7	2243.8
G10.0	2251.1	2250.0	2248.4	2246.1	2244.6	2242.2	2241.0	2239.0	2238.2	2237.4
G11.0	2244.2	2242.7	2241.3	2238.5	2237.2	2235.0	2233.4	2231.6	2230.9	2230.1
G12.0	2236.6	2234.9	2233.2	2231.0	2229.4	2227.3	2225.2	2223.5	2222.7	2221.6
G13.0	2227.6	2226.6	2225.8	2222.8	2221.1	2218.8	2216.5	2215.3	2213.6	2212.4
G14.0	2218.2	2217.5	2216.6	2213.8	2212.4	2209.6	2207.6	2205.5	2204.1	2203.0
G15.0	2208.8	2208.3	2207.9	2204.9	2203.5	2200.6	2198.6	2196.4	2194.6	2193.1
G16.0	2198.9	2198.9	2198.7	2195.8	2194.0	2190.9	2189.0	2186.6	2184.2	2182.6
G17.0	2189.8	2189.0	2188.2	2185.1	2184.0	2181.2	2178.8	2176.7	2174.1	2171.7
G18.0	2179.0	2178.1	2177.3	2173.9	2172.4	2169.5	2167.5	2165.9	2163.5	2160.6
G19.0	2167.6	2166.4	2164.9	2161.4	2159.5	2157.1	2155.1	2154.1	2151.6	2149.2
G20.0	2154.1	2153.2	2151.6	2147.0	2145.3	2143.3	2141.8	2140.4	2138.4	2135.2
G21.0	2141.1	2139.4	2137.1	2132.4	2131.1	2128.9	2127.2	2126.1	2123.6	2121.6
G22.0	2126.7	2124.6	2122.1	2117.7	2115.7	2113.6	2112.0	2111.0	2108.6	2106.9
G23.0	2111.0	2109.4	2106.5	2102.6	2101.2	2098.6	2096.6	2095.5	2093.8	2091.1
G24.0	2095.3	2094.1	2091.4	2087.0	2085.5	2082.9	2080.4	2079.4	2077.6	2074.2
G25.0	2079.6	2078.2	2075.3	2071.6	2069.7	2066.6	2064.6	2063.2	2062.2	2058.2
G26.0	2062.6	2060.9	2059.2	2055.2	2052.5	2048.9	2047.9	2046.1	2045.5	2041.7
G27.0	2045.5	2042.9	2041.3	2037.1	2034.8	2031.3	2029.0	2028.4	2028.0	2024.5
G28.0	2026.5	2024.0	2021.2	2018.0	2015.5	2012.4	2010.1	2009.5	2008.3	2004.6
G29.0	2007.0	2003.9	2001.6	1998.5	1996.5	1993.4	1989.7	1989.1	1988.9	1985.4
G30.0	1985.9	1983.6	1981.3	1979.1	1976.7	1973.0	1968.8	1968.0	1966.2	1963.9
G31.0	1964.6	1962.3	1961.0	1958.2	1956.8	1952.9	1947.0	1946.2	1944.5	1942.0
G32.0	1942.2	1940.4	1939.7	1936.9	1935.4	1931.0	1925.8	1923.3	1921.5	1919.5
G33.0	1919.4	1918.9	1917.5	1915.0	1913.4	1909.2	1903.1	1900.8	1897.6	1896.3
G34.0	1895.4	1895.5	1894.0	1891.2	1889.6	1885.1	1879.6	1876.2	1873.9	1872.1
G35.0	1870.8	1870.5	1870.3	1866.0	1864.8	1861.1	1854.4	1850.8	1849.0	1847.1
G36.0	1844.7	1844.8	1844.2	1840.2	1838.5	1835.2	1829.2	1825.4	1822.2	1821.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	1820.2	1819.7	1819.5	1815.2	1813.6	1810.2	1803.6	1798.7	1796.5	1796.2
G38.0	1792.6	1793.0	1793.9	1789.9	1787.3	1782.9	1777.4	1770.7	1768.5	1767.1
G39.0	1764.9	1766.4	1766.8	1763.4	1760.8	1755.4	1750.0	1744.2	1741.4	1739.3
G40.0	1736.3	1738.4	1739.3	1735.3	1731.3	1727.0	1721.7	1715.8	1711.9	1710.7
G41.0	1708.3	1710.0	1710.5	1705.8	1702.0	1697.3	1692.4	1687.3	1682.9	1680.1
G42.0	1678.6	1679.5	1679.2	1675.0	1671.5	1666.5	1662.2	1656.1	1651.6	1648.6
G43.0	1646.9	1648.3	1648.6	1644.5	1641.0	1635.7	1631.2	1624.4	1619.1	1616.9
G44.0	1615.8	1616.8	1616.6	1613.3	1610.8	1605.3	1599.2	1592.8	1586.6	1585.0
G45.0	1583.2	1584.8	1585.2	1581.3	1577.6	1571.9	1565.6	1559.0	1553.6	1550.0
G46.0	1551.0	1551.8	1551.9	1548.1	1544.4	1539.3	1531.1	1525.2	1520.1	1516.0
G47.0	1517.3	1517.0	1517.3	1514.3	1510.5	1503.6	1495.1	1490.2	1484.4	1479.9
G48.0	1482.1	1483.9	1482.4	1479.5	1477.0	1470.6	1461.5	1454.6	1449.2	1443.2
G49.0	1446.5	1448.2	1447.9	1444.8	1442.0	1435.4	1425.9	1418.5	1412.4	1406.7
G50.0	1408.3	1411.6	1411.7	1409.6	1404.8	1398.6	1388.8	1380.8	1376.0	1371.2
G51.0	1371.0	1372.5	1374.6	1371.9	1366.3	1359.5	1350.8	1342.4	1336.3	1332.1
G52.0	1334.2	1335.9	1336.8	1333.5	1328.9	1323.0	1313.8	1304.8	1297.8	1293.6
G53.0	1295.9	1297.4	1298.2	1295.6	1289.8	1282.5	1273.7	1265.1	1259.2	1252.7
G54.0	1255.4	1257.0	1259.3	1254.8	1249.8	1241.8	1232.5	1226.0	1219.2	1214.2
G55.0	1214.6	1217.3	1217.7	1213.6	1209.0	1201.7	1191.4	1183.7	1177.8	1174.2
G56.0	1173.9	1177.4	1177.5	1172.2	1166.8	1161.3	1147.9	1143.5	1136.4	1134.0
G57.0	1131.4	1134.0	1133.6	1129.3	1124.7	1116.6	1106.3	1099.3	1094.6	1093.8
G58.0	1090.9	1092.7	1091.6	1086.1	1081.9	1074.6	1061.6	1055.8	1051.6	1049.5
G59.0	1049.0	1050.2	1047.8	1041.8	1036.9	1028.7	1019.2	1012.2	1006.6	1003.8
G60.0	1005.2	1004.6	1002.4	997.3	991.3	985.4	972.4	968.5	964.3	960.6
G61.0	958.4	957.3	957.3	951.6	944.8	937.3	927.7	921.5	920.0	917.1
G62.0	912.1	913.3	908.3	903.0	898.8	891.7	882.1	875.5	876.7	875.0
G63.0	868.0	865.5	862.6	856.7	849.9	842.0	835.2	828.9	828.4	831.3
G64.0	822.8	820.3	814.9	802.7	800.7	793.3	782.5	779.8	778.7	782.6
G65.0	774.9	766.0	758.8	752.5	745.8	737.5	729.3	729.4	728.2	734.0
G66.0	724.3	715.1	707.7	699.0	692.3	684.0	678.5	682.0	684.5	686.0
G67.0	673.0	665.7	655.6	642.8	634.2	625.9	623.5	627.7	637.9	640.2
G68.0	620.7	612.2	600.1	586.2	575.5	573.5	567.4	574.6	585.5	594.1
G69.0	572.3	564.3	545.6	528.5	523.1	517.2	516.0	525.5	533.1	547.7
G70.0	526.5	511.0	491.7	477.3	467.4	465.3	466.1	475.2	484.7	499.9
G71.0	482.2	459.2	437.5	421.8	416.8	411.8	414.3	422.9	440.1	452.4
G72.0	432.4	406.5	388.9	370.7	365.3	360.8	366.2	377.5	391.6	406.7
G73.0	379.1	359.5	337.9	324.0	313.8	314.0	314.5	334.1	347.8	366.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	334.3	316.5	289.4	274.1	265.9	265.9	268.4	286.6	306.0	324.4
G75.0	293.2	269.6	248.3	227.3	224.3	220.1	230.4	241.9	263.2	282.8
G76.0	256.0	227.1	206.6	190.1	180.1	183.2	187.1	205.1	227.0	246.9
G77.0	217.5	189.5	168.0	150.3	144.3	143.6	152.6	170.5	188.4	207.7
G78.0	175.9	158.9	134.9	117.4	109.9	110.9	121.4	137.6	156.2	176.6
G79.0	147.9	124.1	105.3	88.1	81.7	84.5	94.6	108.8	127.3	145.7
G80.0	120.3	100.2	81.3	66.1	60.2	62.9	71.4	87.5	102.1	117.9
G81.0	96.3	77.3	59.4	45.0	40.0	41.8	51.5	66.3	80.2	93.8
G82.0	74.4	57.8	41.7	28.5	23.0	25.4	33.5	48.3	62.4	74.6
G83.0	57.0	42.1	26.9	15.8	10.0	13.1	21.3	32.8	45.2	56.0
G84.0	41.6	29.3	17.9	9.7	5.6	8.1	13.6	21.8	32.5	41.6
G85.0	29.2	19.6	11.9	6.2	4.5	5.4	9.0	14.6	22.1	29.5
G86.0	20.0	13.1	7.9	4.3	3.8	3.9	5.8	9.4	14.0	19.1
G87.0	13.0	8.8	5.4	3.3	3.0	3.1	4.2	6.4	9.1	11.9
G88.0	8.2	6.1	4.0	2.6	1.6	2.3	3.2	4.5	5.9	6.8
G89.0	5.5	4.5	3.2	2.1	0.9	1.6	2.6	3.7	4.8	5.4
G90.0	5.0	3.9	2.8	1.6	1.0	1.2	2.3	3.3	4.3	4.9
G91.0	4.4	3.4	2.4	1.4	1.1	1.2	2.0	2.8	3.7	4.4
G92.0	3.8	2.9	2.1	1.4	1.3	1.4	1.8	2.5	3.3	3.8
G93.0	3.3	2.6	2.0	1.5	1.6	1.5	1.7	2.2	2.8	3.4
G94.0	3.0	2.3	1.9	1.7	1.7	1.7	1.7	2.1	2.5	2.9
G95.0	2.8	2.2	1.9	1.9	1.9	1.9	1.9	2.1	2.3	2.6
G96.0	2.4	2.2	2.1	2.1	2.1	2.1	2.2	2.1	2.2	2.4
G97.0	2.4	2.3	2.3	2.3	2.2	2.3	2.3	2.3	2.3	2.5
G98.0	2.5	2.5	2.4	2.5	2.5	2.5	2.5	2.5	2.6	2.6
G99.0	2.8	2.7	2.7	2.7	2.7	2.7	2.7	2.8	2.8	2.8
G100.0	3.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	3.0
G101.0	3.1	3.2	3.1	3.1	3.1	3.1	3.2	3.2	3.2	3.2
G102.0	3.4	3.3	3.3	3.3	3.4	3.3	3.3	3.4	3.4	3.4
G103.0	3.6	3.6	3.6	3.6	3.5	3.6	3.6	3.6	3.6	3.7
G104.0	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
G105.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.1	4.0	4.1
G106.0	4.3	4.2	4.3	4.3	4.2	4.3	4.3	4.2	4.3	4.3
G107.0	4.4	4.5	4.4	4.4	4.5	4.4	4.5	4.5	4.5	4.5
G108.0	4.7	4.7	4.7	4.7	4.8	4.7	4.7	4.7	4.7	4.8
G109.0	5.0	4.9	4.9	4.9	4.9	4.9	4.9	4.9	4.9	5.0
G110.0	5.1	5.2	5.1	5.2	5.2	5.2	5.2	5.2	5.2	5.2

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4
G112.0	5.6	5.6	5.7	5.7	5.7	5.7	5.6	5.7	5.6	5.7
G113.0	5.9	5.9	5.8	5.9	5.9	5.9	5.9	5.9	5.9	5.9
G114.0	6.1	6.1	6.1	6.1	6.2	6.1	6.1	6.1	6.1	6.1
G115.0	6.4	6.4	6.4	6.3	6.3	6.3	6.4	6.3	6.4	6.4
G116.0	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
G117.0	6.8	6.8	6.9	6.8	6.9	6.8	6.8	6.8	6.8	6.8
G118.0	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
G119.0	7.3	7.3	7.3	7.4	7.3	7.3	7.3	7.2	7.2	7.3
G120.0	7.6	7.5	7.5	7.6	7.6	7.6	7.6	7.5	7.5	7.5
G121.0	7.7	7.7	7.7	7.7	7.8	7.7	7.7	7.7	7.7	7.7
G122.0	8.0	8.0	8.0	8.1	8.0	8.0	8.0	7.9	7.9	8.0
G123.0	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.1	8.1	8.1
G124.0	8.5	8.4	8.5	8.4	8.4	8.5	8.4	8.4	8.3	8.4
G125.0	8.7	8.6	8.6	8.7	8.6	8.7	8.7	8.6	8.6	8.6
G126.0	8.9	8.9	8.9	8.9	9.0	8.9	8.9	8.8	8.8	8.8
G127.0	9.1	9.1	9.1	9.2	9.1	9.1	9.1	9.1	9.0	9.1
G128.0	9.3	9.3	9.4	9.4	9.4	9.3	9.3	9.3	9.3	9.3
G129.0	9.6	9.6	9.6	9.6	9.6	9.6	9.5	9.5	9.5	9.5
G130.0	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.7	9.8
G131.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.9	9.9	9.9
G132.0	10.2	10.2	10.3	10.2	10.2	10.2	10.2	10.2	10.1	10.2
G133.0	10.4	10.4	10.5	10.4	10.4	10.4	10.4	10.4	10.4	10.3
G134.0	10.7	10.6	10.6	10.7	10.7	10.7	10.6	10.5	10.6	10.5
G135.0	10.8	10.9	10.9	10.8	10.9	10.9	10.9	10.8	10.8	10.8
G136.0	11.0	11.0	11.1	11.1	11.0	11.0	11.0	10.9	11.0	10.9
G137.0	11.2	11.3	11.3	11.2	11.2	11.2	11.2	11.2	11.1	11.2
G138.0	11.4	11.5	11.4	11.5	11.4	11.4	11.4	11.4	11.3	11.4
G139.0	11.6	11.7	11.7	11.7	11.7	11.7	11.6	11.5	11.6	11.6
G140.0	11.9	11.9	11.8	11.9	11.9	11.9	11.7	11.8	11.7	11.7
G141.0	12.0	12.0	12.0	12.0	12.0	11.9	12.0	12.0	11.9	11.9
G142.0	12.2	12.3	12.2	12.2	12.2	12.1	12.1	12.1	12.1	12.1
G143.0	12.4	12.4	12.4	12.4	12.4	12.3	12.3	12.3	12.3	12.3
G144.0	12.5	12.6	12.5	12.6	12.5	12.5	12.5	12.4	12.4	12.4
G145.0	12.7	12.8	12.8	12.7	12.7	12.7	12.7	12.6	12.7	12.6
G146.0	12.9	12.9	12.9	12.9	12.9	12.9	12.8	12.8	12.9	12.8
G147.0	13.0	13.1	13.1	13.0	13.0	13.0	13.0	13.0	13.0	12.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	13.2	13.2	13.2	13.2	13.2	13.1	13.1	13.1	13.1	13.2
G149.0	13.3	13.4	13.4	13.3	13.3	13.3	13.3	13.3	13.2	13.3
G150.0	13.5	13.5	13.5	13.5	13.5	13.4	13.4	13.5	13.5	13.4
G151.0	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6
G152.0	13.7	13.8	13.8	13.7	13.7	13.7	13.7	13.7	13.7	13.7
G153.0	13.9	13.9	13.9	13.9	13.9	13.8	13.9	13.9	13.8	13.9
G154.0	14.0	14.0	14.1	14.0	14.0	14.0	14.0	14.0	14.0	13.9
G155.0	14.2	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1
G156.0	14.2	14.2	14.2	14.2	14.2	14.2	14.3	14.3	14.3	14.2
G157.0	14.4	14.4	14.4	14.4	14.3	14.3	14.4	14.4	14.4	14.3
G158.0	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5
G159.0	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6
G160.0	14.7	14.7	14.7	14.7	14.7	14.7	14.7	14.7	14.7	14.6
G161.0	14.8	14.8	14.8	14.8	14.8	14.8	14.9	14.9	14.8	14.7
G162.0	14.9	14.9	14.9	14.9	14.9	14.9	15.0	15.0	14.9	14.8
G163.0	15.0	15.0	15.0	15.0	15.0	15.0	15.1	15.1	15.0	15.0
G164.0	15.1	15.1	15.1	15.1	15.1	15.1	15.1	15.1	15.1	15.0
G165.0	15.2	15.1	15.1	15.2	15.2	15.3	15.2	15.2	15.1	15.1
G166.0	15.3	15.2	15.3	15.3	15.3	15.4	15.3	15.3	15.3	15.2
G167.0	15.4	15.3	15.3	15.4	15.4	15.4	15.5	15.4	15.3	15.3
G168.0	15.4	15.4	15.4	15.5	15.5	15.5	15.6	15.4	15.4	15.3
G169.0	15.5	15.5	15.5	15.5	15.6	15.6	15.6	15.5	15.4	15.4
G170.0	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.5	15.4
G171.0	15.6	15.6	15.6	15.7	15.8	15.7	15.6	15.6	15.5	15.6
G172.0	15.6	15.6	15.7	15.8	15.8	15.8	15.7	15.6	15.6	15.6
G173.0	15.7	15.8	15.8	15.8	15.8	15.9	15.8	15.7	15.6	15.6
G174.0	15.8	15.8	15.8	15.8	15.8	15.9	15.8	15.7	15.6	15.6
G175.0	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.7	15.7	15.6
G176.0	15.8	15.8	15.8	15.9	15.9	15.9	15.8	15.8	15.8	15.6
G177.0	15.8	15.8	15.8	15.9	16.0	15.8	15.8	15.8	15.8	15.7
G178.0	15.9	15.9	15.9	15.9	16.0	15.9	15.8	15.8	15.8	15.7
G179.0	15.9	15.9	15.9	15.9	15.9	15.9	15.8	15.8	15.8	15.7
G180.0	15.8	15.8	15.9	16.0	16.0	15.8	15.8	15.7	15.7	15.7

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	2273.2	2273.8	2275.7	2276.6	2277.5	2278.6	2278.9	2280.6	2281.0	2281.7
G1.0	2272.2	2273.0	2274.5	2275.7	2276.4	2277.8	2278.1	2279.7	2279.9	2280.8
G2.0	2270.8	2271.1	2273.4	2273.7	2274.5	2276.0	2276.1	2277.8	2278.0	2279.0
G3.0	2268.3	2268.7	2270.5	2271.3	2272.1	2273.3	2273.4	2275.2	2275.6	2276.4
G4.0	2265.5	2266.1	2267.9	2268.3	2268.9	2270.0	2270.0	2272.0	2272.4	2272.9
G5.0	2262.0	2262.6	2264.0	2264.4	2265.0	2265.8	2265.9	2267.4	2267.9	2268.9
G6.0	2258.1	2258.2	2259.6	2259.6	2260.1	2260.9	2260.9	2262.4	2263.2	2263.9
G7.0	2253.7	2254.1	2254.7	2254.0	2254.8	2255.7	2255.3	2256.4	2257.6	2258.0
G8.0	2249.2	2248.9	2249.7	2248.8	2248.8	2249.3	2248.3	2249.4	2251.0	2251.3
G9.0	2244.0	2243.7	2244.1	2243.0	2242.8	2242.8	2241.8	2242.9	2243.9	2244.7
G10.0	2237.4	2237.2	2238.1	2236.5	2236.4	2236.1	2234.8	2235.7	2235.9	2236.2
G11.0	2229.8	2229.9	2231.4	2230.4	2229.7	2229.1	2227.3	2226.7	2226.8	2227.0
G12.0	2221.8	2221.9	2223.2	2222.9	2222.2	2221.7	2219.1	2217.8	2217.3	2217.5
G13.0	2212.0	2213.2	2214.7	2214.0	2214.1	2213.2	2210.4	2208.4	2207.4	2207.7
G14.0	2202.5	2203.3	2205.1	2204.9	2204.6	2203.9	2201.1	2199.9	2198.0	2197.6
G15.0	2191.9	2193.4	2194.8	2194.4	2194.2	2193.9	2192.2	2190.4	2187.8	2186.8
G16.0	2181.3	2181.1	2182.7	2182.8	2182.7	2182.5	2181.4	2179.6	2177.1	2175.6
G17.0	2170.3	2169.6	2169.5	2170.0	2170.3	2171.2	2170.1	2167.7	2165.4	2163.8
G18.0	2158.6	2157.3	2156.8	2157.3	2157.8	2159.6	2157.6	2155.9	2152.8	2149.7
G19.0	2145.8	2145.0	2144.3	2144.2	2145.3	2145.8	2144.8	2142.6	2139.4	2136.6
G20.0	2132.6	2131.5	2130.6	2130.3	2130.9	2131.9	2129.8	2128.1	2125.2	2122.1
G21.0	2118.8	2117.7	2117.5	2116.1	2116.4	2116.3	2115.0	2112.9	2110.4	2108.1
G22.0	2103.8	2102.7	2102.7	2102.0	2101.2	2100.6	2098.4	2096.3	2094.3	2091.9
G23.0	2087.8	2087.6	2087.3	2086.2	2085.9	2085.0	2082.3	2079.8	2077.7	2076.0
G24.0	2071.4	2070.4	2071.2	2070.2	2069.7	2067.9	2064.8	2062.5	2060.4	2058.3
G25.0	2054.5	2053.5	2053.8	2053.1	2053.4	2051.1	2047.5	2044.2	2042.6	2040.9
G26.0	2037.6	2035.2	2035.6	2035.3	2035.1	2033.0	2028.1	2025.4	2023.4	2022.6
G27.0	2019.3	2017.9	2016.2	2015.7	2016.9	2013.7	2008.8	2004.3	2004.7	2004.3
G28.0	2001.2	1998.5	1996.8	1996.4	1996.9	1992.8	1988.3	1984.7	1984.9	1984.7
G29.0	1981.9	1978.5	1976.9	1975.4	1975.8	1971.8	1967.6	1964.0	1964.8	1964.2
G30.0	1961.1	1957.9	1955.7	1953.9	1954.0	1951.0	1946.8	1942.9	1942.3	1943.3
G31.0	1939.3	1936.0	1934.9	1932.1	1931.6	1928.3	1924.6	1919.8	1920.3	1922.4
G32.0	1916.0	1913.3	1912.3	1909.4	1909.0	1906.3	1901.7	1896.8	1898.1	1899.7
G33.0	1892.8	1889.8	1889.5	1886.0	1885.9	1882.5	1877.9	1874.7	1876.3	1877.7
G34.0	1869.2	1864.8	1864.2	1862.2	1862.6	1858.0	1854.1	1852.3	1852.4	1853.2
G35.0	1843.4	1840.1	1838.4	1837.9	1837.9	1832.9	1831.3	1827.9	1827.2	1826.7
G36.0	1819.2	1815.7	1812.8	1811.9	1812.3	1808.6	1807.4	1802.7	1799.8	1798.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	1793.3	1789.8	1787.2	1785.8	1787.9	1784.6	1782.2	1774.0	1773.4	1772.5
G38.0	1766.5	1763.8	1761.6	1758.3	1761.0	1758.5	1753.1	1747.3	1746.1	1745.8
G39.0	1736.8	1734.4	1736.1	1731.5	1734.3	1730.8	1723.4	1719.1	1719.5	1718.9
G40.0	1706.7	1705.4	1705.9	1705.1	1707.0	1700.7	1694.9	1691.9	1692.1	1691.2
G41.0	1676.0	1674.9	1675.7	1676.8	1676.9	1670.3	1666.3	1663.3	1664.3	1662.7
G42.0	1646.7	1645.5	1644.4	1648.8	1645.2	1640.3	1637.4	1634.3	1635.0	1632.1
G43.0	1614.6	1613.7	1614.6	1617.2	1613.0	1609.5	1607.5	1602.6	1602.3	1598.9
G44.0	1582.2	1581.7	1583.4	1583.8	1581.9	1580.9	1576.8	1572.2	1569.4	1566.5
G45.0	1548.4	1548.4	1551.6	1549.7	1551.7	1550.8	1545.9	1538.1	1535.7	1532.1
G46.0	1514.1	1516.1	1518.2	1515.9	1520.4	1518.4	1512.2	1504.8	1501.8	1499.5
G47.0	1477.8	1481.3	1481.0	1482.1	1487.4	1484.6	1477.2	1469.8	1469.4	1466.0
G48.0	1441.7	1446.8	1444.9	1448.5	1455.6	1448.0	1443.4	1437.1	1436.6	1432.8
G49.0	1405.6	1411.2	1409.3	1414.6	1420.3	1412.3	1409.0	1403.2	1403.0	1399.8
G50.0	1369.1	1372.6	1373.1	1379.6	1382.1	1376.9	1375.0	1369.4	1368.3	1366.2
G51.0	1331.4	1333.9	1337.5	1341.9	1343.2	1340.6	1339.4	1334.2	1332.6	1330.5
G52.0	1295.3	1294.8	1300.7	1302.9	1304.2	1306.0	1306.5	1300.0	1296.0	1293.1
G53.0	1254.9	1254.4	1262.4	1261.7	1266.9	1269.5	1270.9	1262.2	1256.6	1253.9
G54.0	1213.1	1216.6	1222.5	1222.7	1229.7	1232.6	1232.1	1222.7	1219.1	1215.8
G55.0	1171.3	1177.4	1179.4	1183.2	1193.6	1194.1	1192.7	1182.7	1179.4	1176.5
G56.0	1130.1	1138.1	1138.2	1143.3	1155.0	1155.6	1151.8	1143.6	1141.9	1139.7
G57.0	1089.0	1095.9	1096.0	1104.7	1114.3	1112.2	1110.1	1104.6	1102.9	1099.9
G58.0	1046.8	1051.1	1055.2	1062.9	1072.6	1070.8	1072.2	1065.0	1063.4	1062.6
G59.0	1003.2	1006.5	1013.5	1024.4	1028.4	1028.8	1030.9	1027.8	1024.1	1022.1
G60.0	960.8	963.8	974.2	980.9	987.1	988.4	992.0	988.4	986.0	983.0
G61.0	917.3	922.7	931.8	935.7	944.3	948.6	952.4	948.0	945.9	940.4
G62.0	870.6	880.1	887.6	892.0	903.4	910.1	911.9	906.7	902.7	898.3
G63.0	827.6	838.7	842.5	850.7	861.8	867.1	870.0	862.5	857.4	851.9
G64.0	781.7	795.0	799.6	808.3	821.4	824.7	824.7	815.4	811.3	810.0
G65.0	738.3	747.2	756.8	767.3	781.6	781.7	779.7	771.4	768.7	767.2
G66.0	694.3	701.4	712.4	725.8	738.3	733.8	733.7	725.9	725.2	725.0
G67.0	645.6	658.4	669.2	685.8	691.6	686.6	688.8	683.2	681.4	681.4
G68.0	599.9	613.9	629.2	638.8	643.8	644.8	644.5	639.8	640.0	640.0
G69.0	553.9	571.7	587.7	591.6	599.8	599.0	601.1	598.4	597.2	597.5
G70.0	511.6	529.5	543.2	545.8	557.0	559.2	558.3	555.0	556.6	556.8
G71.0	469.0	485.8	494.6	502.8	511.8	516.1	515.8	514.4	513.2	514.1
G72.0	424.9	443.4	449.2	462.5	469.4	475.1	475.4	470.7	472.7	474.3
G73.0	380.6	396.4	407.1	420.8	428.4	432.7	433.6	430.9	432.2	431.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	340.3	354.7	369.5	379.2	389.6	392.1	392.8	390.3	392.7	392.8
G75.0	299.0	313.0	329.4	339.1	350.4	350.4	353.5	351.5	351.9	353.5
G76.0	258.9	278.8	293.2	300.5	312.0	312.9	315.4	312.2	314.2	315.5
G77.0	226.1	243.5	254.4	264.5	273.7	275.7	276.7	275.6	276.9	277.4
G78.0	190.6	208.6	220.4	230.5	236.1	239.6	241.5	239.7	241.9	242.0
G79.0	160.3	176.4	187.6	195.8	201.4	205.6	207.4	206.1	207.5	207.5
G80.0	134.0	147.9	158.1	163.3	170.0	173.5	173.6	174.1	174.9	175.3
G81.0	108.5	121.1	128.3	134.1	141.4	143.4	143.9	143.7	144.3	144.7
G82.0	85.6	95.2	103.8	108.4	114.5	116.5	116.6	116.5	117.6	116.1
G83.0	65.3	75.1	81.3	85.3	89.6	90.4	92.2	91.1	90.5	90.0
G84.0	47.8	55.6	61.3	63.7	66.8	67.8	69.3	68.1	67.8	67.2
G85.0	34.6	40.0	43.0	45.5	47.4	48.3	48.8	48.2	48.0	46.3
G86.0	22.5	25.9	28.1	29.1	30.4	31.4	31.1	30.3	29.5	28.8
G87.0	13.6	15.3	16.3	16.5	17.1	16.6	16.7	15.4	15.4	14.5
G88.0	6.9	7.1	7.1	7.0	6.9	6.6	6.2	5.6	5.2	4.6
G89.0	5.8	6.1	6.3	6.2	6.1	5.8	5.4	4.9	4.3	3.8
G90.0	5.4	5.7	5.9	5.9	5.8	5.5	5.2	4.8	4.3	3.8
G91.0	4.9	5.4	5.6	5.6	5.6	5.4	5.1	4.8	4.3	3.8
G92.0	4.3	4.8	5.1	5.3	5.4	5.3	5.0	4.7	4.3	3.9
G93.0	3.8	4.2	4.6	4.8	5.0	5.0	4.9	4.6	4.3	3.9
G94.0	3.3	3.8	4.1	4.5	4.8	4.9	4.8	4.6	4.3	3.9
G95.0	2.9	3.3	3.8	4.2	4.5	4.7	4.7	4.6	4.3	3.9
G96.0	2.6	3.0	3.4	3.9	4.3	4.5	4.6	4.5	4.3	4.0
G97.0	2.6	2.8	3.3	3.7	4.1	4.3	4.5	4.5	4.3	4.0
G98.0	2.7	2.8	3.2	3.6	4.0	4.3	4.5	4.5	4.3	4.1
G99.0	2.8	2.9	3.2	3.6	4.0	4.3	4.5	4.4	4.3	4.1
G100.0	3.0	3.2	3.3	3.6	4.0	4.3	4.5	4.4	4.3	4.2
G101.0	3.3	3.3	3.5	3.8	4.1	4.4	4.5	4.5	4.4	4.3
G102.0	3.4	3.5	3.6	3.9	4.2	4.4	4.6	4.6	4.5	4.4
G103.0	3.7	3.7	3.8	4.1	4.3	4.5	4.6	4.7	4.6	4.5
G104.0	3.8	3.9	4.1	4.3	4.4	4.7	4.8	4.8	4.7	4.7
G105.0	4.1	4.2	4.3	4.4	4.6	4.8	4.8	4.9	4.8	4.8
G106.0	4.3	4.3	4.5	4.6	4.8	4.9	5.0	5.0	5.1	4.9
G107.0	4.5	4.5	4.6	4.8	5.0	5.0	5.1	5.2	5.2	5.2
G108.0	4.7	4.8	4.8	4.9	5.1	5.2	5.3	5.3	5.4	5.3
G109.0	5.0	5.0	5.0	5.1	5.2	5.4	5.4	5.5	5.5	5.5
G110.0	5.3	5.2	5.3	5.3	5.4	5.5	5.6	5.7	5.7	5.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	5.4	5.4	5.5	5.5	5.7	5.8	5.8	5.9	5.9	5.9
G112.0	5.7	5.7	5.8	5.8	5.8	5.9	6.0	6.0	6.1	6.2
G113.0	5.9	5.9	5.9	6.0	6.0	6.2	6.2	6.3	6.3	6.3
G114.0	6.1	6.1	6.1	6.2	6.2	6.4	6.4	6.4	6.5	6.6
G115.0	6.4	6.4	6.4	6.4	6.4	6.5	6.6	6.7	6.7	6.8
G116.0	6.6	6.6	6.7	6.6	6.7	6.7	6.8	6.9	6.9	7.0
G117.0	6.8	6.8	6.9	6.9	6.9	7.0	7.1	7.1	7.2	7.1
G118.0	7.1	7.1	7.1	7.1	7.1	7.2	7.3	7.3	7.4	7.5
G119.0	7.3	7.3	7.3	7.4	7.4	7.5	7.5	7.6	7.6	7.6
G120.0	7.5	7.6	7.5	7.6	7.6	7.6	7.7	7.7	7.8	7.8
G121.0	7.7	7.7	7.8	7.8	7.9	7.9	7.9	8.0	8.0	8.1
G122.0	8.0	8.0	8.0	8.0	8.1	8.1	8.1	8.2	8.2	8.3
G123.0	8.2	8.2	8.2	8.2	8.3	8.4	8.4	8.5	8.5	8.6
G124.0	8.4	8.4	8.5	8.5	8.5	8.6	8.6	8.6	8.7	8.7
G125.0	8.6	8.6	8.7	8.7	8.7	8.8	8.8	8.8	8.9	9.0
G126.0	8.9	8.8	8.9	8.9	9.0	9.0	9.0	9.1	9.1	9.2
G127.0	9.1	9.1	9.1	9.1	9.2	9.3	9.3	9.3	9.3	9.3
G128.0	9.3	9.3	9.3	9.4	9.4	9.4	9.5	9.5	9.5	9.6
G129.0	9.5	9.5	9.6	9.6	9.6	9.7	9.7	9.7	9.8	9.8
G130.0	9.7	9.8	9.8	9.8	9.8	9.8	9.9	9.9	10.0	10.0
G131.0	10.0	9.9	10.0	10.0	10.0	10.0	10.1	10.1	10.2	10.2
G132.0	10.1	10.2	10.2	10.2	10.2	10.3	10.3	10.3	10.4	10.4
G133.0	10.4	10.4	10.4	10.4	10.4	10.4	10.5	10.5	10.5	10.6
G134.0	10.5	10.6	10.6	10.7	10.6	10.6	10.7	10.7	10.8	10.8
G135.0	10.8	10.8	10.8	10.8	10.9	10.8	10.9	10.9	10.9	10.9
G136.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.1	11.1	11.1
G137.0	11.2	11.2	11.2	11.3	11.2	11.3	11.2	11.3	11.3	11.3
G138.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.5	11.5
G139.0	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.7	11.7
G140.0	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.9
G141.0	11.9	11.9	11.9	12.0	11.9	11.9	11.9	12.0	12.0	12.0
G142.0	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.2	12.2	12.2
G143.0	12.3	12.3	12.3	12.3	12.3	12.2	12.3	12.3	12.3	12.3
G144.0	12.4	12.4	12.4	12.5	12.4	12.4	12.4	12.5	12.5	12.5
G145.0	12.6	12.7	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6
G146.0	12.8	12.8	12.8	12.8	12.8	12.8	12.7	12.8	12.8	12.8
G147.0	13.0	13.0	12.9	12.9	12.9	12.9	12.9	12.9	12.9	13.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	13.1	13.1	13.1	13.1	13.1	13.0	13.1	13.0	13.1	13.1
G149.0	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.1	13.2	13.3
G150.0	13.4	13.4	13.4	13.3	13.3	13.3	13.3	13.4	13.4	13.4
G151.0	13.6	13.5	13.5	13.5	13.5	13.4	13.5	13.5	13.5	13.5
G152.0	13.7	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6
G153.0	13.8	13.8	13.8	13.7	13.7	13.7	13.7	13.7	13.7	13.8
G154.0	14.0	14.0	13.9	13.9	13.8	13.8	13.8	13.8	13.8	13.9
G155.0	14.1	14.0	14.1	14.0	14.0	13.9	13.9	13.9	14.0	14.0
G156.0	14.2	14.1	14.1	14.1	14.1	14.0	14.1	14.1	14.1	14.1
G157.0	14.3	14.3	14.3	14.2	14.2	14.2	14.2	14.2	14.2	14.2
G158.0	14.4	14.4	14.4	14.4	14.3	14.3	14.3	14.3	14.3	14.3
G159.0	14.5	14.6	14.5	14.5	14.4	14.4	14.4	14.4	14.4	14.4
G160.0	14.6	14.6	14.6	14.6	14.5	14.5	14.5	14.5	14.5	14.6
G161.0	14.7	14.7	14.7	14.7	14.6	14.6	14.6	14.6	14.6	14.6
G162.0	14.8	14.8	14.8	14.8	14.7	14.7	14.7	14.7	14.8	14.7
G163.0	14.9	14.9	14.9	14.9	14.8	14.8	14.8	14.8	14.9	14.8
G164.0	15.0	15.0	15.0	15.0	14.9	14.9	14.9	14.9	15.0	14.9
G165.0	15.1	15.1	15.1	15.1	15.0	15.0	15.0	15.0	15.0	15.0
G166.0	15.1	15.1	15.2	15.1	15.1	15.1	15.1	15.1	15.1	15.1
G167.0	15.2	15.2	15.2	15.2	15.2	15.2	15.1	15.2	15.2	15.1
G168.0	15.3	15.3	15.3	15.3	15.3	15.3	15.2	15.3	15.3	15.2
G169.0	15.4	15.4	15.4	15.4	15.3	15.3	15.3	15.3	15.3	15.3
G170.0	15.4	15.4	15.4	15.4	15.4	15.4	15.4	15.4	15.4	15.4
G171.0	15.6	15.6	15.5	15.5	15.5	15.4	15.5	15.5	15.4	15.5
G172.0	15.5	15.6	15.6	15.6	15.5	15.5	15.6	15.5	15.6	15.6
G173.0	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.5	15.6
G174.0	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6
G175.0	15.7	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.7	15.7
G176.0	15.7	15.7	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6
G177.0	15.8	15.8	15.7	15.7	15.7	15.7	15.7	15.7	15.6	15.6
G178.0	15.7	15.8	15.7	15.7	15.6	15.7	15.7	15.8	15.7	15.8
G179.0	15.8	15.8	15.8	15.7	15.7	15.7	15.8	15.7	15.8	15.8
G180.0	15.7	15.8	15.8	15.7	15.6	15.7	15.7	15.7	15.8	15.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	2282.3	2283.5	2283.4						
G1.0	2281.5	2282.6	2283.2						
G2.0	2279.7	2280.7	2282.3						
G3.0	2276.7	2277.6	2280.4						
G4.0	2273.6	2274.7	2277.9						
G5.0	2269.5	2270.7	2274.5						
G6.0	2264.2	2265.3	2270.9						
G7.0	2258.4	2259.7	2266.0						
G8.0	2251.6	2252.6	2260.0						
G9.0	2244.8	2245.7	2253.8						
G10.0	2236.5	2237.9	2246.4						
G11.0	2227.3	2228.5	2238.8						
G12.0	2218.1	2218.9	2230.1						
G13.0	2207.9	2209.4	2220.7						
G14.0	2197.4	2198.8	2210.7						
G15.0	2187.4	2188.4	2201.1						
G16.0	2175.9	2176.9	2190.5						
G17.0	2163.3	2164.5	2179.9						
G18.0	2149.4	2151.6	2168.2						
G19.0	2136.0	2138.0	2155.5						
G20.0	2121.6	2124.3	2142.5						
G21.0	2107.4	2109.3	2128.8						
G22.0	2091.7	2094.4	2114.2						
G23.0	2074.9	2077.2	2099.9						
G24.0	2057.7	2060.4	2084.0						
G25.0	2039.8	2042.5	2067.7						
G26.0	2022.0	2024.2	2050.3						
G27.0	2004.0	2005.2	2032.9						
G28.0	1983.2	1985.0	2014.9						
G29.0	1962.7	1962.8	1994.5						
G30.0	1941.8	1942.2	1973.4						
G31.0	1920.9	1920.5	1953.0						
G32.0	1899.7	1899.5	1931.4						
G33.0	1877.1	1876.2	1911.5						
G34.0	1851.7	1851.1	1888.5						
G35.0	1825.3	1823.9	1864.5						
G36.0	1798.8	1798.5	1837.9						

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	1773.9	1772.5	1813.6						
G38.0	1746.8	1747.4	1788.5						
G39.0	1720.9	1720.6	1764.2						
G40.0	1692.7	1692.7	1739.7						
G41.0	1664.4	1662.8	1714.8						
G42.0	1632.5	1632.4	1686.2						
G43.0	1599.5	1601.2	1655.9						
G44.0	1566.3	1568.8	1624.2						
G45.0	1532.9	1538.3	1593.1						
G46.0	1500.7	1507.2	1562.8						
G47.0	1468.6	1474.9	1533.1						
G48.0	1436.6	1443.0	1500.7						
G49.0	1403.0	1409.1	1469.2						
G50.0	1368.9	1373.9	1438.5						
G51.0	1330.5	1336.5	1404.7						
G52.0	1293.1	1298.8	1369.7						
G53.0	1253.2	1261.8	1332.4						
G54.0	1217.8	1224.5	1295.5						
G55.0	1178.2	1186.8	1257.9						
G56.0	1141.7	1148.3	1222.7						
G57.0	1101.8	1111.0	1186.7						
G58.0	1065.7	1070.7	1150.9						
G59.0	1025.9	1030.9	1114.7						
G60.0	985.5	991.0	1076.2						
G61.0	942.3	947.9	1037.6						
G62.0	897.9	902.7	997.6						
G63.0	853.6	859.1	953.7						
G64.0	811.3	814.9	910.7						
G65.0	769.4	773.9	865.1						
G66.0	728.2	731.1	823.8						
G67.0	684.0	689.1	781.3						
G68.0	643.1	647.4	741.1						
G69.0	600.5	606.3	697.0						
G70.0	559.2	561.9	656.7						
G71.0	517.0	520.4	613.5						
G72.0	475.3	477.6	572.2						
G73.0	434.7	438.1	530.1						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G74.0	395.7	396.4	488.8							
G75.0	354.4	356.3	446.8							
G76.0	316.2	317.3	406.6							
G77.0	278.6	279.9	366.1							
G78.0	242.7	243.1	328.1							
G79.0	207.9	208.7	289.3							
G80.0	173.8	174.1	251.6							
G81.0	143.4	143.3	216.7							
G82.0	115.4	113.8	182.3							
G83.0	89.0	87.8	151.6							
G84.0	65.9	64.1	121.8							
G85.0	45.9	44.3	95.5							
G86.0	27.7	26.7	71.3							
G87.0	13.6	12.5	49.4							
G88.0	4.1	3.8	31.8							
G89.0	3.4	3.0	16.6							
G90.0	3.3	3.0	4.4							
G91.0	3.5	3.2	2.6							
G92.0	3.5	3.2	2.5							
G93.0	3.5	3.3	2.5							
G94.0	3.7	3.3	2.7							
G95.0	3.7	3.4	2.7							
G96.0	3.7	3.5	2.8							
G97.0	3.8	3.6	2.9							
G98.0	3.9	3.7	2.9							
G99.0	4.0	3.8	3.0							
G100.0	4.1	4.0	3.2							
G101.0	4.2	4.0	3.3							
G102.0	4.3	4.2	3.3							
G103.0	4.4	4.4	3.5							
G104.0	4.6	4.5	3.6							
G105.0	4.7	4.7	3.8							
G106.0	4.9	4.8	3.9							
G107.0	5.1	5.1	4.1							
G108.0	5.3	5.3	4.3							
G109.0	5.5	5.4	4.5							
G110.0	5.7	5.6	4.7							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	5.9	5.9	4.9							
G112.0	6.1	6.1	5.1							
G113.0	6.3	6.3	5.3							
G114.0	6.6	6.6	5.5							
G115.0	6.8	6.8	5.7							
G116.0	7.1	7.1	5.9							
G117.0	7.2	7.2	6.2							
G118.0	7.5	7.5	6.3							
G119.0	7.6	7.7	6.6							
G120.0	7.9	7.9	6.8							
G121.0	8.1	8.1	7.1							
G122.0	8.3	8.3	7.3							
G123.0	8.6	8.6	7.5							
G124.0	8.8	8.9	7.7							
G125.0	9.0	9.0	7.9							
G126.0	9.3	9.3	8.1							
G127.0	9.5	9.5	8.4							
G128.0	9.6	9.7	8.5							
G129.0	9.9	9.8	8.8							
G130.0	10.0	10.1	9.0							
G131.0	10.2	10.3	9.2							
G132.0	10.4	10.5	9.3							
G133.0	10.7	10.7	9.5							
G134.0	10.9	10.9	9.8							
G135.0	11.0	11.0	9.9							
G136.0	11.2	11.3	10.2							
G137.0	11.4	11.4	10.4							
G138.0	11.5	11.6	10.5							
G139.0	11.8	11.7	10.7							
G140.0	11.9	12.0	10.9							
G141.0	12.0	12.1	11.1							
G142.0	12.2	12.2	11.3							
G143.0	12.4	12.4	11.4							
G144.0	12.5	12.6	11.6							
G145.0	12.7	12.7	11.8							
G146.0	12.8	12.8	11.9							
G147.0	12.9	13.1	12.1							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	13.1	13.1	12.2							
G149.0	13.2	13.3	12.4							
G150.0	13.4	13.4	12.5							
G151.0	13.5	13.6	12.6							
G152.0	13.6	13.6	12.9							
G153.0	13.7	13.7	12.9							
G154.0	13.9	13.9	13.1							
G155.0	14.0	14.1	13.2							
G156.0	14.1	14.1	13.3							
G157.0	14.2	14.3	13.5							
G158.0	14.3	14.3	13.6							
G159.0	14.4	14.5	13.8							
G160.0	14.5	14.5	13.9							
G161.0	14.6	14.6	14.0							
G162.0	14.7	14.7	14.1							
G163.0	14.8	14.9	14.3							
G164.0	14.9	14.9	14.4							
G165.0	15.0	15.0	14.5							
G166.0	15.1	15.1	14.6							
G167.0	15.1	15.2	14.7							
G168.0	15.2	15.2	14.9							
G169.0	15.3	15.3	15.0							
G170.0	15.3	15.4	15.1							
G171.0	15.4	15.5	15.2							
G172.0	15.5	15.6	15.3							
G173.0	15.6	15.6	15.5							
G174.0	15.6	15.6	15.6							
G175.0	15.7	15.8	15.6							
G176.0	15.8	15.8	15.8							
G177.0	15.8	15.8	15.8							
G178.0	15.8	15.8	15.9							
G179.0	15.8	15.8	16.0							
G180.0	15.8	15.8	16.0							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector: