

Report No.:

Test Time: 2018-03-02 16:06

Luminaire Property

Luminaire Manufacturer: Svetolub

Luminaire Category: Svetolub-Street-2152-60-7000

Luminous Length (mm): 280

Luminous Width (mm): 130

Luminous Height (mm): 130

Voltage: 230.0 V

Current: 0.242 A

Power: 54.7 W

Power Factor: 0.983

Photometric Results

CIE Class: Direct

Measurement Flux: 6953.4 lm

Downward Ratio: 99%

Total Rated Lamp Lumens: 6953.4 lm

Efficiency: 100%

Upward Ratio: 1%

Horizontal Diffuse Angle(25%,50%,75%): H155.8,H152.4,H148.6

Vertical Diffuse Angle(25%,50%,75%): V83.8,V64.8,V54.2


Luminaire Efficacy Rating (LER): 127

Central Intensity: 1802.44 cd


Max. Intensity: 3786.66 cd

Pos of Max. Intensity: H200 V67

Picture Of Luminaire



Luminous Intensity Distribution Curve

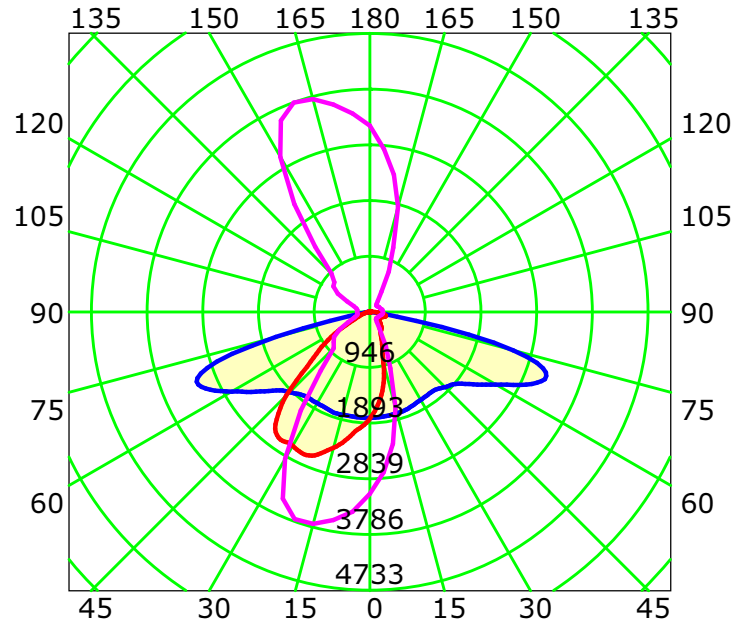

Unit: cd

— C0-C180 — C90-C270 — G67

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:


Luminous Intensity Distribution Curve

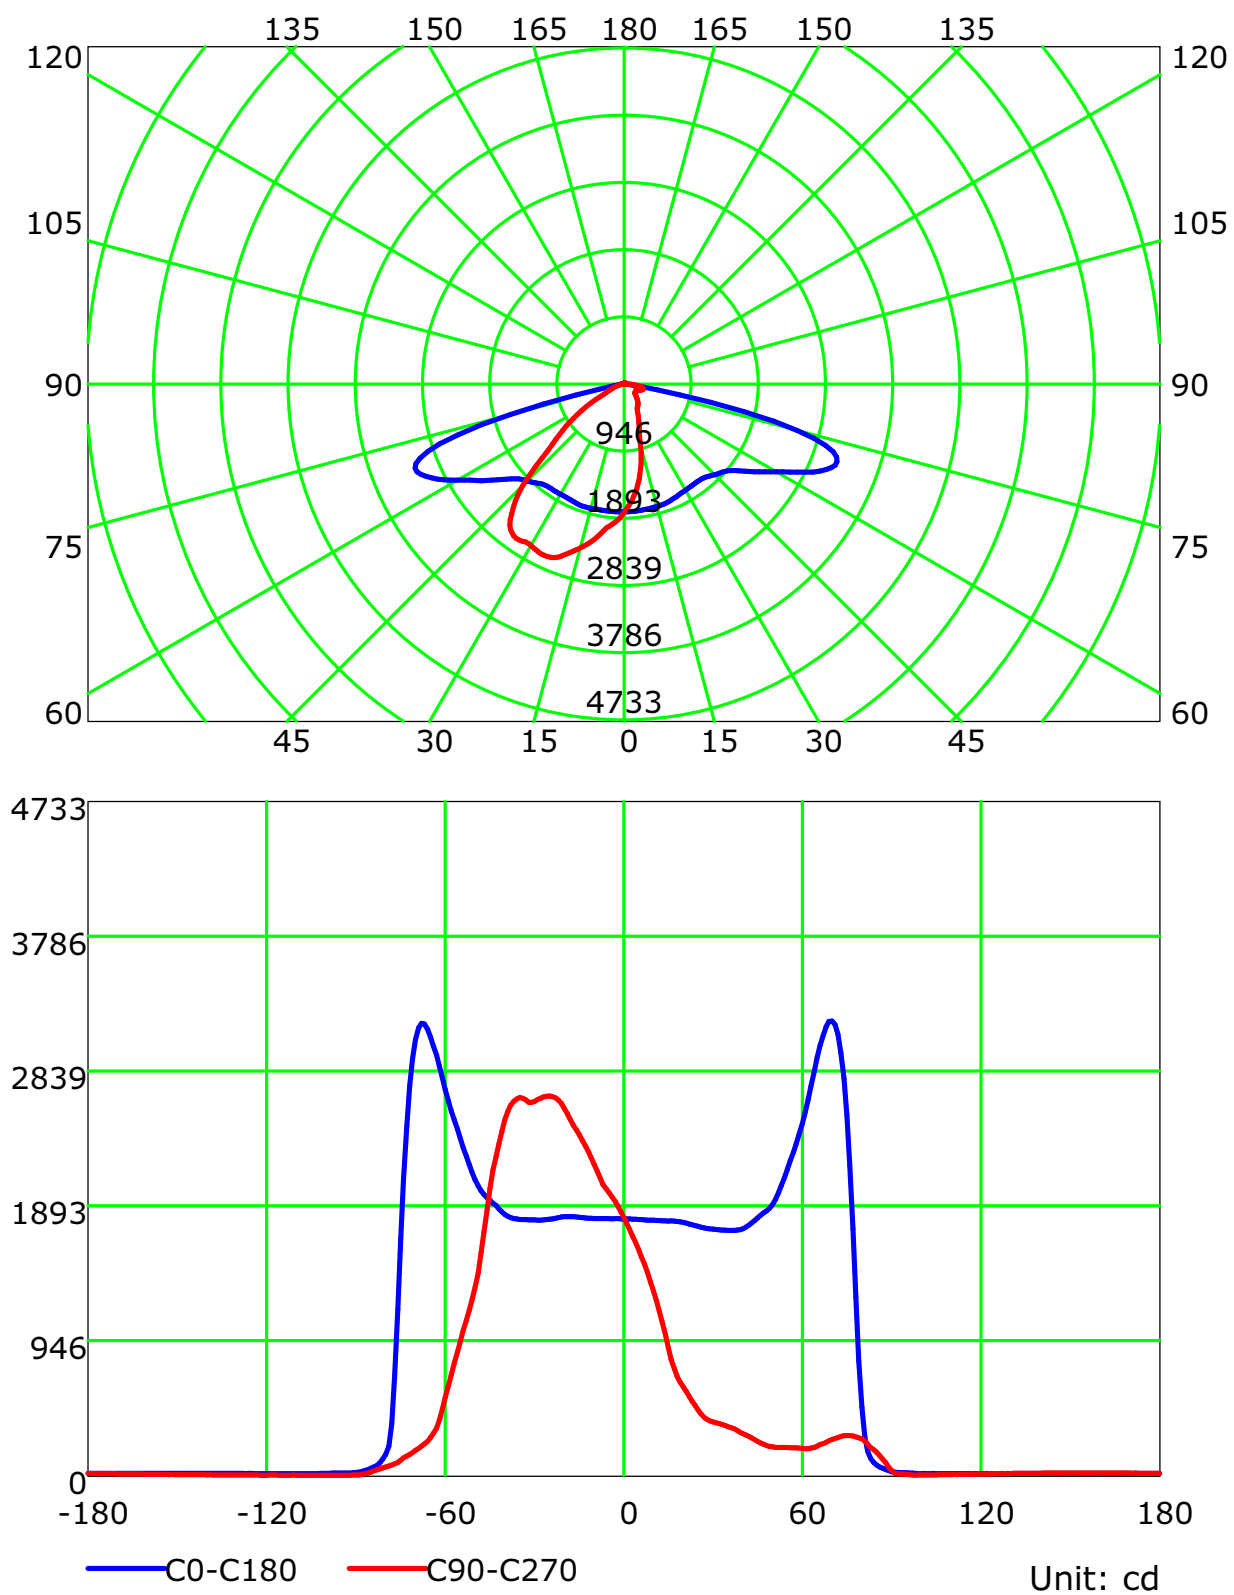

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

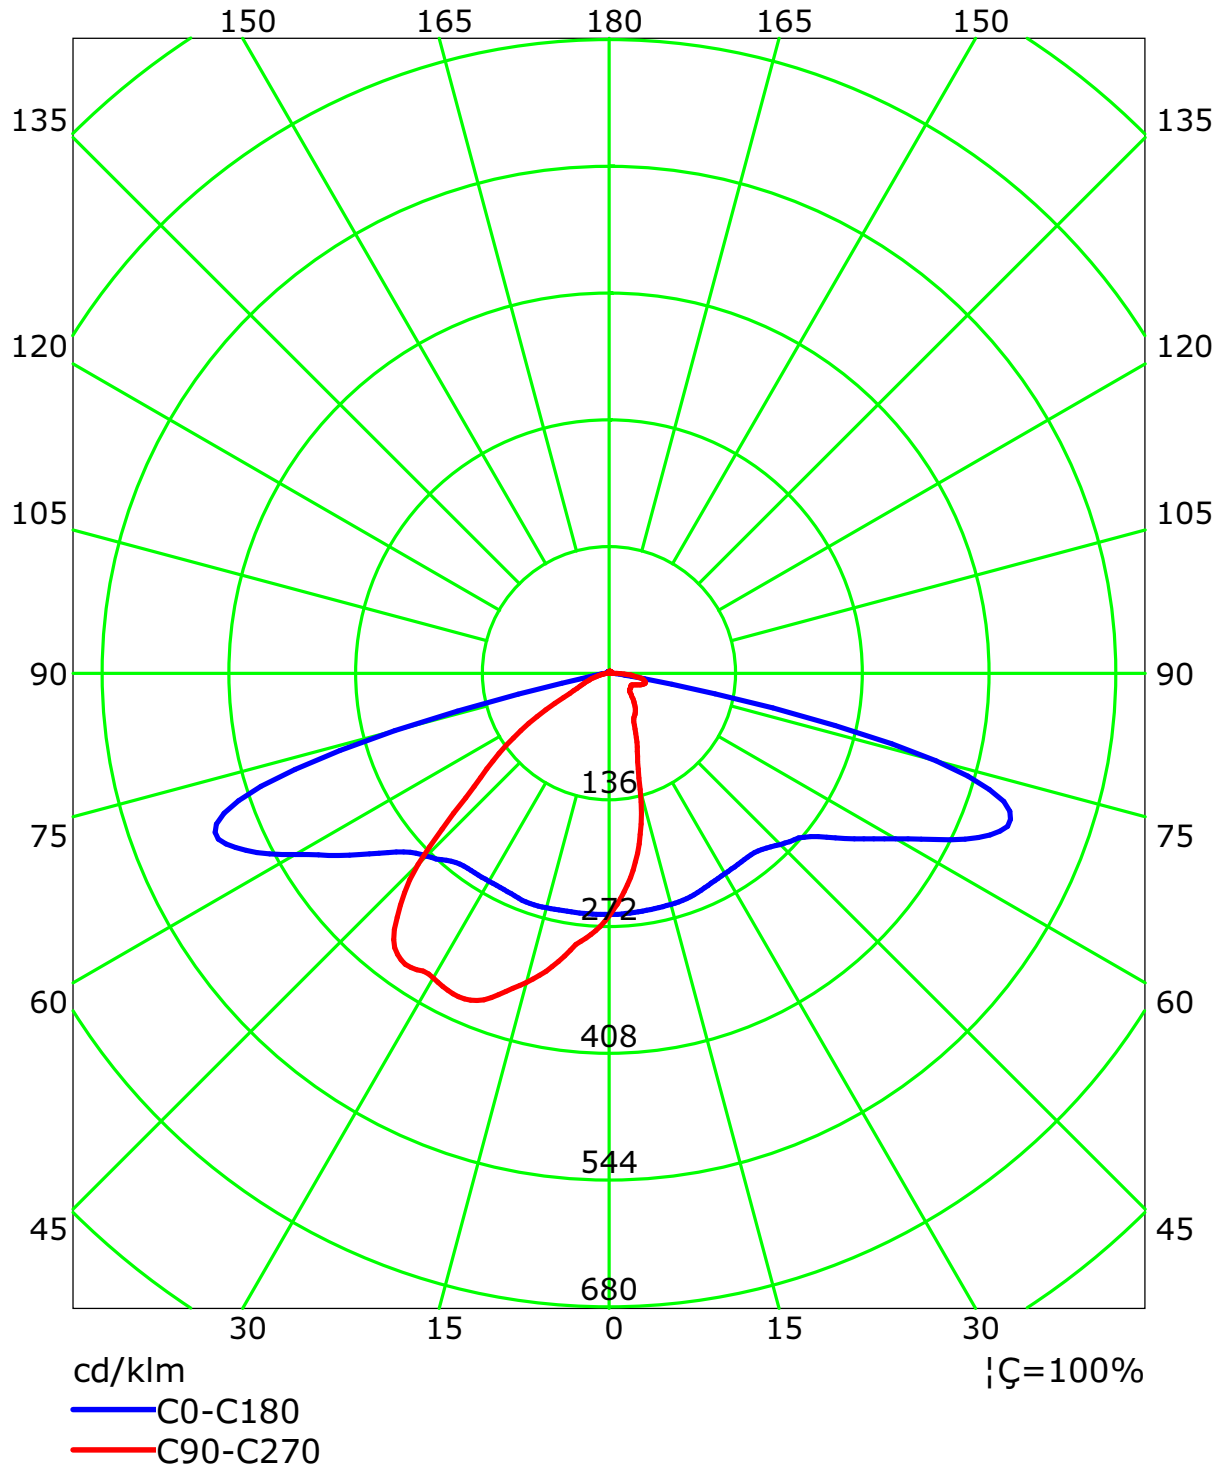

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:


Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	107	101	97	92	104	99	95	91	95	91	87	90	87	85	87	84	82	80
2	96	86	79	72	93	84	77	71	81	75	69	77	72	68	74	70	66	64
3	86	74	65	58	84	73	64	58	70	62	56	67	60	55	64	59	54	52
4	78	65	55	48	76	64	55	48	61	53	47	58	52	46	56	50	45	43
5	72	58	48	40	69	56	47	40	54	46	40	52	45	39	50	44	39	36
6	66	51	42	35	64	50	41	35	48	40	34	47	39	34	45	38	33	31
7	61	46	37	30	59	45	36	30	44	36	30	42	35	29	41	34	29	27
8	56	42	33	27	55	41	33	27	40	32	26	38	31	26	37	31	26	24
9	53	38	30	24	51	38	29	24	36	29	23	35	28	23	34	28	23	21
10	49	35	27	21	48	35	27	21	34	26	21	33	26	21	32	25	21	19

Spacing Criteria (0-180): 1.50

Spacing Criteria (90-270): 1.26

Spacing Criteria (Diagonal): 1.61

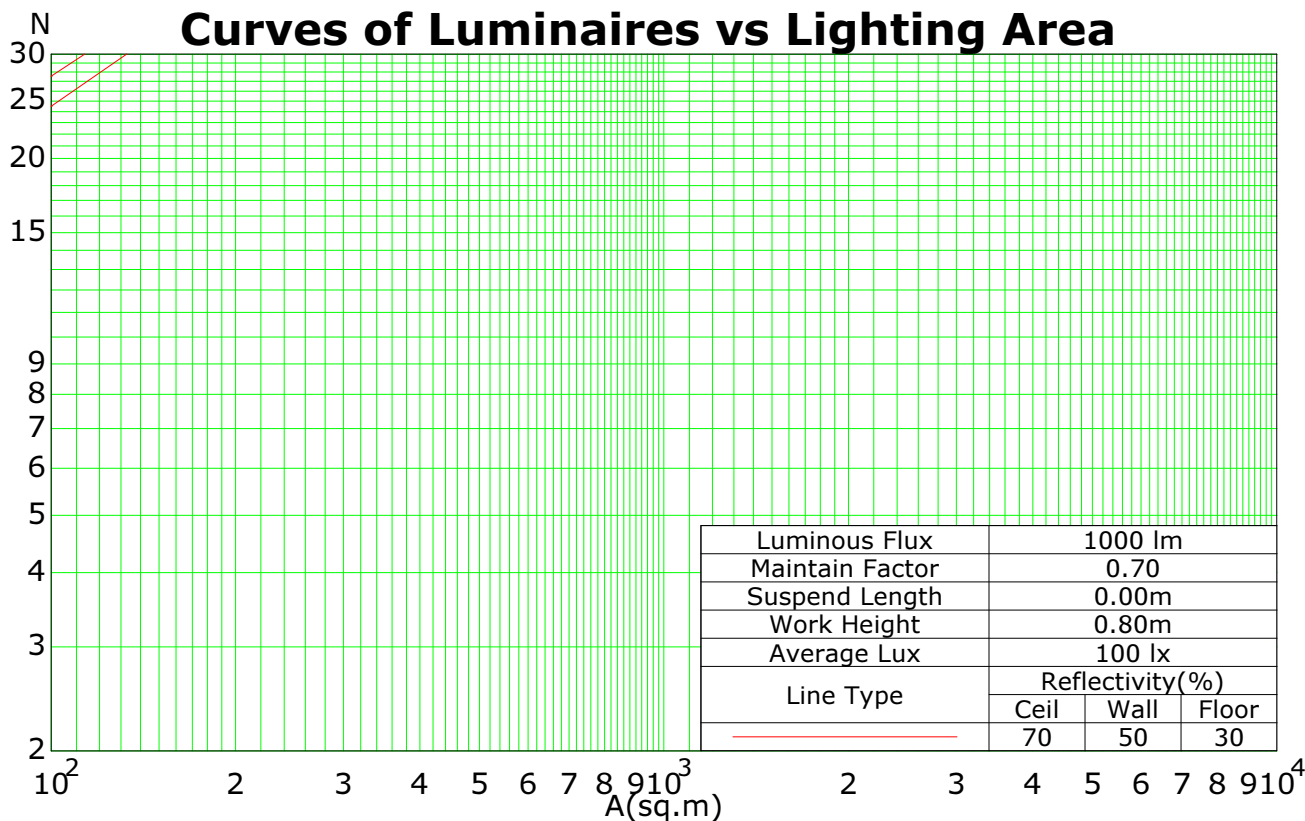

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m


Humidity: 40

Inspector:

Isocandela (rectangle)

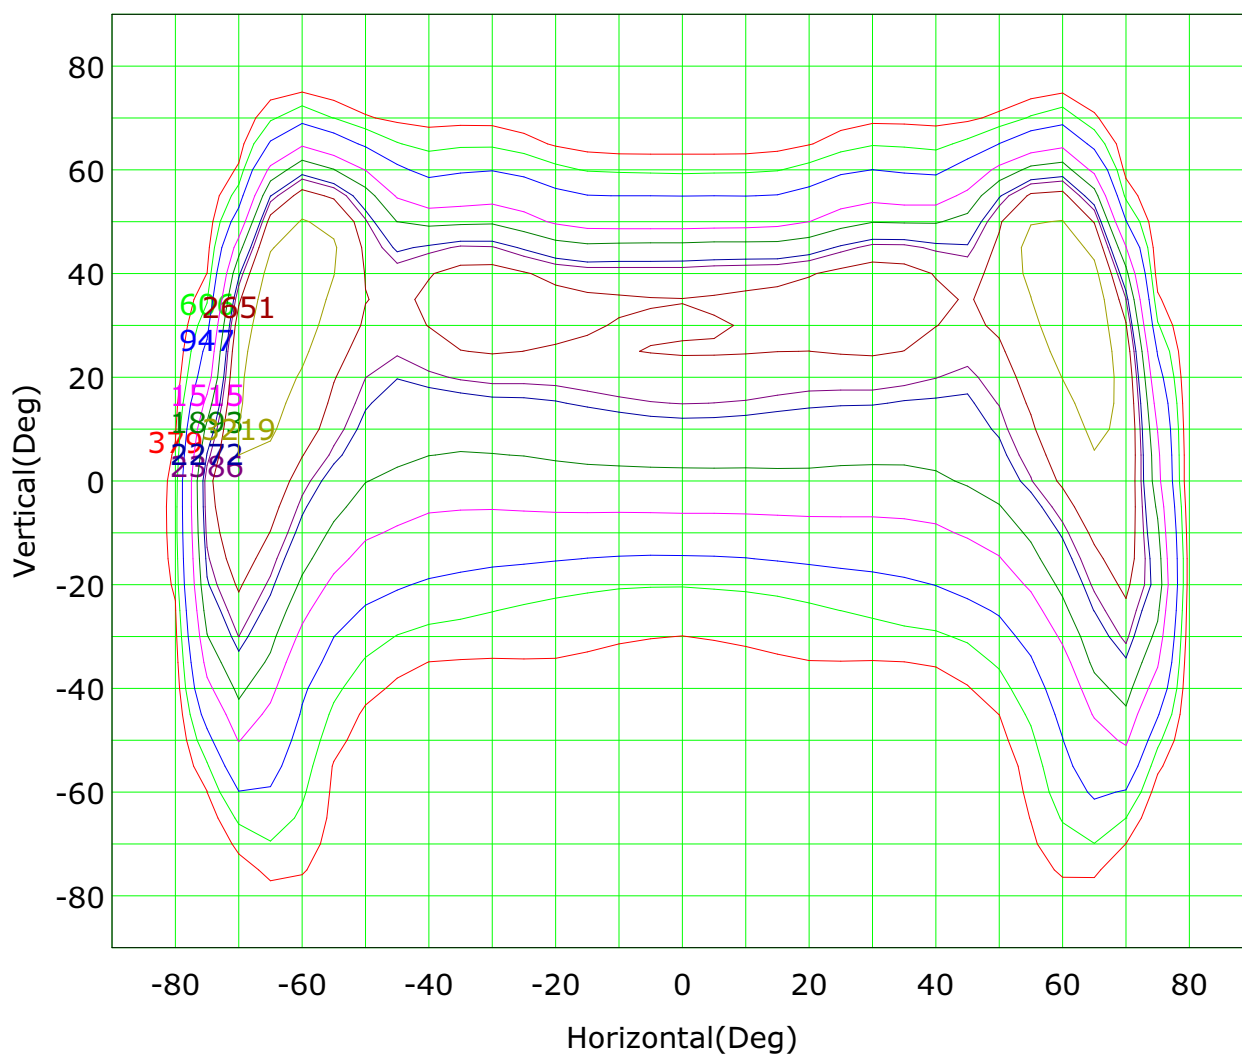

Isocandela (sphere)

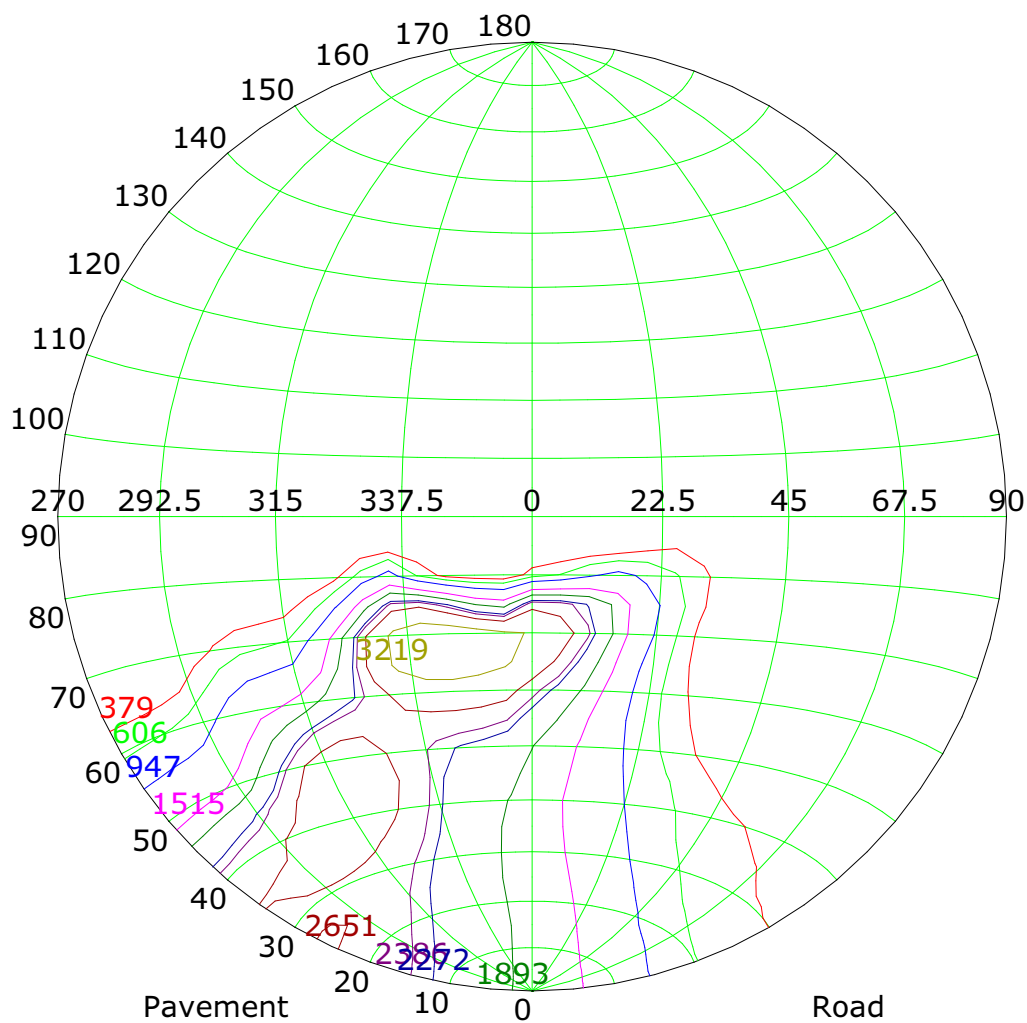

Imax (100%): 3787 cd

(10%): 379 cd	(16%): 606 cd
(25%): 947 cd	(40%): 1515 cd
(63%): 2386 cd	(100%): 3787 cd
(50%): 1893 cd	(60%): 2272 cd
(70%): 2651 cd	(85%): 3219 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

IsoLux Plot

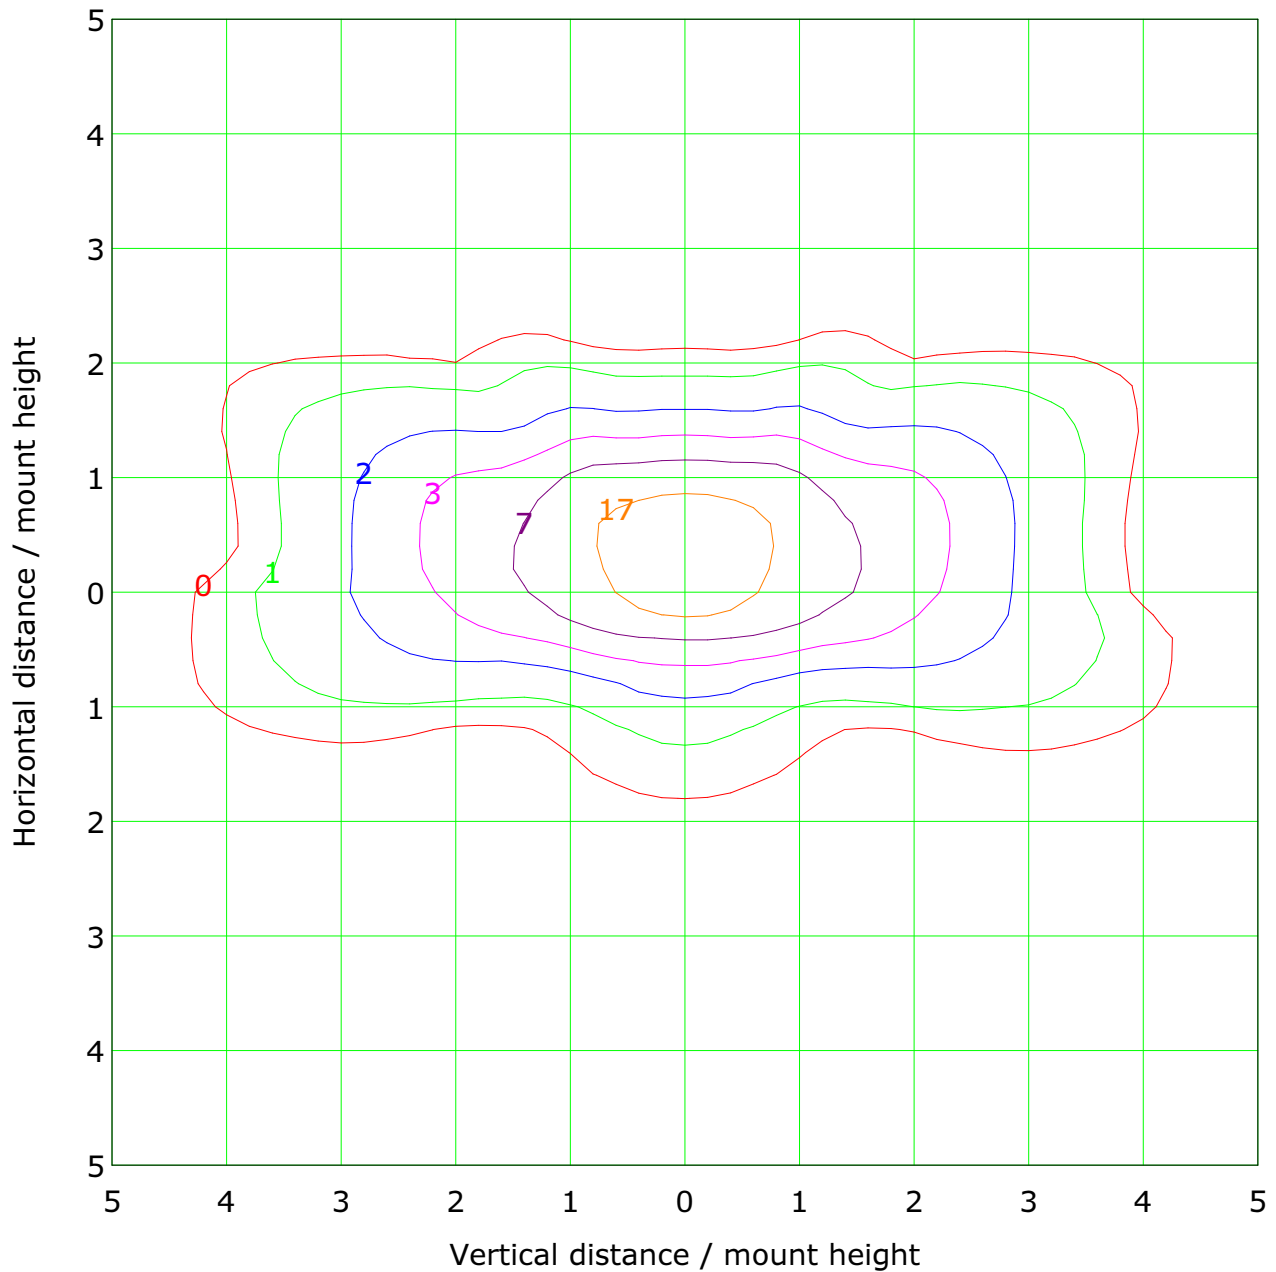

Mounting Height: 8.0m		Max Lux(100%): 33.7 lx	
(1%):	0.3 lx	(2%):	0.7 lx
(5%):	1.7 lx	(10%):	3.4 lx
(20%):	6.7 lx	(50%):	16.8 lx
(100%):	33.7 lx	(200%):	67.4 lx
(300%):	101.1 lx	(500%):	168.5 lx

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.000 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

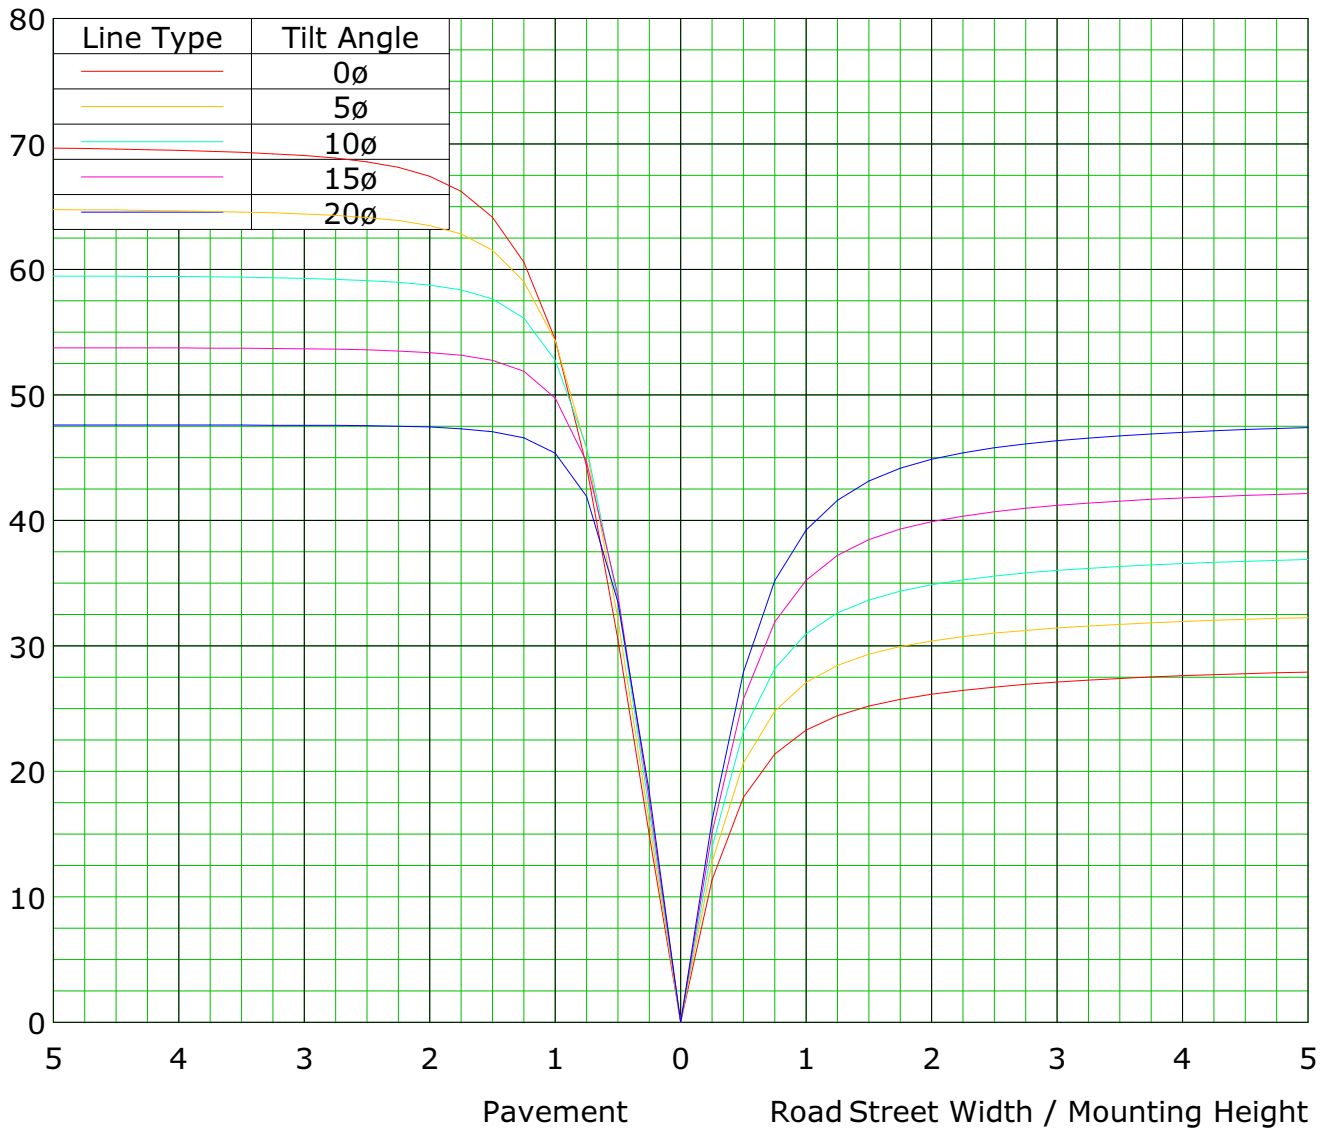

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

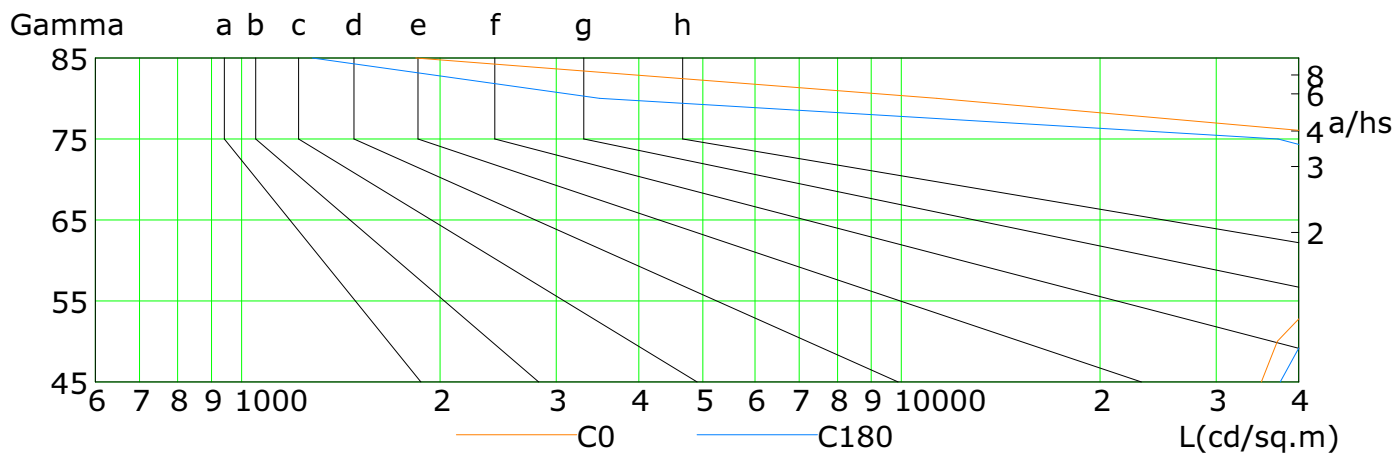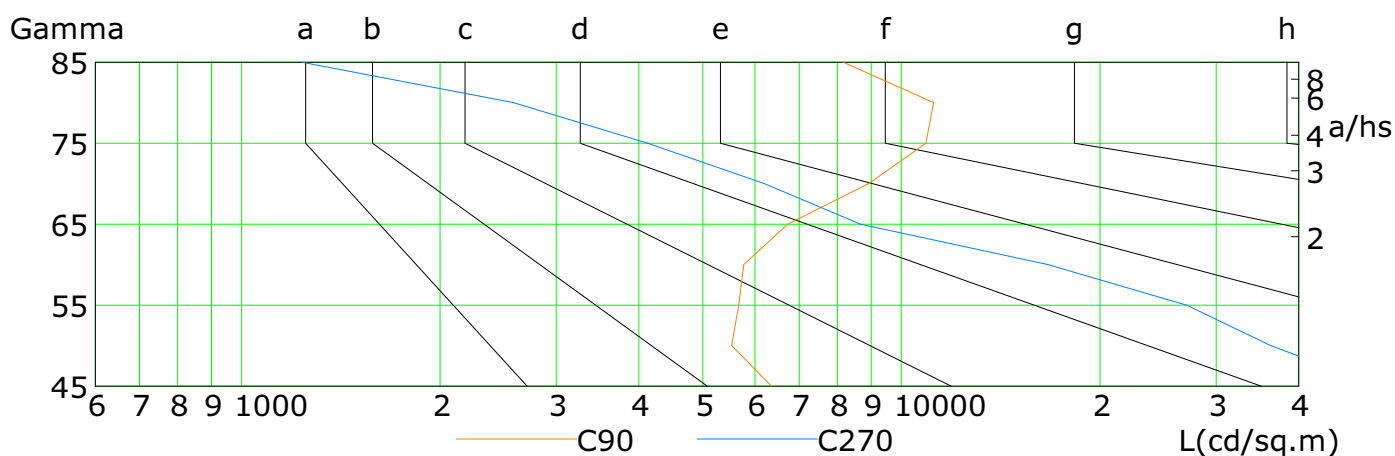


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	35138	37139	42424	49722	60676	68426	56710	11312	1836
C90	6359	5528	5670	5773	6722	8922	10891	11184	8163
C180	37529	40520	46726	54509	63667	65607	37238	3485	1280
C270	53574	36278	27068	16671	8672	6199	4127	2581	1235


C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Illuminance at a Distance

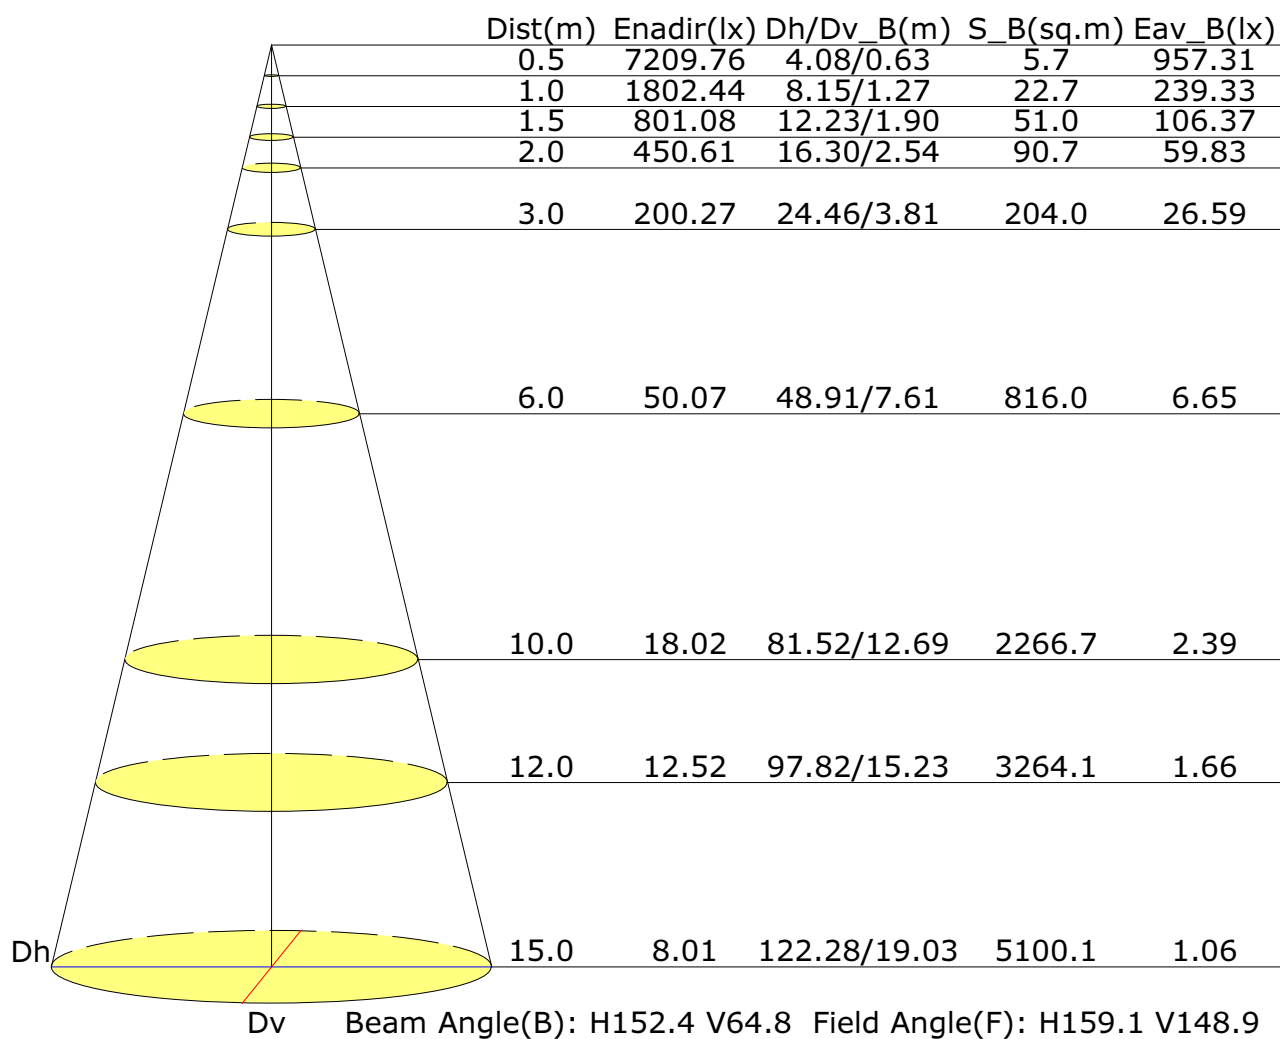

Vertical IsoLux Plot

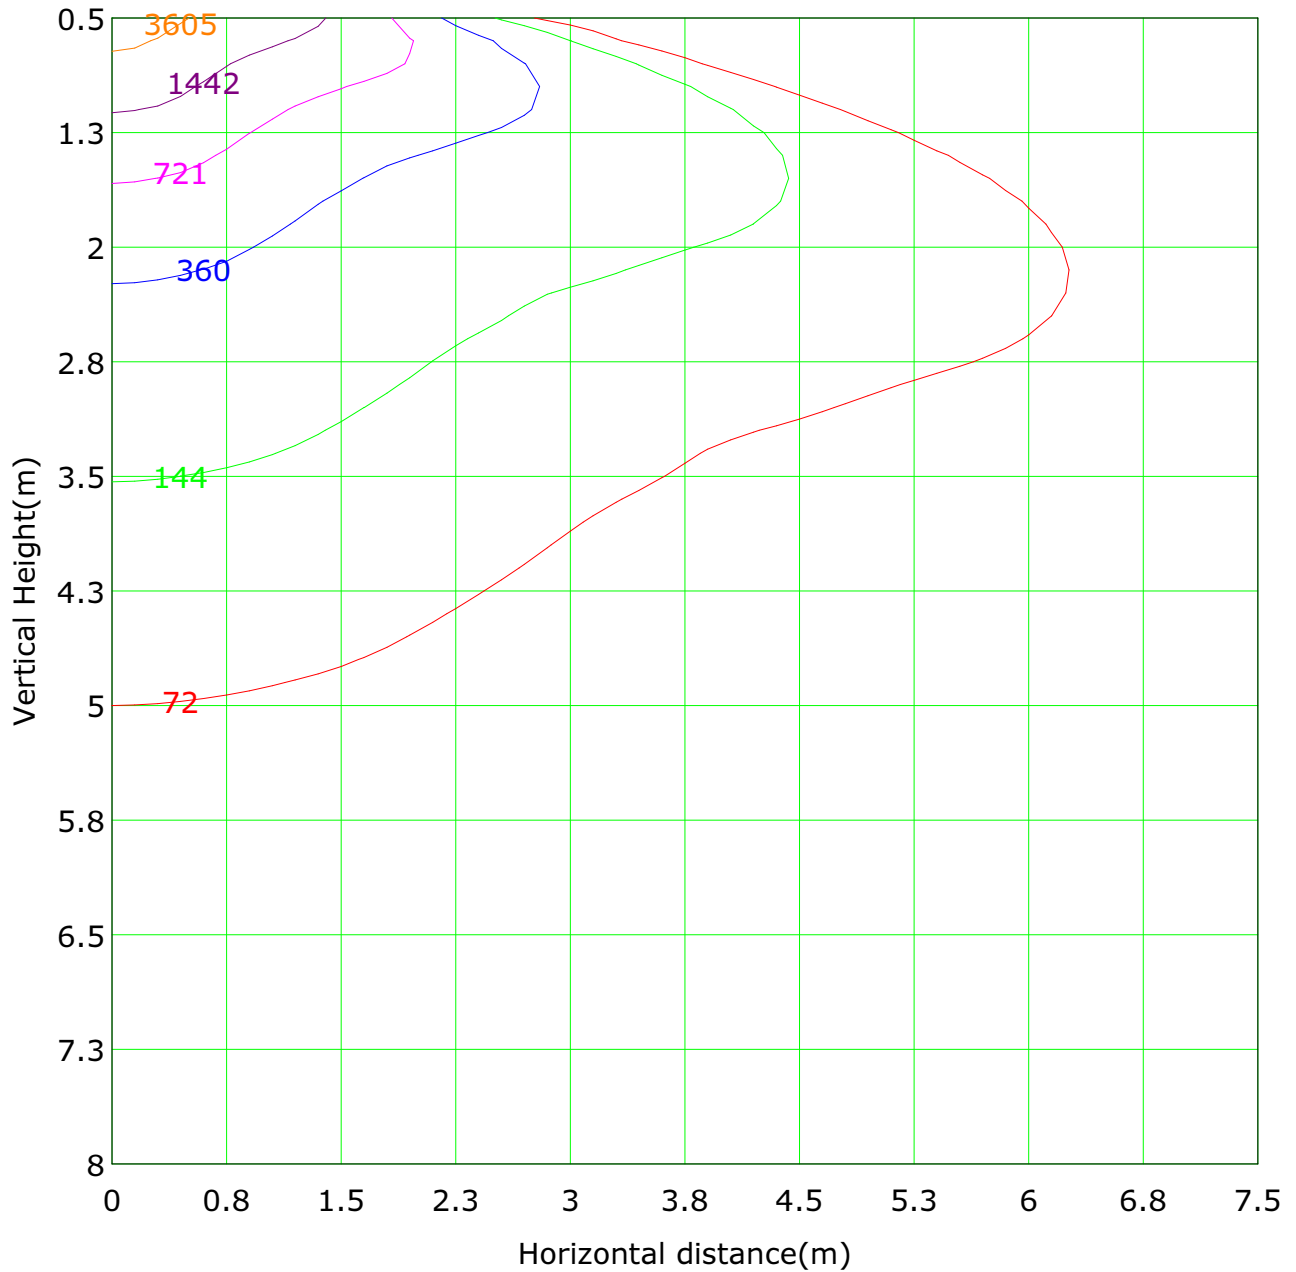

Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 7209.8 lx

(1%): 72.1 lx	(2%): 144.2 lx
(5%): 360.5 lx	(10%): 721.0 lx
(20%): 1442.0 lx	(50%): 3604.9 lx
(100%): 7209.8 lx	(200%): 14419.5 lx
(300%): 21629.3 lx	(500%): 36048.8 lx

C Plane (°): 0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°): 0.0-180.0: 1.0

Test Device: LSG-1600B


Distance: 8.000 m

Humidity: 40

Inspector:

The Average Illuminance Effective Figure

Flux Out: 6719.04lm

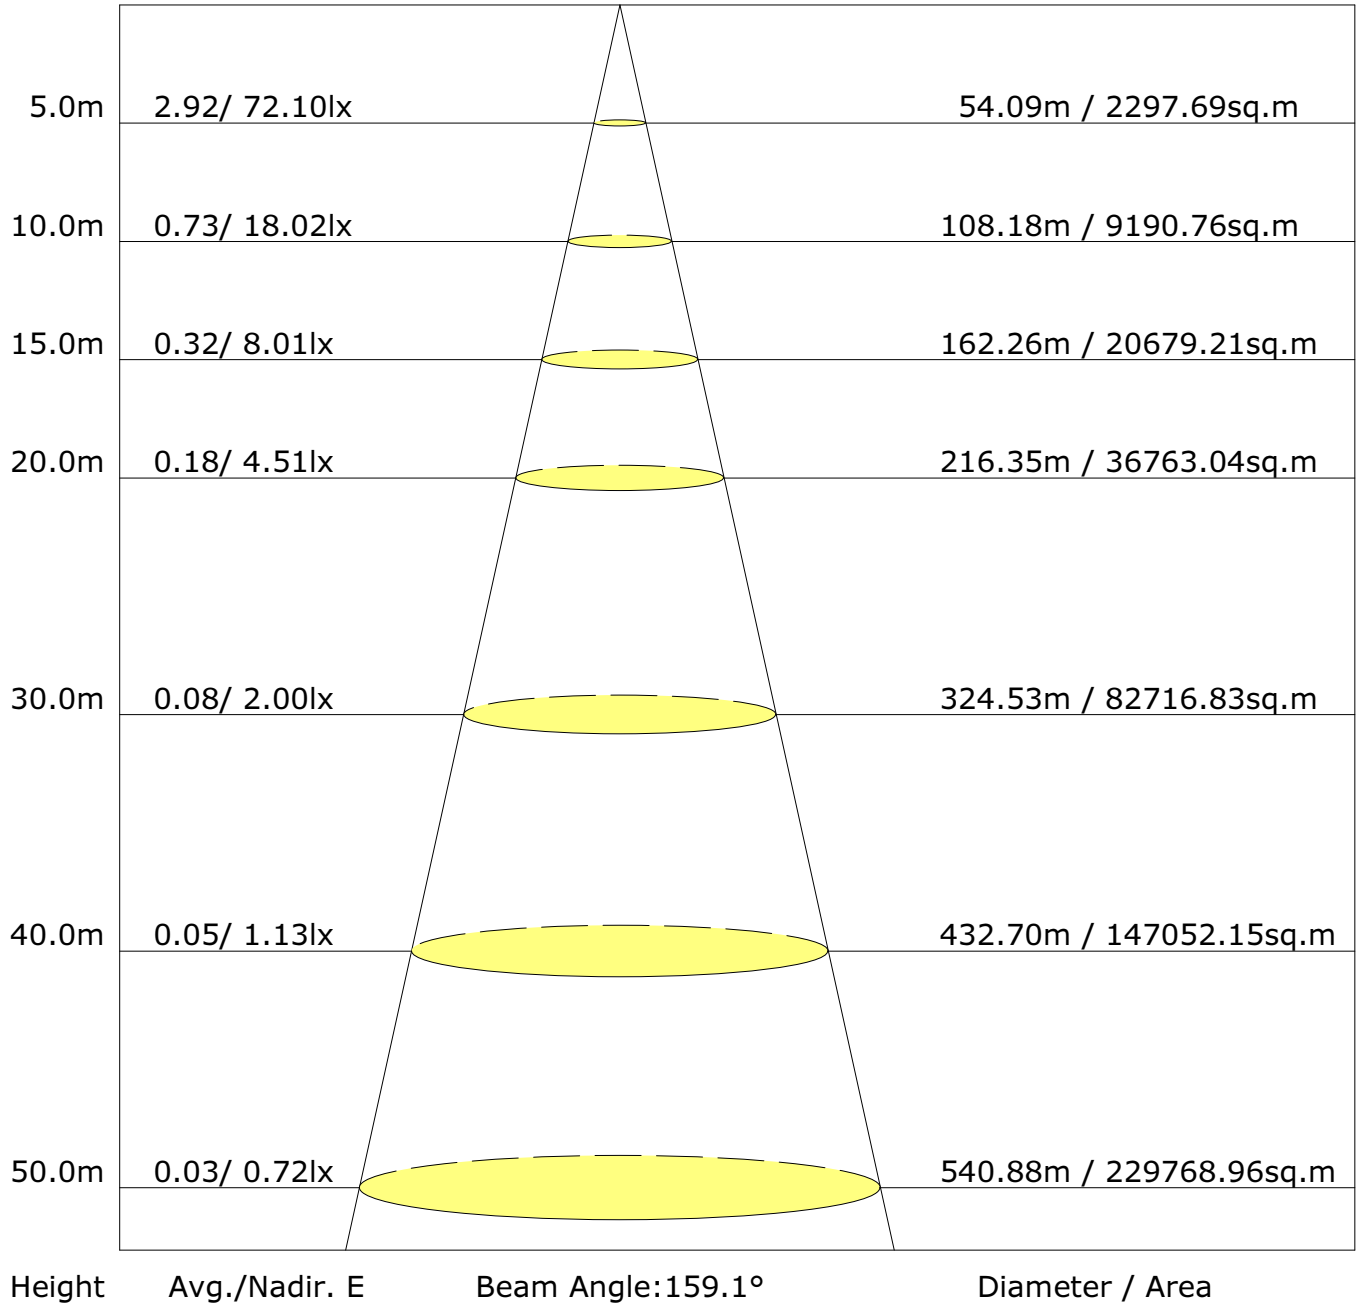

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:


UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	20.7	22.4	21.0	22.7	23.1	3.3	5.1	3.7	5.4	5.7
3H	25.7	27.3	26.1	27.6	28.0	7.2	8.8	7.5	9.1	9.5
4H	27.0	28.5	27.4	28.8	29.2	9.3	10.8	9.7	11.2	11.6
6H	27.2	28.6	27.6	29.0	29.4	11.1	12.5	11.5	12.9	13.3
8H	27.2	28.5	27.6	29.0	29.4	11.7	13.0	12.1	13.4	13.9
12H	27.2	28.5	27.6	28.9	29.3	12.1	13.4	12.5	13.8	14.2
X=4H Y=2H	20.6	22.2	21.0	22.5	22.9	4.1	5.6	4.5	5.9	6.3
3H	25.9	27.2	26.3	27.6	28.0	7.9	9.2	8.4	9.6	10.1
4H	27.4	28.6	27.8	29.0	29.4	10.2	11.3	10.6	11.8	12.2
6H	27.8	28.8	28.2	29.3	29.7	12.2	13.2	12.6	13.7	14.1
8H	27.8	28.8	28.3	29.2	29.7	12.9	13.9	13.4	14.3	14.8
12H	27.8	28.7	28.3	29.1	29.6	13.4	14.3	13.9	14.8	15.3
X=8H Y=4H	27.3	28.3	27.8	28.8	29.2	11.4	12.4	11.9	12.8	13.3
6H	27.8	28.6	28.3	29.1	29.6	13.2	14.0	13.7	14.5	15.0
8H	27.8	28.5	28.3	29.0	29.5	13.9	14.7	14.5	15.2	15.7
12H	27.8	28.4	28.3	28.9	29.5	14.5	15.2	15.1	15.7	16.3
X=12H Y=4H	27.3	28.2	27.8	28.7	29.2	12.4	13.3	12.9	13.8	14.3
6H	27.8	28.5	28.3	29.0	29.5	13.9	14.6	14.4	15.1	15.6
8H	27.8	28.4	28.3	28.9	29.5	14.6	15.2	15.1	15.7	16.3

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

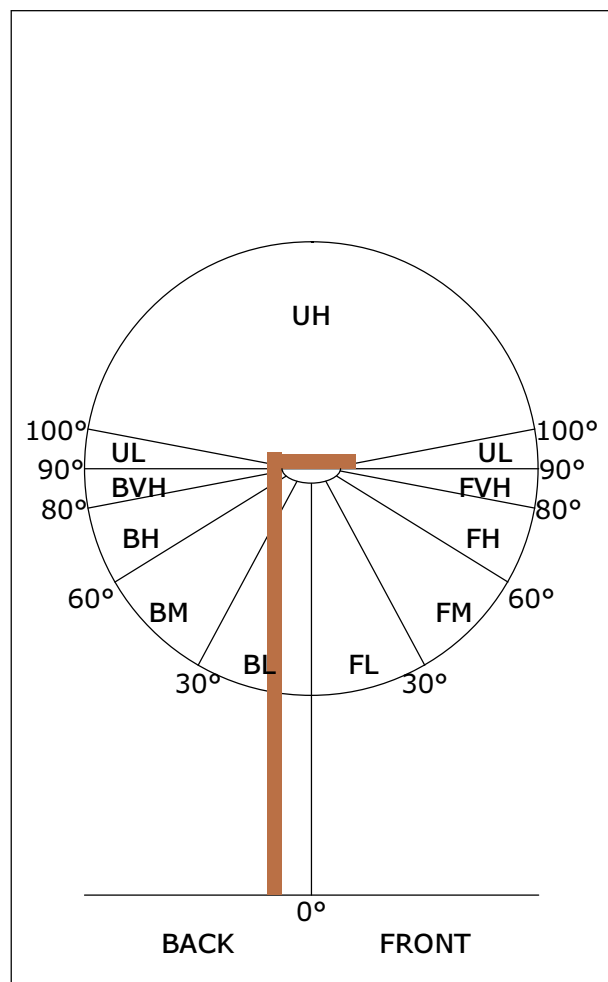FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


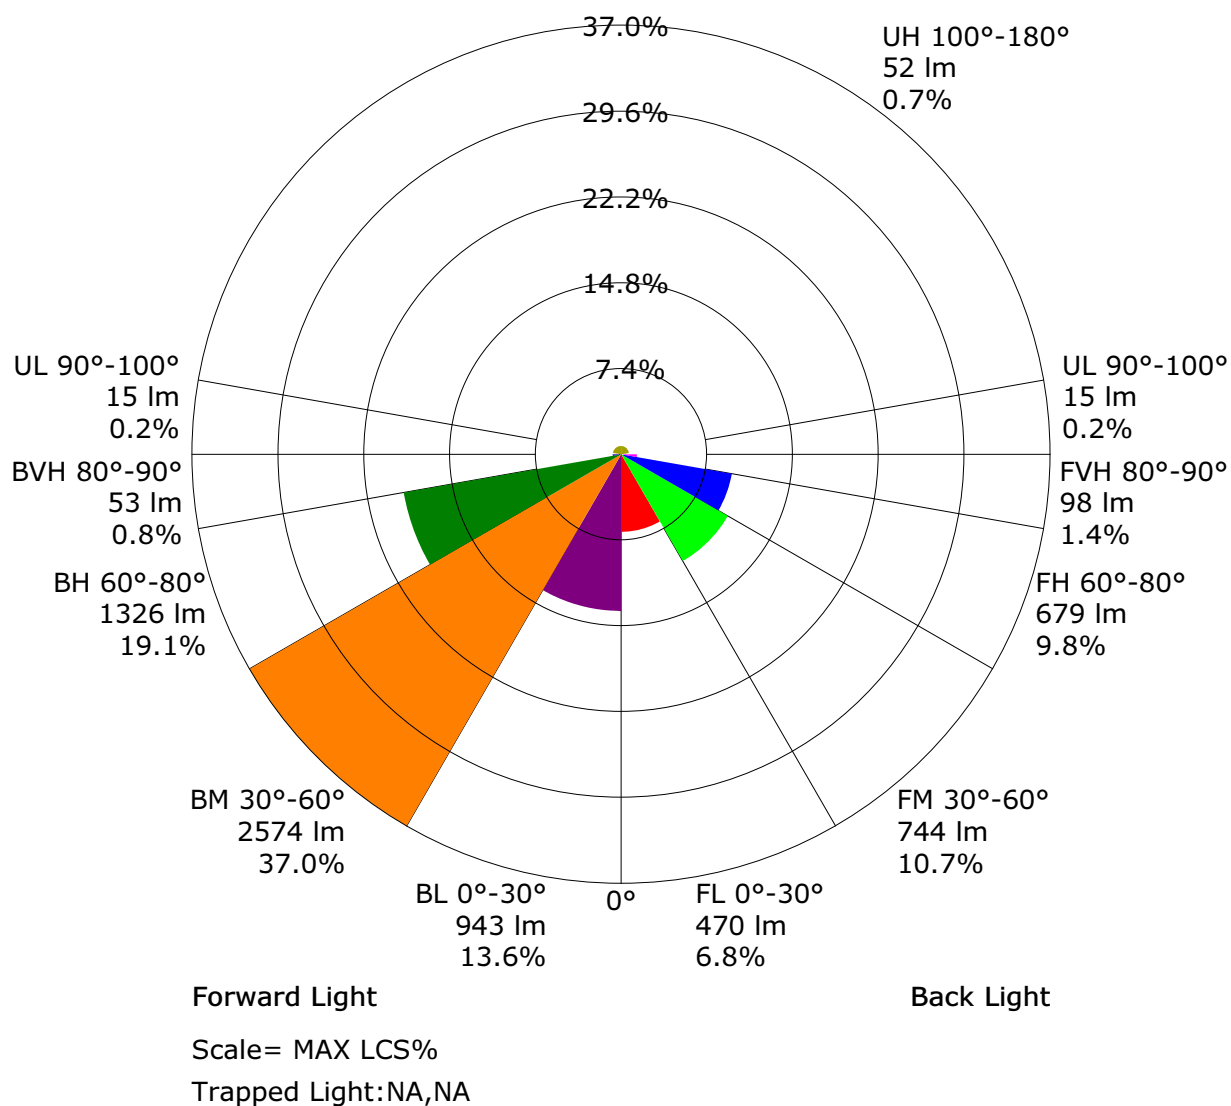
ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	1991	28.6
FL (0°-30°)	470	6.8
FM (30°-60°)	744	10.7
FH (60°-80°)	679	9.8
FVH (80°-90°)	98	1.4
BACK LIGHT	4896	70.4
BL (0°-30°)	943	13.6
BM (30°-60°)	2574	37.0
BH (60°-80°)	1326	19.1
BVH (80°-90°)	53	0.8
UP LIGHT	66	1.0
UL (90°-100°)	15	0.2
UH (100°-180°)	52	0.7
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U2 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U2 G1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

LCS Graph



Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1809.0	1.7	1.7	0.02	0.02
1.0-2.0	1808.1	5.2	6.9	0.07	0.10
2.0-3.0	1806.3	8.6	15.6	0.12	0.22
3.0-4.0	1803.2	12.1	27.6	0.17	0.40
4.0-5.0	1798.5	15.5	43.1	0.22	0.62
5.0-6.0	1792.5	18.8	61.9	0.27	0.89
6.0-7.0	1785.9	22.2	84.1	0.32	1.21
7.0-8.0	1779.2	25.5	109.6	0.37	1.58
8.0-9.0	1773.3	28.7	138.3	0.41	1.99
9.0-10.0	1768.1	32.0	170.3	0.46	2.45
10.0-11.0	1762.4	35.2	205.5	0.51	2.96
11.0-12.0	1755.5	38.4	243.9	0.55	3.51
12.0-13.0	1747.3	41.5	285.4	0.60	4.10
13.0-14.0	1737.9	44.5	329.9	0.64	4.74
14.0-15.0	1726.5	47.4	377.3	0.68	5.43
15.0-16.0	1713.8	50.2	427.5	0.72	6.15
16.0-17.0	1701.4	53.0	480.5	0.76	6.91
17.0-18.0	1690.3	55.7	536.2	0.80	7.71
18.0-19.0	1681.0	58.5	594.7	0.84	8.55
19.0-20.0	1673.2	61.2	656.0	0.88	9.43
20.0-21.0	1666.5	64.0	720.0	0.92	10.35
21.0-22.0	1660.0	66.7	786.7	0.96	11.31
22.0-23.0	1653.6	69.4	856.1	1.00	12.31
23.0-24.0	1647.2	72.0	928.1	1.04	13.35
24.0-25.0	1640.5	74.6	1002.7	1.07	14.42
25.0-26.0	1633.6	77.1	1079.8	1.11	15.53
26.0-27.0	1626.6	79.6	1159.4	1.14	16.67
27.0-28.0	1620.0	82.0	1241.5	1.18	17.85
28.0-29.0	1614.2	84.5	1325.9	1.21	19.07
29.0-30.0	1609.6	86.9	1412.8	1.25	20.32
30.0-31.0	1606.0	89.4	1502.2	1.29	21.60
31.0-32.0	1604.4	91.9	1594.2	1.32	22.93
32.0-33.0	1605.5	94.6	1688.8	1.36	24.29
33.0-34.0	1608.3	97.3	1786.1	1.40	25.69
34.0-35.0	1611.2	100.1	1886.2	1.44	27.13
35.0-36.0	1613.5	102.7	1988.9	1.48	28.60

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1614.3	105.3	2094.2	1.51	30.12
37.0-38.0	1613.5	107.7	2201.9	1.55	31.67
38.0-39.0	1610.4	109.9	2311.9	1.58	33.25
39.0-40.0	1604.4	111.9	2423.8	1.61	34.86
40.0-41.0	1595.1	113.6	2537.4	1.63	36.49
41.0-42.0	1582.9	115.0	2652.4	1.65	38.15
42.0-43.0	1568.4	116.2	2768.6	1.67	39.82
43.0-44.0	1551.7	117.1	2885.7	1.68	41.50
44.0-45.0	1531.3	117.7	3003.4	1.69	43.19
45.0-46.0	1505.7	117.8	3121.2	1.69	44.89
46.0-47.0	1475.4	117.4	3238.6	1.69	46.57
47.0-48.0	1443.2	116.7	3355.2	1.68	48.25
48.0-49.0	1411.1	115.9	3471.1	1.67	49.92
49.0-50.0	1382.2	115.3	3586.4	1.66	51.58
50.0-51.0	1357.5	114.9	3701.3	1.65	53.23
51.0-52.0	1335.6	114.6	3815.9	1.65	54.88
52.0-53.0	1316.3	114.5	3930.4	1.65	56.52
53.0-54.0	1298.8	114.5	4044.9	1.65	58.17
54.0-55.0	1282.6	114.5	4159.4	1.65	59.82
55.0-56.0	1267.1	114.5	4273.9	1.65	61.46
56.0-57.0	1251.4	114.4	4388.3	1.65	63.11
57.0-58.0	1235.7	114.3	4502.6	1.64	64.75
58.0-59.0	1221.6	114.2	4616.8	1.64	66.40
59.0-60.0	1210.2	114.4	4731.2	1.64	68.04
60.0-61.0	1202.5	114.8	4846.0	1.65	69.69
61.0-62.0	1198.1	115.5	4961.4	1.66	71.35
62.0-63.0	1197.1	116.4	5077.9	1.67	73.03
63.0-64.0	1199.9	117.8	5195.6	1.69	74.72
64.0-65.0	1204.8	119.3	5314.9	1.71	76.44
65.0-66.0	1208.7	120.6	5435.5	1.73	78.17
66.0-67.0	1208.2	121.5	5557.0	1.75	79.92
67.0-68.0	1201.1	121.7	5678.7	1.75	81.67
68.0-69.0	1185.9	121.0	5799.7	1.74	83.41
69.0-70.0	1160.9	119.2	5918.9	1.71	85.12
70.0-71.0	1124.7	116.3	6035.2	1.67	86.79
71.0-72.0	1077.1	112.0	6147.2	1.61	88.41

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	1016.6	106.3	6253.5	1.53	89.93
73.0-74.0	942.3	99.1	6352.6	1.42	91.36
74.0-75.0	855.4	90.4	6443.0	1.30	92.66
75.0-76.0	757.4	80.4	6523.4	1.16	93.82
76.0-77.0	649.6	69.3	6592.7	1.00	94.81
77.0-78.0	540.3	57.8	6650.5	0.83	95.64
78.0-79.0	440.2	47.3	6697.8	0.68	96.32
79.0-80.0	354.9	38.3	6736.1	0.55	96.87
80.0-81.0	285.7	30.9	6767.0	0.44	97.32
81.0-82.0	231.7	25.1	6792.1	0.36	97.68
82.0-83.0	190.9	20.8	6812.9	0.30	97.98
83.0-84.0	159.4	17.4	6830.2	0.25	98.23
84.0-85.0	134.2	14.6	6844.9	0.21	98.44
85.0-86.0	112.7	12.3	6857.2	0.18	98.62
86.0-87.0	93.6	10.2	6867.4	0.15	98.76
87.0-88.0	75.9	8.3	6875.8	0.12	98.88
88.0-89.0	59.1	6.5	6882.2	0.09	98.98
89.0-90.0	43.5	4.8	6887.0	0.07	99.04
90.0-91.0	30.1	3.3	6890.3	0.05	99.09
91.0-92.0	21.1	2.3	6892.6	0.03	99.13
92.0-93.0	16.4	1.8	6894.4	0.03	99.15
93.0-94.0	13.3	1.5	6895.9	0.02	99.17
94.0-95.0	11.3	1.2	6897.1	0.02	99.19
95.0-96.0	9.9	1.1	6898.2	0.02	99.21
96.0-97.0	8.9	1.0	6899.2	0.01	99.22
97.0-98.0	8.2	0.9	6900.1	0.01	99.23
98.0-99.0	7.9	0.9	6900.9	0.01	99.24
99.0-100.0	7.8	0.8	6901.8	0.01	99.26
100.0-101.0	7.7	0.8	6902.6	0.01	99.27
101.0-102.0	7.6	0.8	6903.4	0.01	99.28
102.0-103.0	7.5	0.8	6904.2	0.01	99.29
103.0-104.0	7.4	0.8	6905.0	0.01	99.30
104.0-105.0	7.4	0.8	6905.8	0.01	99.31
105.0-106.0	7.3	0.8	6906.6	0.01	99.33
106.0-107.0	7.3	0.8	6907.3	0.01	99.34
107.0-108.0	7.3	0.8	6908.1	0.01	99.35

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	7.4	0.8	6908.9	0.01	99.36
109.0-110.0	7.5	0.8	6909.7	0.01	99.37
110.0-111.0	7.6	0.8	6910.4	0.01	99.38
111.0-112.0	7.7	0.8	6911.2	0.01	99.39
112.0-113.0	7.8	0.8	6912.0	0.01	99.40
113.0-114.0	7.9	0.8	6912.8	0.01	99.42
114.0-115.0	8.0	0.8	6913.6	0.01	99.43
115.0-116.0	8.2	0.8	6914.4	0.01	99.44
116.0-117.0	8.4	0.8	6915.2	0.01	99.45
117.0-118.0	8.5	0.8	6916.1	0.01	99.46
118.0-119.0	8.6	0.8	6916.9	0.01	99.47
119.0-120.0	8.8	0.8	6917.7	0.01	99.49
120.0-121.0	9.0	0.8	6918.6	0.01	99.50
121.0-122.0	9.1	0.9	6919.4	0.01	99.51
122.0-123.0	9.3	0.9	6920.3	0.01	99.52
123.0-124.0	9.5	0.9	6921.2	0.01	99.54
124.0-125.0	9.6	0.9	6922.0	0.01	99.55
125.0-126.0	9.8	0.9	6922.9	0.01	99.56
126.0-127.0	9.9	0.9	6923.8	0.01	99.57
127.0-128.0	10.1	0.9	6924.7	0.01	99.59
128.0-129.0	10.3	0.9	6925.5	0.01	99.60
129.0-130.0	10.4	0.9	6926.4	0.01	99.61
130.0-131.0	10.5	0.9	6927.3	0.01	99.62
131.0-132.0	10.6	0.9	6928.2	0.01	99.64
132.0-133.0	10.8	0.9	6929.0	0.01	99.65
133.0-134.0	10.9	0.9	6929.9	0.01	99.66
134.0-135.0	11.0	0.9	6930.8	0.01	99.67
135.0-136.0	11.1	0.9	6931.6	0.01	99.69
136.0-137.0	11.2	0.8	6932.5	0.01	99.70
137.0-138.0	11.3	0.8	6933.3	0.01	99.71
138.0-139.0	11.4	0.8	6934.1	0.01	99.72
139.0-140.0	11.6	0.8	6935.0	0.01	99.73
140.0-141.0	11.7	0.8	6935.8	0.01	99.75
141.0-142.0	11.8	0.8	6936.6	0.01	99.76
142.0-143.0	11.8	0.8	6937.4	0.01	99.77
143.0-144.0	11.9	0.8	6938.1	0.01	99.78

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	12.0	0.8	6938.9	0.01	99.79
145.0-146.0	12.1	0.7	6939.7	0.01	99.80
146.0-147.0	12.2	0.7	6940.4	0.01	99.81
147.0-148.0	12.3	0.7	6941.1	0.01	99.82
148.0-149.0	12.3	0.7	6941.8	0.01	99.83
149.0-150.0	12.4	0.7	6942.5	0.01	99.84
150.0-151.0	12.4	0.7	6943.2	0.01	99.85
151.0-152.0	12.4	0.7	6943.8	0.01	99.86
152.0-153.0	12.5	0.6	6944.5	0.01	99.87
153.0-154.0	12.6	0.6	6945.1	0.01	99.88
154.0-155.0	12.7	0.6	6945.7	0.01	99.89
155.0-156.0	12.7	0.6	6946.3	0.01	99.90
156.0-157.0	12.8	0.6	6946.8	0.01	99.90
157.0-158.0	12.8	0.5	6947.4	0.01	99.91
158.0-159.0	12.9	0.5	6947.9	0.01	99.92
159.0-160.0	12.9	0.5	6948.4	0.01	99.93
160.0-161.0	13.0	0.5	6948.9	0.01	99.93
161.0-162.0	13.1	0.5	6949.3	0.01	99.94
162.0-163.0	13.1	0.4	6949.7	0.01	99.95
163.0-164.0	13.2	0.4	6950.2	0.01	99.95
164.0-165.0	13.3	0.4	6950.5	0.01	99.96
165.0-166.0	13.3	0.4	6950.9	0.01	99.96
166.0-167.0	13.4	0.3	6951.2	0.00	99.97
167.0-168.0	13.4	0.3	6951.6	0.00	99.97
168.0-169.0	13.5	0.3	6951.9	0.00	99.98
169.0-170.0	13.5	0.3	6952.1	0.00	99.98
170.0-171.0	13.5	0.2	6952.4	0.00	99.98
171.0-172.0	13.6	0.2	6952.6	0.00	99.99
172.0-173.0	13.6	0.2	6952.8	0.00	99.99
173.0-174.0	13.7	0.2	6953.0	0.00	99.99
174.0-175.0	13.6	0.1	6953.1	0.00	100.00
175.0-176.0	13.7	0.1	6953.2	0.00	100.00
176.0-177.0	13.7	0.1	6953.3	0.00	100.00
177.0-178.0	13.7	0.1	6953.4	0.00	100.00
178.0-179.0	13.7	0.0	6953.4	0.00	100.00
179.0-180.0	13.7	0.0	6953.4	0.00	100.00

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	1802.4	1804.1	1805.1	1806.8	1808.5	1809.9	1810.8	1812.8	1813.0	1814.5
G1.0	1802.2	1800.1	1797.7	1795.8	1794.1	1791.0	1789.7	1787.5	1785.3	1783.7
G2.0	1801.5	1795.7	1789.4	1784.2	1780.2	1773.7	1768.7	1762.0	1757.6	1753.6
G3.0	1800.6	1789.9	1781.6	1772.1	1763.0	1753.9	1745.9	1737.5	1729.1	1721.9
G4.0	1799.0	1786.2	1772.5	1759.2	1747.3	1734.6	1721.7	1708.6	1698.5	1688.8
G5.0	1798.2	1780.1	1764.2	1747.6	1731.1	1714.3	1698.0	1682.7	1667.8	1654.5
G6.0	1796.8	1774.5	1755.2	1734.5	1714.6	1694.1	1674.7	1655.2	1635.4	1618.6
G7.0	1795.6	1769.6	1747.1	1722.8	1698.8	1674.4	1650.9	1628.4	1604.5	1583.7
G8.0	1794.3	1764.7	1737.6	1709.8	1683.3	1653.7	1626.1	1598.9	1571.1	1544.9
G9.0	1793.2	1761.8	1729.7	1697.6	1665.8	1632.3	1601.2	1567.3	1536.6	1506.1
G10.0	1792.5	1757.6	1721.6	1686.2	1649.6	1611.4	1574.8	1537.3	1499.8	1464.6
G11.0	1791.2	1753.7	1713.7	1673.8	1633.3	1590.4	1548.9	1505.8	1464.6	1424.4
G12.0	1790.0	1748.6	1704.2	1661.4	1615.7	1568.3	1521.4	1471.8	1426.0	1380.7
G13.0	1788.9	1744.4	1696.2	1649.6	1598.9	1547.9	1494.0	1439.4	1387.7	1336.7
G14.0	1787.7	1738.5	1688.8	1636.7	1582.6	1525.0	1466.5	1407.5	1349.0	1291.0
G15.0	1787.6	1736.0	1681.9	1625.1	1564.9	1502.2	1438.5	1373.2	1306.9	1242.7
G16.0	1787.7	1731.0	1673.7	1612.3	1547.2	1478.9	1409.3	1337.8	1266.2	1194.7
G17.0	1785.7	1726.1	1664.6	1599.6	1529.5	1455.3	1379.7	1301.8	1224.8	1146.3
G18.0	1783.2	1721.0	1654.9	1583.8	1509.1	1429.4	1350.4	1267.0	1181.5	1096.1
G19.0	1781.1	1714.1	1644.1	1569.3	1489.1	1404.6	1318.4	1228.3	1138.2	1039.7
G20.0	1777.2	1707.9	1633.8	1552.8	1467.1	1378.1	1284.8	1190.3	1088.7	981.5
G21.0	1772.5	1699.6	1622.9	1537.8	1446.8	1353.5	1255.4	1151.3	1040.2	922.6
G22.0	1766.8	1692.2	1611.5	1522.1	1427.4	1327.3	1222.2	1108.3	986.1	862.4
G23.0	1761.0	1682.8	1599.4	1506.9	1407.9	1301.3	1190.2	1066.9	932.7	813.9
G24.0	1755.7	1672.9	1586.0	1490.8	1386.6	1274.4	1156.2	1023.3	879.2	771.0
G25.0	1750.9	1664.4	1573.8	1472.8	1365.7	1248.7	1122.3	977.3	833.9	735.5
G26.0	1744.4	1655.6	1560.1	1454.7	1344.6	1222.1	1086.0	929.4	796.4	703.7
G27.0	1739.7	1647.3	1548.1	1438.2	1321.6	1195.4	1051.9	884.9	763.5	679.1
G28.0	1735.9	1640.4	1534.3	1421.5	1298.8	1166.3	1014.2	845.5	732.0	657.3
G29.0	1732.5	1631.8	1521.9	1405.0	1279.0	1136.6	975.0	812.1	707.0	638.8
G30.0	1729.3	1624.5	1510.3	1388.9	1256.8	1107.1	932.4	783.7	686.8	621.0
G31.0	1727.0	1618.7	1499.2	1372.2	1236.2	1078.2	894.2	757.6	670.7	602.4
G32.0	1724.9	1613.0	1489.8	1356.4	1215.0	1047.2	858.8	731.4	651.9	581.8
G33.0	1724.6	1609.7	1481.7	1343.1	1193.8	1017.1	831.3	709.3	632.8	562.3
G34.0	1722.6	1604.7	1473.6	1330.6	1174.3	988.5	805.9	688.6	613.0	545.4
G35.0	1721.6	1599.7	1465.6	1318.0	1155.0	962.2	780.7	670.7	597.0	530.0
G36.0	1720.3	1596.0	1457.4	1305.4	1136.5	935.2	758.2	654.8	584.1	515.8

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	1720.7	1591.2	1448.2	1293.2	1118.4	908.5	739.0	641.6	575.5	501.1
G38.0	1722.6	1588.7	1440.3	1280.9	1099.3	880.9	720.8	631.4	563.5	486.8
G39.0	1725.1	1588.1	1435.1	1270.1	1077.7	856.7	707.0	623.0	551.8	469.9
G40.0	1732.7	1590.3	1431.2	1259.1	1056.8	834.3	691.1	614.0	535.5	452.3
G41.0	1744.1	1596.2	1432.1	1248.2	1038.1	812.9	677.9	602.9	516.4	434.5
G42.0	1757.0	1605.5	1434.4	1241.9	1019.9	790.9	667.7	588.5	490.8	415.5
G43.0	1772.5	1617.1	1439.6	1238.2	1002.0	773.2	659.1	572.4	462.7	396.3
G44.0	1790.5	1629.3	1443.8	1235.4	987.5	756.6	649.3	551.4	436.0	373.5
G45.0	1808.8	1643.3	1452.7	1234.5	972.7	741.3	635.5	527.5	412.0	350.9
G46.0	1827.3	1656.5	1461.5	1234.4	959.9	727.6	616.8	500.9	389.6	329.8
G47.0	1844.1	1669.5	1468.2	1234.7	946.8	716.1	595.6	472.7	367.4	311.9
G48.0	1859.4	1680.1	1473.7	1231.9	932.9	704.4	567.8	440.8	344.9	292.4
G49.0	1876.0	1692.4	1480.3	1226.7	917.8	691.4	540.2	407.9	325.7	276.3
G50.0	1904.5	1709.2	1486.8	1222.0	904.0	679.1	514.9	380.8	309.6	262.3
G51.0	1939.9	1734.3	1497.5	1218.3	889.0	666.5	496.5	360.6	294.4	249.1
G52.0	1983.6	1766.9	1515.3	1219.5	877.4	653.4	479.9	342.4	281.8	236.9
G53.0	2035.6	1806.7	1539.2	1224.2	867.5	641.7	464.0	326.2	268.8	226.8
G54.0	2091.4	1854.6	1569.5	1232.4	860.5	632.0	446.7	312.2	256.6	218.1
G55.0	2150.7	1907.2	1605.5	1244.1	854.9	624.2	432.6	299.5	244.4	209.7
G56.0	2211.2	1962.8	1647.3	1261.4	850.9	618.6	420.7	289.0	234.2	202.1
G57.0	2270.7	2015.9	1694.2	1283.6	850.9	614.1	409.3	279.3	224.4	194.4
G58.0	2333.5	2073.9	1741.9	1315.2	855.3	608.9	398.7	270.8	215.9	187.1
G59.0	2401.1	2133.5	1789.7	1347.5	864.2	603.7	388.7	262.3	208.5	181.0
G60.0	2472.4	2194.4	1838.6	1381.7	875.6	602.0	384.7	255.0	202.1	176.2
G61.0	2553.1	2263.8	1889.1	1414.1	890.1	603.3	374.6	249.5	195.1	171.4
G62.0	2640.7	2335.0	1943.5	1449.6	906.0	605.8	362.2	243.3	189.8	167.4
G63.0	2737.8	2415.8	2003.0	1490.8	925.8	611.2	352.5	238.5	185.0	164.3
G64.0	2837.5	2498.2	2068.8	1531.6	948.0	618.5	344.5	232.5	180.6	161.4
G65.0	2935.1	2581.8	2138.4	1579.4	971.0	627.0	338.1	227.5	175.7	159.7
G66.0	3018.6	2664.3	2209.5	1628.8	995.2	635.6	333.0	223.1	171.6	158.5
G67.0	3090.8	2737.9	2279.9	1684.3	1022.7	646.0	331.1	217.6	168.8	156.1
G68.0	3150.4	2802.0	2346.7	1739.2	1051.1	660.2	332.6	213.3	167.0	154.9
G69.0	3189.9	2851.4	2399.3	1794.8	1085.6	674.8	336.5	210.4	165.1	150.7
G70.0	3192.4	2874.2	2437.7	1841.1	1116.1	689.0	344.0	208.8	161.6	147.4
G71.0	3167.8	2874.2	2453.1	1871.6	1151.1	708.0	353.1	208.3	158.2	147.3
G72.0	3100.5	2843.1	2449.5	1876.7	1174.6	726.5	364.5	206.7	154.1	148.8
G73.0	2971.3	2770.6	2414.1	1878.9	1180.7	747.2	380.5	206.1	151.9	148.9

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	2788.9	2650.1	2350.8	1847.4	1178.2	756.6	394.6	205.8	150.0	146.6
G75.0	2528.1	2480.6	2253.6	1800.9	1165.6	749.4	416.7	208.5	150.8	141.6
G76.0	2176.7	2227.6	2122.5	1734.2	1141.7	737.2	432.9	215.9	147.9	136.6
G77.0	1732.4	1872.3	1914.0	1636.4	1101.6	716.4	441.7	222.0	143.5	130.7
G78.0	1252.6	1432.1	1619.2	1484.6	1051.2	692.7	437.7	231.9	137.2	125.3
G79.0	807.1	981.6	1272.8	1286.1	967.2	667.9	429.7	242.7	130.5	120.4
G80.0	477.0	620.4	888.7	1068.4	862.8	638.1	421.7	249.3	127.1	116.9
G81.0	270.5	349.4	557.3	816.5	743.3	600.4	408.1	253.0	126.6	117.6
G82.0	168.9	205.6	320.5	577.1	624.6	547.3	385.7	248.2	126.2	119.9
G83.0	120.4	139.6	186.5	361.0	506.9	484.0	363.7	240.2	126.1	122.6
G84.0	91.3	105.9	124.1	219.2	393.9	419.8	333.3	228.3	125.2	122.4
G85.0	72.4	82.4	94.9	142.0	289.5	358.6	299.3	212.3	122.4	119.1
G86.0	59.3	66.8	74.5	100.0	199.3	294.5	265.6	195.4	117.6	115.7
G87.0	49.5	53.8	59.5	74.4	137.4	232.8	232.8	176.1	111.8	110.6
G88.0	42.5	45.5	48.1	57.3	96.5	173.2	194.1	154.5	99.3	98.1
G89.0	33.8	35.8	37.6	44.5	65.9	122.6	150.2	124.5	84.0	81.3
G90.0	26.5	28.5	29.7	32.5	43.2	81.2	107.7	81.8	62.4	53.1
G91.0	23.0	23.9	24.2	24.4	30.9	49.7	71.5	52.2	39.6	31.5
G92.0	21.3	21.9	20.9	20.5	24.9	37.8	51.2	43.8	31.5	26.8
G93.0	19.5	20.3	19.0	18.6	21.1	29.1	39.0	31.2	27.5	23.3
G94.0	19.1	18.7	18.7	18.1	18.0	21.5	27.4	24.1	24.1	20.9
G95.0	18.3	17.9	18.0	16.5	16.6	18.0	22.9	19.7	18.7	17.0
G96.0	17.6	17.4	17.5	16.9	15.5	15.5	18.6	16.1	15.7	12.2
G97.0	15.8	16.8	16.4	15.9	14.6	14.0	15.3	12.9	11.0	9.1
G98.0	14.1	14.9	14.5	13.7	13.0	12.1	10.8	10.3	9.3	8.4
G99.0	13.3	12.9	13.2	13.3	12.3	11.6	11.8	10.8	10.2	8.6
G100.0	13.3	12.8	14.3	13.7	12.9	12.1	12.2	11.0	10.4	9.6
G101.0	13.7	13.3	14.5	14.1	13.3	12.6	12.6	10.9	10.0	8.9
G102.0	12.9	14.0	14.0	14.3	13.6	12.8	11.6	11.6	10.9	8.9
G103.0	12.9	13.8	13.8	14.3	13.2	12.9	12.9	11.0	10.1	8.7
G104.0	13.9	13.7	13.1	12.9	12.8	12.1	11.0	11.3	10.2	8.7
G105.0	12.6	13.6	12.9	13.0	12.3	12.2	11.0	11.4	9.9	9.7
G106.0	12.4	12.8	12.6	13.0	12.1	12.1	10.9	10.9	10.0	9.7
G107.0	13.2	13.3	13.1	11.9	12.1	12.1	12.1	10.9	10.1	10.0
G108.0	12.9	13.3	12.9	12.9	11.9	11.7	11.0	11.3	10.7	9.1
G109.0	12.2	12.3	12.9	12.9	12.2	11.8	12.2	11.1	10.9	10.2
G110.0	12.9	13.1	13.0	11.8	12.3	11.8	11.0	11.4	11.1	9.3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	12.8	13.2	12.4	11.9	12.2	11.9	11.1	11.5	10.6	9.3
G112.0	12.8	12.4	12.9	13.0	12.3	11.9	11.3	11.3	10.9	10.7
G113.0	13.1	12.3	12.4	12.9	12.4	11.9	11.3	11.1	10.9	10.9
G114.0	12.9	12.2	12.4	13.0	12.4	12.1	11.4	11.5	11.1	11.3
G115.0	12.8	12.4	12.4	13.1	12.4	12.4	12.5	11.4	11.0	10.2
G116.0	12.9	13.2	12.9	12.2	12.5	12.2	12.6	11.8	11.3	11.6
G117.0	13.0	12.5	13.0	13.3	12.8	12.3	12.6	11.8	11.5	11.8
G118.0	13.0	12.6	13.2	12.4	12.8	12.6	11.9	11.9	11.7	11.0
G119.0	12.1	13.5	13.0	12.5	12.8	12.5	12.2	12.4	12.2	11.3
G120.0	13.3	12.8	13.3	12.8	13.3	13.1	13.5	12.6	12.4	12.6
G121.0	13.3	13.0	13.5	13.9	13.0	12.9	13.5	12.9	12.5	12.9
G122.0	13.6	13.8	13.7	13.1	13.5	13.1	12.6	13.0	12.8	11.9
G123.0	13.5	13.7	13.6	14.0	13.9	13.5	12.9	13.1	12.9	12.2
G124.0	12.8	13.2	13.6	13.5	13.5	13.6	13.9	13.2	13.1	13.5
G125.0	13.0	13.6	13.9	14.5	13.6	13.9	14.3	13.6	13.2	13.7
G126.0	13.1	13.7	14.0	14.6	13.7	13.7	14.3	13.8	13.3	13.8
G127.0	14.1	14.3	13.9	14.6	14.5	13.9	14.3	13.8	13.6	13.9
G128.0	13.2	13.8	14.4	13.9	14.6	14.3	13.5	14.1	13.8	12.8
G129.0	14.1	14.4	14.1	14.9	14.7	14.4	14.5	14.0	13.8	13.0
G130.0	13.5	14.1	14.1	14.0	14.0	14.3	13.9	13.8	14.0	13.1
G131.0	13.7	14.5	14.9	14.3	15.0	14.5	14.7	14.4	14.1	14.4
G132.0	13.6	14.4	14.4	14.4	14.3	14.6	14.0	14.7	13.9	13.3
G133.0	14.5	14.7	14.6	15.1	14.4	14.7	14.1	14.1	14.0	14.7
G134.0	13.7	14.9	15.0	15.3	14.5	14.9	14.3	14.7	14.1	14.9
G135.0	13.9	14.9	15.1	14.7	14.6	14.9	14.5	14.9	14.3	13.7
G136.0	15.0	14.7	15.0	14.9	15.7	15.3	15.4	14.6	15.0	13.9
G137.0	15.2	15.0	15.4	15.1	15.8	15.2	15.0	14.9	15.2	14.1
G138.0	14.3	15.1	16.0	16.1	15.2	15.7	15.3	15.1	14.9	15.5
G139.0	14.3	15.1	16.1	15.3	16.1	15.9	15.3	15.3	15.7	14.5
G140.0	14.4	15.3	16.2	16.4	15.7	15.9	15.5	16.1	15.9	16.0
G141.0	14.4	15.7	15.7	15.7	16.6	16.2	15.8	16.4	16.1	14.9
G142.0	14.7	15.7	15.7	15.8	15.9	16.4	16.1	16.5	16.2	15.1
G143.0	14.7	15.9	15.8	16.6	16.1	16.4	16.1	16.5	16.5	16.5
G144.0	14.9	15.5	15.9	16.0	16.9	16.6	16.2	16.7	15.9	16.6
G145.0	15.4	15.7	15.8	16.8	17.0	16.5	16.7	17.0	16.7	15.5
G146.0	15.5	15.9	16.4	16.7	16.4	16.8	16.7	16.4	16.8	15.7
G147.0	14.5	15.8	16.6	16.7	16.4	16.6	16.7	17.2	16.0	15.8

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	14.6	15.8	16.4	16.0	17.0	16.8	16.7	16.5	16.1	15.9
G149.0	15.3	16.0	16.5	16.6	17.0	16.6	16.9	16.5	16.2	17.3
G150.0	15.4	15.9	16.2	16.8	16.9	16.8	16.8	17.0	16.5	17.3
G151.0	14.5	15.9	16.2	16.0	17.0	16.8	16.9	17.0	17.2	16.0
G152.0	15.2	15.8	15.4	15.9	16.9	16.8	16.8	17.0	16.5	16.1
G153.0	15.2	14.7	15.3	16.2	16.8	16.7	17.0	16.5	17.3	16.1
G154.0	15.1	15.7	15.4	16.2	16.7	16.4	16.8	16.6	17.0	17.4
G155.0	14.9	15.7	15.3	15.7	15.9	16.5	16.6	17.2	16.4	16.2
G156.0	15.0	14.6	15.0	15.7	16.6	16.4	16.6	17.0	16.4	17.4
G157.0	14.9	15.5	15.1	16.2	16.5	16.4	16.9	16.4	17.2	17.4
G158.0	15.0	14.4	15.0	15.4	16.4	16.4	16.9	16.9	16.2	17.4
G159.0	14.0	15.4	14.9	15.9	15.5	16.2	16.2	16.2	16.4	17.3
G160.0	13.9	15.4	15.7	15.8	15.5	16.2	16.4	16.2	16.8	16.1
G161.0	13.9	15.3	15.0	15.7	15.3	16.0	16.1	16.7	16.2	17.3
G162.0	13.8	14.1	15.5	15.1	16.1	15.9	16.6	16.2	16.7	16.0
G163.0	14.6	15.2	14.9	15.1	15.8	16.0	16.6	16.7	16.9	17.2
G164.0	14.6	14.1	15.4	15.0	15.4	15.9	15.9	16.1	16.8	17.2
G165.0	14.6	14.0	14.7	15.3	15.7	15.8	16.4	16.0	16.7	15.9
G166.0	13.7	14.0	14.5	14.9	15.7	15.7	16.4	15.8	16.0	15.8
G167.0	14.6	15.1	15.0	15.3	15.5	15.4	16.2	16.1	15.9	15.7
G168.0	13.9	15.1	15.0	14.7	15.4	15.3	15.7	15.9	16.4	15.5
G169.0	14.6	15.1	14.5	14.6	15.5	15.3	15.7	16.0	16.2	16.7
G170.0	14.5	15.1	14.6	14.6	14.7	15.2	15.2	15.9	16.0	16.6
G171.0	14.6	15.0	14.9	14.5	15.4	15.2	15.5	15.5	16.0	16.5
G172.0	13.9	13.8	14.6	14.6	14.6	15.1	14.7	15.3	15.4	15.1
G173.0	14.0	15.0	14.7	15.1	15.1	15.1	15.0	15.3	15.3	15.0
G174.0	13.8	15.0	14.4	14.9	15.0	14.9	15.5	15.2	15.3	16.0
G175.0	14.6	15.0	14.3	14.9	15.1	14.7	15.3	15.1	15.3	14.6
G176.0	13.9	15.0	14.5	14.9	14.3	14.7	14.6	15.0	15.0	15.7
G177.0	13.9	15.0	14.4	14.7	14.1	14.5	14.9	14.9	14.9	15.4
G178.0	14.6	14.5	14.4	14.1	14.9	14.5	14.3	14.3	14.7	15.4
G179.0	14.5	14.9	14.6	14.0	14.1	14.4	14.7	15.1	14.4	14.0
G180.0	13.9	13.7	14.9	13.8	13.8	14.6	13.8	15.0	14.7	13.8

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	1815.4	1815.4	1815.1	1814.7	1815.1	1814.2	1815.3	1812.4	1812.4	1811.5
G1.0	1782.0	1781.2	1779.5	1777.6	1774.7	1772.9	1771.3	1770.8	1771.0	1769.2
G2.0	1750.4	1745.5	1741.8	1739.7	1734.6	1731.6	1729.3	1727.2	1727.4	1726.6
G3.0	1713.8	1708.5	1703.6	1697.6	1692.2	1689.9	1686.6	1684.0	1683.7	1682.4
G4.0	1678.2	1671.5	1661.6	1655.8	1648.0	1642.8	1640.6	1635.8	1636.3	1636.6
G5.0	1640.4	1630.5	1619.3	1609.5	1601.8	1595.2	1592.5	1586.9	1587.7	1586.7
G6.0	1601.8	1589.0	1574.7	1563.1	1550.8	1542.7	1540.9	1534.6	1535.3	1534.4
G7.0	1562.4	1544.9	1529.6	1517.1	1502.8	1490.1	1484.9	1480.2	1483.3	1481.3
G8.0	1521.7	1500.3	1477.8	1462.8	1446.2	1434.3	1428.2	1421.4	1423.6	1423.9
G9.0	1478.8	1453.0	1429.0	1407.5	1392.4	1376.6	1369.3	1361.4	1362.3	1362.4
G10.0	1432.3	1404.7	1376.1	1354.3	1329.6	1312.3	1305.1	1294.3	1295.1	1296.2
G11.0	1387.2	1353.3	1320.6	1292.7	1268.0	1249.8	1235.4	1226.6	1226.8	1229.3
G12.0	1336.3	1297.8	1260.4	1230.0	1198.5	1177.0	1164.4	1153.3	1153.4	1155.4
G13.0	1286.2	1242.8	1200.9	1162.8	1131.9	1108.3	1086.9	1076.4	1075.2	1079.4
G14.0	1234.8	1185.3	1137.8	1097.6	1056.7	1027.3	1006.0	991.0	991.0	994.4
G15.0	1181.9	1124.4	1069.7	1021.0	977.0	942.4	917.1	897.7	899.0	903.1
G16.0	1126.7	1062.8	995.8	941.6	889.2	851.7	830.9	814.9	813.9	817.3
G17.0	1066.4	991.6	919.9	859.3	814.6	784.2	762.1	750.3	749.6	752.6
G18.0	1004.7	921.1	843.3	793.8	754.4	724.7	706.9	695.1	694.6	698.3
G19.0	942.2	850.9	786.7	738.7	701.9	679.7	665.3	656.3	655.2	660.9
G20.0	873.7	794.8	734.3	691.8	662.8	643.3	630.8	620.6	621.3	625.6
G21.0	819.1	747.5	690.6	655.3	627.8	608.9	596.0	589.1	589.3	592.7
G22.0	772.9	705.9	657.4	623.0	595.8	577.0	564.9	557.5	556.8	559.3
G23.0	732.1	672.6	629.5	595.0	569.1	547.7	534.8	524.0	522.8	527.6
G24.0	695.5	644.6	603.0	568.6	540.5	519.1	505.5	493.6	491.6	495.1
G25.0	669.7	620.2	577.7	542.1	513.1	489.8	473.5	464.1	460.6	464.9
G26.0	643.6	596.7	552.5	516.0	484.0	460.5	445.6	435.8	433.3	437.7
G27.0	622.5	572.0	527.8	488.5	455.0	432.7	418.6	411.7	409.1	413.0
G28.0	601.1	548.9	501.3	462.4	430.1	408.0	399.7	394.4	393.8	397.5
G29.0	581.9	524.5	476.4	438.4	408.7	394.6	390.8	385.2	384.4	387.9
G30.0	559.0	501.6	453.8	419.9	397.8	387.3	384.4	378.3	377.6	381.1
G31.0	540.0	481.4	435.2	408.0	392.9	382.5	378.4	371.9	371.0	374.5
G32.0	518.4	463.4	422.0	401.5	388.8	376.9	372.0	366.6	366.0	368.9
G33.0	501.1	448.4	414.8	395.3	383.6	372.4	365.1	359.4	358.8	361.7
G34.0	485.4	436.3	408.6	389.4	376.9	364.9	356.5	351.3	350.8	353.2
G35.0	471.3	426.7	402.1	382.5	367.7	357.2	348.8	344.8	342.9	346.0
G36.0	457.3	419.2	395.3	374.8	359.1	349.5	344.0	338.8	337.1	340.1

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	443.9	412.3	387.5	366.3	350.7	341.4	336.1	330.3	329.5	332.6
G38.0	431.0	404.5	377.1	357.0	341.6	329.8	326.3	319.7	318.2	320.8
G39.0	418.4	393.0	366.0	344.6	329.1	315.8	311.6	305.9	303.9	306.6
G40.0	406.6	377.8	352.6	331.9	313.4	302.1	296.9	295.1	292.9	295.1
G41.0	391.7	361.9	336.9	318.8	300.7	289.9	287.1	285.6	284.7	285.4
G42.0	373.9	343.4	318.4	305.7	285.8	277.9	276.4	276.3	274.4	275.2
G43.0	354.6	320.2	298.0	290.6	271.9	265.5	264.5	264.1	263.4	263.4
G44.0	331.9	298.0	277.8	274.7	260.3	252.4	252.1	251.6	251.0	250.0
G45.0	310.1	278.1	258.0	257.4	250.9	240.2	238.5	238.6	239.7	237.1
G46.0	288.5	256.5	241.2	240.9	241.4	228.6	227.4	227.8	229.3	227.3
G47.0	268.9	240.5	227.7	227.6	227.5	218.4	216.5	218.1	220.1	218.0
G48.0	252.9	227.6	216.0	215.4	214.5	212.4	207.6	209.4	211.0	210.1
G49.0	238.6	217.7	207.2	206.1	205.8	205.4	203.1	205.1	204.4	204.5
G50.0	227.3	208.7	200.1	199.8	199.9	200.1	200.1	200.2	200.9	201.6
G51.0	217.3	200.2	195.0	195.0	193.4	195.5	200.0	195.8	197.8	198.6
G52.0	208.3	193.4	190.0	192.0	189.3	192.3	197.4	193.6	197.0	196.0
G53.0	200.9	188.6	187.1	188.9	185.8	189.6	195.9	194.6	197.0	195.5
G54.0	194.3	184.7	184.8	186.4	183.5	189.2	195.8	196.7	196.9	195.9
G55.0	187.6	180.3	182.0	196.9	185.3	190.2	194.9	196.0	196.9	194.9
G56.0	181.9	176.9	180.9	222.0	188.6	190.0	193.7	194.2	195.2	193.0
G57.0	177.3	174.4	179.3	231.1	188.6	189.3	192.0	192.3	195.4	190.9
G58.0	173.2	173.7	180.4	232.9	187.6	188.9	190.9	192.0	194.0	190.1
G59.0	169.0	170.6	180.7	210.7	183.8	188.7	191.2	189.8	191.5	189.1
G60.0	166.1	172.0	179.6	191.8	181.8	186.2	190.8	189.2	189.6	188.4
G61.0	164.5	171.9	177.3	182.7	178.9	183.8	190.2	189.2	188.9	188.9
G62.0	163.2	173.1	173.3	177.5	176.9	182.1	189.8	189.7	188.9	189.4
G63.0	164.6	171.0	169.9	174.9	175.9	181.7	190.2	190.2	191.3	190.8
G64.0	163.3	167.3	167.9	173.4	176.8	183.9	193.5	195.2	196.5	194.8
G65.0	161.0	164.6	169.5	173.4	178.5	190.5	201.8	203.9	206.4	204.6
G66.0	158.9	163.3	170.3	174.6	183.5	198.1	211.7	216.0	216.6	214.1
G67.0	155.8	165.3	172.6	177.6	189.2	207.4	221.0	224.1	224.0	222.7
G68.0	155.9	165.9	175.2	180.5	194.5	214.0	231.2	235.0	233.7	231.8
G69.0	157.8	167.7	177.8	184.4	198.7	222.5	241.4	244.3	244.2	242.3
G70.0	160.3	167.6	178.3	186.5	202.7	228.8	247.6	251.8	252.8	250.9
G71.0	160.7	168.1	179.2	186.8	206.0	235.4	254.3	258.7	260.4	258.2
G72.0	158.5	167.0	177.6	188.4	211.4	241.4	263.7	265.5	266.9	264.0
G73.0	152.8	164.5	176.7	189.4	214.1	245.2	269.1	271.7	273.8	269.5

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	147.9	164.1	177.4	191.6	217.2	249.2	274.9	276.2	279.5	274.4
G75.0	144.9	166.4	178.2	193.5	218.1	250.3	277.8	279.6	280.4	277.5
G76.0	146.2	171.6	181.2	195.5	219.7	250.8	280.8	281.4	281.1	278.8
G77.0	149.4	176.0	183.6	197.7	218.1	249.6	281.4	278.3	276.8	277.4
G78.0	152.4	177.3	186.3	198.3	217.7	247.7	280.5	275.9	270.5	273.8
G79.0	155.0	180.3	187.6	198.9	217.2	243.1	276.0	268.9	264.7	269.5
G80.0	155.8	180.3	185.7	195.4	213.2	236.8	267.1	260.9	256.8	260.4
G81.0	155.3	177.7	181.4	191.5	207.6	226.9	249.2	243.4	242.6	242.1
G82.0	152.8	171.4	173.5	185.1	198.4	211.8	231.2	220.3	218.8	221.3
G83.0	148.5	160.7	164.4	174.0	186.9	196.0	211.2	200.6	196.6	199.5
G84.0	140.5	145.6	151.3	162.9	173.7	178.9	191.3	183.2	180.3	181.8
G85.0	129.7	135.1	141.2	149.6	156.1	160.3	166.4	163.6	163.3	161.0
G86.0	119.0	126.4	129.0	131.7	136.4	139.7	145.8	139.9	141.5	140.6
G87.0	106.9	114.7	110.9	112.3	115.4	118.3	119.7	112.1	114.3	114.0
G88.0	93.3	97.0	93.6	93.5	95.1	96.6	95.0	90.7	90.5	90.6
G89.0	77.1	79.1	72.8	70.5	76.8	77.4	79.0	57.3	59.5	65.9
G90.0	45.0	54.8	51.0	52.9	56.3	63.0	38.4	30.4	34.8	30.0
G91.0	30.0	33.3	31.0	30.2	31.9	33.6	24.9	20.0	16.7	19.8
G92.0	24.5	26.9	23.7	20.8	23.1	17.4	19.0	14.3	12.4	14.6
G93.0	20.8	19.4	15.9	14.3	10.7	11.7	11.7	11.1	10.8	12.4
G94.0	17.5	15.9	9.6	6.5	6.5	7.5	7.8	9.9	9.5	11.1
G95.0	13.7	10.2	7.7	6.2	5.3	5.4	5.7	8.2	7.2	7.4
G96.0	8.6	8.2	5.7	4.8	4.3	3.8	3.8	5.1	5.1	4.1
G97.0	7.9	7.8	5.1	4.9	3.9	3.4	2.9	3.3	2.5	3.4
G98.0	7.9	7.5	5.2	5.0	3.4	2.7	2.4	2.5	2.2	2.4
G99.0	8.0	6.6	5.3	5.0	3.5	2.8	3.1	2.8	2.4	2.7
G100.0	8.5	7.9	6.5	4.9	4.2	2.9	3.5	3.4	3.7	2.9
G101.0	8.4	6.6	6.5	5.0	3.7	3.3	3.6	3.4	3.8	3.8
G102.0	8.0	6.5	6.7	4.9	4.4	3.4	3.4	3.7	4.2	4.1
G103.0	8.1	6.7	6.7	5.3	4.3	3.7	3.7	3.6	3.4	4.3
G104.0	8.2	6.8	6.8	5.0	4.9	4.1	4.4	4.3	3.6	4.5
G105.0	8.4	8.1	7.0	5.6	4.8	5.0	4.2	3.9	3.9	4.3
G106.0	8.5	8.0	7.2	5.9	5.3	5.3	4.4	4.9	5.2	4.6
G107.0	8.6	7.0	7.4	6.2	5.6	5.0	5.1	5.2	4.5	4.9
G108.0	8.7	7.3	6.5	6.5	5.9	5.3	5.1	5.0	5.9	5.8
G109.0	8.7	8.6	6.7	6.8	6.6	5.7	5.8	5.9	6.0	6.2
G110.0	9.1	9.1	7.2	7.0	6.3	6.5	5.8	5.6	6.5	6.5

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	9.3	8.1	7.4	7.3	6.5	6.7	6.5	5.8	6.8	6.7
G112.0	9.6	9.4	7.8	7.8	7.4	7.1	6.4	6.8	6.3	7.1
G113.0	9.9	8.8	9.3	8.4	7.4	7.4	6.7	7.4	7.5	7.1
G114.0	10.1	9.2	8.4	8.6	7.5	7.7	7.1	7.9	7.1	7.4
G115.0	10.4	10.3	10.0	8.6	7.9	7.9	7.5	8.0	8.2	7.8
G116.0	10.8	10.7	9.1	9.2	8.2	8.4	8.2	7.8	8.6	8.6
G117.0	11.0	10.9	9.3	9.1	8.8	8.5	8.7	9.1	9.1	8.6
G118.0	11.3	11.3	10.8	9.4	9.2	9.1	8.6	8.6	8.7	9.4
G119.0	11.3	10.6	11.0	10.3	9.5	9.3	9.5	8.8	9.1	9.7
G120.0	11.7	10.7	10.2	9.9	10.0	9.7	9.9	10.0	9.5	9.7
G121.0	11.9	10.9	10.4	10.8	10.2	10.0	9.6	10.3	10.6	10.4
G122.0	12.2	12.3	11.9	10.4	10.7	10.3	10.6	10.0	10.2	10.8
G123.0	12.4	12.5	12.2	11.5	10.8	10.6	10.8	11.1	10.7	11.3
G124.0	12.6	11.8	11.3	11.1	11.3	11.0	11.4	10.8	11.0	11.6
G125.0	12.5	13.1	11.5	11.3	11.4	11.3	11.6	11.7	11.9	11.8
G126.0	13.0	11.9	12.9	12.4	11.7	11.6	11.4	12.1	12.2	12.2
G127.0	13.1	13.5	11.9	11.8	12.2	11.8	11.6	12.5	12.4	12.6
G128.0	13.0	12.6	12.2	12.8	12.4	12.4	12.5	13.0	12.9	12.8
G129.0	13.2	13.8	13.6	13.0	12.5	12.8	12.3	13.3	13.2	13.2
G130.0	13.6	13.0	12.5	13.7	12.9	13.0	13.2	12.5	13.1	13.5
G131.0	13.8	13.0	12.6	12.5	13.2	13.3	12.9	13.7	13.8	13.7
G132.0	13.7	13.2	12.9	13.9	13.5	13.7	13.1	13.2	14.1	14.0
G133.0	13.9	14.3	14.1	14.1	13.6	13.3	13.6	14.4	14.3	14.1
G134.0	14.0	13.6	14.4	14.4	13.7	13.6	13.7	13.8	14.6	14.3
G135.0	14.3	13.8	14.5	13.3	14.0	14.0	14.5	14.9	14.7	14.5
G136.0	14.5	13.9	14.7	14.7	14.1	14.6	14.1	15.1	14.6	15.3
G137.0	14.6	14.7	13.7	14.9	14.5	14.9	14.9	14.5	15.1	15.0
G138.0	14.9	15.1	15.0	13.8	14.5	14.3	15.1	14.6	15.1	15.1
G139.0	14.9	15.2	15.3	15.1	14.9	14.5	14.7	14.9	15.7	15.8
G140.0	15.1	14.5	15.4	15.3	14.7	14.6	14.9	15.8	15.5	15.4
G141.0	15.2	14.7	15.4	15.4	15.1	15.5	15.8	15.3	15.9	15.5
G142.0	15.4	15.9	14.6	15.5	15.2	14.9	15.9	15.4	15.8	16.2
G143.0	15.7	15.9	14.7	14.9	15.0	14.9	16.1	15.8	15.9	15.8
G144.0	15.7	15.1	14.9	15.0	15.7	16.0	15.4	16.1	16.2	16.2
G145.0	16.1	15.3	15.1	15.1	15.8	15.2	15.5	16.4	16.2	16.5
G146.0	16.0	16.4	15.1	15.3	15.8	16.2	16.2	16.6	16.5	16.1
G147.0	16.1	16.7	15.3	15.5	15.8	16.5	16.5	16.6	16.4	16.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	16.2	16.8	16.6	16.4	15.7	16.6	16.6	16.6	16.5	16.8
G149.0	16.5	16.8	15.9	15.8	15.8	16.7	16.6	16.8	16.6	17.0
G150.0	16.5	17.0	15.9	15.9	16.0	16.0	16.0	16.7	16.6	16.9
G151.0	16.5	16.0	16.9	16.6	16.2	16.0	16.1	16.2	16.6	16.2
G152.0	16.6	16.1	15.9	16.2	16.2	17.0	16.1	16.5	16.6	16.9
G153.0	16.9	16.2	17.3	16.5	16.9	16.1	16.2	16.5	16.9	16.9
G154.0	16.6	17.2	17.2	16.9	16.9	16.1	17.0	16.7	17.0	16.5
G155.0	16.6	16.4	16.5	16.9	17.0	16.5	17.2	16.9	16.8	17.2
G156.0	17.0	16.5	16.4	16.6	16.6	17.4	16.5	16.8	16.8	16.5
G157.0	16.7	16.4	17.2	16.6	17.2	17.5	17.3	17.0	16.6	16.6
G158.0	17.0	17.2	16.5	16.6	16.7	16.5	17.3	16.9	17.0	17.4
G159.0	16.8	17.3	17.2	16.8	17.3	16.5	16.7	17.0	16.8	16.6
G160.0	16.7	16.5	17.4	17.2	17.4	16.5	17.4	16.8	17.0	16.4
G161.0	17.0	16.5	17.2	16.9	16.7	17.6	17.4	17.2	16.7	17.0
G162.0	16.5	17.3	16.6	17.2	17.3	16.5	16.7	17.0	16.7	16.4
G163.0	16.5	16.4	17.3	16.9	16.6	16.5	17.4	16.9	16.6	16.1
G164.0	16.7	16.5	17.3	17.2	17.2	17.5	16.7	16.9	16.6	17.2
G165.0	16.2	17.2	17.0	16.9	16.6	17.5	17.3	16.8	16.4	17.0
G166.0	16.8	16.2	16.5	16.7	17.2	16.2	17.0	16.6	16.7	15.9
G167.0	16.7	16.2	17.0	16.7	16.4	16.2	17.0	16.8	16.2	15.8
G168.0	16.1	16.9	16.2	16.8	16.2	16.1	17.0	16.5	16.1	16.7
G169.0	16.4	16.8	16.8	16.6	16.0	17.0	16.2	16.2	16.0	15.7
G170.0	16.6	16.7	16.5	16.5	16.9	15.9	16.0	16.6	16.0	16.5
G171.0	16.5	16.6	16.5	16.1	16.7	16.8	16.6	16.2	15.7	15.4
G172.0	15.2	16.2	15.7	15.9	16.5	15.7	16.5	15.9	16.0	15.2
G173.0	15.3	16.0	15.3	15.9	16.4	16.5	15.5	15.5	15.3	15.8
G174.0	15.8	15.2	15.9	15.5	15.3	16.1	16.1	16.0	15.2	15.0
G175.0	15.7	15.8	15.2	15.4	15.0	15.1	15.2	15.0	15.0	14.6
G176.0	15.3	14.7	14.9	15.4	15.0	15.7	14.9	15.7	15.3	15.2
G177.0	14.4	14.6	14.7	15.0	15.5	14.6	14.7	14.7	14.5	14.5
G178.0	15.1	15.2	14.5	14.7	15.1	14.5	15.0	14.1	14.4	14.5
G179.0	14.9	15.0	14.7	14.9	15.1	14.4	14.7	15.0	14.0	14.3
G180.0	15.0	14.0	14.7	14.0	13.8	14.1	14.4	14.7	13.9	14.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	1808.9	1808.9	1809.6	1809.1	1809.5	1808.5	1808.7	1809.1	1807.2	1807.4
G1.0	1768.0	1770.3	1768.3	1771.5	1771.6	1774.5	1775.8	1778.3	1779.2	1782.4
G2.0	1726.2	1727.7	1731.4	1731.9	1736.4	1739.3	1743.9	1749.6	1753.5	1759.1
G3.0	1682.6	1684.1	1690.0	1692.8	1699.6	1704.2	1710.4	1718.8	1726.2	1733.9
G4.0	1638.1	1639.5	1647.3	1650.0	1659.6	1668.6	1678.1	1688.5	1697.9	1709.1
G5.0	1589.2	1594.9	1601.6	1609.4	1619.7	1629.1	1642.6	1655.3	1670.1	1684.8
G6.0	1537.6	1542.8	1553.3	1563.1	1575.8	1589.2	1607.2	1623.2	1639.5	1657.9
G7.0	1487.3	1494.2	1503.3	1515.3	1531.7	1549.3	1569.2	1590.7	1611.0	1634.2
G8.0	1426.5	1435.8	1451.0	1463.6	1482.9	1505.1	1528.4	1554.3	1578.4	1606.8
G9.0	1370.3	1380.5	1397.3	1413.0	1434.5	1459.5	1486.9	1518.0	1547.0	1578.8
G10.0	1305.1	1317.2	1337.6	1356.9	1384.8	1412.1	1444.3	1479.7	1513.1	1549.8
G11.0	1238.6	1256.1	1276.0	1300.8	1331.5	1364.4	1402.2	1439.2	1478.4	1520.1
G12.0	1168.8	1185.4	1213.4	1238.9	1274.8	1313.0	1354.7	1400.7	1442.5	1488.4
G13.0	1096.3	1113.6	1142.7	1174.9	1215.7	1261.1	1308.2	1358.6	1408.2	1459.9
G14.0	1011.5	1035.6	1072.7	1107.4	1154.1	1204.1	1259.0	1316.1	1370.1	1430.2
G15.0	920.5	951.2	993.0	1035.1	1089.6	1145.9	1207.8	1270.5	1334.0	1399.9
G16.0	836.5	862.1	905.5	955.5	1017.5	1084.0	1153.4	1226.5	1294.3	1366.5
G17.0	770.3	793.0	827.8	873.7	941.5	1014.9	1096.1	1177.4	1254.4	1334.8
G18.0	712.7	734.2	768.4	806.2	864.2	946.7	1036.3	1127.8	1213.4	1300.4
G19.0	672.9	691.6	720.6	754.9	806.5	875.5	972.2	1074.2	1171.7	1264.5
G20.0	637.8	656.5	681.6	712.5	756.2	814.9	904.6	1020.0	1122.1	1228.6
G21.0	604.6	623.0	646.4	675.1	714.3	767.1	844.0	955.7	1072.4	1188.1
G22.0	570.7	588.7	613.2	640.8	678.0	727.8	794.3	892.3	1019.0	1145.3
G23.0	539.3	558.8	583.1	610.8	648.5	694.0	753.8	840.2	966.4	1104.8
G24.0	508.9	528.4	553.3	580.9	620.0	664.6	720.7	798.1	912.4	1062.2
G25.0	479.0	498.7	524.1	555.0	593.7	639.2	692.5	763.0	864.9	1018.8
G26.0	449.5	468.0	495.6	527.8	567.3	613.5	668.3	734.5	825.0	973.5
G27.0	424.5	440.5	465.8	500.7	542.1	588.8	644.5	707.6	790.8	925.9
G28.0	405.3	415.3	440.3	473.1	516.6	565.7	623.7	686.6	763.1	884.0
G29.0	395.0	402.1	418.0	448.5	490.9	543.8	601.9	666.9	740.3	849.8
G30.0	387.0	393.4	406.5	427.6	467.7	520.7	582.1	646.0	719.3	818.4
G31.0	380.3	387.2	399.0	415.9	448.2	499.5	561.9	627.8	701.1	790.8
G32.0	374.6	381.1	392.5	408.1	431.3	479.5	543.9	611.5	683.5	765.7
G33.0	368.1	376.4	385.7	400.3	423.5	461.5	525.4	595.9	665.4	744.4
G34.0	359.6	368.4	379.1	392.5	415.4	446.6	507.3	579.2	648.2	725.3
G35.0	350.9	359.3	369.6	384.9	407.5	435.8	488.0	562.6	635.2	708.9
G36.0	343.3	351.1	360.3	376.5	397.5	426.8	469.0	544.5	623.4	694.6

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	335.9	342.4	352.8	368.5	389.9	417.3	453.1	524.8	611.0	682.0
G38.0	325.4	332.5	344.4	359.4	381.0	407.6	438.6	504.5	595.9	670.7
G39.0	312.4	320.8	333.0	349.0	371.2	396.8	425.1	481.5	578.4	660.6
G40.0	300.1	306.7	320.9	338.0	358.7	382.6	411.1	459.1	558.8	650.7
G41.0	290.5	296.4	308.2	327.9	344.1	366.5	396.1	439.5	534.8	638.5
G42.0	279.3	283.5	295.0	313.1	326.8	349.4	380.6	420.5	508.4	621.0
G43.0	266.7	271.8	282.8	296.6	306.6	330.4	361.8	403.0	481.3	602.3
G44.0	254.3	259.3	271.8	278.5	285.5	309.1	341.4	383.7	451.1	581.4
G45.0	239.7	247.1	258.2	261.0	266.0	287.3	321.8	363.8	425.1	558.7
G46.0	227.3	236.1	243.8	244.9	247.9	267.6	299.6	343.0	401.5	531.1
G47.0	217.2	224.9	231.5	232.1	233.5	250.2	281.2	323.2	380.0	502.2
G48.0	209.3	215.9	219.1	220.4	222.1	236.5	263.4	305.0	356.8	469.0
G49.0	204.6	206.5	208.8	210.7	211.7	224.6	248.5	288.4	337.3	433.9
G50.0	202.3	200.0	201.7	203.1	204.2	214.1	235.4	273.6	322.1	404.6
G51.0	201.0	195.5	197.0	198.1	197.4	205.1	223.6	259.3	305.8	378.9
G52.0	198.8	191.9	191.5	194.0	192.3	197.4	214.0	246.0	291.2	356.8
G53.0	197.7	189.2	187.5	191.6	189.1	191.1	206.5	235.9	277.9	338.8
G54.0	197.1	188.4	185.4	193.7	185.9	186.9	199.2	226.0	265.0	324.7
G55.0	194.3	190.9	185.0	198.8	185.6	183.3	193.5	218.0	252.6	311.9
G56.0	192.4	191.3	187.1	217.0	184.4	180.5	188.2	208.6	242.8	301.5
G57.0	191.3	190.6	187.8	214.9	185.4	177.8	183.1	201.5	232.5	292.7
G58.0	192.0	190.2	185.7	206.7	187.7	177.1	178.5	193.4	224.1	284.1
G59.0	191.4	187.5	184.2	195.5	185.9	177.5	175.4	188.0	216.9	277.0
G60.0	189.6	184.6	182.1	187.8	184.2	178.9	173.2	181.8	210.1	270.3
G61.0	188.4	182.7	180.5	182.9	181.4	178.1	172.7	178.2	204.5	264.4
G62.0	187.8	181.7	177.9	179.1	177.0	176.0	172.0	174.5	198.8	259.4
G63.0	188.4	181.2	176.6	176.2	175.1	173.2	169.9	172.6	194.2	254.6
G64.0	192.6	183.5	176.9	175.1	173.5	171.2	167.9	170.1	189.6	250.0
G65.0	201.8	189.4	180.4	176.6	173.4	168.2	164.1	166.8	186.8	245.2
G66.0	211.1	197.0	185.1	178.6	175.3	167.2	161.1	163.4	184.6	241.6
G67.0	220.6	205.7	189.8	181.3	177.7	168.8	158.9	160.2	181.8	238.5
G68.0	228.4	212.9	194.5	183.3	178.5	170.4	158.0	156.6	178.1	236.2
G69.0	237.2	218.7	198.9	186.5	180.0	171.3	159.2	153.1	174.9	235.3
G70.0	243.3	224.8	202.1	188.3	178.9	171.0	162.6	150.6	172.1	234.4
G71.0	251.6	230.4	205.4	188.9	178.8	169.8	164.8	150.3	168.7	234.3
G72.0	261.4	236.1	209.3	190.7	177.5	166.6	162.6	151.6	164.8	236.1
G73.0	267.0	241.4	212.6	192.7	177.3	165.0	156.5	153.7	161.2	239.5

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	271.5	244.3	214.6	195.0	180.3	165.0	147.6	151.9	158.6	243.3
G75.0	274.6	247.1	218.0	197.7	184.9	167.2	143.0	148.0	157.1	249.4
G76.0	276.7	246.2	220.8	201.8	188.5	171.8	140.8	142.7	154.8	259.7
G77.0	277.6	245.2	221.4	204.3	193.6	178.3	143.4	135.4	152.3	275.2
G78.0	273.6	243.1	220.8	204.5	195.1	181.2	148.9	129.0	149.9	280.8
G79.0	269.4	238.6	218.9	202.4	194.2	183.8	152.9	123.0	147.2	277.9
G80.0	262.3	232.8	214.9	200.0	191.6	182.9	157.1	118.2	147.7	272.6
G81.0	244.9	222.8	207.6	193.0	185.7	178.6	158.1	113.9	153.5	264.5
G82.0	227.3	209.7	199.9	185.4	176.3	172.4	155.7	113.2	155.1	254.0
G83.0	209.1	192.9	189.0	175.6	166.0	162.4	152.1	114.4	153.1	241.6
G84.0	185.7	175.7	175.3	162.6	154.1	150.1	144.9	116.1	146.5	225.9
G85.0	163.0	157.2	158.7	150.0	142.3	135.0	134.7	115.2	134.8	208.8
G86.0	142.2	138.3	139.2	133.2	129.3	125.6	123.9	114.4	121.9	188.7
G87.0	117.7	118.6	117.5	115.3	113.0	115.7	113.6	111.1	109.3	166.2
G88.0	94.2	97.8	98.1	95.8	97.8	101.7	97.3	102.6	94.7	145.8
G89.0	76.6	79.2	77.4	76.3	80.2	82.5	81.3	87.0	73.8	119.8
G90.0	42.7	64.5	57.0	54.5	55.1	61.7	57.4	67.3	57.5	92.1
G91.0	25.1	40.8	33.4	33.8	34.8	37.7	31.7	35.2	37.2	51.3
G92.0	16.7	19.0	25.3	23.1	26.6	27.0	26.2	28.6	26.0	37.5
G93.0	13.6	12.1	15.7	13.8	16.8	20.6	22.6	25.2	23.0	31.1
G94.0	9.4	8.2	7.1	8.5	13.5	18.0	19.8	22.0	20.5	23.1
G95.0	5.2	5.3	5.7	6.7	8.9	14.4	16.9	19.5	18.4	18.6
G96.0	4.1	4.2	4.9	5.7	8.1	9.6	12.3	16.7	16.2	17.4
G97.0	2.7	3.7	4.1	5.6	6.4	8.1	9.6	12.9	14.5	16.1
G98.0	2.8	3.1	4.1	5.4	6.4	8.5	9.3	11.1	12.1	13.5
G99.0	3.5	3.7	4.2	5.1	7.3	8.6	9.9	11.1	12.1	13.2
G100.0	3.7	4.1	4.3	5.2	7.5	8.8	9.9	10.8	11.9	12.1
G101.0	3.9	3.6	4.5	5.3	7.5	8.8	9.5	10.1	11.8	11.7
G102.0	4.3	4.5	4.6	6.2	6.7	8.8	10.1	10.6	11.3	11.7
G103.0	3.8	4.9	4.9	5.7	7.0	9.1	10.1	10.4	11.4	11.9
G104.0	3.9	5.2	5.2	6.5	7.1	8.5	10.1	10.4	11.1	12.4
G105.0	5.2	5.6	5.6	6.2	7.3	8.5	9.6	10.6	12.1	12.5
G106.0	4.8	5.0	5.8	7.2	7.4	9.6	10.6	10.6	12.1	11.6
G107.0	5.0	5.3	6.3	6.8	7.7	9.6	10.7	11.4	12.2	12.5
G108.0	6.0	5.7	6.6	7.8	8.0	9.3	10.9	10.9	11.4	11.8
G109.0	6.4	7.0	7.0	8.1	8.4	9.4	10.4	11.6	11.5	12.6
G110.0	7.0	7.3	7.4	8.6	9.7	9.7	10.6	11.8	12.5	12.8

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	6.5	7.7	7.7	8.2	10.0	10.7	10.9	11.4	11.9	12.8
G112.0	7.7	7.1	8.4	9.3	10.4	11.1	11.1	11.9	12.8	12.3
G113.0	7.9	7.5	8.7	9.6	9.7	11.5	11.8	12.1	11.9	12.2
G114.0	8.2	8.8	9.2	9.3	11.0	11.8	11.9	12.2	12.9	13.1
G115.0	8.8	8.2	9.5	10.3	11.4	11.9	12.2	12.3	12.2	12.4
G116.0	8.5	9.6	9.5	10.0	11.7	12.3	12.5	12.4	13.5	13.2
G117.0	9.3	10.0	10.0	11.0	11.9	12.6	12.8	13.1	12.6	12.9
G118.0	8.9	10.3	10.4	10.9	11.5	12.9	13.0	13.2	13.0	13.6
G119.0	9.3	9.9	10.3	11.6	11.8	12.5	13.1	13.5	13.1	13.9
G120.0	10.7	11.0	10.7	11.7	12.1	13.3	13.8	13.8	14.4	14.1
G121.0	10.9	10.4	11.6	11.7	13.0	13.1	13.6	14.0	14.6	14.1
G122.0	10.6	10.8	11.8	12.4	12.6	13.8	14.4	14.4	13.8	14.6
G123.0	11.5	11.1	12.2	12.1	13.5	13.6	14.7	14.6	14.1	14.0
G124.0	11.1	11.5	12.5	13.2	13.7	13.9	14.9	14.7	14.3	14.9
G125.0	12.5	12.8	12.9	13.6	13.5	13.9	14.3	14.9	14.5	14.5
G126.0	13.0	12.1	13.1	12.9	13.8	14.1	15.3	15.3	15.5	15.2
G127.0	12.2	12.4	13.0	13.1	14.1	14.9	14.5	14.9	14.7	14.9
G128.0	12.5	12.8	13.7	14.3	14.3	15.1	15.7	15.7	15.0	15.0
G129.0	12.8	13.0	13.5	14.5	14.4	15.2	14.7	15.8	15.0	15.0
G130.0	14.1	14.1	13.8	14.7	14.6	15.3	15.8	15.2	16.1	15.1
G131.0	13.5	14.9	14.0	15.0	14.7	15.3	15.0	15.2	16.1	15.2
G132.0	14.6	14.7	14.7	14.4	15.1	15.1	16.0	15.2	15.3	16.0
G133.0	15.0	14.1	14.4	14.4	15.3	15.5	16.0	16.2	15.3	15.9
G134.0	14.3	14.4	15.2	14.6	15.3	15.3	15.2	16.2	16.4	15.4
G135.0	15.4	15.4	15.4	15.8	15.2	15.4	16.0	16.4	16.2	16.1
G136.0	15.7	14.7	15.0	15.9	15.8	15.7	16.0	15.3	16.4	16.2
G137.0	14.9	15.8	15.1	15.0	15.9	15.7	16.0	16.4	15.4	16.1
G138.0	16.0	16.0	15.3	16.1	15.9	15.5	15.5	16.4	15.7	16.1
G139.0	16.1	16.1	15.3	15.2	15.4	15.8	15.5	16.4	15.4	16.0
G140.0	16.2	16.4	16.1	16.4	16.1	15.9	15.5	16.4	16.4	15.3
G141.0	15.5	15.5	16.2	15.4	16.2	15.9	15.7	15.3	15.4	16.1
G142.0	16.5	15.7	15.7	16.5	16.4	15.8	15.8	16.4	15.4	15.3
G143.0	16.5	16.6	15.8	15.4	16.4	16.0	15.8	15.3	15.4	15.9
G144.0	15.9	16.7	16.5	16.7	15.5	16.0	15.9	16.2	16.2	15.9
G145.0	16.7	16.8	16.6	15.5	16.6	15.9	15.9	16.0	15.3	16.0
G146.0	16.1	16.0	16.0	15.8	16.6	15.7	15.7	16.0	15.3	15.2
G147.0	16.9	16.9	16.1	16.8	15.7	15.7	16.0	16.0	16.1	15.9

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	16.9	16.9	16.1	16.8	15.7	15.9	16.1	15.3	15.2	15.1
G149.0	16.4	16.9	16.1	16.9	15.7	15.9	15.4	15.3	15.1	15.0
G150.0	16.4	17.0	16.8	16.8	16.7	15.5	16.1	15.9	15.9	14.9
G151.0	16.4	16.9	16.0	16.8	15.8	15.5	16.1	15.2	15.1	14.9
G152.0	16.5	16.1	16.8	15.9	16.0	15.5	16.1	15.8	15.8	14.7
G153.0	16.5	16.2	16.1	15.8	16.6	15.4	16.1	15.7	15.0	14.7
G154.0	16.7	16.1	16.1	16.9	15.9	15.5	15.1	15.2	14.9	14.7
G155.0	16.7	16.1	16.1	15.8	15.8	16.0	15.2	15.2	14.9	14.6
G156.0	16.7	17.0	16.8	15.8	15.7	15.7	15.1	15.4	14.7	14.5
G157.0	16.8	16.1	16.8	16.8	16.5	15.5	15.1	15.2	14.7	14.4
G158.0	16.7	16.1	16.0	16.7	15.7	16.2	16.0	15.3	15.4	14.3
G159.0	16.7	16.1	16.8	15.7	16.4	15.4	15.9	15.2	14.7	15.2
G160.0	16.7	16.0	16.0	15.7	16.4	15.4	15.9	15.1	14.5	15.1
G161.0	16.6	16.9	15.9	16.6	15.7	15.9	15.1	15.1	15.3	15.1
G162.0	16.6	16.0	15.9	15.5	16.0	15.2	15.7	14.9	14.4	15.0
G163.0	16.6	15.9	15.9	16.4	15.5	15.1	15.0	15.0	14.3	13.9
G164.0	16.6	16.7	15.7	15.3	15.8	15.5	14.7	15.0	15.0	13.8
G165.0	16.5	15.7	16.4	15.3	15.7	15.0	15.3	15.0	14.1	14.0
G166.0	16.2	16.6	16.4	15.2	15.3	15.0	15.1	14.9	14.9	14.3
G167.0	16.1	15.4	15.3	15.1	15.3	15.3	14.6	14.6	14.0	13.6
G168.0	15.8	15.3	16.1	15.1	15.2	14.9	14.9	14.4	14.6	14.5
G169.0	16.0	16.2	16.0	14.9	15.1	15.2	14.7	14.6	13.7	14.5
G170.0	15.9	15.1	15.9	14.9	15.1	15.0	14.6	14.3	13.7	14.3
G171.0	15.7	15.0	15.0	14.7	14.9	14.4	14.5	14.1	13.6	14.3
G172.0	15.4	15.8	15.2	14.5	14.6	14.3	14.5	14.4	13.5	14.1
G173.0	15.4	14.9	15.2	15.2	14.6	14.5	14.1	14.3	14.1	13.1
G174.0	15.1	15.4	14.9	15.1	14.5	14.3	13.9	14.1	14.0	14.0
G175.0	15.1	15.1	14.7	14.0	14.5	14.1	14.0	14.0	13.1	12.9
G176.0	14.4	14.1	14.5	14.6	14.3	13.9	13.5	13.2	13.9	12.8
G177.0	14.6	14.7	14.0	13.7	13.6	13.7	13.8	13.8	13.7	13.6
G178.0	14.0	14.4	14.0	13.6	14.0	13.5	13.6	13.7	13.6	12.5
G179.0	13.8	13.5	13.7	13.3	13.7	13.8	13.5	13.6	12.5	12.4
G180.0	14.1	13.3	13.5	13.2	13.6	13.7	13.2	13.3	12.5	13.1

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	1806.0	1805.5	1804.4	1803.0	1801.8	1801.4	1802.4	1804.1	1805.1	1806.8
G1.0	1785.2	1787.7	1790.6	1792.9	1795.4	1797.8	1802.2	1808.1	1812.3	1817.9
G2.0	1764.9	1770.5	1775.9	1782.6	1788.1	1794.1	1803.5	1812.0	1820.4	1829.0
G3.0	1744.1	1754.2	1762.8	1771.2	1781.7	1790.8	1803.5	1816.0	1827.6	1839.2
G4.0	1722.1	1735.2	1748.8	1762.0	1774.9	1787.9	1803.3	1817.8	1834.9	1848.4
G5.0	1700.6	1718.3	1732.8	1751.6	1768.1	1784.5	1803.7	1821.8	1841.1	1859.1
G6.0	1679.3	1700.5	1718.9	1739.6	1760.9	1781.4	1804.1	1825.4	1847.4	1868.3
G7.0	1656.7	1682.3	1705.5	1729.6	1754.9	1777.8	1805.3	1830.2	1855.7	1878.7
G8.0	1635.1	1664.2	1692.6	1719.7	1746.9	1774.9	1805.2	1834.2	1862.1	1888.2
G9.0	1611.5	1645.4	1678.2	1709.4	1740.2	1772.1	1804.8	1837.4	1868.1	1897.2
G10.0	1586.9	1626.5	1662.2	1699.1	1733.3	1768.8	1805.2	1840.7	1875.2	1906.7
G11.0	1563.1	1605.0	1647.1	1687.8	1727.0	1765.6	1805.9	1843.4	1881.8	1916.6
G12.0	1537.2	1585.4	1631.3	1677.6	1720.6	1762.2	1806.4	1848.2	1887.7	1926.0
G13.0	1512.0	1566.7	1616.3	1667.8	1714.6	1759.4	1808.4	1853.3	1895.8	1935.2
G14.0	1486.4	1547.0	1601.8	1657.9	1708.7	1758.1	1810.9	1859.8	1903.0	1943.2
G15.0	1462.7	1527.5	1588.5	1646.4	1703.3	1756.5	1813.7	1864.3	1909.2	1951.4
G16.0	1437.4	1507.2	1573.7	1636.7	1698.4	1756.7	1816.0	1868.2	1916.1	1960.8
G17.0	1411.8	1485.6	1557.2	1626.1	1694.3	1756.6	1817.8	1872.0	1923.6	1967.2
G18.0	1383.3	1464.3	1539.6	1616.0	1689.2	1756.2	1818.9	1875.9	1926.8	1973.3
G19.0	1354.9	1442.9	1523.2	1604.8	1683.0	1752.9	1819.0	1878.7	1932.1	1977.7
G20.0	1323.8	1419.2	1506.9	1593.6	1673.6	1748.4	1818.6	1878.2	1934.4	1982.1
G21.0	1294.3	1394.9	1489.2	1579.4	1663.9	1743.3	1815.6	1878.4	1938.4	1986.9
G22.0	1261.2	1371.2	1472.4	1565.4	1655.0	1738.9	1812.1	1877.5	1939.6	1992.1
G23.0	1230.7	1347.3	1454.2	1550.4	1645.7	1731.9	1806.3	1877.2	1944.1	1996.6
G24.0	1198.8	1322.5	1436.5	1537.0	1633.7	1723.0	1802.0	1877.8	1946.4	2000.5
G25.0	1165.9	1298.1	1416.3	1523.8	1623.3	1714.9	1799.5	1878.7	1950.5	2005.6
G26.0	1132.5	1273.4	1396.3	1509.7	1612.7	1707.4	1797.5	1880.6	1953.5	2011.1
G27.0	1098.5	1247.3	1376.8	1494.7	1602.3	1700.5	1795.1	1882.4	1957.7	2018.7
G28.0	1061.4	1220.8	1354.4	1480.0	1591.2	1693.9	1793.7	1885.3	1963.4	2024.9
G29.0	1024.0	1192.4	1335.7	1465.2	1580.9	1689.3	1793.4	1888.3	1967.5	2032.4
G30.0	982.2	1164.9	1315.8	1450.7	1571.7	1685.5	1794.6	1891.5	1972.2	2041.9
G31.0	942.5	1137.1	1296.1	1436.3	1562.9	1681.9	1795.6	1894.6	1979.8	2054.4
G32.0	904.1	1108.3	1276.7	1422.3	1554.4	1678.2	1796.5	1898.8	1986.1	2065.0
G33.0	872.1	1078.6	1256.2	1409.2	1547.7	1674.5	1797.0	1902.7	1993.2	2073.7
G34.0	843.9	1051.4	1236.9	1397.1	1541.1	1670.9	1797.9	1907.1	1997.1	2083.5
G35.0	821.3	1022.4	1217.9	1385.3	1533.6	1667.3	1798.4	1911.1	2004.8	2092.9
G36.0	800.4	994.3	1198.1	1372.9	1526.9	1664.2	1801.6	1916.8	2011.0	2102.9

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	781.3	968.7	1182.3	1360.7	1520.1	1662.8	1804.2	1922.3	2020.8	2114.9
G38.0	763.5	940.2	1165.1	1349.8	1515.3	1663.6	1810.2	1931.8	2031.1	2126.2
G39.0	747.8	912.5	1149.1	1340.9	1511.3	1665.1	1820.5	1944.0	2042.4	2138.3
G40.0	733.1	887.3	1129.6	1332.8	1510.0	1670.0	1834.2	1961.4	2058.7	2153.5
G41.0	721.8	864.8	1112.6	1326.6	1512.0	1677.2	1852.3	1980.8	2077.7	2169.5
G42.0	711.7	843.2	1094.8	1322.0	1517.0	1689.7	1873.1	2004.2	2102.5	2190.7
G43.0	701.2	824.9	1080.8	1320.1	1523.6	1704.3	1896.9	2027.6	2123.8	2210.0
G44.0	689.6	809.3	1066.6	1321.6	1535.3	1722.9	1913.2	2046.5	2140.9	2221.0
G45.0	673.0	795.5	1056.0	1324.8	1547.7	1737.8	1931.9	2063.9	2153.6	2228.8
G46.0	654.1	783.7	1048.0	1325.4	1554.6	1752.6	1950.2	2082.6	2168.3	2234.8
G47.0	631.0	770.3	1033.2	1324.8	1562.2	1766.4	1972.2	2105.4	2184.9	2245.1
G48.0	601.7	754.9	1017.8	1322.7	1569.2	1783.7	2000.0	2134.8	2210.5	2269.5
G49.0	574.6	741.3	1000.9	1322.5	1579.1	1801.9	2034.6	2171.3	2249.1	2300.0
G50.0	555.7	729.3	985.2	1323.3	1593.6	1826.1	2077.9	2218.3	2294.5	2339.3
G51.0	538.6	716.8	970.7	1326.7	1612.0	1856.7	2128.5	2272.0	2346.3	2381.5
G52.0	522.7	705.3	960.2	1335.4	1636.2	1891.9	2183.9	2329.6	2401.9	2432.7
G53.0	506.5	695.2	952.3	1347.5	1666.4	1936.7	2242.2	2391.5	2464.7	2493.7
G54.0	491.3	689.0	947.4	1365.0	1702.8	1986.1	2303.6	2458.1	2531.2	2560.5
G55.0	477.8	683.3	945.2	1386.8	1743.8	2041.2	2368.8	2527.6	2603.6	2633.8
G56.0	465.3	677.7	948.1	1412.7	1788.3	2097.0	2435.0	2595.1	2669.6	2705.2
G57.0	453.1	675.4	954.0	1443.8	1834.5	2154.4	2498.8	2656.8	2734.5	2773.6
G58.0	441.6	674.0	964.0	1479.4	1887.2	2210.5	2560.4	2721.8	2803.2	2843.6
G59.0	434.1	676.1	977.2	1516.4	1936.7	2271.2	2629.8	2801.0	2886.1	2937.2
G60.0	425.5	678.4	993.7	1553.0	1984.6	2328.5	2710.4	2886.8	2986.1	3047.5
G61.0	416.5	683.8	1012.1	1589.9	2033.9	2390.1	2794.3	2981.6	3100.5	3171.9
G62.0	406.7	694.0	1032.4	1628.1	2088.2	2458.3	2872.7	3073.1	3214.4	3301.1
G63.0	399.5	705.0	1058.2	1671.1	2146.7	2531.2	2952.8	3164.0	3335.3	3438.3
G64.0	394.6	717.1	1084.2	1718.1	2206.0	2601.4	3017.6	3247.4	3437.3	3571.4
G65.0	392.8	730.8	1112.2	1764.2	2263.1	2667.8	3079.7	3319.1	3515.8	3665.9
G66.0	395.1	746.0	1138.8	1810.1	2316.8	2726.6	3133.7	3367.7	3561.9	3720.2
G67.0	402.1	762.1	1164.7	1854.9	2371.3	2784.6	3171.0	3388.2	3583.5	3746.8
G68.0	412.0	776.9	1191.2	1899.5	2423.6	2836.1	3176.1	3371.1	3565.8	3733.3
G69.0	423.4	794.3	1219.9	1944.3	2472.8	2880.9	3144.0	3313.7	3506.9	3677.2
G70.0	436.6	812.8	1248.2	1985.3	2507.4	2899.5	3060.8	3194.2	3386.3	3567.8
G71.0	451.4	829.8	1277.4	2012.5	2521.4	2884.9	2928.0	3019.0	3206.2	3399.1
G72.0	465.4	847.0	1303.3	2015.5	2502.4	2835.3	2736.3	2764.9	2938.9	3175.6
G73.0	482.3	862.4	1303.4	1997.4	2460.2	2738.9	2453.2	2417.1	2581.3	2872.6

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	498.2	863.1	1295.3	1950.5	2367.8	2600.5	2093.3	2020.1	2175.7	2485.9
G75.0	510.3	850.5	1272.0	1887.7	2250.0	2395.0	1660.1	1574.4	1702.2	2060.7
G76.0	501.7	831.0	1237.1	1795.1	2086.8	2138.1	1168.6	1085.0	1202.7	1579.6
G77.0	493.4	804.6	1197.8	1684.3	1849.4	1746.5	698.0	608.3	686.0	1040.1
G78.0	479.2	777.0	1135.8	1507.0	1544.4	1293.3	362.2	308.2	351.7	563.1
G79.0	463.8	739.6	1030.6	1271.3	1145.8	825.7	206.6	187.3	210.7	297.8
G80.0	448.5	698.6	897.4	1012.7	735.6	438.1	147.0	138.5	148.8	196.5
G81.0	429.2	635.5	741.4	725.3	365.8	231.1	115.4	110.4	117.2	144.8
G82.0	405.0	564.1	603.2	445.8	192.4	157.9	89.8	87.6	93.6	112.4
G83.0	374.7	486.5	466.7	221.3	135.4	122.6	71.9	71.2	77.4	88.1
G84.0	336.4	410.8	334.4	124.5	106.5	98.8	59.0	58.8	63.9	70.7
G85.0	297.8	341.4	213.7	96.5	84.6	80.0	50.5	50.2	54.8	58.7
G86.0	261.4	269.2	130.5	78.4	68.0	63.7	42.7	43.5	46.3	50.9
G87.0	221.8	198.5	88.3	64.4	56.4	54.8	36.0	37.6	40.7	42.6
G88.0	186.1	144.1	68.2	52.1	47.1	45.4	29.0	31.2	33.6	35.7
G89.0	143.0	100.2	53.4	41.8	38.7	37.3	23.5	25.8	27.0	27.7
G90.0	103.2	64.5	38.7	32.5	32.5	30.7	20.8	21.6	22.2	23.2
G91.0	70.8	41.6	27.4	26.7	26.8	24.5	19.0	19.3	20.3	20.3
G92.0	49.7	29.8	22.6	21.9	22.9	21.6	18.0	17.9	18.4	18.2
G93.0	35.2	23.8	20.3	19.6	20.2	20.8	17.2	16.8	16.8	16.9
G94.0	26.2	20.1	18.1	18.4	18.8	19.5	17.6	16.8	16.4	16.0
G95.0	18.7	16.9	17.9	17.8	18.0	18.6	18.0	17.6	15.9	15.7
G96.0	17.6	17.0	17.4	17.4	17.9	18.2	16.8	17.4	15.8	15.2
G97.0	16.6	16.6	17.3	17.5	17.8	17.8	16.4	16.2	16.0	14.7
G98.0	15.5	16.4	17.2	17.4	17.5	18.1	16.2	15.9	14.4	14.0
G99.0	14.6	16.2	16.8	17.3	17.6	17.0	15.1	14.5	14.4	13.3
G100.0	13.9	14.9	16.4	16.9	16.4	17.0	14.6	13.9	13.2	11.8
G101.0	13.1	15.3	16.2	16.4	16.1	15.3	13.9	13.3	13.2	11.3
G102.0	13.2	13.9	15.7	15.8	15.2	14.3	13.6	12.5	12.3	11.9
G103.0	12.8	13.6	15.3	15.2	14.1	14.1	13.5	13.0	11.8	11.8
G104.0	12.8	14.0	15.0	14.5	13.7	13.0	12.4	12.5	11.3	11.3
G105.0	12.4	13.8	14.3	14.1	13.3	12.6	12.1	11.4	11.1	11.0
G106.0	12.2	13.5	13.6	13.5	13.6	12.4	12.5	12.1	11.6	9.7
G107.0	12.9	12.8	13.3	13.1	13.2	12.1	11.7	12.1	11.4	9.5
G108.0	12.3	12.5	13.0	13.0	12.4	12.4	11.7	11.0	11.4	10.7
G109.0	12.2	13.0	12.9	12.9	12.3	11.6	12.4	11.9	11.1	10.4
G110.0	12.9	12.5	13.0	12.8	12.2	11.9	12.3	11.9	11.0	9.3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	12.9	13.2	12.9	12.5	11.9	12.1	12.2	11.9	10.4	9.2
G112.0	12.9	13.2	12.8	12.4	11.9	11.9	11.6	10.9	10.4	9.1
G113.0	12.9	13.2	12.5	12.4	11.9	11.9	11.6	11.8	10.8	9.1
G114.0	12.4	13.0	12.6	12.4	12.5	11.3	12.4	11.9	10.9	10.3
G115.0	13.2	12.3	12.6	12.3	12.3	11.7	11.6	11.0	10.4	9.3
G116.0	12.6	12.4	12.8	12.4	12.3	11.3	11.7	11.3	11.1	9.3
G117.0	13.3	13.3	12.8	12.6	12.4	11.7	11.7	11.9	11.1	10.4
G118.0	13.5	12.8	12.9	12.8	11.9	11.6	12.6	12.1	10.6	10.6
G119.0	13.1	12.9	12.9	12.6	11.7	11.7	12.9	12.4	10.7	10.7
G120.0	13.9	12.9	13.0	12.8	11.8	11.4	12.9	11.5	11.7	10.8
G121.0	13.5	14.0	13.1	12.8	12.5	11.8	12.9	11.6	10.8	11.0
G122.0	14.4	14.1	13.3	13.1	12.1	11.9	13.0	11.8	11.3	10.2
G123.0	13.8	13.9	13.5	12.9	12.1	11.6	13.5	12.9	11.4	11.3
G124.0	14.0	13.6	13.6	13.2	12.8	11.8	12.9	12.3	11.3	11.5
G125.0	14.9	14.7	13.6	13.5	12.2	11.9	13.7	13.0	12.3	11.6
G126.0	14.4	13.8	13.9	13.3	12.3	12.2	13.7	12.5	11.9	11.1
G127.0	14.5	14.1	13.9	13.5	12.4	11.9	13.3	12.9	12.4	11.8
G128.0	14.6	14.3	14.0	13.6	13.1	12.2	13.7	13.8	12.3	11.5
G129.0	15.4	15.0	14.1	13.7	13.1	11.9	14.3	13.8	12.2	11.7
G130.0	14.9	15.2	14.3	13.5	12.5	12.1	13.8	13.8	13.2	11.8
G131.0	15.5	14.4	14.1	13.5	12.6	12.1	14.6	13.5	12.8	11.8
G132.0	15.7	15.2	14.3	13.9	12.8	12.2	14.3	13.7	13.2	12.4
G133.0	15.8	15.4	14.3	13.7	12.8	12.2	14.3	14.5	13.6	12.5
G134.0	15.8	15.5	14.6	14.1	13.3	12.3	14.5	13.9	13.0	12.6
G135.0	15.2	14.7	14.5	14.1	13.5	12.4	14.7	14.6	13.1	12.4
G136.0	15.3	14.7	14.7	14.4	13.6	12.6	14.7	14.5	13.6	12.4
G137.0	15.3	15.8	14.6	13.8	13.8	12.8	14.7	14.1	13.3	12.4
G138.0	15.9	15.7	15.0	13.9	13.5	13.0	15.4	14.0	13.3	12.4
G139.0	16.0	15.0	14.9	14.6	13.5	13.1	15.0	14.1	13.6	12.6
G140.0	15.9	15.7	14.9	14.9	13.9	13.1	14.7	14.1	13.1	12.5
G141.0	15.3	15.7	15.1	14.1	13.7	13.2	14.6	14.1	13.7	12.6
G142.0	15.2	15.8	15.0	14.9	14.0	13.5	14.7	14.0	13.1	12.2
G143.0	15.3	15.0	15.2	14.3	13.8	13.5	15.3	14.1	13.5	12.4
G144.0	15.9	15.0	14.9	14.5	13.9	13.3	15.0	14.3	13.3	12.4
G145.0	15.1	15.4	15.1	14.6	14.0	13.6	14.4	13.9	13.0	12.4
G146.0	15.1	15.4	15.1	14.6	14.1	13.5	14.5	13.9	13.3	12.5
G147.0	15.1	15.4	14.7	14.7	14.3	13.5	14.3	13.9	12.9	12.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	15.0	14.7	15.0	14.6	13.7	13.5	14.1	13.9	13.3	12.3
G149.0	14.9	14.7	15.0	14.6	13.6	13.5	14.6	13.7	12.9	12.4
G150.0	15.4	15.3	14.5	14.6	13.7	13.2	14.7	13.5	12.8	12.5
G151.0	15.3	14.6	14.7	14.6	13.6	13.2	13.9	13.7	12.9	12.5
G152.0	15.3	14.4	14.6	13.8	13.9	13.0	14.0	13.7	12.9	12.3
G153.0	15.2	14.4	14.5	13.9	13.5	12.9	14.0	13.5	13.2	12.6
G154.0	15.1	14.3	14.0	14.1	13.7	13.0	13.9	13.7	13.1	12.4
G155.0	15.0	14.9	13.9	14.1	13.7	12.9	13.9	13.7	13.7	12.8
G156.0	14.5	14.3	13.8	14.1	13.6	13.1	13.7	13.9	12.6	12.4
G157.0	14.9	14.7	14.3	13.5	13.6	12.6	13.9	13.6	12.6	12.4
G158.0	14.3	14.0	14.3	13.6	13.5	13.0	14.4	13.6	13.7	12.4
G159.0	14.4	13.9	13.7	13.5	13.2	12.5	14.4	13.6	12.9	12.5
G160.0	14.6	13.9	13.8	13.6	13.3	12.5	13.8	14.0	12.8	12.6
G161.0	14.5	14.4	13.6	13.8	13.2	12.9	13.9	13.6	13.8	12.6
G162.0	14.5	13.8	13.5	13.2	13.2	12.6	14.3	14.0	13.8	12.8
G163.0	14.1	13.8	13.9	13.7	13.1	12.9	13.8	13.6	12.9	12.6
G164.0	14.4	13.6	13.3	13.1	13.1	12.9	14.5	14.0	13.0	13.6
G165.0	14.0	14.1	13.2	13.0	13.1	13.0	14.5	13.6	13.9	13.5
G166.0	13.7	13.6	13.9	13.3	13.1	13.0	13.8	13.6	13.1	13.5
G167.0	14.0	13.5	13.8	13.2	13.0	13.0	14.3	14.3	14.1	13.0
G168.0	14.0	13.8	13.8	13.0	13.0	13.1	14.5	14.3	13.3	13.0
G169.0	13.6	13.3	13.7	13.3	13.0	13.0	13.9	13.7	13.3	13.9
G170.0	13.5	13.6	13.0	13.1	12.9	13.0	14.4	14.4	14.1	14.0
G171.0	13.5	13.3	13.6	12.9	12.9	12.4	14.0	13.7	13.3	13.2
G172.0	13.7	13.6	13.6	13.0	13.0	13.0	14.6	13.6	13.5	13.2
G173.0	13.7	13.5	13.5	13.0	12.8	12.5	14.5	13.7	13.6	13.3
G174.0	13.6	13.1	12.6	13.0	12.8	12.5	14.4	13.7	13.7	13.5
G175.0	13.0	12.9	13.3	12.9	12.6	12.5	14.4	13.7	14.4	14.4
G176.0	13.1	13.1	13.3	12.9	12.6	12.5	14.4	13.7	14.4	14.4
G177.0	12.8	13.0	12.4	12.8	12.9	13.0	14.1	14.7	13.8	13.6
G178.0	12.8	13.0	12.3	12.9	12.5	13.0	13.9	13.8	13.9	14.6
G179.0	12.5	12.6	13.1	12.6	12.4	13.0	14.6	14.9	14.5	14.7
G180.0	12.4	12.5	12.2	12.8	12.2	13.0	14.0	13.7	14.5	13.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	1808.5	1809.9	1810.8	1812.8	1813.0	1814.5	1815.4	1815.4	1815.1	1814.7
G1.0	1823.9	1827.0	1831.9	1834.6	1838.9	1842.2	1844.4	1849.1	1849.9	1852.8
G2.0	1837.4	1844.6	1852.2	1858.4	1864.6	1870.3	1876.8	1879.9	1883.8	1886.9
G3.0	1850.8	1861.3	1871.3	1879.2	1888.4	1896.3	1902.8	1910.1	1916.1	1919.9
G4.0	1863.0	1877.2	1889.9	1902.2	1912.8	1923.0	1932.3	1939.4	1945.7	1950.6
G5.0	1875.4	1891.8	1908.2	1921.9	1935.6	1945.7	1955.6	1964.6	1971.2	1976.7
G6.0	1888.3	1907.1	1926.1	1940.0	1954.4	1966.8	1977.1	1987.9	1995.2	2003.1
G7.0	1901.2	1923.0	1942.5	1958.5	1972.4	1985.2	1997.6	2010.3	2019.1	2027.1
G8.0	1914.2	1936.9	1957.0	1973.0	1990.3	2005.9	2019.1	2032.8	2043.4	2055.8
G9.0	1925.9	1949.8	1970.9	1990.3	2008.8	2023.8	2040.1	2059.3	2077.6	2095.9
G10.0	1938.2	1963.0	1985.3	2007.9	2026.6	2045.6	2069.6	2096.2	2119.8	2142.8
G11.0	1948.8	1974.2	2000.3	2022.8	2044.5	2072.4	2103.4	2135.9	2162.2	2187.0
G12.0	1958.9	1985.8	2013.6	2038.6	2067.0	2104.4	2140.8	2175.7	2204.6	2227.7
G13.0	1967.5	1997.4	2026.2	2054.5	2095.5	2136.1	2175.7	2211.9	2241.6	2264.6
G14.0	1977.3	2008.5	2038.7	2074.5	2123.2	2168.8	2210.5	2246.1	2274.7	2298.2
G15.0	1986.3	2018.9	2052.0	2097.8	2149.9	2198.4	2239.8	2275.7	2305.7	2332.2
G16.0	1995.5	2029.5	2070.1	2122.8	2177.8	2226.2	2266.2	2307.9	2337.8	2363.3
G17.0	2004.6	2039.6	2089.2	2146.0	2201.3	2250.8	2296.3	2336.2	2367.6	2396.0
G18.0	2012.8	2052.0	2109.9	2168.1	2224.9	2275.9	2321.0	2364.1	2397.2	2426.2
G19.0	2019.3	2064.6	2128.5	2190.1	2247.9	2299.6	2345.0	2388.9	2423.9	2455.3
G20.0	2026.9	2078.9	2146.5	2209.6	2268.7	2322.5	2370.3	2414.8	2451.4	2484.3
G21.0	2033.5	2093.1	2164.9	2230.0	2288.7	2343.0	2392.7	2438.5	2478.0	2516.7
G22.0	2041.4	2108.1	2182.9	2249.3	2310.3	2364.1	2414.1	2463.7	2506.9	2547.6
G23.0	2048.8	2121.4	2198.4	2267.0	2330.4	2384.8	2436.4	2488.5	2536.2	2583.8
G24.0	2055.9	2136.1	2215.4	2286.5	2349.4	2406.8	2461.0	2514.2	2569.0	2613.9
G25.0	2065.1	2150.8	2232.5	2305.9	2370.6	2428.7	2484.6	2542.6	2598.9	2637.3
G26.0	2076.6	2166.9	2250.1	2324.4	2390.7	2450.1	2510.8	2572.0	2623.2	2651.6
G27.0	2087.7	2183.3	2269.4	2346.6	2412.7	2475.5	2535.4	2601.1	2640.4	2662.4
G28.0	2102.0	2199.9	2291.3	2366.6	2437.0	2500.4	2565.6	2622.6	2655.5	2668.4
G29.0	2115.6	2217.6	2313.0	2392.2	2461.1	2526.6	2594.0	2642.2	2666.2	2671.6
G30.0	2131.0	2237.7	2335.8	2418.5	2488.8	2554.8	2619.1	2659.4	2672.3	2671.6
G31.0	2148.6	2257.6	2359.9	2444.2	2516.3	2587.1	2642.8	2671.5	2676.5	2672.5
G32.0	2166.8	2282.7	2385.1	2474.3	2548.6	2618.8	2665.7	2685.4	2686.5	2678.0
G33.0	2184.0	2304.9	2410.1	2501.9	2579.7	2651.2	2694.5	2706.7	2704.6	2695.1
G34.0	2197.6	2322.9	2434.2	2529.1	2611.6	2684.2	2732.7	2739.7	2726.2	2712.1
G35.0	2210.9	2339.4	2456.0	2554.7	2646.0	2731.3	2770.5	2766.1	2745.7	2727.3
G36.0	2224.7	2357.2	2478.2	2583.0	2690.0	2776.2	2804.8	2788.2	2760.9	2736.8

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	2236.3	2373.3	2499.6	2616.0	2731.0	2811.2	2829.5	2803.0	2771.4	2741.0
G38.0	2250.8	2392.3	2524.1	2651.4	2767.2	2843.4	2849.6	2816.3	2778.1	2738.1
G39.0	2261.5	2409.0	2549.3	2682.6	2801.2	2869.9	2865.9	2825.2	2775.4	2727.0
G40.0	2272.6	2424.8	2574.4	2711.7	2833.0	2891.7	2877.4	2828.0	2769.6	2705.8
G41.0	2285.4	2441.1	2593.8	2740.3	2858.9	2907.9	2880.8	2821.8	2747.6	2668.8
G42.0	2300.9	2456.5	2612.8	2765.7	2882.4	2922.1	2880.3	2810.6	2717.0	2619.8
G43.0	2317.6	2469.3	2628.4	2784.2	2902.0	2929.6	2873.8	2788.6	2679.3	2561.6
G44.0	2325.1	2477.7	2637.3	2796.6	2914.2	2930.0	2863.8	2765.1	2637.3	2494.7
G45.0	2327.8	2479.6	2636.5	2798.8	2916.3	2928.9	2854.2	2740.2	2585.6	2420.3
G46.0	2325.7	2477.5	2633.0	2792.9	2910.4	2921.6	2843.9	2708.5	2521.0	2315.8
G47.0	2329.9	2480.0	2633.1	2784.4	2894.3	2906.1	2821.9	2664.1	2436.9	2195.1
G48.0	2340.9	2486.3	2634.5	2774.8	2873.5	2883.5	2790.2	2603.7	2336.5	2058.2
G49.0	2360.4	2495.7	2637.7	2767.5	2849.6	2852.6	2748.1	2521.0	2221.9	1913.1
G50.0	2389.9	2504.6	2635.9	2752.7	2821.3	2812.2	2694.3	2431.2	2102.0	1785.4
G51.0	2423.3	2521.3	2627.4	2731.3	2781.3	2765.5	2618.6	2325.6	1985.4	1671.4
G52.0	2462.3	2537.4	2620.7	2704.4	2736.7	2703.2	2523.2	2221.1	1878.8	1567.9
G53.0	2507.3	2560.9	2621.8	2677.9	2686.0	2625.6	2417.3	2112.2	1780.2	1471.0
G54.0	2565.7	2599.0	2625.7	2645.8	2630.2	2531.5	2299.3	2006.4	1690.3	1381.6
G55.0	2638.8	2644.6	2624.3	2606.9	2558.1	2412.9	2169.6	1899.3	1597.3	1295.2
G56.0	2712.1	2690.6	2613.4	2559.1	2472.2	2290.7	2034.7	1802.2	1513.4	1216.4
G57.0	2782.4	2732.8	2598.8	2499.4	2372.9	2152.8	1897.0	1701.8	1430.8	1144.0
G58.0	2848.2	2771.6	2593.5	2432.4	2266.6	2017.7	1767.1	1600.5	1355.5	1072.7
G59.0	2928.0	2822.8	2608.0	2365.9	2159.7	1885.6	1634.7	1499.7	1278.7	1002.6
G60.0	3025.0	2893.8	2642.2	2314.5	2060.0	1757.8	1514.1	1397.3	1205.0	928.0
G61.0	3146.4	2984.2	2689.4	2283.2	1967.1	1627.6	1399.9	1301.2	1125.1	855.4
G62.0	3275.1	3091.6	2741.7	2271.0	1864.3	1500.8	1290.5	1202.7	1045.8	780.8
G63.0	3417.0	3220.8	2801.6	2266.4	1760.0	1371.5	1176.3	1107.4	957.8	706.2
G64.0	3565.9	3348.9	2875.5	2267.0	1664.1	1254.6	1067.7	1014.4	872.6	627.9
G65.0	3684.6	3476.7	2959.7	2266.4	1590.3	1142.3	970.1	931.6	789.2	559.0
G66.0	3755.9	3564.9	3029.3	2261.2	1524.2	1032.9	881.3	844.2	707.8	490.1
G67.0	3786.7	3591.1	3050.5	2241.3	1450.6	925.7	789.3	762.0	628.7	429.7
G68.0	3777.3	3568.7	3017.1	2189.1	1368.5	823.5	705.9	681.4	554.1	375.1
G69.0	3714.2	3500.6	2936.6	2107.8	1267.2	732.7	626.0	607.6	489.0	334.4
G70.0	3598.9	3387.1	2810.3	1990.1	1159.4	651.9	556.6	536.3	429.7	298.6
G71.0	3441.4	3235.9	2654.9	1831.2	1043.1	576.1	487.6	468.1	375.7	270.6
G72.0	3237.9	3069.4	2473.1	1660.6	918.6	498.9	424.6	401.1	333.6	247.0
G73.0	3001.9	2870.8	2260.9	1461.1	790.4	431.9	365.9	345.7	299.8	224.5

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	2723.4	2652.3	2049.8	1254.9	663.7	375.3	319.2	303.5	272.5	204.1
G75.0	2398.0	2407.3	1826.7	1056.0	538.1	322.7	291.3	274.1	246.5	185.3
G76.0	2038.7	2139.0	1605.5	867.9	433.0	276.7	266.2	247.2	223.8	167.0
G77.0	1615.8	1849.9	1384.1	683.0	344.5	234.6	238.6	223.3	200.0	148.7
G78.0	1184.8	1565.9	1167.2	526.2	280.5	207.1	210.0	203.0	179.3	132.4
G79.0	724.7	1263.7	952.4	406.6	236.2	193.3	193.1	187.8	160.2	118.6
G80.0	423.2	942.8	751.8	320.8	204.2	183.8	181.8	174.0	143.7	106.0
G81.0	283.0	645.2	562.8	255.7	179.9	174.7	169.7	158.9	127.8	95.3
G82.0	206.7	422.9	423.4	209.5	161.5	163.6	158.3	146.3	113.0	82.9
G83.0	157.9	286.0	315.5	166.4	143.4	151.7	148.5	134.8	99.1	72.4
G84.0	121.8	207.6	236.1	129.0	124.8	136.9	137.5	123.0	88.7	61.6
G85.0	95.5	156.9	174.8	97.6	104.6	118.7	123.5	109.4	78.4	52.8
G86.0	75.3	116.5	122.8	74.2	83.4	101.4	107.2	95.5	71.3	45.2
G87.0	59.7	86.5	90.1	57.9	60.5	79.9	88.5	79.8	64.3	37.9
G88.0	46.8	59.7	60.7	40.1	41.8	53.7	64.8	61.7	50.5	29.2
G89.0	30.9	40.6	38.5	28.5	28.0	33.8	45.6	41.6	35.6	21.6
G90.0	25.3	24.4	23.4	20.6	19.6	25.6	35.0	31.0	25.9	15.2
G91.0	19.7	18.6	17.9	15.2	14.5	18.2	23.7	20.4	18.3	10.3
G92.0	16.0	15.4	13.9	12.6	11.4	12.4	14.3	12.4	8.9	5.8
G93.0	16.0	14.4	13.6	11.3	10.7	10.2	10.0	7.2	5.0	3.6
G94.0	14.0	13.3	11.6	10.1	9.4	9.5	7.2	5.1	3.8	3.3
G95.0	14.9	12.8	11.8	10.1	8.4	7.8	5.9	4.3	4.3	3.1
G96.0	14.0	12.1	10.8	8.4	7.8	5.8	5.3	4.2	3.1	3.0
G97.0	13.6	11.3	10.2	7.8	6.6	6.6	5.6	5.0	3.1	2.2
G98.0	11.8	10.7	8.5	8.1	6.6	5.1	5.2	4.6	3.7	2.3
G99.0	12.1	9.7	7.9	7.9	6.6	5.3	5.1	4.2	2.3	2.0
G100.0	10.2	9.4	8.9	7.1	6.5	5.9	4.5	3.9	3.0	1.9
G101.0	9.9	9.3	9.2	7.8	6.4	5.6	3.8	2.5	2.8	1.6
G102.0	9.6	9.3	8.0	6.4	5.9	5.2	3.6	2.5	1.9	1.7
G103.0	10.4	8.8	7.7	6.3	5.8	4.1	3.9	3.6	1.7	1.6
G104.0	10.1	8.5	8.4	7.1	5.1	5.0	3.9	2.2	1.6	2.0
G105.0	9.9	8.5	8.1	5.9	5.2	4.8	3.4	2.1	2.5	1.9
G106.0	8.8	8.0	8.0	6.8	5.6	3.9	3.8	3.1	1.7	2.0
G107.0	9.7	7.9	6.7	6.7	5.3	4.5	3.6	2.1	2.5	2.1
G108.0	9.5	7.9	6.7	5.7	5.3	3.9	3.5	2.3	2.1	2.1
G109.0	9.5	7.8	6.5	5.6	4.8	4.1	3.7	2.4	2.1	2.2
G110.0	9.4	7.9	7.5	6.6	5.4	4.1	3.4	3.4	2.8	2.2

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	9.3	7.5	6.4	5.6	5.1	4.2	3.3	2.3	2.8	2.1
G112.0	8.1	7.9	6.5	5.6	5.1	4.5	3.9	3.6	2.2	2.3
G113.0	8.1	8.0	7.7	6.8	5.6	4.6	3.5	2.7	2.3	2.3
G114.0	9.4	7.7	6.5	7.0	5.2	4.6	4.2	2.7	2.3	2.3
G115.0	9.5	7.8	7.8	5.8	5.8	4.8	3.7	3.8	3.0	2.4
G116.0	9.4	8.4	7.9	7.2	6.0	5.1	4.5	2.9	2.4	2.4
G117.0	9.6	8.5	7.0	7.3	6.2	5.2	3.7	3.0	2.4	2.4
G118.0	9.7	8.1	7.2	6.4	5.9	5.0	4.4	3.0	3.3	2.5
G119.0	8.7	8.8	7.3	6.5	6.5	5.0	4.8	4.2	3.4	2.5
G120.0	10.1	8.5	8.6	7.9	6.4	5.1	4.2	4.2	2.8	2.7
G121.0	9.1	8.6	8.8	6.8	6.7	5.1	4.2	4.3	2.8	2.8
G122.0	9.3	9.4	7.8	8.1	6.8	5.2	5.0	4.4	2.9	3.0
G123.0	10.7	9.1	9.2	7.1	6.6	5.3	4.4	4.4	3.7	2.9
G124.0	9.6	9.7	8.2	7.3	6.6	6.3	5.3	4.5	3.0	3.0
G125.0	9.9	10.0	8.2	7.3	6.7	5.4	5.4	3.8	3.8	3.3
G126.0	11.1	10.1	9.6	7.5	7.0	5.6	5.3	3.9	3.9	3.4
G127.0	10.2	9.6	8.5	7.7	7.4	6.7	5.4	4.8	3.4	3.3
G128.0	11.5	10.3	9.9	8.9	7.2	5.7	5.4	5.0	4.3	3.6
G129.0	11.6	10.6	8.7	7.8	7.2	6.5	5.1	5.0	4.4	3.8
G130.0	10.8	10.7	9.1	9.2	7.3	6.8	6.0	5.2	3.7	3.9
G131.0	11.8	10.8	9.9	9.2	7.7	7.1	5.1	5.2	3.8	4.1
G132.0	10.8	10.8	8.9	8.0	7.8	7.2	5.9	5.3	4.8	3.7
G133.0	10.9	10.8	9.1	9.2	7.9	7.1	6.4	5.4	5.0	3.9
G134.0	12.1	10.2	10.3	8.1	7.9	6.4	5.6	5.0	5.1	4.6
G135.0	10.9	10.3	10.3	9.3	7.7	7.1	6.3	5.1	5.2	4.3
G136.0	12.2	10.3	9.2	8.2	8.0	6.4	5.9	5.9	4.5	4.4
G137.0	12.2	10.2	9.3	8.4	8.0	7.7	6.8	5.9	4.6	5.1
G138.0	11.0	11.1	9.2	8.4	7.9	7.7	5.9	6.2	4.8	5.2
G139.0	11.4	11.1	9.3	9.1	7.9	6.7	6.8	6.3	5.8	5.3
G140.0	11.3	11.1	9.3	8.8	8.4	7.9	7.1	5.8	6.0	5.3
G141.0	12.3	10.6	10.4	8.6	8.4	8.0	6.5	6.6	6.3	5.7
G142.0	11.0	10.3	10.6	8.7	8.2	8.1	6.5	6.2	6.4	5.9
G143.0	12.1	10.4	10.6	8.8	8.2	8.2	6.7	6.8	5.6	5.3
G144.0	11.9	10.4	10.7	8.8	8.4	7.5	7.8	7.0	5.8	6.3
G145.0	11.8	10.4	9.5	8.9	8.5	7.7	7.2	6.6	7.0	5.7
G146.0	11.4	11.3	9.7	9.2	8.9	8.5	7.8	7.3	7.0	5.8
G147.0	11.4	11.3	10.4	9.3	9.1	8.6	7.3	7.7	6.4	6.0

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	11.4	10.4	10.4	9.3	9.3	8.2	8.2	7.7	7.4	7.1
G149.0	12.1	10.6	10.1	10.0	9.3	8.8	7.8	7.4	7.7	7.2
G150.0	12.3	10.7	10.1	9.5	9.5	8.6	8.5	8.1	7.9	6.6
G151.0	12.1	11.5	10.7	9.7	9.2	8.8	8.1	8.2	7.2	6.7
G152.0	11.5	11.6	10.9	9.9	9.7	9.1	8.4	8.5	8.2	7.0
G153.0	12.3	11.7	11.0	10.4	9.5	9.2	9.1	8.1	8.5	7.2
G154.0	11.6	11.8	11.0	10.4	9.6	9.5	8.7	8.8	7.7	7.4
G155.0	11.6	11.8	10.6	10.6	10.2	9.5	8.9	9.1	7.9	8.7
G156.0	12.4	11.9	11.6	10.6	10.3	9.7	8.8	8.8	8.1	8.9
G157.0	11.7	11.1	11.7	10.6	10.6	10.0	10.1	9.4	8.5	9.2
G158.0	11.9	11.3	10.9	11.0	10.7	9.9	9.5	9.7	9.5	8.4
G159.0	12.8	12.2	11.6	11.1	10.3	10.3	9.7	9.4	9.1	8.6
G160.0	12.9	11.5	11.4	10.9	11.1	10.4	10.4	10.0	9.9	9.9
G161.0	12.1	12.5	12.2	11.1	10.8	10.8	10.2	10.3	9.3	10.1
G162.0	12.8	11.7	11.5	11.6	11.5	10.8	10.7	10.0	10.4	9.4
G163.0	12.2	12.8	11.7	11.4	11.0	11.0	11.3	10.7	10.6	9.7
G164.0	12.4	11.9	11.8	11.5	11.7	11.1	11.1	11.0	10.7	10.9
G165.0	13.3	13.0	11.9	12.1	11.3	11.6	11.5	10.7	11.0	10.9
G166.0	13.3	12.2	12.5	11.9	12.1	11.6	11.1	11.4	10.7	10.4
G167.0	13.2	13.2	12.2	12.4	12.4	11.6	11.7	11.7	11.7	11.4
G168.0	13.6	12.3	12.4	12.2	11.8	12.1	12.2	11.8	11.7	10.9
G169.0	13.6	13.6	13.0	12.2	12.8	11.9	11.8	12.1	11.9	11.7
G170.0	12.9	12.5	13.3	12.6	12.9	12.2	12.1	12.5	12.1	11.1
G171.0	13.0	12.6	13.3	12.6	13.2	12.4	12.5	12.6	11.8	11.5
G172.0	14.0	12.8	13.6	13.5	12.6	13.1	12.6	12.3	12.6	12.9
G173.0	14.0	14.0	13.0	13.5	13.5	13.2	12.9	12.6	13.3	13.1
G174.0	14.0	14.1	13.1	13.0	12.9	13.0	12.9	13.2	13.1	12.3
G175.0	14.0	14.3	13.2	13.1	14.0	13.1	13.5	13.6	12.9	12.4
G176.0	14.5	14.1	13.5	14.1	14.1	14.0	13.6	13.2	13.6	13.9
G177.0	14.3	13.3	13.7	14.3	13.3	13.5	13.7	13.5	13.8	13.0
G178.0	13.8	13.7	14.4	14.5	14.5	14.5	13.8	14.3	14.1	13.2
G179.0	14.7	14.4	14.9	13.8	13.7	13.8	14.4	13.9	13.7	14.6
G180.0	14.7	14.6	15.0	14.0	15.0	14.0	14.3	14.0	14.9	15.0

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	1815.1	1814.2	1815.3	1812.4	1812.4	1811.5	1808.9	1808.9	1809.6	1809.1
G1.0	1852.1	1852.1	1853.5	1851.3	1851.3	1848.8	1847.7	1849.5	1848.3	1846.8
G2.0	1888.9	1890.3	1892.0	1890.3	1890.3	1887.8	1888.1	1884.2	1881.9	1878.8
G3.0	1923.4	1925.8	1927.4	1925.8	1926.6	1925.1	1923.1	1919.9	1918.2	1914.6
G4.0	1953.5	1957.5	1958.0	1957.9	1956.8	1955.6	1955.1	1950.6	1947.3	1941.9
G5.0	1981.2	1982.9	1985.3	1985.6	1985.6	1983.8	1981.2	1978.8	1974.1	1968.6
G6.0	2008.5	2011.1	2013.8	2013.4	2013.0	2011.6	2008.7	2006.1	2001.2	1994.4
G7.0	2031.9	2036.1	2041.2	2042.3	2041.9	2039.6	2035.5	2032.0	2024.5	2018.7
G8.0	2066.6	2074.5	2083.2	2087.7	2089.2	2082.7	2078.9	2070.6	2058.7	2046.4
G9.0	2111.8	2124.8	2131.7	2136.5	2137.5	2133.5	2127.8	2119.1	2104.8	2089.0
G10.0	2158.1	2170.3	2180.4	2185.4	2185.9	2183.3	2177.1	2164.9	2151.1	2133.2
G11.0	2203.9	2217.6	2228.3	2232.4	2232.1	2228.9	2223.1	2212.5	2196.4	2174.7
G12.0	2245.9	2258.1	2268.8	2273.5	2276.0	2272.3	2265.6	2252.9	2235.5	2214.3
G13.0	2281.2	2297.2	2309.4	2312.6	2315.8	2312.3	2304.0	2291.6	2272.0	2250.7
G14.0	2318.5	2335.6	2347.2	2352.1	2355.2	2352.1	2342.4	2328.3	2310.1	2287.7
G15.0	2353.8	2368.6	2381.3	2387.6	2392.9	2387.2	2376.3	2362.6	2342.9	2318.4
G16.0	2386.2	2404.1	2416.1	2423.5	2426.8	2421.3	2412.4	2397.5	2375.1	2349.7
G17.0	2418.6	2436.9	2452.9	2458.1	2462.1	2456.4	2446.0	2430.0	2406.6	2379.8
G18.0	2450.3	2471.1	2486.4	2497.2	2500.2	2493.7	2481.8	2463.9	2440.3	2410.1
G19.0	2481.8	2504.5	2524.4	2534.9	2540.9	2534.5	2519.2	2501.2	2474.4	2441.3
G20.0	2515.3	2543.1	2562.7	2572.4	2578.5	2571.9	2558.8	2538.5	2508.3	2471.7
G21.0	2549.5	2578.7	2600.2	2608.5	2613.8	2607.9	2593.6	2573.7	2543.0	2506.0
G22.0	2584.3	2610.2	2627.9	2634.9	2636.9	2633.1	2621.8	2605.4	2578.4	2538.7
G23.0	2614.3	2634.3	2645.7	2651.1	2653.3	2650.3	2643.0	2628.1	2605.9	2572.9
G24.0	2639.6	2651.8	2659.2	2661.3	2662.1	2659.9	2651.6	2642.6	2624.9	2597.9
G25.0	2653.3	2660.5	2666.0	2666.0	2665.5	2663.9	2659.4	2649.5	2638.4	2616.3
G26.0	2663.4	2667.7	2667.4	2664.8	2664.0	2661.6	2659.2	2654.1	2642.5	2628.3
G27.0	2668.3	2668.1	2662.9	2659.9	2658.0	2657.1	2656.0	2653.6	2646.6	2634.6
G28.0	2669.3	2664.6	2657.3	2651.4	2649.7	2650.5	2649.5	2649.4	2644.2	2638.6
G29.0	2667.1	2658.8	2647.4	2641.6	2640.3	2641.4	2642.1	2643.8	2640.3	2638.7
G30.0	2664.2	2651.0	2637.8	2629.4	2628.3	2629.9	2632.2	2638.0	2639.2	2638.8
G31.0	2659.8	2644.3	2631.3	2620.5	2619.8	2622.0	2624.6	2632.2	2637.1	2640.9
G32.0	2664.2	2649.4	2636.1	2624.4	2621.8	2623.2	2628.4	2635.5	2641.9	2649.8
G33.0	2680.4	2664.3	2654.6	2643.0	2639.9	2641.3	2645.6	2652.7	2657.0	2664.6
G34.0	2697.1	2683.3	2670.7	2655.9	2650.4	2651.4	2659.7	2668.2	2674.0	2685.3
G35.0	2709.2	2694.0	2679.9	2664.7	2655.1	2656.6	2666.1	2679.2	2687.3	2700.6
G36.0	2714.2	2699.0	2678.8	2658.1	2646.0	2649.3	2662.0	2677.9	2688.4	2713.2

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	2712.6	2690.4	2666.0	2643.3	2628.4	2632.4	2650.3	2666.7	2680.2	2710.4
G38.0	2697.4	2673.3	2645.7	2617.7	2602.6	2608.1	2628.3	2647.9	2666.1	2702.2
G39.0	2680.5	2648.3	2613.6	2580.5	2559.7	2566.8	2593.1	2619.2	2638.2	2683.4
G40.0	2642.9	2603.0	2558.2	2519.3	2497.4	2500.3	2531.6	2568.9	2601.5	2656.6
G41.0	2594.9	2542.0	2487.8	2444.8	2415.5	2422.5	2452.4	2499.3	2540.9	2613.1
G42.0	2529.3	2464.9	2405.2	2357.8	2331.1	2336.4	2369.4	2423.6	2477.2	2559.8
G43.0	2457.0	2387.9	2321.9	2270.7	2241.5	2248.2	2283.9	2340.9	2398.7	2498.6
G44.0	2374.7	2299.7	2226.7	2173.5	2144.2	2152.2	2190.9	2250.1	2318.5	2429.0
G45.0	2281.1	2184.3	2110.6	2050.5	2019.1	2025.9	2071.9	2140.7	2213.3	2348.7
G46.0	2155.9	2047.8	1960.6	1894.7	1866.6	1874.3	1927.2	1999.8	2090.9	2246.5
G47.0	2006.5	1876.9	1794.6	1738.3	1708.4	1719.4	1769.3	1842.0	1942.7	2125.7
G48.0	1852.9	1721.8	1649.2	1588.4	1563.8	1571.8	1619.4	1685.4	1793.1	1989.1
G49.0	1703.0	1578.1	1499.2	1441.6	1419.8	1429.0	1475.8	1539.9	1644.9	1843.7
G50.0	1580.1	1455.4	1381.2	1340.3	1318.5	1332.3	1371.5	1426.4	1528.8	1713.8
G51.0	1467.1	1342.3	1282.3	1247.7	1236.6	1247.4	1278.1	1323.1	1417.9	1602.7
G52.0	1364.1	1244.4	1196.8	1173.7	1159.0	1170.1	1199.2	1236.7	1326.3	1507.6
G53.0	1265.2	1159.9	1120.1	1099.9	1089.2	1099.2	1121.7	1154.9	1239.4	1416.5
G54.0	1178.1	1081.3	1047.0	1027.7	1017.7	1024.5	1050.4	1081.0	1157.7	1333.0
G55.0	1094.1	1006.2	971.8	949.5	939.8	949.9	974.3	1007.1	1081.5	1254.6
G56.0	1018.3	931.5	894.7	874.7	864.2	875.6	900.5	934.3	1009.6	1182.1
G57.0	945.3	856.9	820.3	795.5	786.7	795.5	822.2	861.7	937.5	1112.1
G58.0	872.0	783.6	742.0	720.6	707.7	721.4	746.7	787.8	864.2	1047.8
G59.0	797.0	707.3	666.7	642.9	630.0	640.5	668.6	708.9	792.0	981.2
G60.0	725.0	632.3	588.4	561.1	547.4	561.5	590.0	633.6	715.5	914.0
G61.0	653.6	557.7	504.7	476.4	464.7	478.4	510.6	556.7	641.4	838.7
G62.0	580.7	480.0	429.7	399.2	389.3	403.5	433.7	481.1	568.0	762.5
G63.0	508.2	410.4	361.9	338.0	332.2	337.8	366.2	411.5	498.1	687.2
G64.0	442.9	350.8	307.3	298.0	295.3	295.8	309.8	351.6	430.4	609.9
G65.0	385.5	303.0	268.8	265.9	266.2	264.1	268.1	301.1	375.0	540.5
G66.0	331.5	267.4	238.6	237.7	238.5	238.0	237.1	261.5	321.0	474.9
G67.0	292.6	237.6	216.1	218.9	221.2	220.2	215.3	229.8	280.3	412.4
G68.0	262.8	211.6	197.2	202.4	205.1	203.5	196.7	204.7	249.2	358.9
G69.0	236.3	190.1	182.0	187.0	190.2	188.0	179.6	183.3	223.3	316.0
G70.0	214.1	172.5	167.3	173.3	175.6	173.7	166.4	167.3	200.8	280.4
G71.0	194.1	157.9	153.7	158.9	161.6	158.1	152.5	151.9	182.4	252.3
G72.0	175.7	143.8	140.9	146.6	148.4	145.7	140.3	139.2	163.6	229.0
G73.0	159.3	130.6	129.3	133.5	136.6	133.5	127.6	127.6	147.3	208.1

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	143.8	118.8	117.4	121.2	124.1	121.0	116.5	114.8	131.7	188.9
G75.0	127.3	103.8	100.9	104.4	106.3	101.8	100.6	100.1	117.5	168.6
G76.0	111.4	91.4	88.4	90.0	91.2	89.1	88.4	89.2	102.6	153.1
G77.0	97.8	83.1	81.1	81.1	81.7	80.2	80.6	81.2	92.0	135.3
G78.0	87.8	76.3	74.7	73.9	74.1	73.3	73.9	74.9	83.5	120.3
G79.0	79.0	70.3	67.5	65.9	65.9	65.3	66.6	69.3	75.4	108.1
G80.0	71.0	63.9	60.7	58.9	59.3	59.2	60.7	63.0	68.1	97.0
G81.0	63.6	57.0	54.3	53.0	52.1	52.9	54.9	57.5	60.8	85.4
G82.0	56.2	50.7	48.6	47.0	45.7	46.0	48.4	50.1	54.1	75.2
G83.0	49.4	45.1	42.1	40.6	39.7	41.1	43.2	43.8	47.6	64.6
G84.0	42.5	38.4	35.2	35.3	33.5	34.9	35.8	37.0	40.6	55.6
G85.0	35.7	30.3	26.9	25.8	24.7	25.8	26.7	29.4	34.2	48.3
G86.0	29.6	23.5	20.1	18.7	17.8	18.1	19.5	23.1	27.7	40.8
G87.0	24.0	17.5	14.1	13.2	12.1	13.0	14.3	16.8	22.2	33.2
G88.0	18.0	13.3	10.0	8.0	7.7	8.6	10.3	12.5	16.8	25.8
G89.0	13.0	9.4	6.2	5.3	4.3	5.3	6.8	8.6	11.6	17.3
G90.0	8.9	6.4	4.2	2.9	3.0	3.0	4.4	5.7	8.0	12.4
G91.0	5.8	4.5	3.4	1.9	2.4	2.9	3.1	4.5	5.4	8.1
G92.0	3.7	2.9	2.0	2.1	1.6	1.5	2.2	2.7	3.4	4.1
G93.0	2.8	2.7	1.9	1.0	1.3	1.2	1.5	2.1	2.9	3.5
G94.0	2.7	2.1	1.7	1.2	1.7	2.0	1.4	1.6	2.8	2.7
G95.0	2.4	1.9	1.6	1.0	1.9	2.0	1.5	1.4	2.8	2.7
G96.0	2.4	1.7	1.7	1.3	1.9	2.0	1.5	2.0	2.0	3.1
G97.0	2.2	1.4	1.3	1.0	1.7	1.2	1.5	1.3	1.9	2.5
G98.0	2.1	1.4	1.4	1.9	1.7	1.2	1.6	1.7	1.9	2.0
G99.0	1.2	1.7	1.4	2.1	1.4	2.1	1.7	1.5	1.9	1.9
G100.0	2.1	1.7	1.9	2.0	1.4	2.2	1.6	1.3	1.9	2.1
G101.0	1.2	1.5	1.6	2.2	1.5	1.3	1.9	1.4	1.9	1.7
G102.0	1.3	1.7	1.6	1.4	1.6	1.2	1.7	1.4	2.0	1.7
G103.0	1.2	1.7	1.5	1.4	2.0	1.3	1.9	1.9	1.9	1.9
G104.0	2.3	1.6	2.0	2.1	2.0	2.3	2.0	1.7	2.0	2.0
G105.0	2.2	1.9	1.6	1.5	1.6	2.3	1.9	1.9	1.7	2.1
G106.0	2.2	1.5	2.0	1.4	1.7	2.3	2.1	1.9	1.9	2.0
G107.0	2.4	2.0	1.5	2.3	1.7	2.4	2.0	2.1	2.2	2.2
G108.0	1.4	1.7	2.0	1.5	1.6	2.4	1.7	2.0	1.9	2.3
G109.0	2.5	2.0	1.6	1.5	1.7	2.5	1.7	2.0	1.9	2.3
G110.0	1.4	2.1	1.7	2.3	1.7	2.5	2.0	1.7	2.0	2.3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	1.5	1.7	2.3	2.5	2.3	2.5	2.0	2.1	2.3	2.2
G112.0	2.7	2.1	1.6	1.7	1.5	2.7	2.3	2.2	2.2	2.4
G113.0	1.9	2.1	2.2	2.3	1.5	2.7	1.9	2.4	2.0	2.5
G114.0	2.7	2.0	2.4	1.6	1.6	1.6	1.9	2.4	2.5	2.5
G115.0	2.8	2.2	1.9	1.7	1.9	2.7	2.5	2.1	2.2	2.4
G116.0	1.6	2.4	2.0	1.9	2.1	2.8	2.5	2.5	2.4	2.5
G117.0	1.7	2.2	2.4	2.0	2.7	1.9	2.5	2.3	2.8	2.5
G118.0	2.9	2.5	2.4	2.0	2.4	2.8	2.2	2.3	2.8	2.8
G119.0	3.0	2.4	2.5	1.9	2.5	2.0	2.8	2.5	2.5	2.9
G120.0	2.0	2.5	2.2	2.0	2.0	2.9	2.2	2.5	2.9	2.8
G121.0	2.1	2.5	2.2	2.9	2.0	2.1	2.4	2.8	2.7	3.0
G122.0	2.9	2.7	2.1	3.0	2.1	2.1	3.1	2.9	2.8	3.1
G123.0	3.1	2.7	2.4	2.2	2.3	3.1	3.0	2.9	2.7	3.3
G124.0	2.8	2.5	2.5	3.0	3.0	2.3	3.1	2.9	2.8	3.3
G125.0	2.8	2.9	3.1	3.3	2.5	2.4	2.5	3.1	3.4	3.1
G126.0	3.5	2.9	3.0	2.7	2.5	3.5	2.8	3.1	3.1	3.4
G127.0	3.1	3.0	2.7	2.7	3.3	3.5	3.4	3.4	3.5	3.6
G128.0	3.0	2.9	2.7	2.7	2.7	3.7	3.5	3.1	3.7	3.7
G129.0	3.0	3.4	3.0	2.8	2.9	3.7	3.8	3.3	3.5	3.8
G130.0	3.1	3.5	2.9	3.7	3.0	2.9	3.8	3.8	3.6	3.8
G131.0	3.3	3.4	3.6	3.3	3.0	3.0	4.1	3.9	3.6	3.9
G132.0	3.5	3.6	3.3	3.3	3.7	3.9	3.1	3.5	3.6	4.2
G133.0	3.5	3.9	3.9	3.3	3.4	4.2	4.3	3.6	3.9	4.3
G134.0	4.1	3.8	4.1	4.1	4.1	3.4	4.4	4.2	4.3	4.4
G135.0	4.2	3.9	3.6	3.6	3.6	3.5	4.6	3.8	3.9	4.4
G136.0	4.4	4.1	3.9	4.2	3.8	4.5	4.6	3.8	4.2	4.6
G137.0	4.6	4.3	3.9	3.9	3.8	3.7	4.9	4.6	4.8	4.9
G138.0	4.6	4.4	3.9	4.6	3.9	3.8	5.0	4.3	4.9	4.8
G139.0	4.5	4.6	4.8	4.2	4.8	5.0	5.1	4.5	4.5	5.0
G140.0	4.5	5.0	4.9	5.0	4.2	5.0	4.9	5.0	4.8	5.3
G141.0	5.2	4.9	4.4	4.3	5.0	5.2	5.2	5.3	5.4	5.2
G142.0	5.6	4.9	5.2	5.1	4.6	5.3	5.3	5.7	5.4	5.6
G143.0	5.3	5.2	4.8	5.3	5.6	5.4	5.6	5.0	5.1	5.4
G144.0	5.8	5.7	5.1	5.0	5.6	5.7	4.9	5.1	5.9	5.6
G145.0	6.2	5.9	5.7	5.3	5.7	5.8	5.2	5.9	6.0	5.7
G146.0	6.4	6.2	5.9	5.7	6.0	5.2	5.9	6.3	6.0	5.9
G147.0	6.0	6.2	5.7	6.2	6.2	5.3	5.6	5.7	6.3	6.0

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	6.0	6.0	6.5	6.4	6.3	5.6	6.4	6.5	6.4	6.2
G149.0	7.0	6.2	5.9	5.9	5.7	5.8	6.0	6.6	6.6	6.4
G150.0	7.3	7.0	6.7	6.7	6.2	6.7	6.5	7.0	6.4	6.5
G151.0	6.5	6.6	6.5	6.3	6.3	7.0	6.4	6.4	6.6	7.2
G152.0	7.8	7.3	6.5	6.6	7.2	7.2	7.1	6.5	6.7	7.4
G153.0	7.0	7.1	6.7	7.3	6.7	7.4	7.0	7.5	7.0	7.1
G154.0	8.2	7.3	7.7	7.1	7.7	7.7	7.2	7.1	7.7	7.9
G155.0	7.7	8.0	8.1	7.3	8.0	7.8	7.5	7.2	7.4	7.4
G156.0	7.7	8.2	7.5	8.0	8.0	7.4	7.7	7.3	7.7	8.2
G157.0	8.0	7.8	7.8	7.9	8.2	7.5	7.9	8.1	7.8	8.5
G158.0	8.0	8.2	8.0	8.5	7.8	8.5	8.2	8.0	8.0	8.7
G159.0	9.5	8.4	8.1	8.5	8.9	8.1	8.5	8.8	8.1	8.2
G160.0	9.7	9.3	8.5	8.9	8.2	8.2	8.4	8.5	8.6	8.5
G161.0	8.8	9.5	9.5	9.2	8.6	9.2	9.1	8.7	8.8	9.3
G162.0	9.1	9.3	8.8	9.4	9.6	9.4	9.1	9.5	9.1	9.5
G163.0	10.4	9.3	10.1	9.4	10.0	9.2	9.5	9.7	9.7	9.2
G164.0	10.8	9.5	10.4	9.7	9.3	9.5	9.4	9.5	9.5	9.3
G165.0	10.9	10.7	9.6	10.1	10.6	9.7	9.6	10.0	9.6	9.5
G166.0	10.1	11.0	10.9	10.3	10.8	10.4	10.6	10.0	10.3	10.6
G167.0	10.4	10.4	11.1	10.4	10.1	10.7	10.3	10.7	10.2	10.8
G168.0	11.7	10.6	10.7	10.9	10.3	10.9	10.9	10.9	11.0	10.2
G169.0	11.8	10.9	11.7	11.3	10.6	10.9	11.3	10.8	10.8	10.4
G170.0	12.2	11.8	11.0	11.4	10.9	11.5	10.8	11.4	11.3	10.7
G171.0	11.5	12.2	12.3	11.7	12.1	11.3	11.1	11.6	11.0	11.7
G172.0	12.5	11.8	11.6	11.9	12.2	11.9	12.1	11.7	11.3	11.9
G173.0	12.2	12.9	12.8	12.2	11.6	12.2	11.5	11.6	12.1	12.1
G174.0	13.0	13.2	12.2	12.5	11.8	12.3	12.5	12.1	11.6	12.3
G175.0	12.6	12.5	13.5	12.8	13.2	12.4	12.1	12.4	12.1	11.7
G176.0	13.1	12.8	13.3	13.1	13.5	12.8	12.2	12.5	12.8	12.9
G177.0	13.6	13.9	13.7	13.3	12.6	13.1	13.2	12.8	13.1	12.3
G178.0	13.7	13.2	13.2	13.8	13.0	13.3	12.9	13.2	13.2	13.5
G179.0	13.9	13.6	13.6	13.7	14.4	13.8	13.2	13.6	13.1	13.6
G180.0	14.0	14.5	14.6	14.3	13.6	14.3	13.7	13.6	13.8	13.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	1809.5	1808.5	1808.7	1809.1	1807.2	1807.4	1806.0	1805.5	1804.4	1803.0
G1.0	1842.9	1840.8	1839.6	1837.5	1832.6	1829.0	1825.6	1822.7	1818.1	1814.5
G2.0	1879.1	1872.7	1869.4	1865.2	1858.0	1851.2	1844.9	1839.1	1830.6	1822.3
G3.0	1909.4	1901.4	1895.9	1889.4	1880.6	1871.5	1862.7	1853.4	1842.2	1831.1
G4.0	1937.2	1930.4	1923.6	1915.6	1904.1	1891.9	1880.5	1869.0	1854.9	1840.8
G5.0	1962.2	1954.8	1945.4	1936.0	1924.7	1911.6	1897.8	1882.8	1866.7	1847.9
G6.0	1987.8	1977.1	1968.3	1957.1	1944.4	1930.2	1914.3	1896.5	1877.2	1857.7
G7.0	2011.7	2000.5	1989.7	1976.4	1962.1	1945.8	1929.7	1911.0	1888.9	1865.8
G8.0	2034.2	2022.3	2010.8	1997.0	1981.1	1963.1	1944.4	1923.9	1900.0	1874.8
G9.0	2069.0	2046.4	2030.8	2015.7	1998.5	1978.4	1958.9	1935.8	1911.1	1882.8
G10.0	2111.2	2084.4	2058.3	2034.7	2015.9	1996.8	1974.6	1949.2	1921.7	1892.0
G11.0	2149.2	2121.3	2094.0	2060.9	2032.8	2011.7	1987.2	1960.8	1931.9	1898.1
G12.0	2188.9	2157.9	2125.9	2091.9	2052.3	2024.0	1999.1	1969.8	1939.9	1906.7
G13.0	2225.3	2193.0	2158.2	2119.6	2078.2	2036.7	2010.1	1980.4	1948.0	1915.0
G14.0	2256.8	2224.7	2188.6	2146.4	2101.0	2055.6	2019.3	1989.4	1956.6	1922.0
G15.0	2286.4	2252.1	2214.7	2172.5	2123.5	2075.6	2030.0	1997.8	1963.0	1927.2
G16.0	2319.8	2281.9	2240.8	2196.9	2148.0	2093.7	2042.6	2005.2	1969.8	1932.9
G17.0	2346.1	2311.1	2268.1	2220.9	2168.7	2113.7	2058.9	2012.9	1975.3	1934.6
G18.0	2375.6	2336.9	2293.8	2244.6	2189.3	2133.4	2072.7	2019.1	1979.5	1938.2
G19.0	2400.7	2362.0	2319.0	2267.0	2209.0	2151.7	2087.0	2026.7	1983.6	1938.9
G20.0	2432.6	2389.2	2341.9	2289.0	2230.7	2168.8	2102.9	2035.5	1988.3	1942.0
G21.0	2460.5	2412.6	2366.1	2311.2	2250.4	2184.4	2116.9	2046.2	1992.2	1943.7
G22.0	2493.0	2440.6	2388.6	2331.8	2269.6	2203.1	2132.5	2055.8	1995.6	1944.4
G23.0	2522.6	2468.2	2412.7	2353.2	2289.1	2219.9	2145.9	2066.5	1999.2	1946.5
G24.0	2556.7	2496.6	2437.6	2374.6	2309.1	2237.3	2160.5	2078.2	2004.2	1949.2
G25.0	2579.8	2525.4	2462.7	2397.6	2328.1	2253.8	2174.2	2090.5	2010.0	1952.2
G26.0	2599.5	2552.8	2489.9	2420.9	2350.1	2273.3	2191.2	2104.2	2018.9	1956.5
G27.0	2615.1	2576.1	2516.6	2446.9	2373.8	2294.6	2208.9	2120.1	2029.2	1962.2
G28.0	2623.6	2594.5	2545.9	2473.1	2399.2	2317.4	2229.0	2135.6	2040.8	1968.1
G29.0	2629.5	2609.6	2572.1	2502.6	2425.5	2344.1	2250.4	2154.6	2053.4	1974.6
G30.0	2634.8	2621.6	2593.5	2532.8	2453.2	2369.5	2277.0	2174.1	2066.6	1981.2
G31.0	2641.6	2631.3	2614.2	2564.8	2482.6	2399.4	2300.8	2195.8	2082.1	1989.7
G32.0	2647.4	2642.1	2636.5	2595.0	2517.1	2430.9	2329.8	2218.3	2098.3	1997.9
G33.0	2667.2	2660.7	2657.3	2628.1	2549.9	2461.9	2359.0	2240.5	2113.2	2005.9
G34.0	2689.2	2686.7	2687.9	2661.1	2587.1	2493.0	2386.9	2261.2	2127.4	2012.8
G35.0	2709.8	2717.8	2720.7	2700.5	2625.6	2525.0	2413.5	2282.1	2140.7	2021.0
G36.0	2727.7	2746.5	2756.4	2739.4	2668.2	2560.6	2439.6	2301.4	2153.0	2028.7

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	2738.0	2766.5	2788.6	2778.8	2712.0	2593.6	2467.3	2320.2	2165.8	2037.8
G38.0	2739.6	2784.1	2813.5	2811.4	2760.0	2635.0	2494.9	2339.9	2179.1	2049.1
G39.0	2735.8	2791.8	2833.1	2839.2	2801.1	2674.2	2524.3	2360.5	2194.1	2061.7
G40.0	2722.9	2791.0	2843.8	2864.4	2836.0	2712.8	2556.7	2382.8	2210.3	2075.5
G41.0	2697.4	2785.0	2849.7	2882.3	2866.4	2746.1	2581.4	2403.1	2224.6	2089.7
G42.0	2661.8	2766.3	2845.6	2895.6	2889.9	2774.7	2602.7	2419.8	2237.4	2103.5
G43.0	2617.4	2743.0	2836.7	2905.4	2908.9	2794.6	2619.4	2433.4	2251.8	2119.1
G44.0	2573.9	2716.5	2828.3	2908.5	2922.9	2812.6	2630.0	2447.3	2264.8	2133.3
G45.0	2515.0	2684.6	2815.9	2908.1	2929.3	2823.6	2642.4	2456.4	2276.1	2149.1
G46.0	2452.1	2648.6	2801.1	2901.4	2924.8	2825.8	2644.4	2460.4	2283.3	2158.9
G47.0	2360.3	2603.8	2778.3	2890.1	2914.3	2819.6	2643.7	2462.8	2289.5	2170.8
G48.0	2260.6	2536.4	2743.7	2867.7	2895.2	2806.8	2636.4	2462.1	2298.5	2189.8
G49.0	2143.8	2456.7	2701.8	2834.1	2867.5	2787.4	2629.7	2459.5	2310.6	2216.0
G50.0	2029.1	2358.8	2647.8	2794.1	2832.5	2764.6	2618.2	2460.8	2329.9	2251.6
G51.0	1914.3	2256.2	2569.9	2744.3	2791.4	2738.7	2603.7	2470.6	2359.8	2293.1
G52.0	1812.2	2157.1	2479.9	2680.8	2745.3	2714.3	2596.8	2484.9	2388.1	2338.4
G53.0	1714.4	2060.0	2379.7	2600.1	2687.9	2681.5	2587.0	2499.3	2421.9	2389.4
G54.0	1623.0	1958.5	2264.9	2501.6	2623.0	2643.1	2572.9	2519.7	2468.3	2447.1
G55.0	1539.1	1854.5	2141.4	2384.3	2538.9	2593.6	2562.0	2550.8	2525.6	2511.6
G56.0	1464.9	1763.2	2007.7	2256.9	2443.8	2535.8	2547.5	2588.9	2592.1	2583.5
G57.0	1389.2	1665.2	1875.6	2117.9	2340.4	2463.4	2530.7	2629.7	2662.0	2656.1
G58.0	1317.7	1569.5	1739.8	1980.3	2231.2	2392.3	2521.8	2673.7	2733.6	2732.9
G59.0	1243.8	1467.4	1617.1	1845.9	2119.5	2313.7	2521.0	2719.6	2817.4	2829.3
G60.0	1168.8	1373.5	1495.5	1702.9	2006.3	2241.7	2529.6	2780.7	2911.5	2940.7
G61.0	1086.5	1277.8	1384.8	1566.3	1892.1	2181.8	2554.4	2858.3	3026.4	3057.4
G62.0	1005.9	1183.9	1276.5	1432.3	1781.3	2132.1	2588.9	2958.1	3148.2	3196.8
G63.0	914.2	1093.3	1175.1	1305.1	1670.4	2102.2	2639.9	3068.1	3289.5	3347.1
G64.0	832.0	1002.5	1078.0	1179.4	1571.5	2085.4	2709.6	3208.2	3452.2	3486.0
G65.0	750.4	916.2	985.6	1076.7	1474.6	2080.6	2781.1	3337.6	3582.7	3603.8
G66.0	671.9	829.8	889.2	972.6	1391.1	2075.4	2851.9	3446.4	3695.6	3692.2
G67.0	596.1	745.1	803.0	874.8	1308.8	2051.5	2886.4	3504.1	3751.2	3733.1
G68.0	527.2	665.6	715.6	790.1	1222.0	2018.7	2866.2	3509.2	3762.1	3741.0
G69.0	463.0	585.8	640.2	705.4	1131.0	1936.1	2797.6	3455.7	3721.6	3701.1
G70.0	402.1	514.0	562.5	624.4	1035.9	1835.7	2686.7	3361.1	3629.6	3613.5
G71.0	347.3	443.2	489.9	551.1	928.1	1698.0	2534.2	3241.6	3497.9	3476.6
G72.0	306.0	382.9	419.1	482.1	823.4	1534.0	2360.6	3087.8	3333.6	3270.1
G73.0	273.4	327.7	360.4	420.7	720.6	1351.4	2176.8	2909.0	3114.4	3016.4

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	247.9	285.6	313.3	361.2	608.9	1156.9	1982.7	2710.7	2871.4	2675.6
G75.0	223.6	254.3	279.1	314.6	508.4	966.1	1771.7	2492.9	2580.1	2276.2
G76.0	200.0	225.2	250.1	273.0	415.4	790.1	1560.1	2247.9	2251.1	1783.7
G77.0	178.9	202.9	224.2	242.4	328.9	619.7	1349.3	1980.2	1861.9	1243.3
G78.0	161.2	184.8	201.3	211.7	265.6	484.9	1133.9	1699.3	1432.5	788.0
G79.0	144.3	168.6	182.0	188.3	225.3	378.6	911.8	1412.3	962.7	467.8
G80.0	128.5	156.0	168.4	174.0	194.0	300.3	716.5	1107.1	597.5	286.5
G81.0	113.8	143.3	156.8	163.9	173.3	240.1	550.2	817.5	391.6	194.9
G82.0	100.9	133.6	147.7	156.3	157.4	198.3	417.5	571.1	275.6	144.2
G83.0	88.3	124.1	139.1	144.5	141.8	159.4	310.2	404.1	203.2	108.7
G84.0	77.3	115.2	129.0	130.3	128.2	123.7	225.3	282.0	156.7	84.9
G85.0	69.1	103.8	117.1	115.2	110.3	92.9	158.5	209.9	122.2	68.7
G86.0	62.5	90.9	102.0	96.9	90.5	70.8	110.9	150.2	93.2	56.5
G87.0	55.6	77.0	83.5	75.4	66.1	52.8	77.6	100.0	72.7	45.9
G88.0	43.2	58.9	61.6	51.8	42.7	36.5	51.0	64.4	49.8	35.0
G89.0	31.7	40.7	45.0	36.0	29.2	25.5	31.4	40.6	34.9	27.4
G90.0	24.6	30.5	34.8	26.7	20.3	18.3	19.8	23.4	25.4	22.2
G91.0	16.1	19.8	21.6	18.7	15.2	14.5	16.0	18.3	18.8	19.4
G92.0	7.0	10.3	12.3	13.6	11.9	12.3	13.9	15.0	16.8	17.2
G93.0	4.4	6.2	7.3	9.4	8.8	10.0	11.9	13.6	14.6	15.7
G94.0	3.5	4.2	5.1	5.9	6.8	8.5	9.5	11.6	12.3	14.0
G95.0	3.6	4.2	5.0	5.0	5.4	7.3	8.8	9.5	10.9	12.1
G96.0	3.7	3.9	4.5	5.6	6.2	6.5	7.8	8.0	10.1	11.4
G97.0	3.6	4.1	4.4	5.7	5.4	6.4	7.2	8.8	9.4	10.6
G98.0	3.0	3.9	4.5	5.1	5.7	6.8	7.7	8.0	9.2	10.8
G99.0	2.7	3.5	4.9	5.0	5.6	6.8	7.8	8.1	9.6	10.4
G100.0	2.3	3.4	4.2	5.2	6.2	6.6	7.2	8.7	8.9	10.4
G101.0	2.4	3.3	3.9	4.9	5.0	6.3	7.9	8.0	9.5	10.4
G102.0	2.4	3.1	3.9	4.2	4.9	6.3	7.1	8.8	8.7	9.9
G103.0	2.3	3.0	3.9	3.9	4.8	6.2	7.3	8.4	8.8	9.3
G104.0	2.2	2.9	3.7	4.3	4.5	5.7	6.4	7.3	8.5	9.3
G105.0	2.3	2.3	3.0	4.1	5.0	5.3	6.3	7.8	7.8	9.2
G106.0	2.2	2.8	2.9	3.7	4.2	5.1	5.9	6.7	8.4	8.8
G107.0	2.4	2.8	2.7	4.1	4.1	5.0	5.8	6.6	8.2	8.8
G108.0	2.2	2.3	2.8	3.7	4.9	5.4	6.4	6.6	8.0	8.6
G109.0	2.4	2.9	3.5	3.6	4.1	5.3	5.6	7.2	7.9	8.2
G110.0	2.7	2.5	2.9	3.8	4.8	4.9	5.4	7.1	7.9	8.6

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	2.7	2.7	3.5	3.8	4.8	4.8	5.4	6.3	7.9	8.4
G112.0	2.8	3.4	3.7	3.9	4.2	5.3	5.6	7.0	7.9	8.4
G113.0	2.9	3.3	3.8	4.2	4.9	5.6	6.4	7.1	7.3	8.4
G114.0	2.8	3.3	3.9	4.3	4.3	5.1	6.4	7.2	7.2	8.5
G115.0	2.7	3.5	3.8	4.1	5.1	5.7	5.7	6.5	7.2	8.5
G116.0	3.0	3.0	3.4	3.9	5.2	5.2	5.8	7.3	8.1	8.5
G117.0	3.1	3.1	4.1	4.5	5.4	5.9	5.8	7.4	8.1	8.5
G118.0	2.9	3.8	3.7	4.6	4.9	5.4	6.0	7.5	7.4	8.7
G119.0	3.0	3.7	3.8	4.3	4.9	6.3	6.0	6.8	7.5	8.8
G120.0	3.5	3.3	3.8	4.4	5.7	6.4	6.3	7.8	8.6	8.9
G121.0	3.0	3.4	4.6	4.5	5.8	5.7	6.3	7.2	8.6	9.1
G122.0	3.0	3.5	3.8	4.4	5.2	6.4	7.2	7.2	8.6	9.1
G123.0	3.4	3.5	3.9	5.2	5.9	6.0	6.7	7.3	8.8	9.2
G124.0	3.8	3.6	4.1	4.6	6.0	6.7	7.5	7.3	8.8	9.1
G125.0	3.9	4.3	5.0	4.9	5.3	6.7	7.5	7.5	8.0	9.4
G126.0	3.9	3.6	4.3	5.4	6.3	6.7	6.7	8.2	9.1	9.3
G127.0	3.7	4.8	5.1	5.4	6.5	7.0	6.8	7.7	9.2	9.4
G128.0	4.3	3.8	5.2	5.1	6.4	6.5	8.0	7.7	9.3	9.6
G129.0	3.7	5.0	5.2	5.3	6.4	6.6	7.4	7.9	9.3	9.6
G130.0	3.8	5.1	5.3	6.0	6.0	7.2	8.1	8.0	9.5	9.7
G131.0	4.6	4.1	4.9	5.9	6.7	6.7	7.2	8.8	8.7	9.9
G132.0	4.2	4.2	5.0	5.8	6.8	7.5	8.1	8.2	8.8	10.1
G133.0	4.6	5.3	5.1	5.8	6.2	6.8	7.5	8.2	9.7	10.1
G134.0	5.0	4.5	5.7	5.8	7.1	6.8	7.7	9.2	8.9	10.3
G135.0	5.1	5.6	5.7	5.9	6.4	6.8	8.2	9.3	9.1	10.4
G136.0	5.1	4.6	5.8	6.0	6.5	7.0	7.9	8.5	10.1	10.4
G137.0	4.6	5.8	5.4	6.2	6.4	7.8	8.5	9.4	9.2	10.6
G138.0	5.6	5.0	5.7	6.4	6.5	7.3	8.5	8.6	10.2	10.6
G139.0	5.0	5.9	5.9	6.4	6.5	7.3	7.9	9.3	9.3	10.6
G140.0	5.0	6.2	5.9	6.3	7.5	8.0	8.7	9.3	9.4	10.8
G141.0	5.1	5.3	6.0	6.5	7.3	8.0	8.6	9.6	10.3	10.6
G142.0	5.3	5.4	6.3	6.6	7.0	8.1	8.7	8.7	9.4	10.7
G143.0	6.3	5.7	6.5	7.1	7.7	7.5	9.1	8.8	10.4	10.9
G144.0	6.3	5.8	6.5	7.1	7.7	7.7	8.4	9.7	10.4	10.9
G145.0	5.6	5.9	6.7	7.3	7.8	7.7	8.2	8.8	9.4	10.4
G146.0	6.7	6.2	6.7	7.4	7.4	7.8	8.4	8.8	9.5	10.3
G147.0	6.8	7.0	6.8	7.5	7.5	8.6	9.1	8.9	10.4	10.4

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	7.0	6.5	7.2	7.8	8.0	8.0	8.6	8.9	9.5	10.3
G149.0	6.4	6.6	7.2	7.8	7.8	8.7	8.6	8.9	9.5	10.9
G150.0	6.6	7.4	7.7	7.5	8.5	8.2	8.5	9.1	9.5	10.9
G151.0	7.4	7.0	7.8	7.4	8.4	9.1	9.4	10.1	10.6	10.4
G152.0	7.8	7.9	7.4	8.5	8.1	8.4	8.8	9.4	9.6	10.4
G153.0	7.9	7.3	7.5	8.7	8.2	9.1	9.4	9.4	10.6	10.6
G154.0	8.0	7.5	8.4	7.8	8.5	9.2	9.7	10.0	9.7	10.9
G155.0	7.5	7.8	8.6	8.9	9.1	9.5	9.3	10.2	10.7	10.6
G156.0	8.4	7.9	8.0	8.0	8.7	9.4	9.7	10.4	9.9	10.8
G157.0	8.7	8.6	8.9	8.2	8.9	8.9	9.4	9.5	9.9	10.9
G158.0	7.9	8.8	8.2	9.4	9.5	9.1	10.0	10.4	10.0	10.8
G159.0	9.1	8.5	8.5	9.6	9.3	9.9	10.2	10.6	10.0	10.8
G160.0	8.4	9.2	9.5	9.6	9.5	9.4	9.6	10.0	10.1	10.8
G161.0	9.5	8.9	8.8	9.1	9.5	9.5	10.3	10.0	11.1	10.9
G162.0	9.7	9.5	8.8	10.0	10.0	9.6	10.1	10.8	10.3	11.0
G163.0	9.1	9.4	9.1	10.2	9.9	10.4	10.6	10.2	11.3	11.0
G164.0	10.2	9.6	10.3	10.2	10.1	10.4	10.2	10.2	10.6	11.1
G165.0	10.3	9.9	10.4	10.3	10.1	10.9	10.3	10.4	11.4	11.3
G166.0	9.7	10.1	10.6	10.6	10.3	11.0	10.4	11.1	11.5	11.7
G167.0	10.8	10.3	10.8	10.7	10.8	11.0	10.7	11.4	11.7	11.6
G168.0	10.2	10.6	10.1	10.6	10.7	10.6	10.8	11.5	10.9	11.5
G169.0	10.4	10.7	10.3	10.9	10.9	11.3	11.3	11.7	11.0	11.5
G170.0	10.6	10.9	10.6	11.0	10.9	10.9	11.1	11.0	11.9	11.6
G171.0	10.8	11.3	11.7	11.3	11.4	11.6	11.5	11.1	11.9	11.6
G172.0	11.9	11.5	11.8	11.6	11.5	11.1	11.5	11.5	11.5	11.7
G173.0	12.2	11.5	11.1	11.7	11.8	11.9	11.6	12.1	12.1	11.9
G174.0	11.5	12.1	12.3	11.5	11.8	12.1	11.9	11.6	11.7	11.9
G175.0	12.6	11.8	11.6	11.6	12.1	12.2	12.1	11.8	12.3	12.4
G176.0	12.8	12.5	12.6	11.7	11.9	11.7	12.3	12.5	12.4	12.6
G177.0	13.1	12.3	12.1	12.9	12.5	11.9	12.2	12.1	12.2	12.2
G178.0	12.3	12.9	12.9	13.0	12.8	12.1	12.3	12.2	12.5	12.3
G179.0	13.6	12.6	13.1	12.4	12.3	12.2	12.6	13.0	12.6	12.4
G180.0	12.9	13.0	13.1	12.8	13.2	12.5	12.8	12.3	12.5	12.4

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G0.0	1801.8	1801.4	1802.4							
G1.0	1809.3	1805.0	1802.2							
G2.0	1814.2	1806.6	1801.5							
G3.0	1820.5	1808.4	1800.6							
G4.0	1826.3	1811.5	1799.0							
G5.0	1830.6	1813.1	1798.2							
G6.0	1836.7	1815.9	1796.8							
G7.0	1840.7	1817.1	1795.6							
G8.0	1846.8	1819.6	1794.3							
G9.0	1853.6	1822.1	1793.2							
G10.0	1858.7	1825.1	1792.5							
G11.0	1863.5	1826.3	1791.2							
G12.0	1870.1	1829.7	1790.0							
G13.0	1875.8	1832.0	1788.9							
G14.0	1880.6	1834.7	1787.7							
G15.0	1884.9	1836.4	1787.6							
G16.0	1887.8	1838.8	1787.7							
G17.0	1889.8	1837.8	1785.7							
G18.0	1891.3	1839.1	1783.2							
G19.0	1890.8	1836.7	1781.1							
G20.0	1890.5	1833.8	1777.2							
G21.0	1891.5	1832.4	1772.5							
G22.0	1890.4	1830.1	1766.8							
G23.0	1890.8	1826.7	1761.0							
G24.0	1891.4	1824.1	1755.7							
G25.0	1892.1	1821.9	1750.9							
G26.0	1894.8	1821.3	1744.4							
G27.0	1897.3	1820.5	1739.7							
G28.0	1900.1	1821.8	1735.9							
G29.0	1903.9	1821.7	1732.5							
G30.0	1907.2	1823.7	1729.3							
G31.0	1911.5	1825.4	1727.0							
G32.0	1916.8	1827.7	1724.9							
G33.0	1920.8	1829.9	1724.6							
G34.0	1925.4	1831.7	1722.6							
G35.0	1930.2	1834.0	1721.6							
G36.0	1935.8	1837.0	1720.3							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G37.0	1942.6	1842.2	1720.7							
G38.0	1952.4	1849.8	1722.6							
G39.0	1964.2	1860.8	1725.1							
G40.0	1978.9	1874.7	1732.7							
G41.0	1994.3	1890.1	1744.1							
G42.0	2008.8	1906.0	1757.0							
G43.0	2029.0	1926.7	1772.5							
G44.0	2046.2	1945.6	1790.5							
G45.0	2064.0	1965.1	1808.8							
G46.0	2077.3	1982.1	1827.3							
G47.0	2092.8	2001.5	1844.1							
G48.0	2117.4	2026.2	1859.4							
G49.0	2152.9	2063.7	1876.0							
G50.0	2197.8	2109.4	1904.5							
G51.0	2245.5	2161.5	1939.9							
G52.0	2301.4	2220.2	1983.6							
G53.0	2356.5	2279.6	2035.6							
G54.0	2414.1	2343.8	2091.4							
G55.0	2479.0	2406.2	2150.7							
G56.0	2545.1	2469.2	2211.2							
G57.0	2612.8	2538.1	2270.7							
G58.0	2690.9	2612.9	2333.5							
G59.0	2782.1	2695.0	2401.1							
G60.0	2890.4	2786.9	2472.4							
G61.0	3010.3	2898.0	2553.1							
G62.0	3143.2	3015.3	2640.7							
G63.0	3271.5	3127.8	2737.8							
G64.0	3392.5	3225.7	2837.5							
G65.0	3485.1	3307.0	2935.1							
G66.0	3556.6	3370.7	3018.6							
G67.0	3596.1	3410.5	3090.8							
G68.0	3591.9	3409.0	3150.4							
G69.0	3552.3	3366.9	3189.9							
G70.0	3456.9	3282.8	3192.4							
G71.0	3302.7	3128.4	3167.8							
G72.0	3080.4	2914.8	3100.5							
G73.0	2786.1	2613.3	2971.3							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G74.0	2354.0	2196.9	2788.9							
G75.0	1872.9	1726.8	2528.1							
G76.0	1345.4	1222.3	2176.7							
G77.0	870.0	775.9	1732.4							
G78.0	496.4	449.0	1252.6							
G79.0	291.2	258.9	807.1							
G80.0	184.1	164.0	477.0							
G81.0	135.1	118.7	270.5							
G82.0	102.7	90.6	168.9							
G83.0	80.2	70.9	120.4							
G84.0	65.1	59.0	91.3							
G85.0	54.1	50.3	72.4							
G86.0	45.7	43.7	59.3							
G87.0	38.9	35.6	49.5							
G88.0	32.3	29.2	42.5							
G89.0	25.8	24.6	33.8							
G90.0	21.7	21.1	26.5							
G91.0	19.4	19.5	23.0							
G92.0	17.5	18.0	21.3							
G93.0	16.1	16.9	19.5							
G94.0	14.1	15.8	19.1							
G95.0	13.7	14.3	18.3							
G96.0	11.9	13.0	17.6							
G97.0	11.0	11.7	15.8							
G98.0	11.5	11.3	14.1							
G99.0	11.4	11.5	13.3							
G100.0	10.4	11.7	13.3							
G101.0	11.1	11.4	13.7							
G102.0	11.1	11.4	12.9							
G103.0	10.1	11.5	12.9							
G104.0	10.2	10.6	13.9							
G105.0	9.5	10.4	12.6							
G106.0	9.9	10.8	12.4							
G107.0	9.9	10.6	13.2							
G108.0	9.7	10.6	12.9							
G109.0	9.7	10.6	12.2							
G110.0	9.1	10.2	12.9							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	8.8	10.0	12.8							
G112.0	9.6	10.4	12.8							
G113.0	9.1	10.0	13.1							
G114.0	9.6	10.6	12.9							
G115.0	9.6	10.4	12.8							
G116.0	9.7	10.6	12.9							
G117.0	9.2	10.6	13.0							
G118.0	9.4	10.1	13.0							
G119.0	10.0	10.8	12.1							
G120.0	9.5	10.6	13.3							
G121.0	10.2	10.4	13.3							
G122.0	9.6	10.9	13.6							
G123.0	10.2	10.7	13.5							
G124.0	10.2	11.1	12.8							
G125.0	9.6	10.7	13.0							
G126.0	9.9	11.3	13.1							
G127.0	10.4	11.3	14.1							
G128.0	10.0	11.0	13.2							
G129.0	10.8	11.1	14.1							
G130.0	11.0	11.3	13.5							
G131.0	10.9	11.7	13.7							
G132.0	11.0	11.8	13.6							
G133.0	10.7	11.7	14.5							
G134.0	10.8	12.1	13.7							
G135.0	11.5	11.9	13.9							
G136.0	11.6	12.1	15.0							
G137.0	11.0	12.3	15.2							
G138.0	11.0	12.4	14.3							
G139.0	11.1	12.3	14.3							
G140.0	11.1	12.4	14.4							
G141.0	11.7	12.3	14.4							
G142.0	11.1	12.3	14.7							
G143.0	11.7	12.3	14.7							
G144.0	11.1	12.2	14.9							
G145.0	11.1	12.2	15.4							
G146.0	11.6	12.1	15.5							
G147.0	11.0	12.1	14.5							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	11.6	11.9	14.6							
G149.0	10.9	11.8	15.3							
G150.0	11.6	11.7	15.4							
G151.0	11.5	11.9	14.5							
G152.0	11.5	11.9	15.2							
G153.0	11.5	11.6	15.2							
G154.0	11.5	11.6	15.1							
G155.0	10.9	11.6	14.9							
G156.0	10.9	11.6	15.0							
G157.0	11.0	11.6	14.9							
G158.0	11.6	12.1	15.0							
G159.0	11.7	12.1	14.0							
G160.0	11.7	11.5	13.9							
G161.0	11.3	12.2	13.9							
G162.0	11.3	11.6	13.8							
G163.0	11.3	11.6	14.6							
G164.0	11.4	12.2	14.6							
G165.0	11.8	12.3	14.6							
G166.0	11.8	11.6	13.7							
G167.0	11.9	11.7	14.6							
G168.0	11.9	11.7	13.9							
G169.0	11.7	12.5	14.6							
G170.0	11.8	11.7	14.5							
G171.0	12.1	12.6	14.6							
G172.0	12.1	12.8	13.9							
G173.0	12.2	12.9	14.0							
G174.0	12.2	12.1	13.8							
G175.0	12.3	12.9	14.6							
G176.0	12.4	12.9	13.9							
G177.0	12.4	12.1	13.9							
G178.0	12.5	12.2	14.6							
G179.0	12.4	13.1	14.5							
G180.0	12.4	12.4	13.9							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector: