

Report No.:

Test Time: 2018-06-05 13:24

Luminaire Property

Luminaire Manufacturer: SVETOLUB

Luminaire Description: SVETOLUB-STREET-2155-70-10000/60

Luminous Length (mm): 230

Luminous Width (mm): 180

Luminous Height (mm): 110

Voltage: 229.8 V

Current: 0.304 A

Power: 69.15 W

Power Factor: 0.989

Photometric Results

CIE Class: Direct

Measurement Flux: 9738.1 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(50%): H57

Vertical Diffuse Angle(50%): V58

Luminaire Efficacy Rating (LER): 141

Max. Intensity: 7988.38 cd

Total Rated Lamp Lumens: 9738.1 lm


Efficiency: 100%

Upward Ratio: 1%


Central Intensity: 7967.5 cd

Pos of Max. Intensity: H180 V3

Picture Of Luminaire



Luminous Intensity Distribution Curve

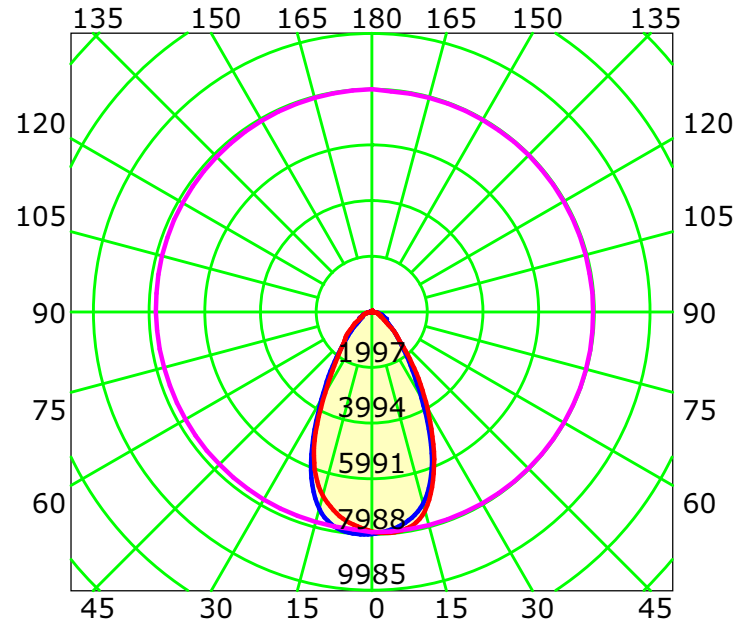

Unit: cd

— C0-C180 — C90-C270 — G3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:


Luminous Intensity Distribution Curve

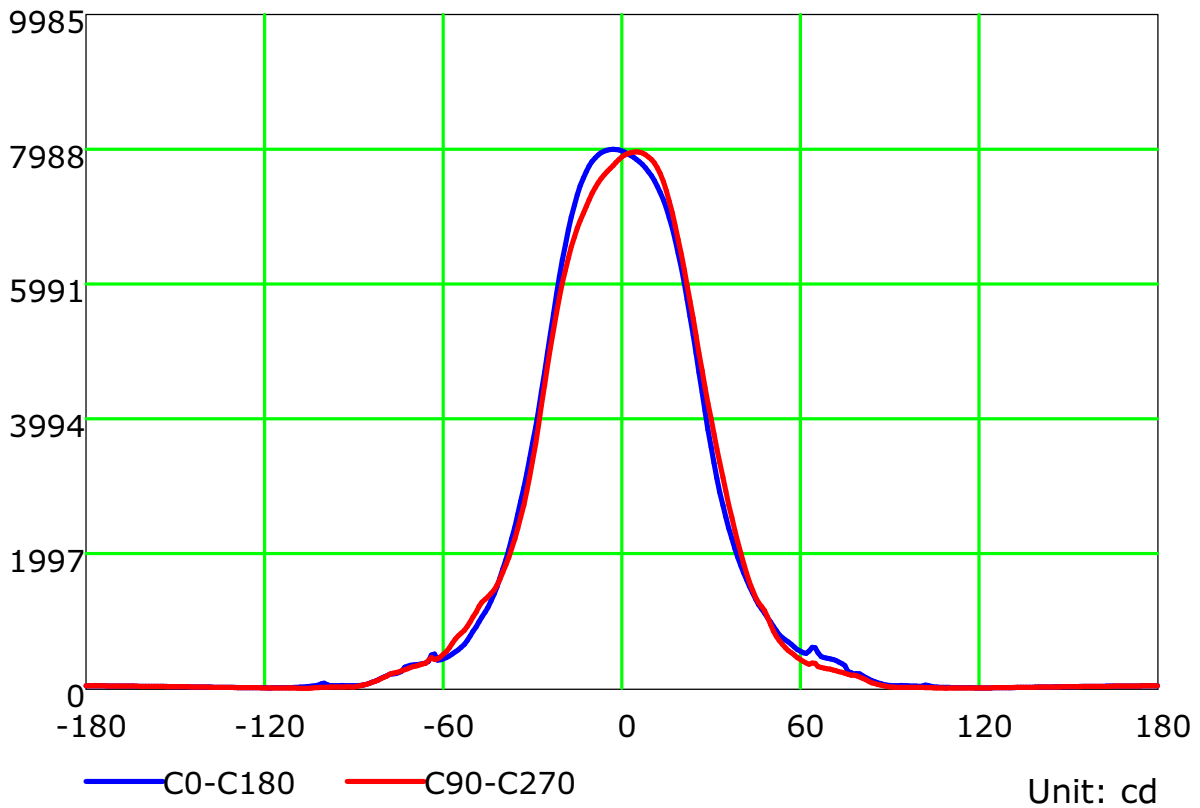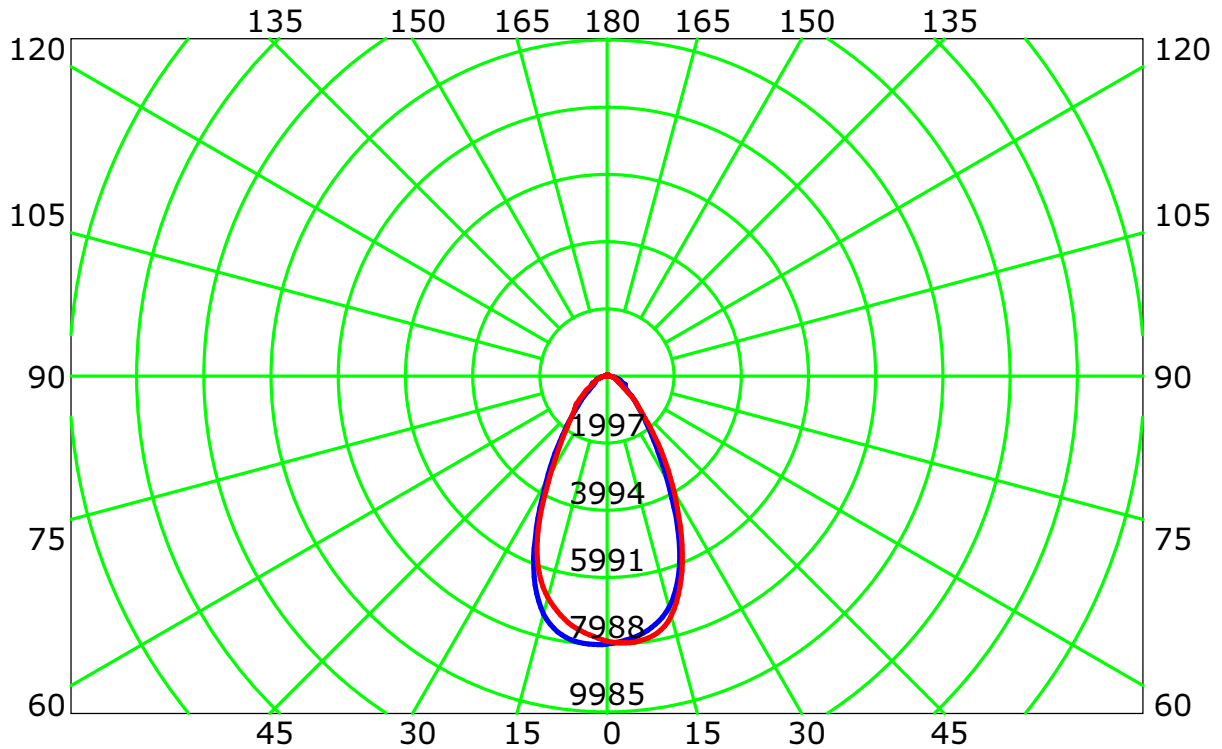

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

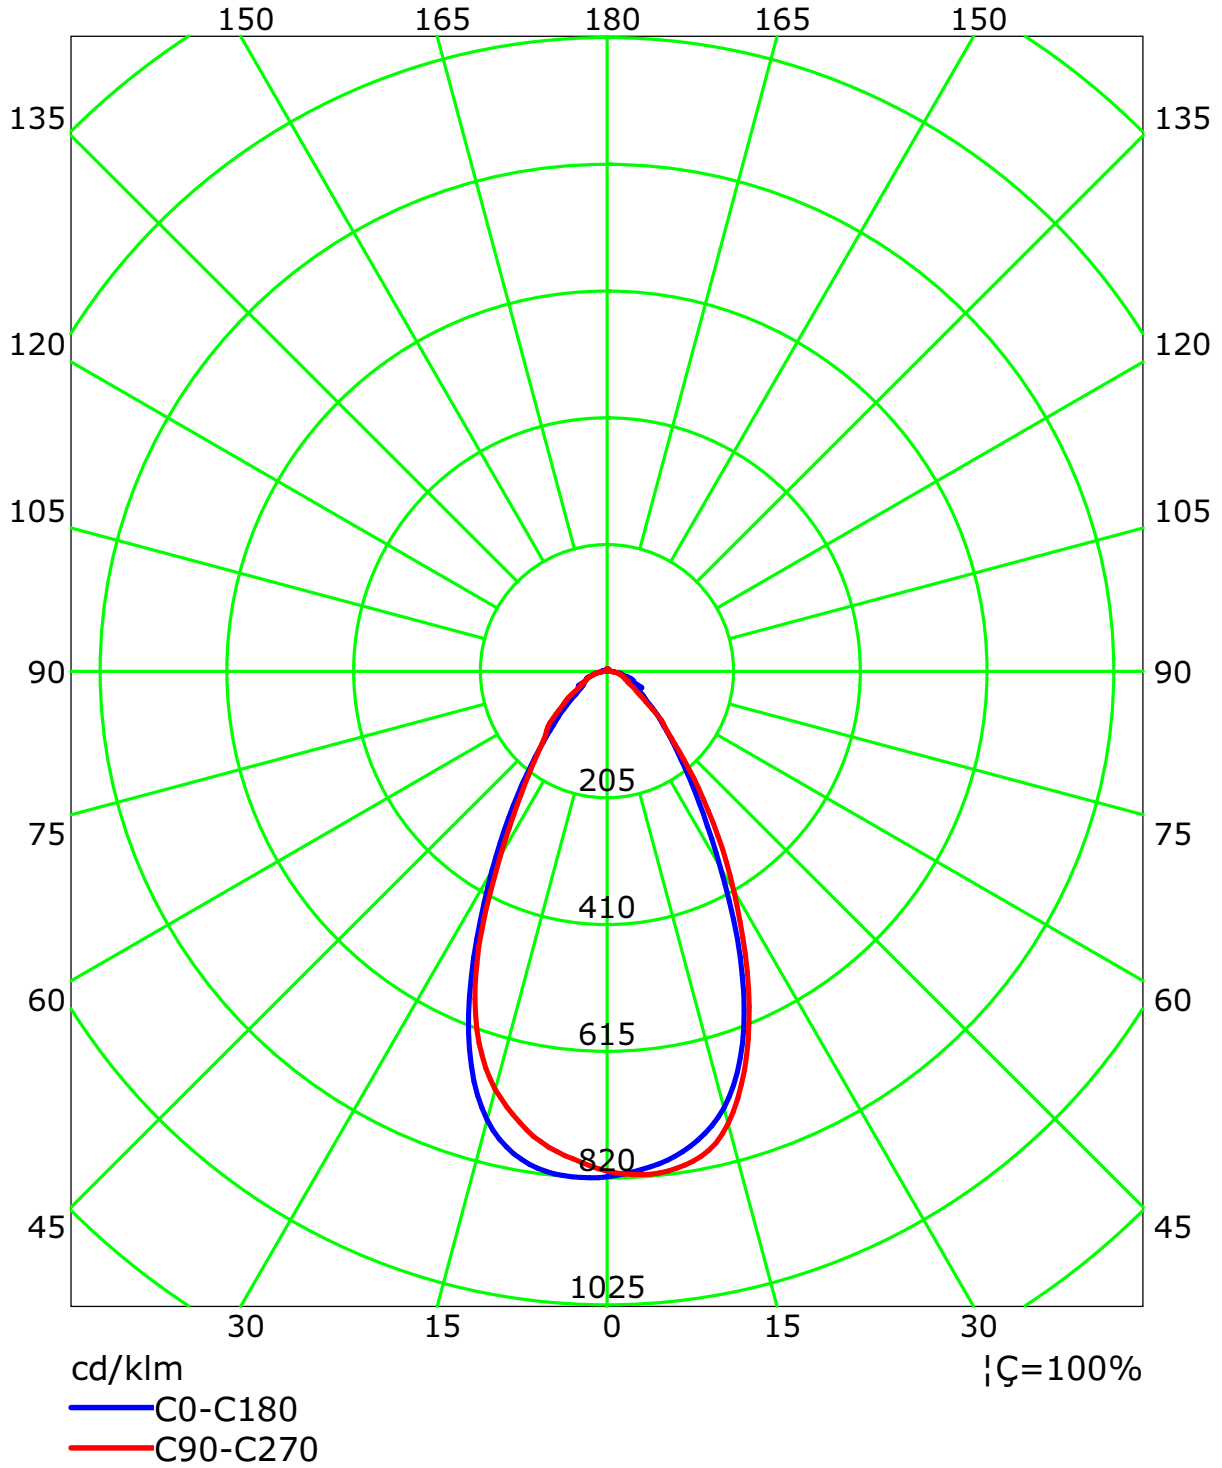


C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	111	107	104	101	108	105	102	99	101	98	96	96	95	93	93	91	90	88
2	104	97	92	87	101	95	90	86	92	88	84	88	85	82	85	83	80	78
3	97	89	82	77	94	87	81	76	84	79	75	81	77	74	79	75	72	70
4	91	81	74	69	88	80	73	68	77	72	67	75	70	66	73	69	65	64
5	85	75	68	62	83	74	67	62	72	66	61	70	65	60	68	63	60	58
6	80	69	62	57	78	68	61	56	66	60	56	65	60	55	63	59	55	53
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	59	54	51	49
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	45
9	67	56	49	45	66	56	49	44	54	48	44	53	48	44	52	47	44	42
10	64	53	46	42	63	52	46	41	51	45	41	50	45	41	49	44	41	39


Spacing Criteria (0-180): 0.89
 Spacing Criteria (90-270): 0.90
 Spacing Criteria (Diagonal): 0.93

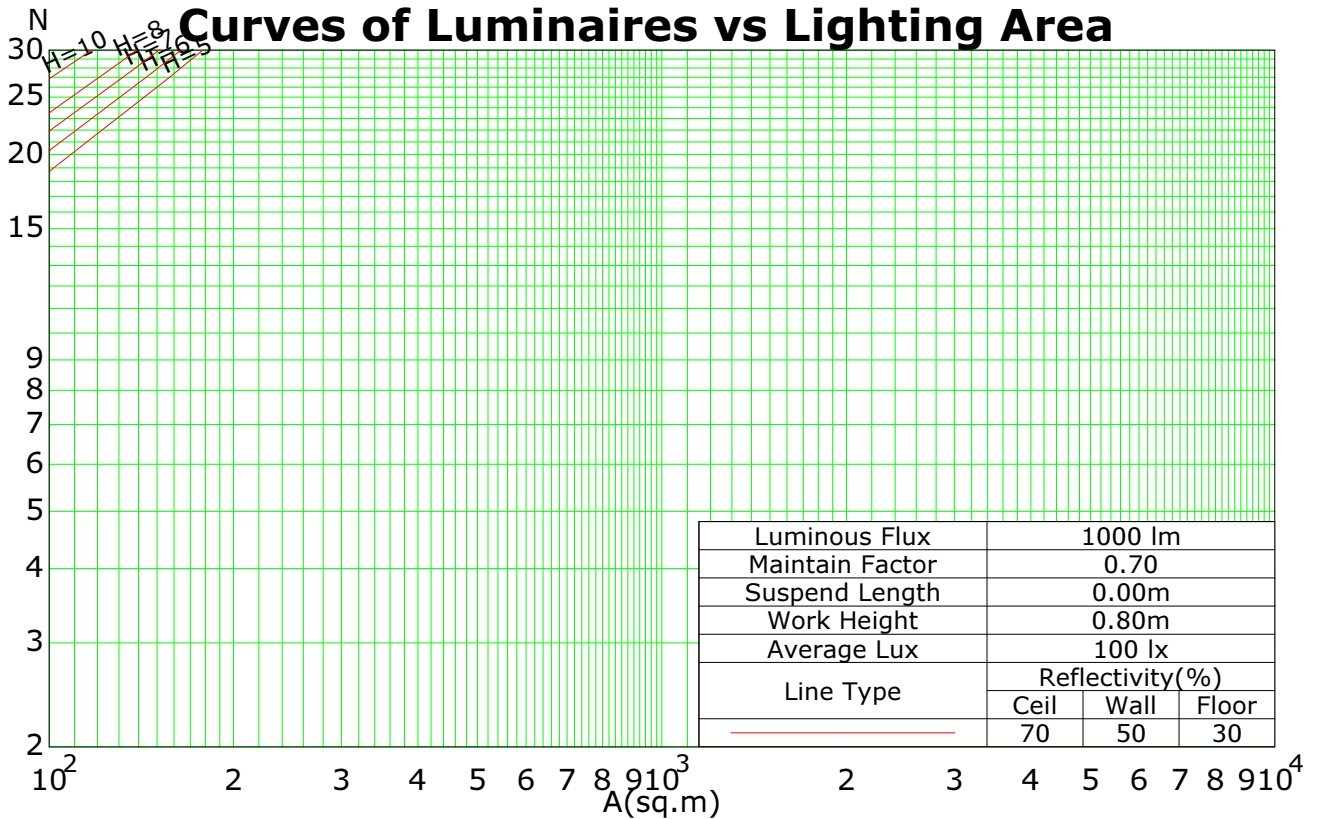

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

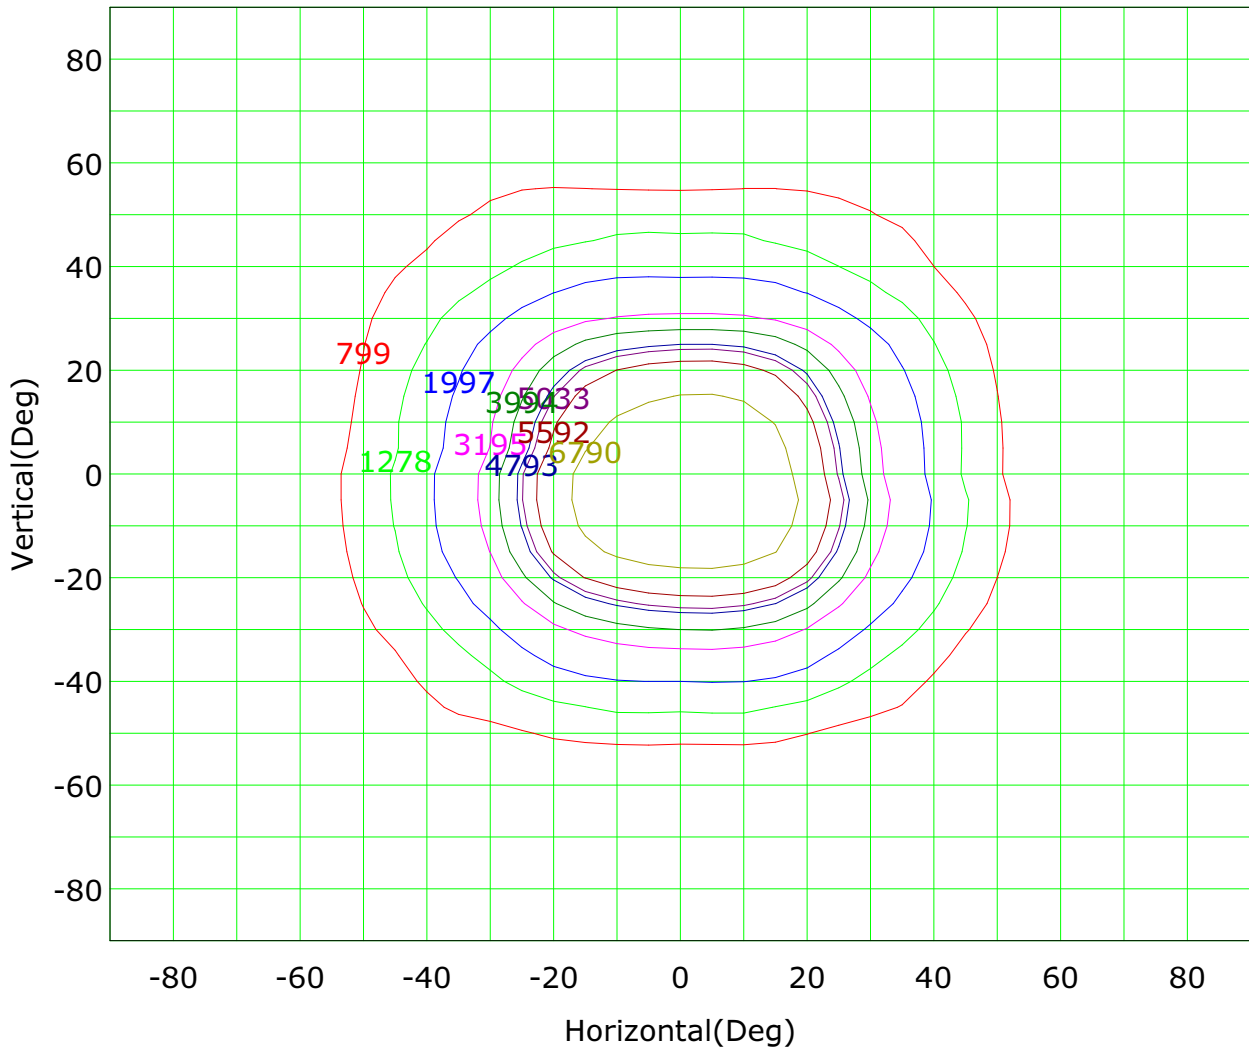

Imax (100%): 7988 cd

- | | |
|-------------------|-------------------|
| — (10%): 799 cd | — (16%): 1278 cd |
| — (25%): 1997 cd | — (40%): 3195 cd |
| — (63%): 5033 cd | — (100%): 7988 cd |
| — (50%): 3994 cd | — (60%): 4793 cd |
| — (70%): 5592 cd | — (85%): 6790 cd |

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Isocandela (sphere)

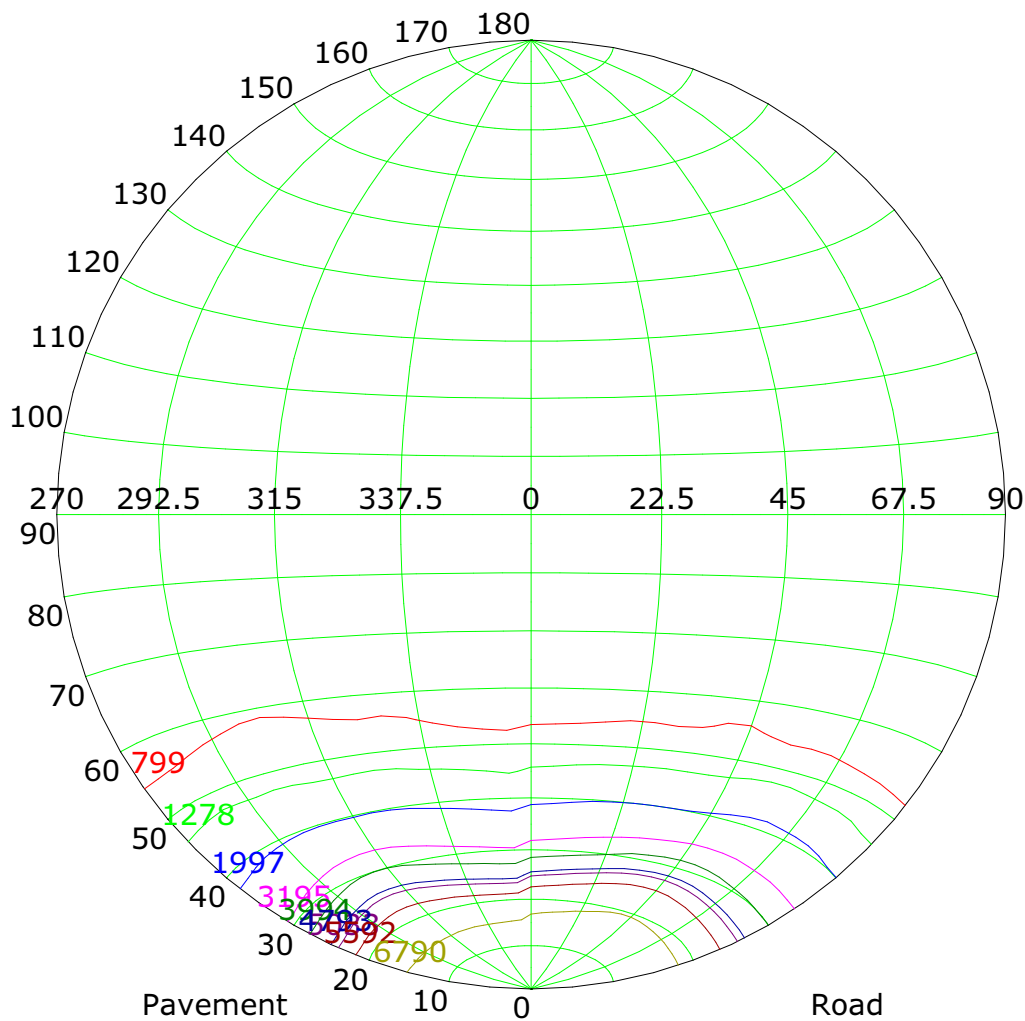


Imax (100%): 7988 cd

- | | |
|-------------------|-------------------|
| — (10%): 799 cd | — (16%): 1278 cd |
| — (25%): 1997 cd | — (40%): 3195 cd |
| — (63%): 5033 cd | — (100%): 7988 cd |
| — (50%): 3994 cd | — (60%): 4793 cd |
| — (70%): 5592 cd | — (85%): 6790 cd |

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

IsoLux Plot

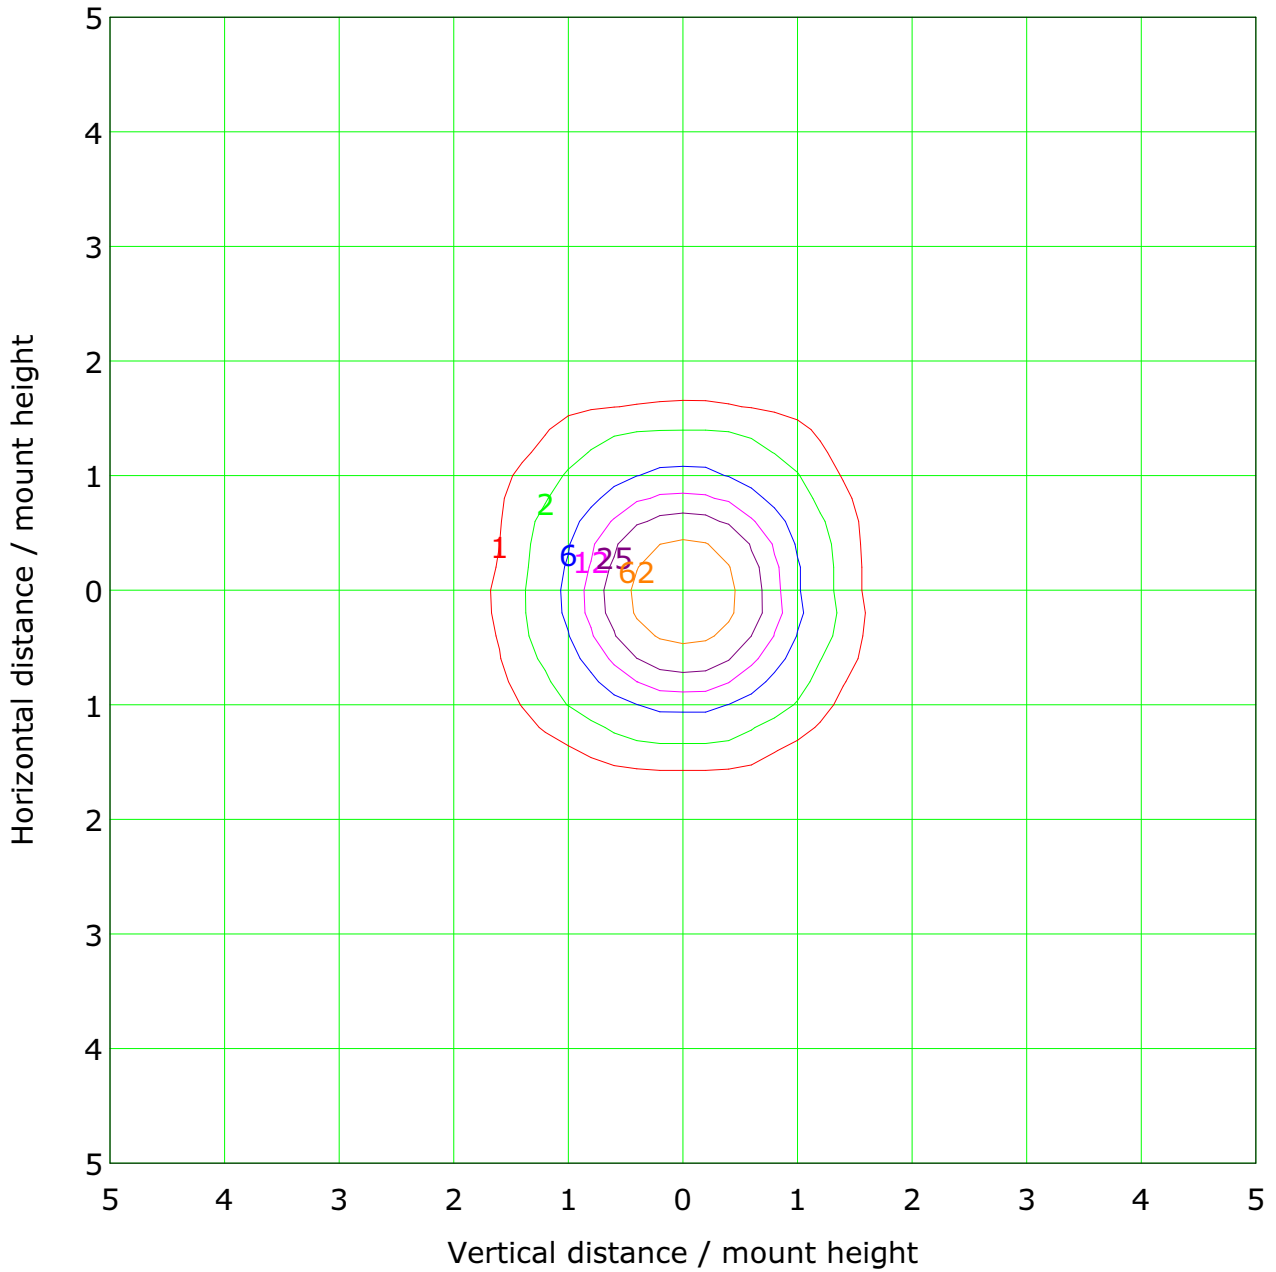


Mounting Height: 8.0m		Max Lux(100%): 124.6 lx	
<ul style="list-style-type: none"> — (1%): 1.2 lx — (5%): 6.2 lx — (20%): 24.9 lx — (100%): 124.6 lx — (300%): 373.9 lx 	<ul style="list-style-type: none"> — (2%): 2.5 lx — (10%): 12.5 lx — (50%): 62.3 lx — (200%): 249.3 lx — (500%): 623.2 lx 		

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Roadway CU Curve

Efficiency(%)

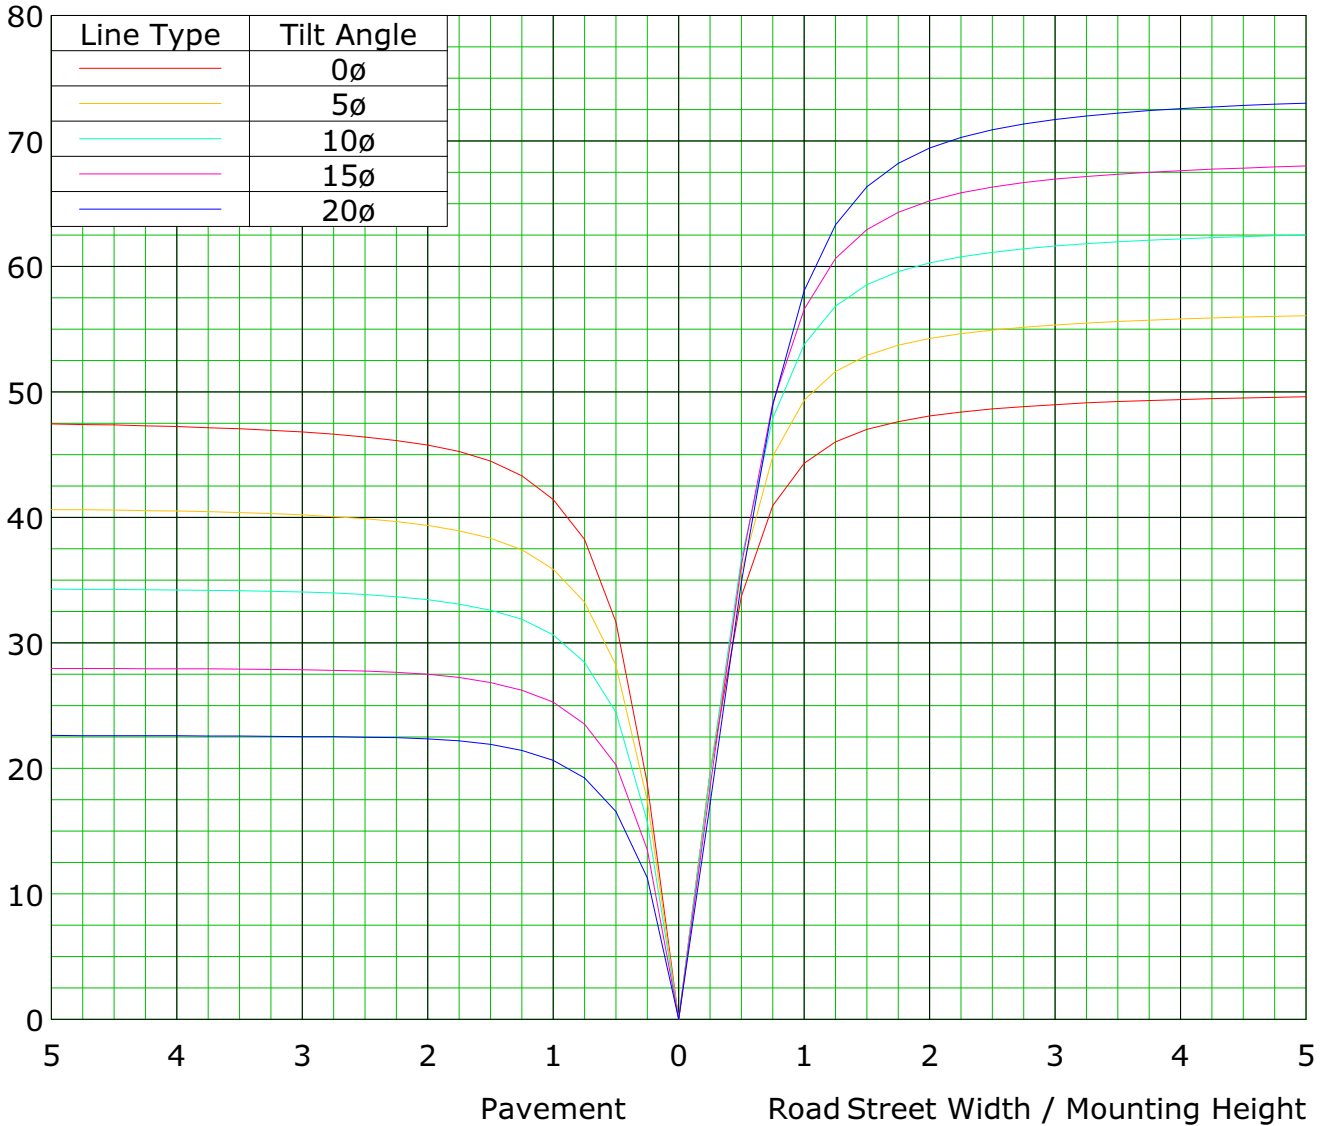

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

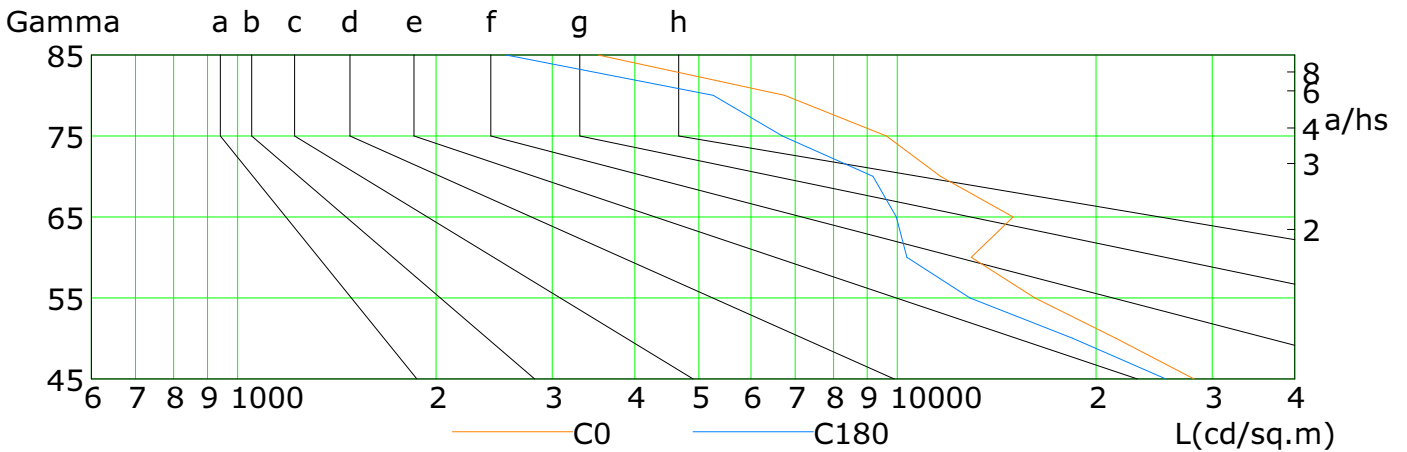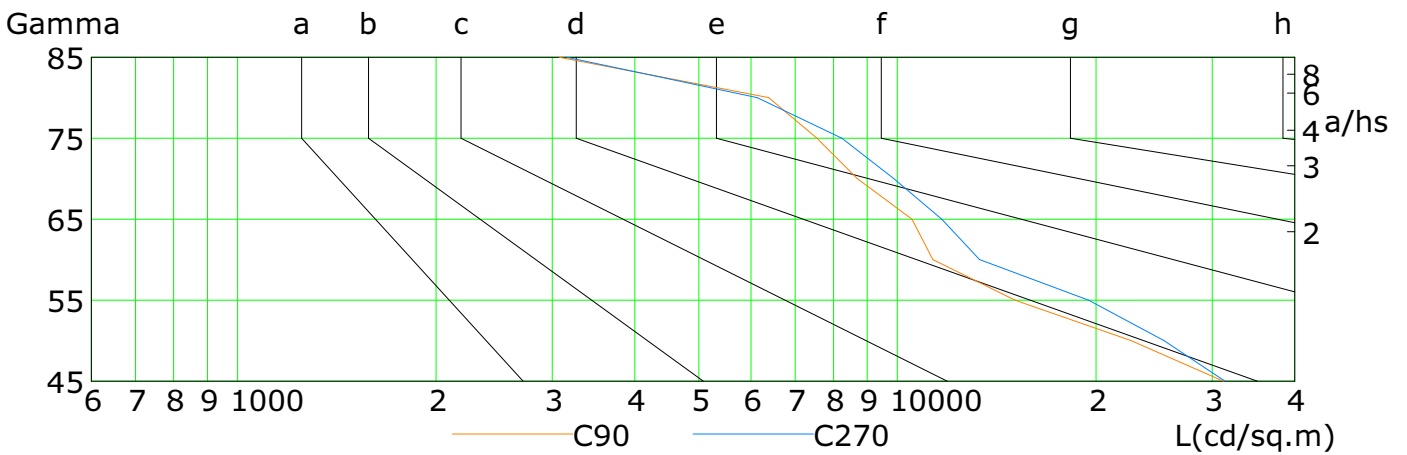

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	28147	21439	16168	12937	14984	11627	9622	6749	3519
C90	31213	22601	15076	11310	10526	8695	7549	6381	3072
C180	25511	18437	12886	10340	9957	9186	6692	5261	2553
C270	31390	25350	19499	13314	11672	9870	8241	6129	3152

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Illuminance at a Distance

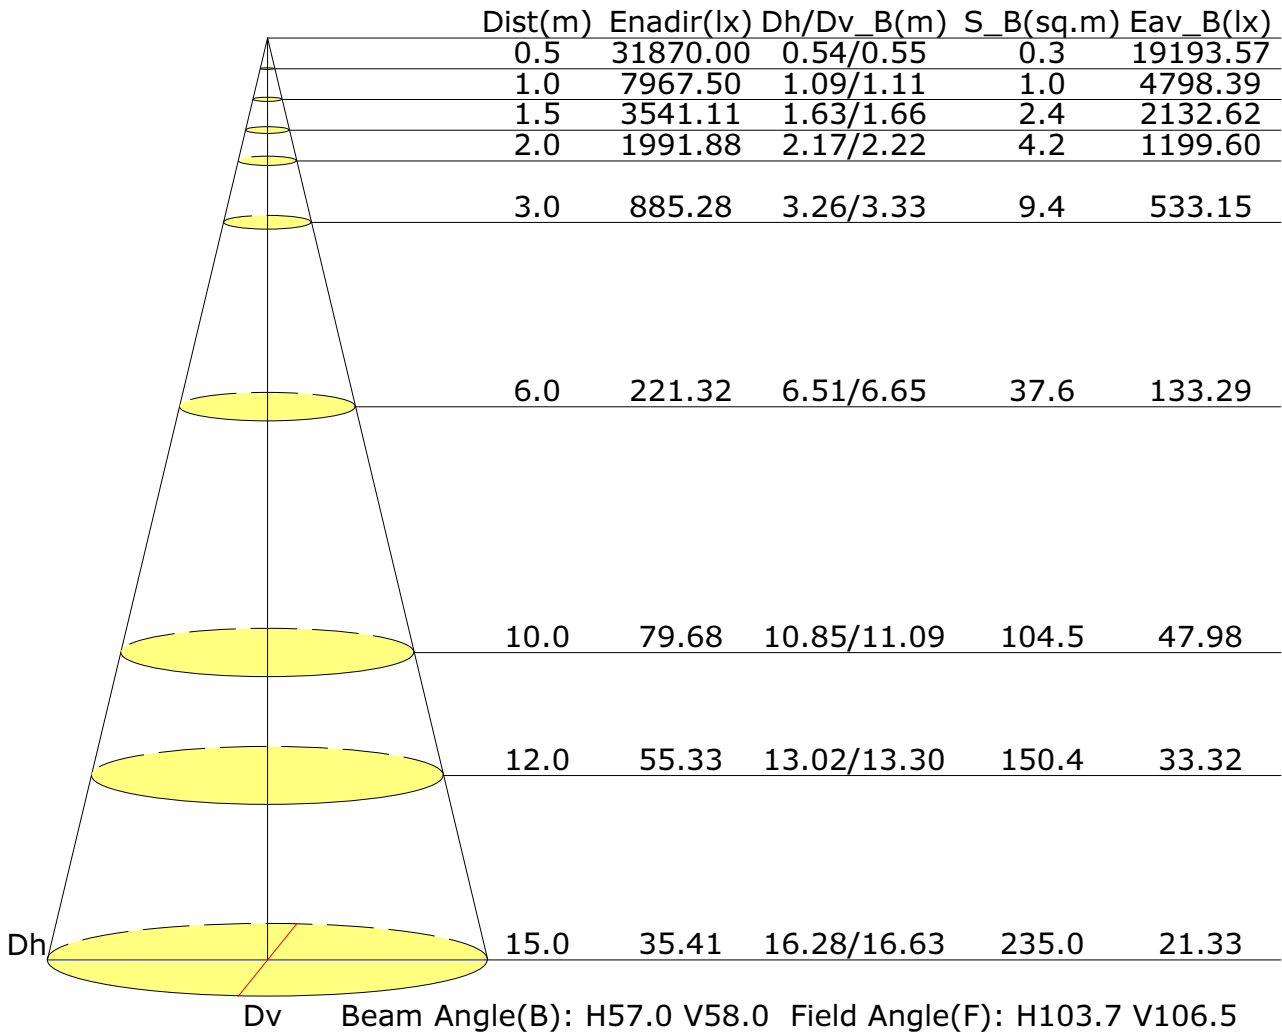

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Vertical IsoLux Plot

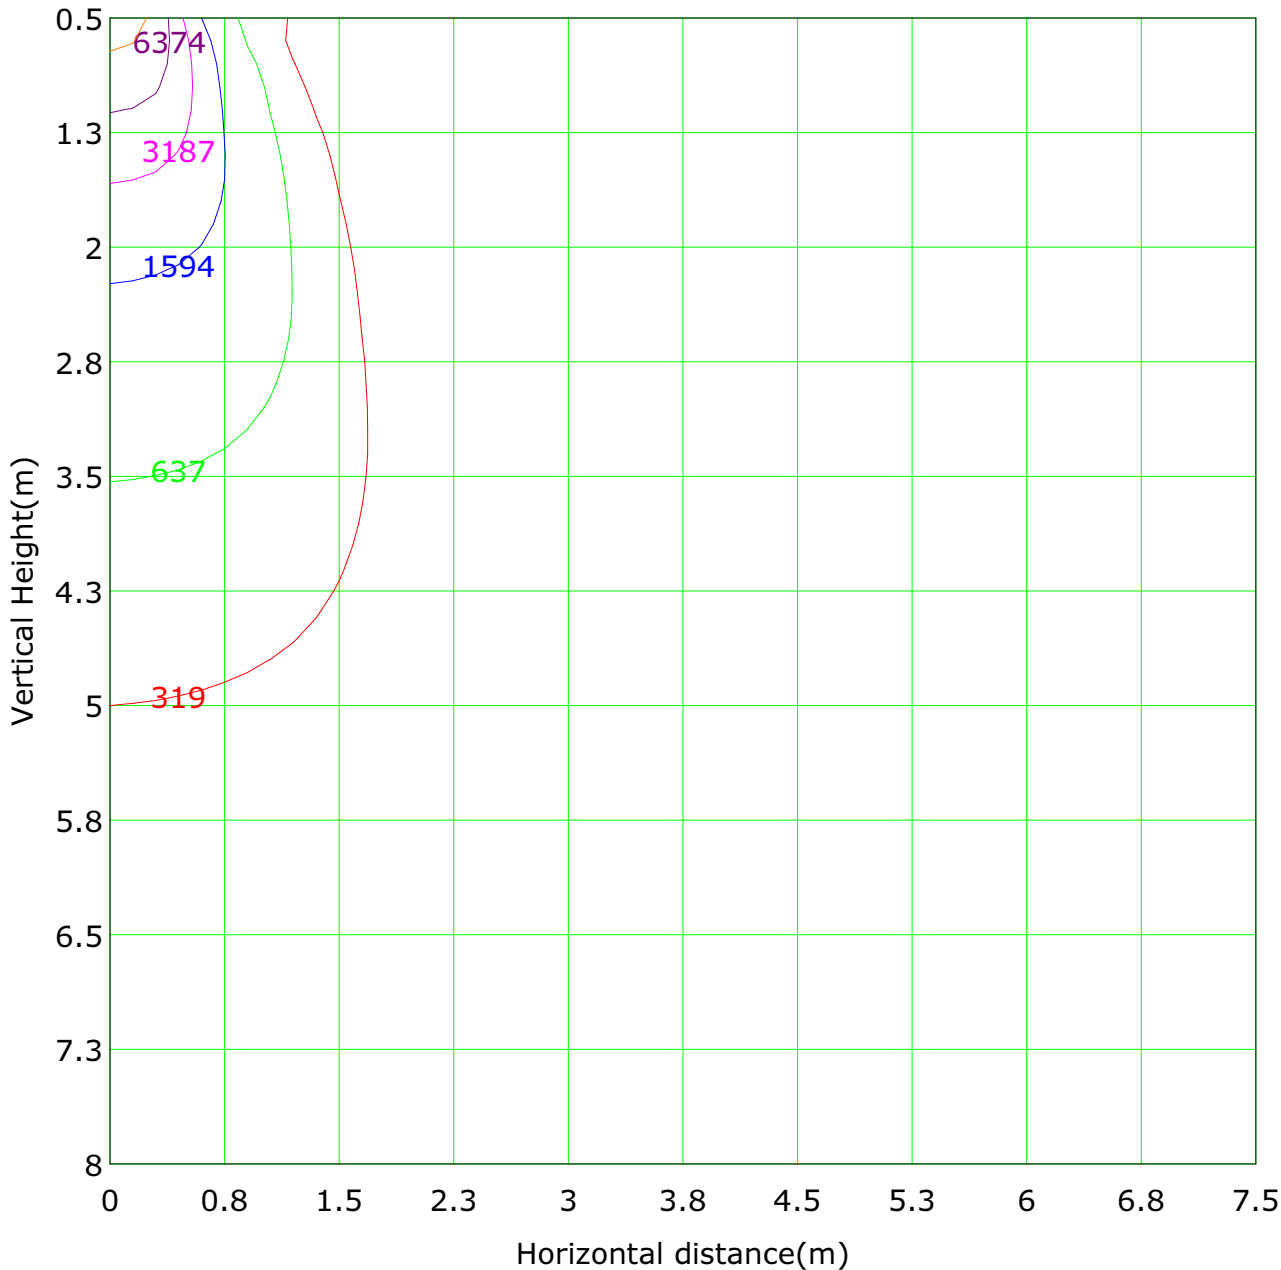


Lowest(m): 0.5m Highest(m): 8.0m Max Lux: 31870.0 lx	
— (1%): 318.7 lx	— (2%): 637.4 lx
— (5%): 1593.5 lx	— (10%): 3187.0 lx
— (20%): 6374.0 lx	— (50%): 15935.0 lx
— (100%): 31870.0 lx	— (200%): 63740.0 lx
— (300%): 95610.0 lx	— (500%): 159350.0 lx

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

The Average Illuminance Effective Figure

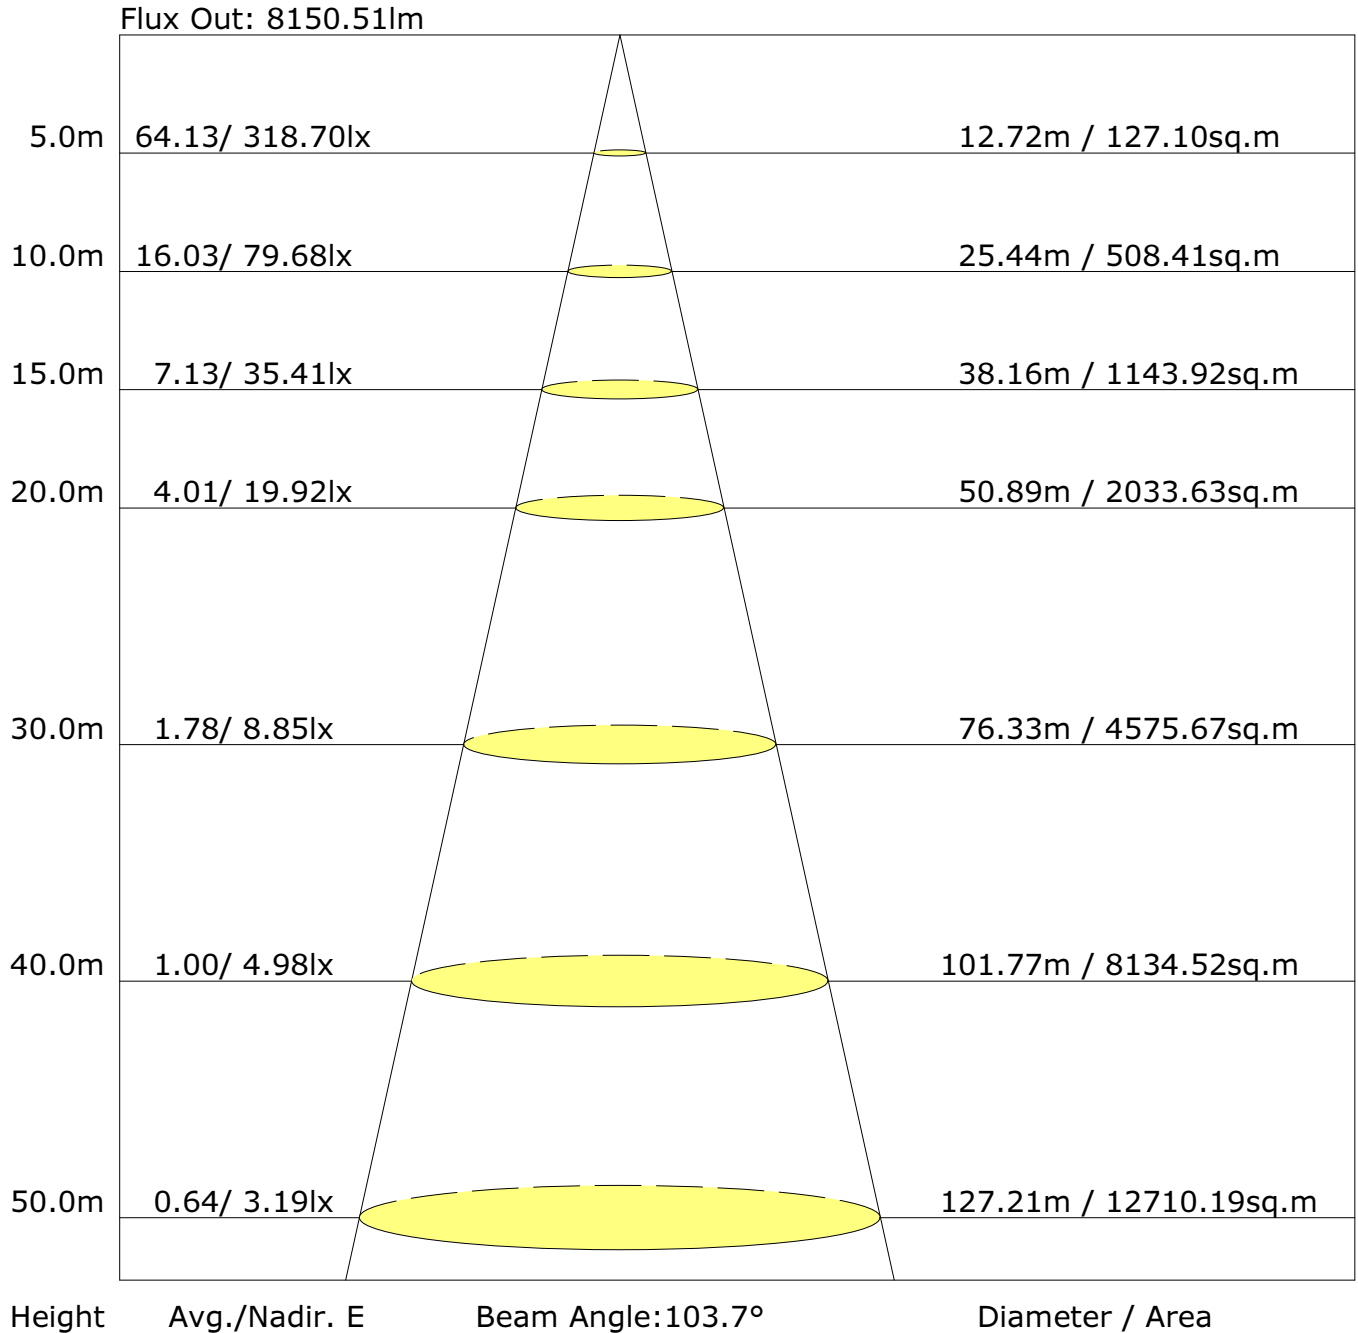

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	10.8	12.1	11.2	12.5	12.8	9.7	11.0	10.1	11.3	11.7
3H	12.6	13.7	13.0	14.1	14.5	10.8	11.9	11.2	12.3	12.7
4H	13.2	14.2	13.6	14.6	15.0	11.3	12.3	11.7	12.7	13.1
6H	13.5	14.5	14.0	14.9	15.3	11.7	12.7	12.1	13.1	13.5
8H	13.6	14.5	14.1	15.0	15.4	11.8	12.7	12.2	13.1	13.6
12H	13.7	14.5	14.1	14.9	15.4	11.8	12.7	12.3	13.1	13.6
X=4H Y=2H	11.4	12.5	11.8	12.8	13.3	10.2	11.3	10.6	11.7	12.1
3H	13.5	14.4	13.9	14.8	15.2	11.7	12.6	12.2	13.0	13.5
4H	14.4	15.2	14.8	15.6	16.1	12.5	13.3	13.0	13.8	14.2
6H	14.9	15.6	15.4	16.0	16.5	13.2	13.8	13.6	14.3	14.8
8H	15.0	15.6	15.5	16.1	16.6	13.3	13.9	13.8	14.4	14.9
12H	15.1	15.6	15.6	16.1	16.6	13.4	13.9	13.9	14.4	14.9
X=8H Y=4H	14.6	15.2	15.0	15.7	16.2	12.9	13.5	13.4	14.0	14.5
6H	15.2	15.7	15.7	16.3	16.8	13.7	14.3	14.3	14.8	15.3
8H	15.4	15.9	16.0	16.4	16.9	14.0	14.5	14.6	15.0	15.5
12H	15.5	16.0	16.1	16.5	17.1	14.1	14.6	14.7	15.1	15.7
X=12H Y=4H	14.6	15.1	15.1	15.6	16.1	13.0	13.5	13.5	14.0	14.5
6H	15.3	15.7	15.8	16.2	16.8	13.8	14.3	14.4	14.8	15.4
8H	15.5	15.9	16.0	16.4	17.0	14.1	14.5	14.7	15.1	15.7

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

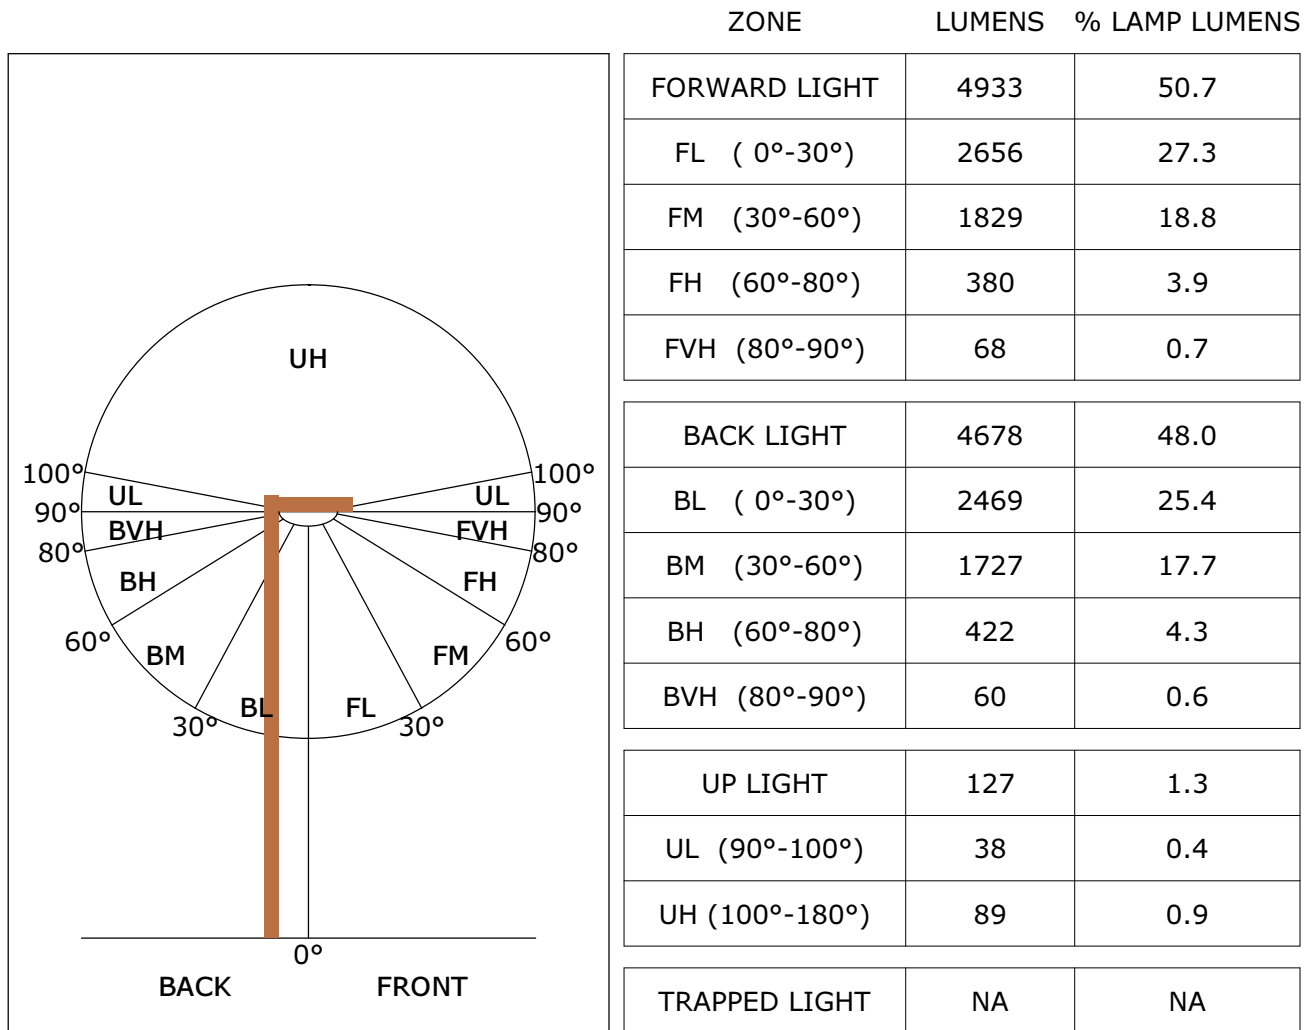


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U2 G1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

LCS Graph

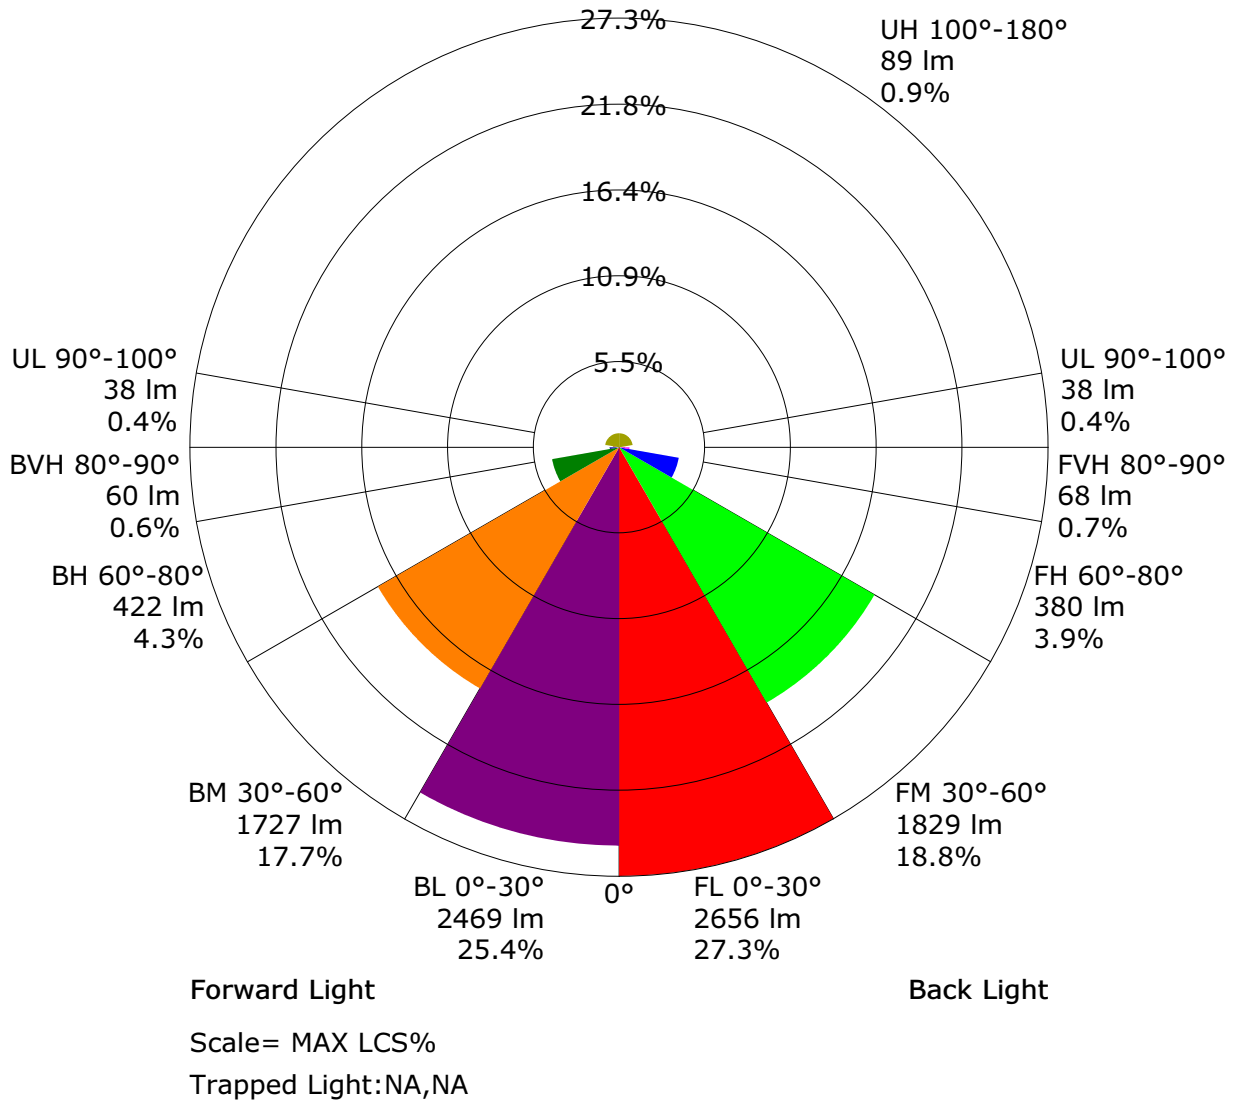

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	7906.2	7.6	7.6	0.08	0.08
1.0-2.0	7899.9	22.7	30.2	0.23	0.31
2.0-3.0	7888.2	37.7	68.0	0.39	0.70
3.0-4.0	7871.9	52.7	120.7	0.54	1.24
4.0-5.0	7852.1	67.6	188.2	0.69	1.93
5.0-6.0	7828.3	82.3	270.5	0.84	2.78
6.0-7.0	7799.3	96.8	367.3	0.99	3.77
7.0-8.0	7763.4	111.1	478.5	1.14	4.91
8.0-9.0	7719.4	125.1	603.6	1.28	6.20
9.0-10.0	7666.6	138.8	742.3	1.42	7.62
10.0-11.0	7604.5	152.0	894.3	1.56	9.18
11.0-12.0	7532.6	164.7	1059.0	1.69	10.87
12.0-13.0	7450.2	176.8	1235.8	1.82	12.69
13.0-14.0	7356.0	188.3	1424.1	1.93	14.62
14.0-15.0	7249.3	199.0	1623.2	2.04	16.67
15.0-16.0	7127.8	208.9	1832.1	2.15	18.81
16.0-17.0	6990.6	217.7	2049.8	2.24	21.05
17.0-18.0	6838.2	225.5	2275.3	2.32	23.36
18.0-19.0	6670.9	232.1	2507.4	2.38	25.75
19.0-20.0	6487.9	237.5	2744.9	2.44	28.19
20.0-21.0	6290.3	241.6	2986.5	2.48	30.67
21.0-22.0	6079.1	244.3	3230.8	2.51	33.18
22.0-23.0	5854.6	245.7	3476.5	2.52	35.70
23.0-24.0	5618.3	245.7	3722.2	2.52	38.22
24.0-25.0	5373.6	244.4	3966.5	2.51	40.73
25.0-26.0	5120.2	241.7	4208.2	2.48	43.21
26.0-27.0	4859.8	237.8	4446.0	2.44	45.66
27.0-28.0	4595.8	232.7	4678.7	2.39	48.05
28.0-29.0	4332.4	226.7	4905.4	2.33	50.37
29.0-30.0	4074.6	220.0	5125.5	2.26	52.63
30.0-31.0	3825.3	212.9	5338.4	2.19	54.82
31.0-32.0	3584.7	205.4	5543.8	2.11	56.93
32.0-33.0	3352.6	197.5	5741.3	2.03	58.96
33.0-34.0	3132.3	189.6	5930.9	1.95	60.90
34.0-35.0	2923.4	181.6	6112.5	1.86	62.77
35.0-36.0	2725.0	173.5	6286.0	1.78	64.55

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	2538.4	165.6	6451.6	1.70	66.25
37.0-38.0	2363.6	157.8	6609.4	1.62	67.87
38.0-39.0	2200.2	150.2	6759.6	1.54	69.41
39.0-40.0	2048.7	142.9	6902.5	1.47	70.88
40.0-41.0	1907.9	135.9	7038.4	1.40	72.28
41.0-42.0	1778.0	129.2	7167.5	1.33	73.60
42.0-43.0	1658.3	122.9	7290.4	1.26	74.86
43.0-44.0	1548.6	116.9	7407.3	1.20	76.06
44.0-45.0	1447.7	111.3	7518.6	1.14	77.21
45.0-46.0	1355.7	106.0	7624.6	1.09	78.30
46.0-47.0	1271.5	101.1	7725.8	1.04	79.34
47.0-48.0	1192.4	96.4	7822.2	0.99	80.33
48.0-49.0	1117.4	91.8	7913.9	0.94	81.27
49.0-50.0	1047.4	87.3	8001.3	0.90	82.16
50.0-51.0	983.0	83.2	8084.5	0.85	83.02
51.0-52.0	924.3	79.3	8163.8	0.81	83.83
52.0-53.0	870.3	75.7	8239.5	0.78	84.61
53.0-54.0	820.4	72.3	8311.8	0.74	85.35
54.0-55.0	774.7	69.2	8381.0	0.71	86.06
55.0-56.0	732.1	66.2	8447.2	0.68	86.74
56.0-57.0	690.8	63.2	8510.3	0.65	87.39
57.0-58.0	649.7	60.1	8570.4	0.62	88.01
58.0-59.0	610.1	57.0	8627.5	0.59	88.59
59.0-60.0	573.9	54.2	8681.7	0.56	89.15
60.0-61.0	543.5	51.9	8733.6	0.53	89.68
61.0-62.0	520.1	50.1	8783.7	0.51	90.20
62.0-63.0	505.7	49.2	8832.9	0.51	90.70
63.0-64.0	498.1	48.9	8881.8	0.50	91.21
64.0-65.0	485.8	48.1	8929.8	0.49	91.70
65.0-66.0	462.4	46.1	8976.0	0.47	92.17
66.0-67.0	439.7	44.2	9020.2	0.45	92.63
67.0-68.0	425.5	43.1	9063.3	0.44	93.07
68.0-69.0	415.2	42.4	9105.7	0.43	93.51
69.0-70.0	405.1	41.6	9147.3	0.43	93.93
70.0-71.0	393.8	40.7	9188.0	0.42	94.35
71.0-72.0	380.9	39.6	9227.6	0.41	94.76

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	366.1	38.3	9265.9	0.39	95.15
73.0-74.0	349.1	36.7	9302.6	0.38	95.53
74.0-75.0	329.6	34.8	9337.4	0.36	95.89
75.0-76.0	307.8	32.7	9370.1	0.34	96.22
76.0-77.0	286.2	30.5	9400.6	0.31	96.53
77.0-78.0	269.7	28.9	9429.5	0.30	96.83
78.0-79.0	258.2	27.7	9457.2	0.28	97.12
79.0-80.0	243.9	26.3	9483.5	0.27	97.39
80.0-81.0	220.5	23.9	9507.4	0.24	97.63
81.0-82.0	191.3	20.7	9528.1	0.21	97.84
82.0-83.0	162.6	17.7	9545.8	0.18	98.03
83.0-84.0	137.9	15.0	9560.8	0.15	98.18
84.0-85.0	116.3	12.7	9573.5	0.13	98.31
85.0-86.0	96.2	10.5	9584.1	0.11	98.42
86.0-87.0	78.7	8.6	9592.7	0.09	98.51
87.0-88.0	65.5	7.2	9599.9	0.07	98.58
88.0-89.0	56.0	6.1	9606.0	0.06	98.64
89.0-90.0	48.5	5.3	9611.3	0.05	98.70
90.0-91.0	43.0	4.7	9616.0	0.05	98.75
91.0-92.0	39.9	4.4	9620.4	0.04	98.79
92.0-93.0	37.9	4.2	9624.5	0.04	98.83
93.0-94.0	36.4	4.0	9628.5	0.04	98.87
94.0-95.0	35.5	3.9	9632.4	0.04	98.91
95.0-96.0	34.4	3.8	9636.2	0.04	98.95
96.0-97.0	32.9	3.6	9639.7	0.04	98.99
97.0-98.0	31.2	3.4	9643.1	0.03	99.02
98.0-99.0	30.1	3.3	9646.4	0.03	99.06
99.0-100.0	29.9	3.2	9649.6	0.03	99.09
100.0-101.0	29.7	3.2	9652.8	0.03	99.12
101.0-102.0	27.9	3.0	9655.8	0.03	99.15
102.0-103.0	23.9	2.6	9658.4	0.03	99.18
103.0-104.0	19.1	2.0	9660.4	0.02	99.20
104.0-105.0	15.3	1.6	9662.1	0.02	99.22
105.0-106.0	12.8	1.4	9663.4	0.01	99.23
106.0-107.0	11.2	1.2	9664.6	0.01	99.24
107.0-108.0	10.1	1.1	9665.7	0.01	99.26

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	9.3	1.0	9666.6	0.01	99.27
109.0-110.0	8.8	0.9	9667.5	0.01	99.27
110.0-111.0	8.3	0.9	9668.4	0.01	99.28
111.0-112.0	8.0	0.8	9669.2	0.01	99.29
112.0-113.0	7.8	0.8	9670.0	0.01	99.30
113.0-114.0	7.7	0.8	9670.8	0.01	99.31
114.0-115.0	7.6	0.8	9671.5	0.01	99.32
115.0-116.0	7.7	0.8	9672.3	0.01	99.32
116.0-117.0	7.8	0.8	9673.1	0.01	99.33
117.0-118.0	7.9	0.8	9673.8	0.01	99.34
118.0-119.0	8.0	0.8	9674.6	0.01	99.35
119.0-120.0	8.3	0.8	9675.4	0.01	99.36
120.0-121.0	8.6	0.8	9676.2	0.01	99.36
121.0-122.0	8.9	0.8	9677.0	0.01	99.37
122.0-123.0	9.4	0.9	9677.9	0.01	99.38
123.0-124.0	9.8	0.9	9678.8	0.01	99.39
124.0-125.0	10.3	0.9	9679.7	0.01	99.40
125.0-126.0	10.8	1.0	9680.7	0.01	99.41
126.0-127.0	11.3	1.0	9681.7	0.01	99.42
127.0-128.0	11.8	1.0	9682.7	0.01	99.43
128.0-129.0	12.4	1.1	9683.8	0.01	99.44
129.0-130.0	13.0	1.1	9684.9	0.01	99.45
130.0-131.0	13.6	1.1	9686.0	0.01	99.46
131.0-132.0	14.1	1.2	9687.2	0.01	99.48
132.0-133.0	14.7	1.2	9688.4	0.01	99.49
133.0-134.0	15.4	1.2	9689.6	0.01	99.50
134.0-135.0	16.0	1.3	9690.8	0.01	99.51
135.0-136.0	16.6	1.3	9692.1	0.01	99.53
136.0-137.0	17.3	1.3	9693.4	0.01	99.54
137.0-138.0	17.9	1.3	9694.8	0.01	99.55
138.0-139.0	18.6	1.4	9696.1	0.01	99.57
139.0-140.0	19.2	1.4	9697.5	0.01	99.58
140.0-141.0	19.9	1.4	9698.9	0.01	99.60
141.0-142.0	20.6	1.4	9700.3	0.01	99.61
142.0-143.0	21.2	1.4	9701.7	0.01	99.63
143.0-144.0	21.8	1.4	9703.1	0.01	99.64

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	22.5	1.4	9704.5	0.01	99.65
145.0-146.0	23.1	1.4	9706.0	0.01	99.67
146.0-147.0	23.8	1.4	9707.4	0.01	99.68
147.0-148.0	24.4	1.4	9708.9	0.01	99.70
148.0-149.0	25.1	1.4	9710.3	0.01	99.71
149.0-150.0	25.7	1.4	9711.7	0.01	99.73
150.0-151.0	26.3	1.4	9713.1	0.01	99.74
151.0-152.0	26.9	1.4	9714.5	0.01	99.76
152.0-153.0	27.5	1.4	9715.9	0.01	99.77
153.0-154.0	28.1	1.4	9717.3	0.01	99.79
154.0-155.0	28.6	1.4	9718.7	0.01	99.80
155.0-156.0	29.2	1.3	9720.0	0.01	99.81
156.0-157.0	29.7	1.3	9721.3	0.01	99.83
157.0-158.0	30.3	1.3	9722.6	0.01	99.84
158.0-159.0	30.9	1.2	9723.8	0.01	99.85
159.0-160.0	31.4	1.2	9725.0	0.01	99.87
160.0-161.0	31.9	1.2	9726.2	0.01	99.88
161.0-162.0	32.4	1.1	9727.3	0.01	99.89
162.0-163.0	32.9	1.1	9728.4	0.01	99.90
163.0-164.0	33.3	1.0	9729.4	0.01	99.91
164.0-165.0	33.8	1.0	9730.4	0.01	99.92
165.0-166.0	34.3	0.9	9731.4	0.01	99.93
166.0-167.0	34.7	0.9	9732.3	0.01	99.94
167.0-168.0	35.1	0.8	9733.1	0.01	99.95
168.0-169.0	35.5	0.8	9733.9	0.01	99.96
169.0-170.0	36.0	0.7	9734.6	0.01	99.96
170.0-171.0	36.4	0.7	9735.2	0.01	99.97
171.0-172.0	36.7	0.6	9735.8	0.01	99.98
172.0-173.0	37.1	0.5	9736.4	0.01	99.98
173.0-174.0	37.5	0.5	9736.8	0.00	99.99
174.0-175.0	37.7	0.4	9737.2	0.00	99.99
175.0-176.0	38.0	0.3	9737.6	0.00	99.99
176.0-177.0	38.1	0.3	9737.8	0.00	100.00
177.0-178.0	38.3	0.2	9738.0	0.00	100.00
178.0-179.0	38.4	0.1	9738.1	0.00	100.00
179.0-180.0	38.5	0.0	9738.1	0.00	100.00

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	7967.5	7968.0	7961.7	7959.8	7961.9	7955.0	7954.0	7952.0	7945.2	7944.5
G1.0	7947.5	7951.0	7948.0	7948.9	7951.7	7949.4	7951.5	7952.9	7949.4	7951.3
G2.0	7924.8	7931.5	7929.7	7934.5	7940.1	7940.4	7943.1	7948.5	7947.8	7952.4
G3.0	7900.9	7906.3	7910.4	7915.3	7926.2	7925.5	7934.3	7940.6	7942.2	7948.5
G4.0	7871.2	7881.2	7885.1	7895.4	7906.0	7910.0	7919.0	7927.1	7932.7	7939.9
G5.0	7840.8	7852.7	7859.4	7871.0	7884.2	7890.2	7901.8	7910.9	7917.4	7926.9
G6.0	7805.6	7821.1	7828.5	7842.7	7856.8	7865.2	7879.8	7888.9	7896.5	7908.3
G7.0	7765.4	7782.6	7793.3	7809.0	7826.7	7836.6	7850.6	7864.3	7874.2	7884.7
G8.0	7716.0	7735.7	7749.2	7766.1	7785.8	7797.9	7817.2	7832.0	7842.9	7855.7
G9.0	7659.9	7681.7	7696.8	7716.2	7738.0	7750.6	7772.6	7791.9	7805.8	7818.1
G10.0	7594.7	7619.3	7636.4	7657.1	7679.8	7698.4	7722.3	7740.6	7753.8	7769.4
G11.0	7523.7	7549.4	7567.3	7592.1	7617.9	7636.7	7661.3	7680.0	7699.1	7712.1
G12.0	7440.6	7470.5	7490.7	7517.4	7543.4	7566.8	7591.9	7607.4	7626.9	7645.5
G13.0	7350.1	7382.6	7406.3	7432.0	7463.4	7488.2	7509.5	7528.8	7549.4	7567.8
G14.0	7241.1	7283.1	7303.7	7342.0	7376.6	7395.4	7424.1	7445.3	7461.5	7479.4
G15.0	7123.7	7162.4	7196.1	7229.3	7269.2	7296.8	7325.3	7346.9	7369.4	7386.8
G16.0	6979.6	7030.2	7057.8	7101.7	7147.8	7180.1	7216.5	7239.0	7263.8	7277.3
G17.0	6820.5	6868.5	6907.5	6957.8	7008.2	7048.8	7089.6	7120.5	7148.5	7158.5
G18.0	6643.5	6699.1	6737.6	6798.9	6853.2	6901.0	6953.4	6992.6	7015.8	7018.1
G19.0	6448.1	6513.5	6560.2	6620.5	6679.0	6738.8	6798.2	6844.1	6873.8	6869.9
G20.0	6237.9	6301.7	6355.8	6420.0	6488.9	6549.3	6623.5	6676.2	6706.1	6699.6
G21.0	6012.2	6080.8	6138.8	6212.6	6284.1	6357.6	6438.8	6494.7	6525.1	6520.7
G22.0	5766.0	5848.1	5898.5	5980.8	6059.0	6137.5	6235.1	6292.9	6323.0	6317.5
G23.0	5516.8	5585.0	5651.9	5733.3	5823.1	5915.4	6014.5	6078.8	6110.5	6110.8
G24.0	5239.6	5321.7	5388.8	5478.8	5570.0	5676.7	5784.3	5849.8	5882.2	5873.0
G25.0	4969.5	5039.1	5116.6	5219.9	5317.5	5437.5	5533.1	5614.3	5644.0	5642.6
G26.0	4686.0	4762.1	4829.4	4931.5	5041.7	5160.9	5284.8	5349.3	5394.8	5391.8
G27.0	4391.4	4466.3	4550.8	4653.5	4763.0	4890.9	5015.5	5093.9	5137.0	5136.4
G28.0	4108.6	4186.3	4256.6	4366.8	4488.1	4619.9	4748.4	4820.1	4866.3	4888.1
G29.0	3834.1	3895.1	3990.0	4084.7	4195.8	4341.5	4466.5	4555.9	4607.4	4622.0
G30.0	3576.8	3638.5	3717.9	3805.6	3916.0	4048.9	4194.2	4275.4	4339.9	4355.2
G31.0	3343.4	3395.1	3474.5	3561.0	3655.5	3796.1	3915.1	4008.6	4078.4	4107.2
G32.0	3114.2	3171.5	3230.9	3310.5	3406.5	3518.8	3644.3	3729.2	3802.3	3844.1
G33.0	2906.8	2955.5	3016.1	3098.2	3180.8	3271.7	3382.4	3475.0	3552.0	3589.1
G34.0	2715.6	2764.8	2821.9	2888.0	2964.6	3046.9	3135.1	3213.5	3290.8	3338.6
G35.0	2538.8	2584.3	2637.7	2704.5	2766.2	2836.7	2911.2	2972.7	3047.4	3106.5
G36.0	2375.0	2409.1	2466.7	2526.1	2579.4	2626.3	2688.0	2740.0	2804.5	2860.6

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	2224.5	2256.2	2310.1	2370.2	2416.8	2454.8	2494.5	2529.6	2580.4	2640.4
G38.0	2076.7	2110.1	2158.8	2214.5	2258.6	2285.9	2315.2	2335.6	2372.5	2430.3
G39.0	1945.6	1978.1	2020.8	2077.1	2117.3	2138.1	2148.4	2157.6	2186.2	2232.8
G40.0	1817.3	1846.8	1892.9	1950.0	1978.1	1994.8	1999.9	1998.7	2010.3	2055.8
G41.0	1710.8	1736.6	1775.8	1829.8	1856.5	1861.4	1865.1	1850.7	1853.7	1895.5
G42.0	1610.6	1628.9	1663.0	1713.8	1738.4	1739.1	1741.4	1724.9	1718.2	1751.9
G43.0	1511.3	1528.9	1565.3	1610.6	1626.8	1626.8	1627.7	1608.3	1596.2	1622.9
G44.0	1417.3	1433.8	1466.3	1502.2	1512.9	1523.8	1519.6	1503.4	1487.6	1507.8
G45.0	1327.5	1344.0	1371.4	1399.0	1412.9	1420.3	1421.7	1402.2	1395.5	1408.3
G46.0	1247.0	1264.9	1281.1	1301.8	1310.8	1323.6	1331.7	1316.6	1310.8	1322.9
G47.0	1181.1	1189.5	1199.5	1212.9	1223.8	1237.1	1246.6	1240.5	1236.8	1251.0
G48.0	1117.1	1120.1	1127.1	1131.7	1137.5	1151.7	1166.8	1165.4	1166.1	1183.5
G49.0	1049.6	1058.2	1061.2	1066.3	1063.7	1070.7	1087.4	1096.0	1102.5	1123.6
G50.0	986.0	994.4	1005.5	1011.8	1004.3	1006.0	1017.6	1031.3	1046.1	1068.6
G51.0	917.8	935.2	947.0	958.2	956.3	942.9	954.9	973.3	996.0	1015.0
G52.0	854.0	869.5	891.8	907.6	912.2	897.2	895.8	918.3	949.6	965.8
G53.0	795.1	810.2	831.7	856.6	870.0	855.4	842.6	868.4	907.6	918.5
G54.0	750.3	761.2	780.5	807.4	828.0	819.0	797.9	820.8	867.7	874.2
G55.0	719.0	726.6	738.2	760.7	785.1	782.1	763.5	775.1	827.3	833.8
G56.0	688.1	693.7	700.7	719.7	743.3	750.8	735.7	735.5	786.7	793.9
G57.0	653.3	661.0	661.4	678.2	703.7	717.4	709.5	704.6	747.3	753.5
G58.0	614.6	621.1	620.4	634.5	664.9	684.0	684.4	680.7	709.9	712.3
G59.0	578.6	586.3	580.9	593.5	622.9	641.7	657.7	659.8	673.3	669.8
G60.0	551.2	558.9	554.3	561.9	583.5	598.6	624.8	640.1	644.3	629.9
G61.0	531.3	537.3	536.6	540.3	551.7	563.5	590.7	618.5	617.6	591.6
G62.0	519.7	522.5	526.4	529.2	530.1	537.8	560.5	597.2	596.7	558.7
G63.0	551.2	552.6	559.8	549.2	526.0	517.6	534.3	574.2	575.4	529.7
G64.0	608.3	609.7	623.2	580.0	526.7	506.2	515.3	552.2	555.2	508.8
G65.0	605.8	605.3	602.3	556.3	505.5	493.2	505.8	535.7	535.5	491.6
G66.0	526.7	526.2	517.1	496.7	474.2	477.7	499.3	523.9	520.4	472.6
G67.0	474.2	476.1	473.3	462.6	456.4	468.0	492.5	510.9	507.6	457.0
G68.0	460.1	461.5	461.5	451.7	449.4	464.5	489.3	500.4	490.5	445.0
G69.0	450.5	452.4	451.3	442.2	443.4	464.5	485.8	493.5	474.0	433.9
G70.0	441.0	443.6	442.9	432.7	440.6	464.5	483.5	483.5	453.3	417.4
G71.0	428.7	432.5	429.9	421.8	437.6	463.8	485.1	466.3	423.2	394.2
G72.0	412.7	415.3	412.7	407.6	430.6	457.5	475.6	444.1	388.8	373.3
G73.0	392.3	395.3	392.1	390.2	424.3	451.3	458.4	404.4	358.2	355.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	366.6	368.7	367.7	371.2	414.6	442.0	432.7	371.7	336.2	335.5
G75.0	338.3	339.6	339.0	349.6	413.9	454.7	402.8	340.6	317.1	314.6
G76.0	255.2	257.5	262.9	300.0	402.3	429.0	358.7	317.9	300.5	295.3
G77.0	233.9	234.3	239.0	259.6	339.2	339.2	317.4	295.6	282.8	275.4
G78.0	217.4	218.1	225.3	250.6	321.6	301.4	271.5	261.0	263.3	255.7
G79.0	218.8	220.2	231.3	263.6	346.1	306.9	270.5	240.6	231.1	240.1
G80.0	216.7	218.1	227.1	264.7	348.5	309.3	280.7	236.9	220.9	221.3
G81.0	189.1	189.8	196.5	235.0	321.3	278.4	268.0	220.9	206.3	204.4
G82.0	162.6	164.0	170.1	194.6	242.0	219.9	240.8	192.3	180.0	176.8
G83.0	139.0	141.1	149.2	163.3	194.6	180.5	190.0	159.9	150.6	149.2
G84.0	118.6	122.5	130.9	141.3	161.9	151.0	166.8	139.7	126.7	123.2
G85.0	101.4	105.8	117.6	125.1	145.5	133.4	148.0	127.4	108.1	104.2
G86.0	85.4	90.0	103.7	105.6	119.7	110.4	122.3	107.9	93.0	88.9
G87.0	72.8	77.3	84.7	81.7	84.7	80.3	85.4	84.4	77.7	76.1
G88.0	58.7	63.8	71.0	67.3	70.3	67.3	70.5	69.8	66.6	65.9
G89.0	50.6	54.1	62.0	61.5	64.3	59.9	65.4	63.1	59.9	59.4
G90.0	43.4	47.3	53.4	54.3	57.8	55.5	58.7	55.9	53.1	51.5
G91.0	40.4	43.4	48.3	50.1	50.8	49.7	51.5	49.4	46.6	45.7
G92.0	40.4	43.6	46.9	45.9	48.0	47.6	50.6	46.4	45.0	43.6
G93.0	39.9	42.5	48.5	44.3	45.0	47.1	48.5	45.2	43.2	41.8
G94.0	46.9	47.1	46.2	44.1	47.3	47.3	48.3	44.5	41.5	40.1
G95.0	42.7	44.3	45.5	45.2	47.6	45.7	46.9	43.6	38.5	35.3
G96.0	40.6	40.8	42.0	41.1	41.3	38.7	42.9	39.0	36.2	33.4
G97.0	37.1	37.6	37.1	37.6	39.0	36.7	39.2	34.6	33.6	31.8
G98.0	33.6	33.2	31.8	35.0	39.9	36.4	35.3	35.0	32.3	30.9
G99.0	34.1	32.3	30.4	34.1	35.5	35.5	33.2	33.6	30.2	25.8
G100.0	30.2	30.4	29.9	34.3	37.3	35.0	32.0	27.1	22.7	19.7
G101.0	35.5	39.0	31.5	39.7	43.2	38.5	32.7	24.6	19.5	18.3
G102.0	48.5	51.5	39.0	37.3	42.9	38.5	32.7	27.4	22.5	18.6
G103.0	45.9	45.7	37.6	32.5	32.3	29.2	26.0	22.7	19.5	14.6
G104.0	31.8	30.6	25.8	22.5	20.4	19.3	18.1	15.3	12.3	11.4
G105.0	22.3	20.9	18.8	17.2	16.2	15.1	13.5	12.1	11.1	9.7
G106.0	19.7	18.8	17.9	15.5	14.1	12.8	12.1	11.4	10.0	9.5
G107.0	16.7	16.5	15.5	12.5	12.5	12.1	11.8	10.7	9.3	8.1
G108.0	16.0	15.8	15.1	12.8	12.1	11.8	11.1	9.7	8.6	7.2
G109.0	14.9	14.6	14.6	13.2	11.8	11.4	10.2	9.1	8.1	7.4
G110.0	15.1	14.1	14.4	13.2	11.6	10.7	9.5	8.8	7.9	6.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	13.9	14.4	13.5	12.5	10.9	10.0	9.1	8.1	7.7	6.7
G112.0	13.7	13.0	13.2	12.3	10.4	9.5	8.4	7.9	6.7	5.8
G113.0	12.8	12.1	11.8	11.4	10.0	9.1	8.1	7.7	6.5	5.6
G114.0	11.6	11.8	10.9	10.4	9.3	9.3	8.1	7.4	6.7	5.8
G115.0	11.1	11.1	10.7	10.0	9.3	8.1	7.7	7.0	7.0	5.8
G116.0	10.7	10.7	10.9	10.0	8.4	8.1	7.7	7.0	6.5	7.0
G117.0	10.0	10.2	9.3	8.8	8.4	7.7	7.4	7.0	6.5	7.2
G118.0	9.5	9.1	9.1	9.3	8.4	8.1	7.4	7.2	7.4	7.0
G119.0	9.3	9.1	8.8	8.6	8.1	8.1	7.4	7.4	7.7	7.9
G120.0	9.1	9.1	8.8	8.6	8.1	8.1	7.9	7.9	8.1	8.1
G121.0	8.8	8.8	8.4	8.4	8.4	7.9	8.4	8.1	8.6	8.6
G122.0	8.8	9.1	9.1	8.8	8.8	8.4	8.4	8.8	8.8	8.4
G123.0	9.1	8.8	9.3	8.8	9.3	8.8	9.3	9.3	9.3	9.5
G124.0	9.3	9.1	9.3	9.3	9.5	9.7	9.7	9.5	9.7	9.3
G125.0	10.0	10.0	9.7	10.0	10.0	9.7	10.2	10.0	9.7	10.2
G126.0	10.4	10.2	10.2	10.2	10.4	10.7	10.7	10.4	10.9	10.4
G127.0	10.9	10.9	11.1	11.1	10.9	10.9	11.1	10.9	11.1	11.1
G128.0	11.6	11.4	11.4	11.4	11.6	11.4	11.8	11.8	11.8	11.6
G129.0	12.1	12.1	11.8	12.1	12.3	12.1	11.8	12.3	11.8	11.8
G130.0	12.5	12.5	12.5	13.0	12.8	12.5	13.0	12.8	13.0	12.8
G131.0	13.2	13.5	13.2	13.5	13.5	13.7	13.0	13.5	13.5	13.5
G132.0	13.9	14.1	14.1	13.9	13.9	14.1	13.5	13.7	13.7	13.9
G133.0	14.6	14.6	14.9	14.9	14.6	14.1	14.1	14.6	14.6	14.6
G134.0	15.3	15.3	15.3	15.1	15.3	15.1	14.9	14.9	15.3	15.1
G135.0	16.0	16.0	16.2	16.2	16.0	15.5	15.3	15.5	16.0	15.5
G136.0	16.7	16.7	16.9	16.5	16.7	16.2	16.0	16.7	16.7	16.2
G137.0	17.4	17.4	17.4	17.4	17.4	16.9	16.7	17.2	16.7	16.7
G138.0	18.1	18.1	18.3	17.6	17.9	18.1	18.1	17.6	17.4	17.6
G139.0	19.0	19.0	19.0	19.0	18.8	18.3	18.8	18.3	18.1	18.1
G140.0	19.5	19.7	19.7	19.7	19.3	19.0	18.8	19.3	18.8	19.0
G141.0	20.4	20.4	20.4	20.0	20.2	20.4	19.5	20.0	20.0	19.5
G142.0	21.3	20.9	21.1	21.3	20.6	20.9	20.9	20.6	20.6	20.4
G143.0	21.6	21.3	21.6	22.0	21.3	21.1	20.6	20.9	20.9	21.1
G144.0	22.3	22.5	22.3	22.0	22.0	21.8	21.3	21.8	22.0	21.6
G145.0	23.2	23.2	23.0	23.2	23.0	23.0	22.0	22.7	22.3	22.3
G146.0	23.9	23.7	23.7	23.4	23.4	23.7	23.7	23.4	23.4	23.0
G147.0	24.4	24.6	24.4	24.6	24.1	23.9	23.4	24.1	24.1	23.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	25.5	25.3	25.1	24.6	25.1	24.6	25.1	24.4	24.1	24.4
G149.0	25.8	25.5	25.8	26.0	25.5	25.5	25.5	24.8	24.8	25.1
G150.0	26.5	26.2	26.2	26.0	26.2	26.2	25.3	26.0	26.0	25.5
G151.0	27.1	27.4	26.9	26.7	26.9	26.7	26.9	26.2	26.7	26.7
G152.0	27.6	28.1	27.6	27.8	27.6	27.4	26.7	26.9	27.4	27.1
G153.0	28.3	27.8	28.3	28.3	28.3	27.8	27.4	27.8	27.4	27.8
G154.0	29.2	29.2	29.0	29.0	28.3	28.3	27.8	28.5	28.5	28.1
G155.0	29.9	29.7	29.2	29.2	29.5	29.2	29.2	28.5	28.5	28.5
G156.0	29.9	30.4	29.9	29.5	29.7	29.7	29.9	29.2	29.7	29.2
G157.0	30.4	30.2	30.6	30.6	30.2	30.2	30.4	30.2	29.7	29.7
G158.0	31.1	31.3	30.9	31.1	30.9	30.9	31.1	30.9	30.2	30.4
G159.0	31.5	31.1	31.3	31.1	31.5	31.3	30.9	30.9	31.3	30.9
G160.0	32.5	32.5	32.0	32.3	31.5	31.8	31.3	31.3	31.3	31.8
G161.0	32.9	32.9	32.7	32.5	32.0	32.3	31.8	32.0	32.5	32.0
G162.0	32.7	33.4	32.7	32.7	32.7	32.9	32.9	32.5	32.5	32.5
G163.0	33.9	33.6	33.2	33.6	33.2	33.4	32.9	32.9	33.6	33.4
G164.0	34.3	34.3	34.1	33.6	33.6	33.6	33.4	33.9	33.4	33.4
G165.0	33.9	34.6	34.6	34.3	34.3	34.1	33.9	34.3	34.6	34.3
G166.0	35.0	34.3	34.8	34.8	34.8	34.3	34.8	34.3	35.0	34.3
G167.0	35.5	34.6	34.8	35.3	35.3	34.8	34.8	35.5	35.5	34.8
G168.0	35.3	35.0	35.3	35.7	35.7	35.3	35.3	35.7	36.0	35.3
G169.0	36.4	36.2	35.5	36.0	35.5	35.7	35.5	35.5	35.7	36.2
G170.0	36.4	35.7	35.7	36.2	36.4	36.0	36.4	36.0	36.7	36.0
G171.0	36.7	36.0	36.9	36.4	36.2	36.9	36.9	36.4	36.4	36.4
G172.0	36.9	37.1	36.4	36.7	36.4	37.3	37.1	36.7	36.9	36.9
G173.0	37.3	36.9	36.9	37.1	36.9	37.6	37.3	37.6	37.6	37.1
G174.0	37.8	37.1	37.1	37.6	37.8	37.8	37.3	37.3	37.3	38.0
G175.0	38.5	37.3	38.0	37.8	37.6	37.3	37.8	37.6	38.0	37.6
G176.0	38.3	37.6	37.6	37.8	37.6	38.3	37.8	38.3	38.3	38.3
G177.0	39.0	38.7	38.5	38.3	37.8	38.5	38.0	38.5	37.8	38.0
G178.0	39.0	38.0	38.0	38.0	38.5	37.8	38.3	38.0	38.5	38.5
G179.0	39.0	39.0	38.3	38.3	38.0	38.5	38.3	38.7	38.7	38.7
G180.0	39.2	38.7	38.5	38.7	38.0	38.5	38.5	38.7	38.7	38.7

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	7937.8	7932.7	7929.0	7923.2	7913.7	7904.4	7895.6	7885.4	7875.2	7868.9
G1.0	7946.4	7945.2	7942.9	7941.0	7933.6	7927.8	7920.2	7911.6	7904.9	7898.4
G2.0	7951.3	7951.3	7952.9	7952.4	7947.3	7943.4	7939.4	7931.8	7925.0	7921.6
G3.0	7949.9	7952.0	7954.3	7956.8	7953.4	7953.1	7950.1	7945.7	7940.1	7939.0
G4.0	7942.9	7946.1	7951.7	7956.6	7957.3	7955.2	7954.3	7952.6	7949.6	7950.1
G5.0	7930.6	7935.5	7942.9	7949.4	7949.9	7952.4	7955.4	7953.6	7953.1	7954.7
G6.0	7914.4	7922.5	7930.8	7937.6	7939.2	7942.2	7946.4	7946.6	7948.0	7951.3
G7.0	7893.7	7900.5	7910.0	7918.5	7920.6	7923.9	7927.6	7929.7	7932.5	7938.7
G8.0	7862.9	7871.7	7880.7	7887.9	7892.6	7896.7	7901.8	7905.1	7907.9	7916.7
G9.0	7825.7	7834.6	7843.8	7851.7	7856.8	7860.5	7868.4	7872.6	7877.7	7887.0
G10.0	7779.3	7787.7	7799.8	7806.5	7811.6	7816.5	7823.7	7829.9	7837.8	7849.2
G11.0	7723.2	7735.7	7744.3	7751.5	7758.5	7764.7	7773.5	7778.0	7787.5	7802.1
G12.0	7659.4	7672.9	7683.1	7689.6	7692.3	7696.0	7702.3	7707.9	7716.7	7737.1
G13.0	7582.8	7599.5	7608.4	7607.9	7610.0	7606.5	7611.8	7616.7	7630.9	7651.7
G14.0	7496.8	7506.3	7510.0	7508.8	7504.0	7494.7	7501.4	7502.6	7513.2	7543.4
G15.0	7397.9	7403.7	7397.9	7386.3	7379.8	7365.9	7365.7	7370.3	7380.8	7413.7
G16.0	7281.7	7275.4	7267.3	7251.1	7232.0	7212.8	7205.8	7206.8	7221.1	7261.5
G17.0	7152.5	7135.1	7118.4	7094.0	7067.5	7044.6	7034.8	7028.8	7045.3	7084.3
G18.0	7006.8	6983.3	6951.5	6914.9	6885.7	6854.8	6839.7	6841.8	6853.4	6893.3
G19.0	6849.9	6810.7	6775.5	6729.1	6690.8	6654.4	6641.8	6631.9	6654.4	6691.0
G20.0	6670.8	6621.6	6571.1	6527.5	6483.8	6443.5	6421.9	6417.7	6435.1	6477.6
G21.0	6482.9	6428.4	6363.4	6308.9	6266.7	6228.2	6199.4	6193.4	6211.5	6256.7
G22.0	6279.0	6213.3	6151.8	6082.5	6038.1	5996.4	5964.6	5957.4	5974.6	6031.9
G23.0	6055.3	5989.9	5923.1	5853.7	5805.2	5753.9	5724.5	5715.9	5740.0	5788.0
G24.0	5829.6	5762.5	5684.6	5611.3	5559.1	5506.4	5477.4	5467.2	5484.8	5535.2
G25.0	5600.6	5529.6	5454.4	5374.4	5312.4	5260.0	5224.0	5217.5	5230.3	5278.1
G26.0	5354.9	5283.9	5199.7	5119.4	5054.5	5006.4	4964.0	4951.0	4970.0	5022.0
G27.0	5108.0	5039.1	4956.8	4865.4	4805.0	4752.6	4714.1	4701.1	4712.5	4770.0
G28.0	4856.3	4796.9	4705.5	4613.6	4552.2	4489.1	4453.3	4447.3	4459.4	4521.1
G29.0	4602.3	4544.5	4461.9	4363.3	4303.9	4259.1	4220.9	4210.6	4230.8	4278.4
G30.0	4341.0	4287.4	4203.0	4118.1	4061.9	4024.8	3989.1	3977.7	4000.7	4052.9
G31.0	4097.0	4049.4	3969.8	3890.0	3838.8	3804.6	3774.0	3761.5	3772.6	3819.3
G32.0	3837.4	3796.8	3734.8	3660.3	3613.9	3582.1	3555.5	3536.0	3550.6	3597.9
G33.0	3588.6	3556.9	3505.1	3442.9	3404.0	3376.1	3340.9	3329.5	3345.0	3377.3
G34.0	3346.0	3330.4	3290.3	3239.3	3200.5	3172.0	3141.8	3126.3	3129.0	3168.5
G35.0	3116.8	3113.7	3088.4	3041.1	3006.3	2979.2	2949.5	2922.8	2925.8	2964.6
G36.0	2892.6	2904.9	2890.5	2853.2	2819.1	2788.5	2753.7	2719.1	2719.8	2757.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	2683.1	2705.4	2704.7	2667.8	2645.3	2604.5	2562.9	2528.1	2528.9	2564.8
G38.0	2485.9	2517.7	2521.9	2497.8	2466.2	2433.3	2391.5	2350.0	2345.1	2377.8
G39.0	2303.6	2345.8	2361.3	2337.9	2305.0	2272.9	2223.5	2178.5	2173.9	2206.8
G40.0	2121.0	2184.8	2207.1	2175.5	2146.3	2116.4	2066.0	2012.6	2002.7	2037.2
G41.0	1966.0	2033.1	2061.1	2029.3	2007.8	1965.3	1913.3	1863.5	1850.0	1876.0
G42.0	1822.2	1895.5	1914.5	1892.9	1858.8	1824.0	1767.6	1715.0	1704.3	1731.0
G43.0	1695.0	1768.1	1785.3	1762.5	1725.7	1694.8	1642.4	1591.3	1574.6	1598.7
G44.0	1575.8	1641.0	1661.6	1626.6	1592.9	1571.8	1525.7	1466.0	1453.7	1478.1
G45.0	1473.2	1527.8	1545.4	1503.8	1476.0	1461.9	1421.0	1363.5	1350.7	1372.5
G46.0	1376.0	1427.3	1430.5	1393.0	1366.0	1360.5	1336.8	1287.4	1271.4	1292.0
G47.0	1288.6	1327.3	1325.0	1286.0	1255.1	1272.5	1268.1	1229.9	1214.3	1234.0
G48.0	1207.8	1231.9	1222.7	1180.2	1153.1	1184.8	1199.2	1171.2	1153.8	1165.1
G49.0	1135.2	1138.2	1124.5	1090.9	1071.2	1090.2	1105.3	1082.8	1061.2	1066.5
G50.0	1067.0	1053.8	1035.7	1014.3	1002.7	997.8	992.3	969.3	944.3	949.1
G51.0	1004.8	974.2	954.9	951.2	938.9	920.8	896.2	858.7	846.1	867.2
G52.0	944.0	903.4	887.7	896.7	878.6	857.5	824.3	784.2	771.2	790.9
G53.0	884.6	839.2	832.9	840.5	821.5	792.5	753.5	719.9	707.6	723.6
G54.0	832.4	782.5	787.2	787.7	765.6	729.9	696.0	663.5	652.4	662.4
G55.0	780.2	732.7	744.3	738.7	707.6	672.3	642.7	615.7	602.5	614.1
G56.0	732.7	686.5	698.1	692.1	656.1	624.1	597.9	572.8	564.5	572.6
G57.0	688.6	651.9	655.4	642.9	611.6	580.2	557.0	535.7	529.2	537.1
G58.0	650.1	622.7	617.1	600.7	570.7	538.5	518.1	498.6	494.4	501.1
G59.0	617.4	593.5	579.5	562.8	530.1	496.3	479.3	465.6	459.4	467.7
G60.0	589.5	569.1	545.7	529.4	493.2	461.9	444.8	433.6	428.0	434.1
G61.0	564.9	544.0	518.3	500.4	459.8	434.1	414.6	403.2	398.8	405.8
G62.0	545.7	520.8	498.4	475.4	433.9	418.1	396.7	381.6	377.5	383.3
G63.0	525.7	498.1	486.0	454.5	414.4	395.8	374.9	361.0	358.9	363.3
G64.0	506.7	484.4	471.4	437.6	398.6	387.7	380.3	373.5	376.8	377.0
G65.0	493.2	471.0	454.7	423.2	382.6	379.3	379.3	373.1	373.1	380.3
G66.0	477.5	455.2	443.1	407.6	363.3	342.7	332.5	326.9	324.6	329.0
G67.0	459.8	442.7	429.7	397.4	346.4	326.9	316.7	313.4	311.4	315.8
G68.0	439.4	434.5	420.9	390.0	335.5	316.9	306.9	304.9	302.8	306.7
G69.0	419.7	430.6	416.9	385.6	328.0	306.9	296.7	294.0	293.0	296.7
G70.0	401.6	420.9	418.3	382.8	323.9	296.5	286.8	285.1	284.9	288.4
G71.0	382.3	403.9	411.8	387.2	323.4	287.0	276.5	275.4	273.8	278.2
G72.0	358.2	383.0	403.9	386.3	320.2	278.6	266.6	265.6	263.8	267.0
G73.0	338.7	364.3	392.5	395.3	321.1	271.0	254.0	254.7	249.6	255.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	323.2	341.5	365.4	387.0	329.2	264.5	241.3	241.3	239.0	244.8
G75.0	306.0	323.0	343.1	379.3	324.1	257.8	228.5	228.8	225.3	230.6
G76.0	291.2	308.6	321.3	370.5	342.0	253.8	216.2	216.5	211.8	215.5
G77.0	278.2	294.6	299.0	326.4	310.2	253.1	205.8	205.6	197.7	206.5
G78.0	264.3	283.5	283.5	305.3	295.3	246.2	209.7	205.6	197.9	203.2
G79.0	254.7	268.4	275.9	313.4	300.2	253.4	200.4	191.4	187.0	192.3
G80.0	242.7	254.5	269.6	280.7	273.3	233.4	184.2	175.2	170.3	176.1
G81.0	210.7	236.4	241.1	235.5	246.9	210.4	164.0	155.0	151.5	154.1
G82.0	183.8	195.6	205.3	196.7	213.4	189.6	146.6	131.1	128.3	132.5
G83.0	155.2	164.3	168.9	161.9	179.6	160.1	128.1	111.6	107.9	114.2
G84.0	128.8	138.5	141.8	129.9	147.8	132.7	106.5	89.3	84.2	91.9
G85.0	106.3	112.3	116.9	106.0	120.2	107.2	95.1	78.4	71.7	80.0
G86.0	90.5	94.4	91.6	84.4	88.4	81.0	74.7	66.8	60.1	67.3
G87.0	77.5	83.8	74.0	70.1	71.7	65.9	59.9	54.8	49.7	55.0
G88.0	67.3	69.4	63.1	62.2	60.5	51.5	45.5	43.4	40.1	44.1
G89.0	58.9	59.2	54.3	55.7	49.9	40.8	35.0	32.5	29.9	33.2
G90.0	51.5	49.9	44.3	50.8	38.0	30.4	27.4	23.9	22.0	25.1
G91.0	45.0	45.7	37.8	48.5	31.1	25.8	23.2	19.7	19.3	20.4
G92.0	42.2	42.9	36.2	46.2	27.8	24.4	20.6	19.0	18.3	18.3
G93.0	40.4	39.7	34.6	31.3	26.9	21.1	18.8	16.7	16.0	16.7
G94.0	40.4	37.1	33.9	28.8	23.7	20.0	17.4	16.7	16.9	16.2
G95.0	37.6	36.2	33.9	27.6	25.1	22.3	17.2	17.4	16.7	17.2
G96.0	34.1	36.9	31.1	26.7	25.5	20.9	18.1	17.9	17.9	17.9
G97.0	32.7	30.2	26.9	23.9	22.3	20.2	19.0	18.3	17.6	18.6
G98.0	29.2	27.4	23.9	21.8	19.3	18.3	18.6	18.6	18.3	19.0
G99.0	24.1	23.7	21.6	18.6	18.3	18.1	19.0	19.0	18.3	19.0
G100.0	20.2	20.6	18.8	16.9	16.2	16.2	17.2	17.4	16.7	17.9
G101.0	18.1	18.3	16.7	15.1	15.8	15.3	15.8	16.2	15.5	15.8
G102.0	17.2	15.5	14.1	12.5	13.0	13.2	14.4	14.1	14.1	14.9
G103.0	11.8	11.8	11.4	10.7	11.8	12.8	14.1	13.7	13.5	13.7
G104.0	9.1	8.6	7.7	7.9	9.1	11.1	11.8	12.8	11.8	12.3
G105.0	8.8	6.5	5.1	4.9	6.3	8.1	9.5	10.0	9.3	10.0
G106.0	7.9	6.3	4.4	4.2	4.2	5.1	6.0	6.5	6.7	6.7
G107.0	6.5	5.1	4.6	4.4	4.6	4.4	4.6	4.2	4.9	4.2
G108.0	6.5	4.9	4.4	4.2	3.9	3.9	4.2	4.6	4.9	4.4
G109.0	5.6	5.1	4.4	4.4	4.9	4.4	4.4	5.1	4.4	4.9
G110.0	5.3	4.6	5.1	5.1	4.4	4.6	5.1	5.1	5.3	4.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	5.1	4.9	4.9	5.1	4.6	4.6	4.9	4.9	4.9	5.3
G112.0	5.8	5.1	5.6	5.1	4.9	4.9	5.6	5.6	5.1	5.1
G113.0	5.3	5.8	5.8	5.8	5.8	5.1	5.3	5.3	6.0	5.8
G114.0	5.6	5.3	5.6	5.6	5.3	5.6	6.3	5.6	5.8	5.8
G115.0	6.5	5.8	6.0	5.8	6.5	6.3	6.0	6.5	6.0	6.7
G116.0	6.7	6.7	6.3	6.3	6.0	6.0	6.7	6.7	7.0	6.7
G117.0	6.5	6.5	7.0	6.5	6.3	6.5	7.0	6.5	6.7	6.5
G118.0	7.4	7.4	7.0	7.4	6.7	7.0	7.0	7.0	7.0	7.7
G119.0	7.7	7.7	7.7	7.2	7.9	7.7	7.7	7.2	7.9	7.9
G120.0	8.4	8.1	7.9	8.1	8.4	7.7	8.4	7.7	8.4	8.4
G121.0	8.6	8.6	8.4	8.6	8.4	8.6	7.9	8.6	8.6	8.1
G122.0	8.4	8.4	8.6	9.1	8.8	8.8	8.6	8.6	8.4	9.1
G123.0	8.6	9.5	9.3	8.8	8.8	9.5	9.5	9.1	9.1	8.8
G124.0	9.7	9.1	9.7	9.7	9.3	9.3	9.3	9.5	9.3	9.3
G125.0	10.4	9.5	9.7	9.7	9.7	9.7	10.2	10.4	10.0	10.0
G126.0	10.7	10.2	10.7	10.7	10.2	10.7	10.9	11.1	11.1	10.9
G127.0	11.4	10.4	11.1	10.7	10.7	10.9	11.4	11.4	11.6	11.6
G128.0	11.6	11.1	11.4	11.8	11.8	11.8	11.6	11.4	11.4	11.4
G129.0	12.3	12.3	11.8	12.3	11.8	12.5	12.1	12.1	12.1	11.8
G130.0	12.3	13.0	13.0	12.3	13.0	12.5	12.5	13.2	13.0	13.0
G131.0	13.7	13.5	13.5	13.5	13.5	13.0	13.0	13.2	13.2	13.7
G132.0	13.5	13.2	13.9	13.9	13.9	14.1	14.1	13.7	14.4	14.1
G133.0	14.6	13.9	14.1	14.6	14.1	14.4	14.9	14.4	14.4	14.9
G134.0	14.6	15.3	14.9	15.3	15.3	15.3	15.5	15.5	15.1	15.5
G135.0	16.0	15.3	15.3	15.3	16.0	16.0	15.5	16.2	15.5	16.0
G136.0	15.8	16.7	16.0	16.5	16.0	16.5	16.7	16.2	16.9	16.7
G137.0	16.5	17.2	17.2	17.2	16.7	17.2	17.4	17.2	17.4	16.9
G138.0	18.1	17.4	17.9	17.4	18.1	17.4	17.6	18.1	18.1	18.1
G139.0	18.8	18.3	18.1	18.6	18.6	18.6	18.8	18.1	18.8	18.6
G140.0	18.6	19.0	18.6	19.3	19.3	19.3	19.0	19.3	19.3	18.8
G141.0	19.3	19.7	19.5	19.5	19.5	20.0	19.5	20.0	19.5	20.0
G142.0	20.6	20.2	20.6	20.6	20.0	20.6	20.6	20.2	20.6	20.6
G143.0	21.3	21.1	20.6	21.3	21.3	20.9	21.3	20.9	20.9	20.6
G144.0	21.1	21.6	21.8	21.3	22.0	21.8	22.0	21.6	22.0	21.6
G145.0	22.7	22.5	22.5	22.7	22.3	22.7	22.3	22.5	22.0	22.5
G146.0	22.5	23.0	22.7	22.7	22.7	23.2	23.0	23.2	23.2	23.2
G147.0	24.1	23.7	23.4	23.4	24.1	23.9	23.4	24.1	23.4	23.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	24.6	24.6	24.1	24.1	24.6	24.4	24.1	24.8	24.1	24.6
G149.0	24.6	25.3	25.3	24.8	25.3	25.1	25.3	24.8	24.8	25.1
G150.0	26.2	25.5	25.8	26.0	25.5	25.8	25.5	25.5	26.0	26.0
G151.0	26.7	26.5	26.7	26.0	26.2	26.5	26.7	26.5	26.0	26.5
G152.0	27.4	26.9	27.1	27.4	27.4	27.1	27.4	27.1	27.1	27.1
G153.0	27.1	27.6	27.4	27.8	27.4	27.8	27.4	27.4	27.4	27.6
G154.0	27.8	28.1	27.8	28.1	28.1	28.3	27.8	28.5	27.8	27.8
G155.0	29.2	28.8	29.2	28.5	28.5	29.0	29.0	29.0	29.0	28.3
G156.0	29.7	29.5	29.0	29.2	29.0	29.5	29.2	29.5	29.0	28.8
G157.0	29.5	29.9	30.6	30.4	29.7	30.2	29.7	30.2	29.7	29.9
G158.0	30.2	30.6	30.2	30.9	31.1	30.9	30.9	30.2	30.2	30.4
G159.0	30.9	31.1	31.5	31.1	30.9	31.1	30.9	30.6	31.1	31.1
G160.0	31.8	31.8	32.3	32.0	31.3	32.0	31.8	31.8	31.5	31.5
G161.0	32.5	32.3	31.8	32.0	32.0	32.0	32.5	32.3	31.5	31.5
G162.0	33.2	32.7	33.2	32.5	32.5	32.7	32.9	32.7	32.5	32.5
G163.0	33.6	33.2	33.6	32.9	33.9	33.2	32.9	33.4	32.7	32.9
G164.0	33.2	33.9	34.3	33.6	34.3	33.6	33.4	33.2	32.9	32.9
G165.0	33.9	34.1	33.9	34.1	34.8	34.3	34.6	34.1	34.1	33.9
G166.0	34.1	34.8	35.3	35.0	35.3	34.8	35.0	34.8	34.1	33.6
G167.0	35.5	35.0	35.5	35.5	35.0	35.3	35.5	35.3	34.8	34.1
G168.0	36.0	35.7	35.3	36.0	35.5	35.7	35.3	35.5	35.3	35.3
G169.0	36.4	36.0	36.4	35.7	36.7	36.2	36.4	36.2	35.5	35.0
G170.0	36.7	36.4	36.0	36.7	37.1	36.7	36.2	36.7	36.2	36.2
G171.0	36.4	36.9	36.4	36.7	37.3	36.9	37.3	36.7	36.4	36.0
G172.0	37.6	37.1	37.6	37.1	36.9	37.3	37.1	37.1	37.1	36.4
G173.0	37.8	37.3	37.8	37.8	37.1	37.6	38.0	37.3	37.3	37.3
G174.0	38.0	37.6	38.0	37.8	37.3	37.8	38.3	37.6	37.8	37.8
G175.0	38.3	37.8	37.6	37.8	37.6	38.3	38.0	37.8	38.0	37.3
G176.0	37.8	38.3	38.5	38.3	38.7	38.3	38.0	38.3	38.3	37.6
G177.0	38.7	38.3	38.0	38.5	38.7	38.3	39.0	38.7	38.5	38.5
G178.0	38.7	38.5	39.0	38.3	38.0	38.5	38.3	38.5	38.5	38.7
G179.0	38.7	38.5	38.0	38.3	38.7	38.7	38.3	38.3	38.7	38.0
G180.0	38.7	38.7	39.0	38.5	38.3	38.7	38.3	38.3	39.2	39.0

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	7862.2	7858.7	7860.1	7857.3	7862.2	7865.4	7867.5	7872.8	7877.5	7880.5
G1.0	7893.3	7891.9	7891.9	7890.9	7897.0	7898.8	7900.7	7905.1	7909.7	7910.4
G2.0	7916.9	7916.9	7918.3	7918.3	7922.7	7926.2	7928.5	7932.7	7936.4	7935.7
G3.0	7936.4	7937.8	7939.7	7940.8	7944.1	7949.2	7951.3	7954.3	7957.1	7956.4
G4.0	7948.5	7949.9	7953.8	7955.7	7960.3	7964.3	7966.6	7969.1	7972.6	7968.7
G5.0	7955.7	7958.5	7961.9	7963.6	7968.9	7972.6	7975.4	7977.5	7980.5	7976.8
G6.0	7954.5	7958.9	7963.6	7967.3	7971.9	7975.6	7979.1	7981.0	7982.4	7979.1
G7.0	7942.0	7947.3	7954.5	7959.6	7966.8	7971.4	7975.6	7978.2	7979.3	7975.6
G8.0	7922.3	7929.7	7937.3	7942.9	7950.6	7958.0	7963.1	7967.0	7969.4	7965.9
G9.0	7892.8	7903.9	7911.6	7917.9	7926.0	7936.6	7942.4	7947.5	7950.8	7947.1
G10.0	7857.5	7867.3	7877.5	7885.4	7895.4	7906.3	7913.0	7916.9	7920.6	7918.3
G11.0	7812.8	7825.5	7834.1	7846.4	7860.5	7868.2	7875.2	7876.8	7879.1	7877.0
G12.0	7754.3	7767.5	7781.9	7796.3	7809.7	7821.1	7826.2	7827.6	7827.6	7822.5
G13.0	7671.2	7690.3	7710.4	7735.5	7754.5	7764.3	7767.7	7768.4	7768.7	7759.4
G14.0	7568.2	7589.3	7620.9	7650.8	7679.8	7694.9	7698.6	7700.5	7694.7	7686.5
G15.0	7437.8	7474.3	7511.6	7551.5	7587.5	7609.8	7619.5	7620.4	7612.3	7602.1
G16.0	7291.2	7331.1	7376.4	7427.2	7471.2	7503.3	7524.1	7530.2	7519.0	7504.4
G17.0	7118.6	7169.6	7227.9	7291.4	7345.3	7383.8	7413.9	7423.0	7414.4	7387.5
G18.0	6945.3	6992.4	7053.2	7124.4	7192.6	7244.6	7288.0	7308.6	7292.6	7265.9
G19.0	6748.3	6805.9	6874.1	6948.3	7023.7	7093.8	7141.3	7168.2	7159.4	7122.8
G20.0	6533.9	6597.5	6667.6	6758.8	6842.3	6916.5	6978.7	7013.0	7006.3	6969.0
G21.0	6316.3	6384.1	6462.5	6556.0	6648.1	6730.0	6802.6	6840.9	6832.1	6787.1
G22.0	6095.5	6156.7	6242.8	6336.7	6440.7	6525.1	6595.2	6646.7	6637.6	6596.1
G23.0	5849.3	5925.6	6011.0	6113.1	6221.0	6311.7	6389.4	6432.8	6436.3	6387.1
G24.0	5599.0	5686.7	5773.9	5876.4	5989.2	6081.5	6167.6	6214.7	6208.4	6163.2
G25.0	5349.3	5438.2	5534.9	5642.6	5759.5	5851.4	5932.4	5974.4	5968.3	5918.0
G26.0	5100.9	5180.0	5283.0	5388.1	5510.3	5610.1	5681.3	5726.6	5711.5	5668.1
G27.0	4838.2	4929.4	5021.5	5139.4	5265.1	5352.1	5432.1	5473.5	5447.0	5403.4
G28.0	4584.2	4665.8	4756.1	4868.6	5002.5	5088.3	5166.3	5197.8	5180.4	5127.5
G29.0	4339.0	4419.9	4504.6	4613.6	4733.8	4831.3	4897.6	4924.5	4902.7	4838.0
G30.0	4113.4	4188.1	4252.6	4348.2	4470.0	4557.5	4619.4	4645.7	4618.0	4551.2
G31.0	3889.6	3963.6	4023.4	4106.5	4214.6	4301.8	4351.9	4366.6	4331.8	4264.9
G32.0	3662.0	3729.5	3792.6	3868.2	3958.7	4033.9	4080.0	4099.1	4045.5	3987.5
G33.0	3438.3	3505.8	3570.1	3644.1	3719.5	3763.1	3813.5	3806.7	3757.8	3702.3
G34.0	3235.3	3289.1	3349.7	3418.6	3488.0	3509.3	3533.4	3543.9	3488.9	3439.0
G35.0	3025.6	3084.5	3136.9	3199.1	3258.5	3277.8	3278.0	3275.9	3222.5	3182.2
G36.0	2824.7	2882.7	2930.2	2992.2	3032.5	3037.2	3021.2	2999.4	2967.6	2939.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	2624.0	2691.7	2743.4	2797.5	2828.8	2816.8	2790.3	2757.8	2729.3	2721.9
G38.0	2437.7	2506.1	2556.0	2601.0	2631.4	2611.4	2565.0	2526.3	2504.7	2512.1
G39.0	2270.4	2330.5	2379.0	2425.4	2443.7	2413.3	2362.3	2310.5	2300.1	2317.3
G40.0	2097.3	2166.7	2211.2	2250.4	2268.5	2224.7	2165.8	2112.4	2115.6	2138.6
G41.0	1941.4	2012.2	2059.3	2091.3	2102.4	2057.2	1986.4	1947.7	1943.0	1975.1
G42.0	1790.4	1863.2	1904.5	1937.5	1947.2	1896.4	1824.9	1789.0	1787.1	1821.7
G43.0	1656.1	1722.9	1766.0	1797.8	1796.9	1755.1	1683.2	1654.4	1646.8	1683.2
G44.0	1535.4	1596.9	1626.1	1655.1	1667.9	1616.1	1552.8	1518.5	1525.0	1554.4
G45.0	1428.4	1482.7	1495.3	1522.9	1538.7	1493.7	1441.0	1408.0	1417.8	1438.9
G46.0	1338.0	1373.9	1375.1	1400.2	1420.6	1381.8	1341.0	1314.3	1318.0	1334.5
G47.0	1267.7	1267.7	1253.5	1282.8	1307.1	1283.7	1250.7	1234.0	1230.8	1242.8
G48.0	1175.8	1161.7	1144.7	1175.3	1198.8	1188.1	1165.4	1157.2	1146.1	1153.1
G49.0	1073.5	1066.5	1055.6	1070.5	1096.4	1096.7	1091.3	1091.8	1071.6	1072.3
G50.0	968.4	989.0	985.8	984.9	1002.5	1012.9	1024.8	1027.8	1006.0	991.6
G51.0	900.2	920.8	926.2	912.0	916.0	935.0	964.2	967.5	945.7	918.0
G52.0	831.3	863.5	864.7	855.6	839.2	864.7	906.4	911.1	887.7	850.3
G53.0	762.4	800.0	813.2	801.6	774.0	799.3	845.4	858.0	830.8	788.1
G54.0	701.3	740.1	763.8	750.1	724.5	740.8	787.2	811.1	781.2	730.6
G55.0	648.7	685.3	709.9	705.1	683.0	682.3	732.2	769.1	731.3	681.2
G56.0	599.3	635.7	656.3	662.8	641.3	635.9	683.5	725.0	683.7	638.0
G57.0	558.7	589.3	613.7	616.7	600.9	599.7	636.8	679.3	639.4	604.1
G58.0	518.1	544.3	572.6	573.5	566.1	568.2	593.9	631.8	600.0	574.4
G59.0	477.9	500.0	534.5	536.9	532.9	539.6	555.4	589.1	564.9	547.1
G60.0	442.0	460.3	497.0	501.8	500.2	511.8	526.2	545.2	535.0	522.2
G61.0	414.6	430.8	460.8	471.0	471.2	487.0	500.2	507.2	509.7	500.2
G62.0	392.3	413.9	433.1	445.2	446.8	465.4	476.8	470.7	488.1	479.8
G63.0	375.1	395.1	409.7	423.4	432.0	442.4	455.0	439.2	468.4	461.2
G64.0	374.2	379.6	389.5	404.9	419.0	426.7	434.1	411.8	448.0	441.7
G65.0	393.0	390.5	376.1	390.7	400.4	416.5	418.8	393.7	432.2	426.2
G66.0	335.7	344.3	353.8	373.3	386.5	397.4	407.4	379.6	415.8	417.1
G67.0	317.4	324.1	333.9	361.2	374.2	384.7	389.3	370.7	403.2	406.5
G68.0	307.9	314.1	321.3	352.4	364.7	376.3	375.6	360.3	385.8	392.1
G69.0	298.6	304.2	312.7	346.1	362.2	372.1	362.6	354.5	374.0	388.1
G70.0	289.1	293.5	307.2	339.6	360.8	372.8	353.6	347.3	361.9	381.6
G71.0	278.9	283.0	302.5	339.2	356.8	368.0	342.9	338.5	347.8	376.8
G72.0	268.0	274.0	300.7	340.8	359.8	358.0	328.3	326.7	329.9	366.8
G73.0	256.1	263.8	300.5	355.4	361.5	343.6	314.8	316.2	309.3	347.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	243.4	255.0	301.6	349.6	342.9	322.5	305.5	305.5	294.4	328.5
G75.0	230.8	246.4	299.8	350.1	325.3	306.3	297.0	293.0	282.4	307.6
G76.0	217.4	239.0	315.5	350.1	300.9	297.0	289.1	279.1	270.5	290.9
G77.0	205.6	235.7	293.0	327.4	286.8	289.1	279.8	264.0	260.1	277.3
G78.0	206.3	232.2	282.6	295.6	267.0	278.6	267.7	248.9	247.3	248.5
G79.0	198.8	239.0	291.6	304.2	266.8	268.4	257.1	235.0	223.2	235.0
G80.0	180.5	224.1	271.9	278.6	265.6	256.4	244.5	213.7	210.2	225.5
G81.0	160.3	205.1	248.9	237.8	234.3	240.4	211.8	199.3	200.4	218.6
G82.0	142.4	185.8	215.8	199.8	206.7	201.4	187.5	177.7	180.7	194.9
G83.0	125.3	158.9	181.0	169.4	171.9	169.6	159.4	151.7	153.6	165.0
G84.0	106.3	132.7	154.1	138.3	146.9	142.0	133.2	125.5	129.7	143.1
G85.0	94.2	111.8	123.9	110.2	121.1	114.6	108.6	107.9	111.4	125.8
G86.0	75.2	84.7	92.8	89.3	97.0	98.8	93.5	92.1	95.8	110.7
G87.0	61.3	68.0	76.3	73.6	78.2	84.7	79.6	78.9	81.4	92.1
G88.0	46.9	53.8	63.6	64.3	65.7	73.1	69.4	67.8	69.1	73.6
G89.0	36.7	43.2	51.7	58.0	56.2	61.0	61.3	60.8	62.4	66.6
G90.0	28.5	32.3	39.9	51.5	47.8	53.8	53.8	53.6	55.0	60.8
G91.0	23.4	26.5	32.9	51.7	39.4	46.2	47.1	46.6	47.3	52.2
G92.0	21.3	24.6	28.8	47.8	37.1	44.3	43.6	43.2	44.1	47.8
G93.0	19.0	21.8	27.8	39.9	36.2	41.8	41.3	41.3	42.9	45.5
G94.0	17.6	21.1	26.0	31.8	34.6	38.7	40.6	41.1	41.5	44.5
G95.0	17.4	22.0	25.8	30.9	34.3	39.9	40.1	39.4	41.1	43.8
G96.0	17.6	23.4	27.1	28.5	36.2	40.8	41.3	37.6	39.9	43.6
G97.0	18.8	20.4	22.0	26.9	33.4	39.9	40.8	38.0	39.2	42.7
G98.0	18.3	18.8	19.5	23.7	27.4	34.3	36.9	37.3	37.6	41.1
G99.0	18.3	17.4	18.3	20.0	23.9	27.8	30.2	36.4	38.5	41.8
G100.0	17.2	16.2	16.5	17.9	20.4	23.9	26.0	29.0	32.9	42.9
G101.0	16.0	15.1	15.5	16.0	17.2	20.9	23.7	27.4	29.9	40.8
G102.0	14.6	13.7	13.2	13.9	15.3	18.1	19.7	22.5	27.1	32.5
G103.0	13.7	12.8	11.4	11.1	11.8	13.7	14.1	17.6	22.7	26.5
G104.0	12.1	10.9	9.5	8.4	8.4	8.4	11.1	14.9	18.8	22.7
G105.0	9.5	8.1	6.5	4.9	5.6	7.0	9.3	11.6	15.1	20.2
G106.0	5.8	5.1	4.4	4.4	4.6	7.0	8.1	9.7	12.1	17.2
G107.0	4.4	4.2	4.4	4.6	4.9	5.3	7.4	9.1	10.9	13.5
G108.0	4.6	4.4	4.4	4.4	4.4	5.8	6.7	8.1	9.3	11.8
G109.0	4.9	4.6	4.6	4.6	4.9	5.6	6.0	7.7	9.1	10.4
G110.0	5.1	4.9	4.9	5.1	5.1	5.3	5.8	7.0	7.9	10.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	5.3	5.1	5.1	5.1	5.6	5.6	5.6	6.5	7.4	9.1
G112.0	5.6	5.3	5.6	5.3	5.8	5.1	5.6	6.5	7.7	8.6
G113.0	5.8	5.6	5.8	6.0	5.8	6.3	5.8	6.0	7.4	8.4
G114.0	6.0	5.8	5.8	5.8	6.3	6.5	6.0	6.0	6.5	7.7
G115.0	6.0	6.0	6.3	6.0	6.7	6.0	6.5	6.3	6.3	7.4
G116.0	6.7	6.5	6.5	6.7	6.3	7.0	6.7	6.5	6.5	7.2
G117.0	7.0	6.7	7.0	7.2	7.2	7.4	7.2	7.0	7.2	7.0
G118.0	7.4	7.2	7.4	7.4	7.4	7.0	7.4	7.4	7.4	7.2
G119.0	7.4	7.4	7.7	7.4	7.4	7.9	7.7	7.7	7.9	7.4
G120.0	8.1	7.9	7.7	8.1	7.7	8.4	8.1	7.9	8.1	7.9
G121.0	8.6	8.4	8.1	8.1	8.1	8.6	8.6	8.4	8.1	8.4
G122.0	8.6	8.8	9.1	9.1	9.1	8.4	8.6	8.8	9.1	8.6
G123.0	9.1	9.3	9.1	9.5	8.8	9.5	9.3	9.1	9.5	8.8
G124.0	9.7	9.5	9.3	10.0	10.0	9.3	9.7	9.5	9.3	9.3
G125.0	10.0	10.2	10.4	9.7	10.4	10.4	10.0	10.0	9.7	9.7
G126.0	10.4	10.7	10.2	10.9	10.9	10.0	10.4	10.7	10.2	10.7
G127.0	11.4	11.1	11.4	11.4	10.7	11.4	10.9	10.7	11.1	11.1
G128.0	11.6	11.6	11.4	11.8	11.4	11.1	11.6	11.1	11.6	11.6
G129.0	12.5	12.1	11.8	12.5	11.6	11.6	12.3	12.1	11.8	12.1
G130.0	12.5	12.8	13.0	13.0	12.8	12.8	12.8	12.5	12.3	12.1
G131.0	13.5	13.2	13.7	13.0	12.8	13.5	13.0	13.2	12.8	12.8
G132.0	14.1	13.9	13.5	13.9	14.1	13.2	13.5	13.5	13.7	13.2
G133.0	14.4	14.4	14.6	14.1	13.9	13.9	13.9	14.4	14.4	14.4
G134.0	14.9	15.1	15.3	15.3	14.4	15.1	14.4	14.9	14.6	15.1
G135.0	16.0	15.8	15.3	15.8	15.1	15.1	15.5	15.5	15.3	15.1
G136.0	16.5	16.2	16.7	16.0	16.2	15.8	16.0	15.8	15.8	15.5
G137.0	17.2	16.9	17.2	16.9	16.5	16.9	16.5	16.2	16.7	16.2
G138.0	17.9	17.6	17.2	17.6	17.6	17.6	16.9	17.6	17.2	16.9
G139.0	18.1	18.1	18.6	17.9	17.6	17.6	17.9	17.6	17.9	17.6
G140.0	18.6	18.8	19.3	18.6	18.3	18.1	18.8	18.1	18.6	18.8
G141.0	19.3	19.5	20.0	19.0	19.5	18.8	19.3	18.8	19.3	19.5
G142.0	20.4	20.2	20.4	20.2	20.2	19.5	19.7	20.2	20.0	19.7
G143.0	21.1	20.9	20.4	20.4	20.4	20.2	20.4	20.0	20.4	20.9
G144.0	21.1	21.3	20.9	21.6	20.9	20.9	21.1	20.6	21.1	21.3
G145.0	21.8	22.0	21.6	22.3	21.6	21.6	21.8	22.3	21.8	22.0
G146.0	22.5	22.5	22.3	22.3	22.3	22.0	22.5	22.0	22.5	22.5
G147.0	23.7	23.4	23.0	23.0	23.0	22.7	23.2	22.7	23.2	23.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	23.9	24.1	24.4	23.7	23.7	23.4	23.7	24.1	23.9	23.7
G149.0	25.1	24.6	25.1	24.4	24.6	24.1	24.6	24.8	24.6	24.4
G150.0	25.8	25.3	25.5	25.3	25.1	24.8	25.1	24.6	25.1	25.3
G151.0	25.8	25.8	26.2	26.0	26.0	25.5	25.8	25.3	25.8	26.0
G152.0	26.9	26.5	26.9	26.2	26.5	26.7	26.2	26.0	26.5	26.2
G153.0	27.1	27.1	26.9	27.1	27.1	27.4	26.9	27.1	27.1	26.9
G154.0	27.8	27.8	28.1	27.4	27.4	27.1	27.4	27.4	27.6	27.6
G155.0	28.3	28.3	28.5	28.1	28.1	27.8	28.3	27.8	28.3	28.1
G156.0	28.8	28.8	28.8	28.5	28.5	29.0	28.5	29.0	28.8	29.0
G157.0	29.5	29.5	29.2	29.2	29.2	29.7	29.5	29.7	29.2	29.2
G158.0	29.9	29.9	30.2	30.2	30.2	30.2	29.7	29.7	29.9	29.9
G159.0	31.1	30.4	30.6	30.6	30.4	30.9	30.4	30.6	30.4	30.6
G160.0	31.5	31.1	31.1	31.1	31.1	31.3	31.1	31.3	31.1	31.1
G161.0	31.5	31.5	31.5	31.5	31.8	31.3	31.8	31.3	31.8	31.8
G162.0	32.5	32.0	32.0	32.3	32.3	32.5	32.0	32.0	32.0	32.5
G163.0	32.9	32.7	32.5	32.7	32.7	32.5	32.7	32.7	32.7	32.9
G164.0	33.4	32.9	32.9	33.2	33.2	33.4	33.2	33.2	33.2	33.4
G165.0	33.4	33.4	33.4	33.6	33.6	33.4	33.4	33.6	33.6	33.9
G166.0	33.9	34.1	33.9	34.1	34.1	34.3	33.9	34.1	33.9	34.3
G167.0	34.3	34.3	34.3	34.6	34.3	34.8	34.3	34.6	34.3	34.3
G168.0	35.0	34.8	34.8	34.8	35.0	35.3	35.0	34.8	34.8	34.8
G169.0	35.5	35.3	35.3	35.3	35.3	35.7	35.5	35.3	35.3	35.5
G170.0	35.5	35.5	35.7	35.7	35.7	35.5	36.0	35.5	36.0	36.0
G171.0	36.0	36.2	36.2	36.2	36.2	36.0	36.2	36.4	36.4	36.0
G172.0	36.4	36.7	36.4	36.4	36.4	36.2	36.7	36.9	36.7	36.4
G173.0	37.1	36.9	36.9	37.1	36.9	37.1	36.9	37.1	36.9	37.1
G174.0	37.3	37.1	37.1	37.1	37.3	37.1	37.1	37.3	37.1	37.6
G175.0	37.8	37.8	37.8	37.8	37.6	37.3	37.3	37.3	37.6	37.6
G176.0	37.8	38.0	37.6	37.8	37.8	38.0	37.8	38.0	37.6	37.8
G177.0	38.0	38.0	37.8	38.3	37.8	37.8	38.0	37.6	38.0	37.6
G178.0	38.3	38.3	38.3	37.8	38.0	38.3	38.3	38.5	37.8	38.3
G179.0	38.3	38.0	38.5	38.0	38.0	38.0	38.5	38.7	38.0	38.5
G180.0	38.0	38.5	38.7	37.8	38.0	38.5	38.5	38.5	38.5	37.8

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	7887.0	7891.4	7894.4	7900.0	7902.8	7907.4	7967.5	7968.0	7961.7	7959.8
G1.0	7916.9	7918.1	7917.9	7924.1	7929.2	7926.4	7981.0	7978.4	7970.0	7966.1
G2.0	7941.8	7942.4	7942.2	7944.1	7944.1	7940.1	7986.5	7982.1	7971.7	7964.3
G3.0	7960.1	7958.9	7956.8	7957.1	7954.0	7949.2	7988.4	7980.0	7967.7	7956.1
G4.0	7972.4	7967.7	7964.5	7962.4	7958.2	7951.0	7984.2	7973.1	7957.3	7943.4
G5.0	7977.0	7972.8	7970.3	7965.0	7958.2	7949.2	7976.1	7961.9	7942.7	7926.2
G6.0	7979.3	7972.4	7968.4	7961.2	7954.0	7943.8	7963.1	7945.7	7925.0	7902.3
G7.0	7976.5	7968.7	7964.0	7955.4	7945.7	7930.1	7939.9	7920.2	7898.1	7872.4
G8.0	7963.1	7957.5	7947.5	7937.3	7925.7	7909.7	7907.6	7883.0	7858.5	7830.9
G9.0	7942.4	7934.8	7923.4	7910.0	7894.9	7874.9	7865.0	7837.3	7810.0	7780.7
G10.0	7911.1	7901.4	7886.8	7872.4	7856.6	7833.2	7808.8	7780.5	7749.2	7717.6
G11.0	7869.4	7857.1	7839.4	7824.8	7804.6	7779.6	7742.7	7707.9	7678.9	7645.7
G12.0	7816.0	7801.4	7785.4	7764.0	7740.6	7711.8	7660.1	7624.8	7590.7	7562.4
G13.0	7750.1	7736.2	7711.4	7688.6	7667.5	7632.3	7564.5	7524.1	7492.6	7460.8
G14.0	7671.7	7652.9	7629.7	7600.2	7570.5	7537.4	7449.2	7406.3	7373.3	7351.3
G15.0	7581.9	7558.5	7527.6	7497.5	7468.2	7424.4	7316.5	7271.7	7245.7	7220.4
G16.0	7474.3	7449.2	7411.9	7372.2	7330.9	7292.4	7159.9	7113.7	7088.4	7071.5
G17.0	7358.7	7322.3	7279.4	7231.6	7186.3	7140.9	6987.3	6939.5	6921.2	6909.8
G18.0	7222.1	7175.9	7129.7	7078.7	7021.6	6969.6	6793.1	6750.9	6731.1	6722.1
G19.0	7070.3	7017.2	6956.4	6904.0	6841.8	6787.3	6579.0	6534.2	6522.6	6524.7
G20.0	6898.9	6834.4	6769.9	6704.0	6636.3	6575.7	6345.8	6304.3	6292.0	6306.4
G21.0	6709.3	6633.7	6562.7	6489.4	6412.8	6351.4	6102.6	6056.9	6055.1	6071.3
G22.0	6507.5	6421.6	6332.1	6258.5	6169.9	6105.4	5840.3	5794.5	5798.5	5825.2
G23.0	6297.1	6190.6	6096.6	6013.6	5926.1	5849.8	5559.5	5511.7	5529.1	5563.7
G24.0	6059.7	5948.8	5839.1	5749.8	5660.9	5573.2	5258.1	5237.5	5247.0	5284.1
G25.0	5807.8	5694.5	5579.7	5484.6	5385.8	5293.0	4976.5	4945.4	4961.6	5017.6
G26.0	5553.7	5418.5	5291.6	5190.6	5095.8	5006.7	4687.4	4654.5	4683.0	4731.5
G27.0	5278.8	5139.1	5014.1	4910.8	4813.2	4712.0	4405.1	4367.0	4397.4	4457.0
G28.0	5006.2	4858.9	4723.6	4618.8	4526.2	4427.8	4126.7	4097.7	4128.3	4184.4
G29.0	4716.9	4576.8	4445.2	4338.7	4254.7	4160.1	3873.3	3845.2	3884.0	3932.5
G30.0	4425.7	4295.1	4163.5	4080.5	3994.6	3917.4	3632.5	3604.6	3643.6	3693.1
G31.0	4151.0	4027.8	3917.9	3832.5	3765.2	3680.5	3402.8	3381.2	3416.7	3473.3
G32.0	3875.2	3763.8	3671.2	3601.4	3528.6	3447.1	3182.6	3169.2	3203.1	3248.3
G33.0	3610.4	3525.5	3439.0	3363.8	3311.4	3238.6	2978.7	2959.0	3005.1	3052.0
G34.0	3368.2	3294.2	3212.1	3152.3	3099.8	3027.4	2775.0	2767.8	2811.4	2857.4
G35.0	3128.8	3072.9	3001.9	2951.3	2898.7	2832.8	2582.7	2575.9	2626.5	2676.9
G36.0	2911.4	2857.8	2802.1	2751.6	2700.8	2636.3	2391.0	2395.2	2443.5	2491.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	2701.0	2664.1	2616.1	2568.5	2514.5	2448.6	2222.6	2223.1	2276.9	2321.7
G38.0	2500.5	2474.1	2432.1	2383.4	2333.5	2274.8	2054.2	2061.1	2118.9	2159.5
G39.0	2321.4	2301.9	2261.4	2213.3	2167.9	2114.0	1907.1	1917.1	1973.7	2014.3
G40.0	2149.1	2129.6	2096.4	2066.0	2013.1	1959.7	1767.2	1773.2	1834.2	1873.4
G41.0	1991.3	1977.8	1956.0	1918.2	1870.2	1817.5	1632.6	1642.1	1702.2	1744.9
G42.0	1837.7	1832.4	1816.6	1786.9	1733.5	1683.9	1508.5	1525.0	1581.1	1621.5
G43.0	1701.1	1700.4	1688.5	1657.4	1612.7	1560.9	1397.6	1414.5	1469.8	1508.7
G44.0	1572.5	1573.9	1561.2	1534.7	1488.5	1442.8	1294.8	1319.2	1372.8	1403.4
G45.0	1460.5	1457.0	1446.3	1429.6	1384.6	1341.2	1203.2	1233.6	1284.6	1306.4
G46.0	1352.6	1345.2	1330.8	1319.2	1287.4	1244.0	1133.1	1163.0	1202.5	1216.2
G47.0	1250.0	1239.1	1221.3	1214.5	1199.0	1166.3	1061.2	1088.8	1122.9	1129.4
G48.0	1149.6	1138.0	1118.0	1113.2	1115.0	1096.0	987.0	1013.6	1047.0	1058.6
G49.0	1058.9	1046.8	1028.9	1032.9	1036.1	1025.7	915.0	938.9	970.7	995.3
G50.0	975.1	964.2	959.8	968.6	968.8	953.1	848.0	866.5	899.5	932.0
G51.0	893.5	894.8	900.6	904.1	900.2	887.9	776.5	794.8	829.4	870.0
G52.0	826.4	838.0	844.0	845.7	842.4	822.0	711.1	727.6	762.4	809.0
G53.0	765.2	785.1	792.5	790.0	780.0	757.5	653.6	671.9	701.6	746.1
G54.0	715.7	738.5	745.2	738.2	721.3	694.8	609.9	626.4	648.0	689.5
G55.0	673.3	696.3	699.3	686.0	666.8	642.2	573.0	587.4	604.8	636.4
G56.0	636.8	655.0	654.0	637.1	619.0	600.7	542.4	553.6	567.3	593.5
G57.0	602.5	616.0	609.0	592.1	577.5	567.0	509.7	521.5	531.1	557.3
G58.0	570.5	579.8	572.4	552.6	541.0	536.9	479.3	490.2	497.4	526.0
G59.0	541.0	542.0	539.9	518.5	506.0	506.2	456.4	465.4	471.4	494.9
G60.0	512.7	510.0	509.5	487.7	476.1	475.6	440.6	447.8	454.3	471.0
G61.0	484.2	480.0	476.8	461.0	453.3	453.1	423.2	430.4	440.3	456.8
G62.0	459.1	456.6	453.3	441.5	439.0	437.3	419.5	422.9	433.1	448.7
G63.0	438.3	437.3	432.9	431.3	428.5	421.8	511.8	511.8	513.0	483.3
G64.0	423.6	419.2	427.6	454.7	455.7	449.9	496.7	503.7	504.6	473.1
G65.0	410.9	405.1	427.6	479.5	522.7	519.5	402.5	407.9	411.6	410.0
G66.0	401.1	393.5	400.2	427.4	459.4	463.3	376.8	378.4	380.5	386.1
G67.0	391.2	383.3	380.0	382.3	390.0	392.3	368.0	369.6	371.4	374.7
G68.0	386.1	376.8	367.7	369.1	378.6	379.6	360.1	361.2	362.4	365.6
G69.0	379.6	372.6	361.5	362.4	371.7	371.0	354.0	355.0	355.7	358.2
G70.0	377.9	369.1	357.0	356.4	364.0	363.8	348.5	349.6	348.7	351.5
G71.0	381.2	370.0	356.6	351.3	357.8	358.0	341.7	343.4	341.7	345.9
G72.0	382.3	366.6	351.7	345.2	350.8	351.5	332.0	333.4	331.5	342.2
G73.0	374.9	365.2	350.8	338.5	342.9	343.8	315.3	317.4	316.9	336.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	368.7	366.3	351.0	329.7	331.5	332.9	252.6	255.9	273.3	319.0
G75.0	347.5	371.2	347.5	316.2	316.0	312.7	235.3	235.9	243.6	287.5
G76.0	327.6	385.8	344.5	267.3	256.6	252.6	221.3	221.3	232.9	275.2
G77.0	282.4	320.4	311.6	252.6	242.0	235.7	215.8	215.5	228.3	265.6
G78.0	254.5	277.5	289.3	242.4	230.8	223.2	210.0	210.9	225.0	275.2
G79.0	248.2	277.9	304.6	245.9	227.1	218.6	185.4	186.3	203.7	259.9
G80.0	252.6	284.2	312.7	246.2	223.4	211.1	168.9	170.3	183.5	230.1
G81.0	253.8	268.7	299.3	225.0	200.9	187.5	149.2	151.0	164.5	193.5
G82.0	233.4	227.4	245.9	194.4	176.8	168.2	125.8	128.8	146.4	162.6
G83.0	191.2	184.2	201.6	164.3	153.1	145.2	106.7	110.7	125.3	139.2
G84.0	168.4	156.1	163.8	141.1	134.8	126.7	91.9	99.1	117.2	124.6
G85.0	145.9	132.5	141.5	122.0	117.2	109.5	73.6	79.8	92.1	97.2
G86.0	126.7	113.9	123.4	110.4	109.7	95.3	61.5	67.5	76.1	75.9
G87.0	95.1	86.1	89.6	85.6	87.2	77.3	51.7	57.1	64.5	63.1
G88.0	74.7	69.8	72.6	71.2	74.9	65.9	46.2	50.6	56.4	56.6
G89.0	68.2	62.0	66.1	63.6	66.3	57.1	39.9	42.2	47.3	50.1
G90.0	62.9	56.6	62.0	55.7	56.6	50.1	39.9	41.3	45.5	49.9
G91.0	55.2	50.8	54.3	50.6	48.3	43.6	40.1	41.1	42.9	43.2
G92.0	51.3	48.0	50.3	46.6	46.6	42.7	42.2	41.5	42.5	41.8
G93.0	47.8	46.6	45.9	45.0	46.9	42.7	42.5	42.2	42.2	43.4
G94.0	48.0	47.3	45.9	43.4	45.0	44.5	42.9	43.6	42.9	44.1
G95.0	47.1	48.3	47.8	44.3	44.5	43.2	42.5	42.9	42.7	43.8
G96.0	46.6	45.7	46.2	45.0	45.7	44.3	42.5	42.2	42.0	43.4
G97.0	47.3	44.1	45.2	45.2	45.0	43.8	42.5	42.9	41.8	41.1
G98.0	44.5	43.4	45.5	45.0	44.3	44.1	42.7	41.8	43.8	42.2
G99.0	44.5	43.8	45.0	42.5	43.6	42.2	54.3	55.5	57.1	56.6
G100.0	51.0	49.7	45.9	41.8	44.1	42.0	78.4	75.4	68.4	60.5
G101.0	54.3	66.3	66.6	57.5	55.2	50.6	66.8	67.5	62.4	58.0
G102.0	42.5	58.7	65.9	64.3	74.7	72.8	48.3	52.4	53.8	48.7
G103.0	32.0	43.2	52.4	57.8	65.0	65.0	38.3	41.3	44.8	43.4
G104.0	28.8	35.7	39.9	43.6	48.7	47.1	35.0	36.9	40.8	38.0
G105.0	24.4	33.6	36.9	42.0	42.5	38.5	30.4	32.3	32.5	29.7
G106.0	21.1	25.1	30.6	36.9	37.3	35.3	26.2	27.4	26.2	24.1
G107.0	17.9	21.6	24.4	29.0	30.9	31.3	22.7	24.1	22.7	21.1
G108.0	14.6	18.8	21.1	24.1	25.3	26.0	19.7	20.6	19.3	18.1
G109.0	12.5	16.5	17.6	20.0	21.3	22.5	16.7	16.9	16.7	15.8
G110.0	11.4	13.9	15.5	16.9	18.1	19.5	14.6	15.1	14.6	13.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	10.4	12.1	13.2	14.6	15.8	16.2	13.2	13.5	13.2	12.5
G112.0	9.5	11.4	12.1	13.2	13.7	14.1	12.5	12.5	12.8	12.3
G113.0	9.1	10.2	11.1	12.1	12.5	12.8	11.6	11.6	11.4	11.6
G114.0	8.4	10.0	10.9	11.1	11.6	11.8	11.1	11.1	10.9	10.4
G115.0	7.9	9.3	9.7	10.7	11.1	11.4	10.4	10.0	10.2	9.7
G116.0	7.9	8.4	9.5	10.2	10.7	10.9	10.0	9.7	11.1	11.4
G117.0	7.4	8.1	8.6	9.3	10.0	10.0	12.1	11.6	11.6	9.7
G118.0	7.7	7.9	9.3	9.3	9.5	9.5	9.1	9.3	9.3	9.1
G119.0	7.4	7.9	8.1	9.5	10.2	10.9	9.1	8.8	8.8	8.8
G120.0	7.7	8.1	8.4	8.4	8.8	9.1	9.5	9.5	9.5	9.3
G121.0	8.1	8.1	8.6	8.6	8.6	8.6	9.5	9.1	9.5	9.5
G122.0	8.6	8.6	8.4	8.6	8.8	8.8	9.7	9.5	9.5	9.5
G123.0	9.1	9.1	9.1	8.8	9.1	8.8	10.2	10.7	10.4	10.4
G124.0	9.7	9.5	9.1	9.3	9.3	9.3	11.1	11.1	10.9	10.7
G125.0	10.0	9.7	10.0	9.7	9.7	10.0	11.6	11.1	11.4	11.1
G126.0	10.2	10.2	10.2	10.2	10.2	10.2	11.8	12.1	12.1	11.6
G127.0	10.7	10.9	10.7	10.7	10.9	10.7	12.3	12.1	12.5	12.5
G128.0	11.1	11.4	11.4	11.4	11.4	11.4	13.2	12.8	13.0	12.5
G129.0	12.1	12.1	11.8	11.8	12.1	11.8	13.9	13.7	13.2	13.7
G130.0	12.3	12.3	12.8	12.3	12.5	12.5	14.4	14.4	13.7	14.1
G131.0	12.8	13.2	13.0	13.0	13.0	13.0	14.9	14.4	14.9	14.4
G132.0	13.7	13.7	13.7	13.5	13.5	13.7	15.1	15.5	15.1	15.3
G133.0	14.4	14.1	14.1	14.4	14.4	14.1	16.0	15.8	15.8	15.5
G134.0	14.6	14.9	14.9	15.1	14.9	15.1	16.7	16.2	16.7	16.7
G135.0	15.5	15.5	15.3	15.8	15.5	15.5	17.2	16.9	16.9	17.4
G136.0	16.2	16.2	16.0	16.0	16.5	16.2	18.1	17.6	17.6	17.9
G137.0	16.5	16.7	16.7	16.9	16.9	16.9	18.8	18.3	18.1	18.6
G138.0	17.2	17.6	17.6	17.6	17.6	17.9	19.0	19.0	18.8	19.3
G139.0	17.9	17.9	18.1	18.1	18.3	18.3	20.0	19.7	19.7	20.0
G140.0	18.6	19.0	18.8	18.8	19.0	18.8	20.6	20.6	20.4	20.0
G141.0	19.5	19.3	19.5	19.5	20.0	19.5	21.1	20.9	20.9	21.1
G142.0	20.2	20.0	20.2	20.4	20.2	20.2	21.8	21.8	21.8	21.8
G143.0	20.9	20.6	20.9	20.9	21.1	21.1	22.3	22.5	22.3	22.0
G144.0	21.6	21.8	21.6	21.8	21.6	21.8	23.0	23.0	23.0	23.2
G145.0	22.3	22.0	22.5	22.5	22.3	22.5	23.7	23.7	23.4	23.2
G146.0	23.0	22.5	22.7	23.2	23.0	23.4	24.4	24.4	24.1	24.6
G147.0	23.7	23.2	23.4	23.4	23.9	23.9	24.8	25.1	24.8	24.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	24.4	24.6	24.6	24.6	24.6	24.4	25.5	25.5	25.5	25.8
G149.0	24.8	24.6	25.1	25.3	25.3	24.8	26.2	26.2	26.2	25.8
G150.0	25.1	25.8	25.8	25.3	25.5	25.8	26.9	26.7	26.7	26.5
G151.0	26.2	26.0	26.5	26.0	26.2	26.2	27.4	27.4	27.4	27.1
G152.0	26.9	26.5	26.7	26.7	27.1	27.1	28.1	28.1	27.8	27.6
G153.0	26.9	27.1	27.6	27.4	27.4	27.4	28.5	28.5	28.5	28.1
G154.0	28.1	28.3	27.8	28.3	28.1	28.3	29.0	29.0	29.2	29.5
G155.0	28.1	28.3	29.0	28.8	28.8	28.5	29.7	29.5	29.7	29.9
G156.0	28.8	29.5	29.5	29.5	29.2	29.2	30.2	30.2	30.2	29.7
G157.0	29.5	30.2	29.7	29.7	29.7	30.2	30.6	30.9	30.6	31.1
G158.0	30.6	30.6	30.6	30.6	30.6	30.6	31.1	30.9	31.3	30.9
G159.0	31.1	30.6	31.3	30.9	31.1	31.1	31.5	31.5	31.8	31.3
G160.0	31.5	31.8	31.8	31.3	31.5	31.8	32.0	32.3	32.3	32.5
G161.0	32.3	31.8	32.3	32.3	32.0	31.8	32.5	32.5	32.7	32.3
G162.0	32.0	32.3	32.7	32.3	32.7	32.3	32.9	32.9	33.4	33.4
G163.0	32.5	33.4	32.7	32.9	33.2	32.7	33.2	33.9	33.6	33.9
G164.0	32.9	33.2	33.9	33.9	33.4	33.2	33.6	33.9	34.1	33.6
G165.0	33.4	34.3	33.6	34.3	33.9	34.1	34.3	34.3	34.3	34.8
G166.0	33.9	34.1	34.3	34.3	34.6	34.3	34.8	35.3	35.0	34.6
G167.0	34.8	34.6	35.3	34.8	34.8	34.8	35.0	35.7	35.5	34.8
G168.0	35.5	35.7	35.0	35.3	35.3	35.3	35.5	36.2	36.0	35.3
G169.0	35.7	35.3	36.0	36.2	35.7	35.7	36.2	36.0	36.2	35.7
G170.0	36.2	36.4	36.4	36.4	36.2	36.2	36.9	36.4	36.7	36.9
G171.0	36.0	36.0	36.4	36.4	36.9	37.1	37.3	37.6	37.1	37.1
G172.0	36.9	37.1	37.1	36.7	37.3	37.1	37.3	37.3	37.3	36.7
G173.0	37.1	36.7	37.6	37.6	37.3	37.1	37.6	38.3	37.6	37.8
G174.0	37.6	37.1	37.8	37.3	37.8	37.8	38.5	37.8	37.8	38.0
G175.0	37.3	38.0	38.0	37.6	38.0	38.5	38.3	39.0	38.0	38.3
G176.0	37.3	37.6	37.8	37.8	38.3	38.7	38.7	39.2	38.3	37.8
G177.0	37.6	37.6	38.0	38.0	38.5	38.3	38.7	39.2	38.3	38.7
G178.0	38.3	37.8	38.0	38.5	38.7	39.2	39.0	38.5	38.5	38.7
G179.0	37.8	38.0	38.0	38.7	38.5	39.2	39.0	39.2	38.5	38.7
G180.0	38.7	38.7	38.3	38.0	38.7	39.2	39.7	38.5	38.5	38.5

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	7961.9	7955.0	7954.0	7952.0	7945.2	7944.5	7937.8	7932.7	7929.0	7923.2
G1.0	7964.0	7953.1	7950.3	7944.5	7934.1	7931.5	7921.6	7913.0	7906.7	7898.4
G2.0	7958.7	7947.3	7937.8	7931.5	7918.3	7910.2	7897.4	7885.8	7874.9	7865.6
G3.0	7948.2	7932.2	7919.9	7910.0	7892.8	7881.4	7866.8	7852.4	7839.2	7829.5
G4.0	7931.8	7912.0	7897.7	7882.8	7862.9	7850.1	7832.2	7815.5	7803.2	7788.9
G5.0	7910.2	7886.1	7869.6	7851.7	7830.4	7816.9	7797.0	7780.5	7766.6	7751.3
G6.0	7884.2	7859.1	7836.9	7818.3	7794.2	7780.5	7758.7	7742.9	7726.0	7709.5
G7.0	7851.7	7822.7	7801.6	7781.2	7757.8	7741.8	7718.8	7699.1	7682.6	7665.0
G8.0	7808.6	7779.6	7758.0	7739.7	7717.9	7699.1	7673.3	7651.5	7630.6	7610.0
G9.0	7755.7	7729.5	7709.7	7691.6	7670.5	7650.1	7622.0	7597.5	7573.1	7549.2
G10.0	7696.0	7671.0	7650.6	7634.3	7611.8	7590.7	7561.5	7530.9	7502.3	7474.0
G11.0	7625.3	7600.5	7582.1	7567.1	7544.8	7521.8	7491.2	7455.2	7420.7	7392.4
G12.0	7542.9	7522.3	7504.4	7487.5	7464.0	7439.5	7403.5	7365.9	7334.6	7301.2
G13.0	7444.8	7428.5	7411.6	7400.7	7373.8	7345.7	7312.3	7274.7	7241.3	7207.0
G14.0	7338.5	7323.9	7312.5	7297.7	7269.9	7240.4	7205.8	7170.8	7140.2	7104.7
G15.0	7211.9	7206.1	7193.3	7181.7	7153.2	7126.5	7094.7	7064.1	7030.2	7001.0
G16.0	7073.4	7070.6	7062.7	7050.1	7024.9	7004.0	6970.1	6942.7	6914.2	6885.0
G17.0	6912.3	6915.8	6908.2	6904.5	6884.5	6865.7	6842.5	6819.5	6793.1	6757.4
G18.0	6736.7	6744.1	6743.2	6740.7	6736.3	6724.6	6701.7	6677.8	6647.6	6614.0
G19.0	6542.5	6555.8	6559.0	6572.0	6576.6	6570.8	6555.8	6534.4	6499.8	6457.6
G20.0	6330.2	6351.1	6372.0	6389.6	6401.0	6406.8	6389.4	6365.5	6326.5	6278.0
G21.0	6108.7	6130.5	6152.8	6185.7	6220.7	6230.0	6220.0	6189.0	6146.5	6087.6
G22.0	5866.2	5898.3	5932.1	5981.3	6021.5	6038.4	6031.2	6002.0	5945.4	5883.9
G23.0	5615.7	5659.8	5693.4	5759.3	5814.7	5843.3	5834.2	5800.1	5739.8	5668.8
G24.0	5351.0	5399.7	5463.9	5533.1	5590.8	5627.5	5618.7	5584.6	5511.0	5435.4
G25.0	5083.5	5147.5	5210.4	5302.0	5373.0	5417.3	5409.4	5361.6	5288.3	5194.6
G26.0	4807.1	4879.5	4961.2	5060.7	5139.6	5186.7	5180.7	5132.2	5041.7	4938.7
G27.0	4530.8	4602.0	4701.8	4823.4	4899.2	4954.7	4948.9	4892.3	4793.9	4673.0
G28.0	4256.4	4332.7	4442.4	4560.0	4655.2	4705.3	4702.3	4632.0	4528.0	4399.7
G29.0	4000.2	4073.8	4184.0	4311.1	4408.5	4463.1	4444.0	4387.0	4261.7	4132.5
G30.0	3751.1	3823.4	3935.0	4052.4	4157.3	4211.8	4187.9	4122.3	3994.4	3849.9
G31.0	3525.5	3594.9	3680.8	3816.5	3900.7	3958.9	3934.8	3863.1	3732.7	3583.8
G32.0	3302.1	3372.6	3459.6	3561.5	3663.6	3704.4	3670.8	3594.7	3463.8	3321.1
G33.0	3099.8	3165.2	3243.4	3341.6	3415.3	3452.5	3419.5	3348.1	3216.3	3086.6
G34.0	2903.1	2962.0	3036.9	3120.9	3175.2	3204.9	3169.9	3089.8	2978.7	2868.3
G35.0	2713.8	2782.9	2842.3	2920.0	2954.6	2962.9	2931.6	2853.2	2761.6	2663.2
G36.0	2546.5	2606.3	2657.8	2724.2	2742.5	2732.1	2695.9	2630.5	2560.2	2480.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	2378.7	2442.1	2489.9	2542.5	2549.7	2522.4	2481.1	2434.0	2382.7	2312.6
G38.0	2212.6	2279.2	2330.0	2367.1	2356.5	2313.3	2276.7	2249.3	2208.7	2163.9
G39.0	2061.8	2123.3	2177.8	2208.0	2184.6	2137.2	2094.3	2083.6	2058.1	2022.2
G40.0	1923.3	1978.1	2034.0	2062.5	2021.9	1960.2	1932.1	1926.1	1920.1	1894.3
G41.0	1796.9	1840.0	1896.6	1925.4	1873.4	1812.0	1785.7	1794.3	1795.5	1770.0
G42.0	1672.3	1716.1	1766.7	1783.7	1740.0	1679.7	1656.1	1669.0	1672.8	1665.8
G43.0	1553.7	1598.5	1648.6	1658.8	1616.8	1561.8	1541.0	1557.9	1559.5	1570.0
G44.0	1444.5	1486.9	1541.9	1547.2	1506.4	1459.1	1441.4	1457.2	1464.6	1476.7
G45.0	1340.1	1376.7	1436.3	1437.7	1399.7	1367.9	1357.0	1363.0	1383.0	1383.0
G46.0	1238.9	1280.4	1336.6	1342.2	1310.6	1288.8	1280.9	1283.4	1304.8	1301.1
G47.0	1148.0	1187.9	1238.2	1250.0	1227.1	1215.0	1208.5	1213.4	1228.2	1228.0
G48.0	1073.3	1106.7	1147.3	1164.9	1153.5	1152.4	1143.3	1155.8	1162.8	1163.3
G49.0	1012.5	1035.0	1064.9	1086.0	1089.3	1094.8	1091.1	1102.5	1099.2	1104.8
G50.0	960.3	974.0	989.7	1010.4	1028.2	1044.5	1049.8	1052.1	1046.3	1053.5
G51.0	906.0	922.5	923.4	941.0	973.3	993.2	1012.0	1006.4	996.5	1014.3
G52.0	851.9	877.2	864.5	878.1	922.0	951.5	975.6	963.3	953.8	981.6
G53.0	799.0	831.7	816.4	820.6	874.7	916.0	936.4	923.6	919.0	949.6
G54.0	744.0	788.1	774.0	774.0	831.5	885.1	898.5	885.3	890.7	915.0
G55.0	689.3	742.2	734.1	733.1	788.6	852.6	860.5	846.8	867.7	885.1
G56.0	640.8	699.3	697.2	698.3	746.1	817.8	823.4	816.4	840.5	852.6
G57.0	597.9	654.5	663.1	668.6	704.8	778.1	784.4	793.2	814.3	809.7
G58.0	562.2	613.0	630.4	640.6	667.5	733.1	749.4	770.0	787.9	758.7
G59.0	528.3	572.6	598.6	616.4	636.4	689.5	718.5	745.9	742.0	686.0
G60.0	500.4	541.0	570.5	594.2	609.0	650.8	693.2	718.0	687.7	613.7
G61.0	477.5	515.3	546.4	574.7	588.6	617.8	677.9	688.8	635.0	562.4
G62.0	460.5	496.0	529.7	556.8	571.2	591.4	666.1	657.5	597.9	531.1
G63.0	458.0	479.5	516.7	537.5	552.4	572.1	651.7	628.0	570.7	509.7
G64.0	440.6	470.5	504.6	522.5	537.3	566.8	632.7	615.3	540.3	492.3
G65.0	418.1	461.0	497.4	513.2	529.4	560.3	615.5	584.9	515.3	465.9
G66.0	405.1	456.8	489.8	501.1	521.3	537.8	592.5	561.2	493.9	448.2
G67.0	397.0	454.3	485.1	486.8	498.6	514.6	573.5	542.0	484.2	440.8
G68.0	393.5	451.7	479.8	476.5	473.8	497.2	557.0	531.3	482.3	434.1
G69.0	392.5	450.8	472.4	458.2	445.9	479.8	536.4	520.6	482.1	429.7
G70.0	392.8	448.0	467.5	438.3	418.5	458.9	505.1	512.5	479.8	428.3
G71.0	391.9	439.6	465.2	415.3	391.6	429.4	461.7	488.1	478.4	434.8
G72.0	394.2	441.7	434.5	384.9	365.6	405.5	420.6	450.8	483.5	447.1
G73.0	391.6	436.2	403.0	354.0	342.9	384.7	392.3	408.6	450.1	440.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	390.5	438.7	375.6	330.6	321.3	359.6	369.8	372.6	412.0	437.1
G75.0	377.2	405.8	343.1	313.2	301.6	333.9	349.6	349.9	363.5	422.9
G76.0	333.9	318.5	301.6	296.3	286.3	311.1	330.6	330.6	334.8	404.1
G77.0	315.5	285.8	275.6	263.8	271.2	292.6	312.3	318.8	312.3	368.9
G78.0	337.1	291.2	269.4	251.0	246.4	274.2	293.3	300.0	293.0	344.8
G79.0	332.7	289.5	265.4	237.3	230.8	243.4	270.8	280.7	290.5	318.1
G80.0	301.6	255.0	249.2	220.6	215.5	224.6	235.7	261.5	262.2	273.5
G81.0	230.4	204.6	221.1	189.8	193.3	202.5	208.8	222.5	221.1	222.7
G82.0	190.7	174.5	184.7	162.6	165.4	172.1	177.0	188.2	184.7	187.9
G83.0	162.2	149.6	164.7	139.7	140.4	140.4	146.6	158.2	157.5	159.2
G84.0	145.5	130.1	146.2	123.0	119.5	119.7	122.0	131.1	133.6	129.2
G85.0	114.2	105.3	119.0	103.0	98.8	99.3	102.1	109.7	107.7	107.9
G86.0	81.0	75.9	81.0	83.5	83.1	84.4	87.5	92.3	84.2	87.0
G87.0	65.4	62.6	67.5	69.6	71.0	72.2	74.5	78.9	70.8	78.4
G88.0	59.9	57.1	61.7	62.0	61.5	63.1	65.4	65.7	60.5	70.3
G89.0	53.6	50.1	52.9	53.8	54.1	56.2	57.5	57.8	50.3	64.5
G90.0	47.8	45.5	47.6	45.9	46.2	47.8	50.1	48.3	41.5	63.6
G91.0	43.8	42.9	44.5	43.8	43.8	45.0	46.2	45.7	38.3	56.8
G92.0	42.5	43.2	44.8	42.2	42.0	43.2	43.8	43.4	37.8	39.4
G93.0	44.5	44.3	44.1	40.6	40.6	42.0	42.7	40.1	36.2	33.6
G94.0	44.1	42.9	42.5	40.1	39.4	40.4	42.7	38.3	36.9	31.1
G95.0	43.2	40.8	41.3	39.4	38.7	38.0	40.8	43.6	34.3	29.2
G96.0	42.9	38.7	42.2	38.5	37.8	39.9	43.4	39.9	31.1	26.5
G97.0	42.0	39.2	40.6	38.0	37.8	36.7	34.8	31.8	27.1	25.5
G98.0	47.8	46.9	48.5	40.8	33.9	32.0	32.9	29.0	24.6	21.1
G99.0	56.4	52.7	47.8	39.7	31.1	29.2	27.6	25.5	20.6	19.0
G100.0	62.4	52.7	43.2	38.0	32.7	27.8	24.1	20.9	17.6	16.5
G101.0	52.7	44.1	40.1	35.5	30.2	23.2	18.6	16.5	15.3	13.9
G102.0	44.8	39.2	32.9	26.9	23.0	17.4	14.4	11.8	10.7	10.7
G103.0	39.0	33.6	27.4	22.3	17.6	14.6	12.5	9.3	6.5	6.3
G104.0	34.1	26.9	22.3	18.6	14.6	12.3	10.2	7.4	5.3	3.9
G105.0	25.3	22.3	20.2	15.5	13.2	10.9	9.3	6.7	4.4	3.7
G106.0	21.8	19.5	16.5	13.7	11.4	9.5	7.4	5.6	4.2	3.9
G107.0	18.8	18.3	14.4	11.8	10.4	8.4	7.4	5.1	4.2	4.4
G108.0	16.2	14.1	12.5	10.7	9.1	8.1	6.0	5.3	4.9	4.4
G109.0	13.9	12.8	10.4	9.7	8.8	7.4	6.5	4.6	5.1	4.6
G110.0	12.5	10.9	10.7	9.3	7.9	7.0	6.0	4.9	4.9	5.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	12.1	10.4	10.2	8.8	7.4	6.5	5.3	5.6	5.1	5.3
G112.0	11.1	10.7	9.7	8.4	7.7	6.3	6.0	5.8	6.0	5.6
G113.0	10.4	9.7	9.3	8.1	7.2	6.5	6.5	5.8	6.3	5.8
G114.0	9.7	9.5	8.1	7.4	7.2	6.7	6.0	6.0	6.0	6.5
G115.0	9.1	8.6	7.7	7.2	6.7	7.0	6.3	6.5	7.0	7.0
G116.0	9.7	8.6	7.4	7.4	7.4	7.0	7.4	6.7	6.7	7.4
G117.0	8.4	8.4	7.4	7.4	7.9	7.2	7.9	7.7	7.0	7.7
G118.0	8.1	8.1	7.7	7.9	8.4	8.1	7.7	7.7	8.1	8.1
G119.0	8.4	8.1	7.9	8.4	8.1	8.1	7.9	7.9	8.6	8.6
G120.0	8.6	8.8	8.4	8.8	8.4	8.6	9.1	9.1	8.4	8.8
G121.0	9.1	9.3	8.8	9.1	9.5	9.1	9.5	9.3	8.8	9.3
G122.0	9.3	9.5	9.3	9.5	9.3	9.5	9.3	9.3	10.0	10.0
G123.0	9.7	10.0	10.4	10.0	9.7	10.4	10.4	9.7	9.7	9.7
G124.0	10.9	10.9	10.9	10.7	10.9	10.4	10.2	10.7	10.2	10.2
G125.0	11.6	11.4	10.9	11.4	10.7	10.9	11.4	11.4	10.7	11.4
G126.0	11.4	11.4	11.8	11.8	11.4	11.8	12.1	11.4	11.4	11.4
G127.0	11.8	12.3	11.8	12.1	11.8	12.3	12.5	12.1	11.8	11.8
G128.0	13.2	12.5	12.3	12.5	12.3	12.5	13.0	13.0	12.3	12.3
G129.0	13.0	13.5	13.7	13.0	12.8	13.0	13.0	13.5	13.0	13.7
G130.0	13.7	13.9	14.1	13.7	13.5	14.1	13.5	14.1	13.5	13.5
G131.0	14.1	14.6	14.1	14.6	13.9	14.1	14.9	14.6	14.9	14.9
G132.0	14.6	15.1	15.3	15.1	14.6	14.9	15.3	15.1	15.5	15.5
G133.0	15.3	15.5	16.0	15.3	15.8	15.8	15.8	15.5	15.3	15.3
G134.0	16.0	16.2	16.0	16.0	16.0	16.0	16.5	16.0	16.7	16.7
G135.0	16.7	16.9	17.2	17.2	16.5	16.9	16.5	17.2	17.4	17.2
G136.0	17.9	17.4	17.9	17.2	16.9	17.2	17.2	17.6	17.9	17.2
G137.0	17.9	18.3	17.9	18.3	17.6	17.9	17.6	18.3	18.3	18.6
G138.0	19.3	18.8	19.0	19.0	19.0	18.6	18.3	18.8	19.3	18.3
G139.0	20.0	19.5	19.0	19.0	19.7	19.0	19.5	19.5	19.3	19.0
G140.0	19.7	20.2	19.7	20.2	20.4	19.7	20.2	20.2	19.7	19.7
G141.0	20.4	20.6	20.4	20.9	20.2	20.9	20.9	20.6	20.4	20.4
G142.0	21.1	21.3	21.1	21.6	21.6	20.9	21.3	21.1	21.1	21.3
G143.0	21.8	22.0	21.8	21.6	22.3	22.0	22.0	22.0	22.3	21.6
G144.0	23.2	22.7	22.7	22.7	22.0	22.7	22.3	22.5	22.3	22.7
G145.0	23.2	23.2	23.0	23.4	22.7	23.0	22.7	23.0	23.4	23.4
G146.0	23.9	23.9	24.1	23.4	23.2	23.4	23.9	23.7	23.4	24.1
G147.0	24.4	24.6	24.6	24.6	23.9	24.6	24.1	24.4	24.8	24.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	25.5	25.1	24.8	25.3	24.6	25.1	24.8	24.8	24.4	24.6
G149.0	26.2	26.0	25.3	26.0	26.0	25.3	25.3	25.5	26.0	25.3
G150.0	26.7	26.2	26.0	26.5	25.8	26.2	26.2	26.0	26.5	25.8
G151.0	26.9	26.9	26.7	27.1	26.2	26.5	26.9	26.7	26.9	26.5
G152.0	27.8	27.8	27.6	27.6	27.6	27.4	27.4	27.4	27.6	26.9
G153.0	28.3	28.1	27.8	28.3	28.3	28.1	28.1	27.6	27.4	28.1
G154.0	28.8	28.5	28.8	28.8	28.8	28.1	28.5	28.3	28.8	28.1
G155.0	29.5	29.5	29.2	28.8	28.8	28.5	29.2	29.0	28.3	28.5
G156.0	29.9	29.5	29.5	29.2	29.2	29.2	29.5	29.5	29.9	29.7
G157.0	30.6	30.2	30.4	29.7	30.2	30.2	29.7	29.9	29.5	29.7
G158.0	30.9	31.1	30.6	30.2	30.6	30.4	30.4	30.4	30.9	30.2
G159.0	31.5	31.5	31.1	30.9	30.9	31.1	30.9	30.6	31.3	30.9
G160.0	32.0	32.3	31.5	32.0	31.3	31.3	31.3	31.5	31.8	31.8
G161.0	32.5	32.0	32.0	32.3	31.8	32.0	32.3	32.0	32.3	31.8
G162.0	32.9	32.5	32.7	32.9	32.3	32.5	32.3	32.5	32.9	32.5
G163.0	33.4	33.6	33.2	33.4	32.9	32.9	32.7	32.7	33.4	32.7
G164.0	33.6	34.1	33.6	33.6	33.4	33.4	33.6	33.4	32.9	33.2
G165.0	34.1	33.9	34.1	34.3	34.1	33.9	33.6	33.6	34.3	33.6
G166.0	34.6	35.0	34.6	34.1	34.8	34.6	34.3	34.1	34.8	34.1
G167.0	35.5	34.6	35.0	34.8	34.8	34.8	35.0	34.6	34.3	34.6
G168.0	35.7	35.0	35.3	35.0	35.3	35.5	35.5	35.5	34.8	35.3
G169.0	36.2	35.5	36.0	35.5	36.0	36.0	35.5	35.3	36.0	35.5
G170.0	36.0	35.7	36.2	36.0	36.4	36.4	36.4	35.7	35.7	35.7
G171.0	36.4	36.2	36.7	36.4	36.9	36.9	36.4	36.7	36.9	36.7
G172.0	37.3	36.7	36.9	36.7	36.9	37.1	37.1	37.1	37.3	37.1
G173.0	36.9	37.8	37.1	37.6	37.3	37.6	37.3	37.3	37.6	37.3
G174.0	38.0	38.0	37.6	37.3	37.6	37.6	37.6	37.3	37.1	37.3
G175.0	38.3	38.3	37.6	38.0	38.0	38.0	38.0	38.0	38.3	37.6
G176.0	38.5	37.6	38.0	38.3	38.0	37.8	37.8	38.3	37.6	37.8
G177.0	38.5	38.7	38.0	38.0	38.3	38.0	38.3	37.8	37.8	38.5
G178.0	38.7	37.8	38.5	38.0	38.3	38.5	38.7	38.3	38.7	38.7
G179.0	39.0	39.0	38.3	38.3	38.5	38.5	38.7	38.7	38.0	38.7
G180.0	38.7	38.0	38.0	38.7	38.5	38.5	38.3	38.7	38.3	38.5

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	7913.7	7904.4	7895.6	7885.4	7875.2	7868.9	7862.2	7858.7	7860.1	7857.3
G1.0	7885.8	7875.2	7864.5	7851.7	7839.2	7831.3	7823.4	7821.6	7819.9	7817.2
G2.0	7849.6	7836.2	7822.7	7808.1	7796.7	7786.1	7777.5	7771.2	7771.5	7770.8
G3.0	7810.7	7795.1	7780.5	7764.7	7749.4	7737.4	7727.1	7723.4	7718.8	7718.3
G4.0	7770.5	7753.4	7738.5	7720.2	7703.3	7688.4	7677.0	7671.7	7668.5	7665.2
G5.0	7730.2	7713.7	7695.1	7677.5	7660.1	7644.5	7630.9	7623.4	7619.0	7616.5
G6.0	7689.3	7669.8	7648.3	7629.7	7610.4	7593.7	7578.2	7571.2	7567.1	7562.4
G7.0	7640.8	7619.7	7600.7	7579.6	7556.4	7538.3	7521.8	7515.8	7511.1	7507.0
G8.0	7583.3	7561.3	7539.5	7513.5	7491.2	7473.3	7454.5	7449.7	7445.7	7441.8
G9.0	7519.3	7490.7	7468.5	7441.8	7419.5	7396.3	7378.2	7373.8	7371.0	7371.3
G10.0	7442.5	7413.5	7386.3	7360.8	7335.5	7311.2	7291.4	7288.4	7287.7	7287.0
G11.0	7355.2	7323.7	7294.0	7269.4	7240.9	7217.2	7198.2	7194.0	7194.7	7198.2
G12.0	7261.3	7230.4	7198.9	7171.7	7141.8	7117.4	7098.4	7093.3	7094.5	7097.0
G13.0	7167.5	7133.4	7102.6	7070.1	7042.0	7011.6	6991.2	6989.4	6993.3	6991.7
G14.0	7062.2	7026.3	6998.6	6964.3	6933.0	6904.9	6883.6	6879.4	6880.1	6879.6
G15.0	6958.7	6920.0	6886.8	6851.6	6822.1	6786.4	6769.0	6766.4	6766.4	6764.3
G16.0	6837.2	6793.6	6759.7	6722.8	6688.7	6662.0	6642.1	6636.3	6642.1	6639.5
G17.0	6706.1	6660.9	6620.5	6581.7	6541.6	6508.2	6494.0	6498.5	6507.3	6508.6
G18.0	6559.7	6506.3	6457.9	6415.2	6378.0	6351.8	6337.0	6338.8	6353.4	6357.6
G19.0	6394.3	6332.1	6285.7	6240.7	6202.4	6168.8	6159.0	6174.8	6187.8	6198.0
G20.0	6213.5	6152.8	6089.9	6047.7	6008.0	5975.5	5974.1	5991.0	6008.2	6022.1
G21.0	6018.2	5952.8	5886.0	5835.1	5796.2	5759.5	5760.4	5792.5	5820.5	5841.4
G22.0	5806.1	5732.4	5654.4	5605.9	5565.1	5542.8	5548.6	5579.7	5615.7	5639.6
G23.0	5583.6	5496.6	5416.1	5357.9	5319.4	5293.4	5311.5	5351.0	5396.9	5429.6
G24.0	5334.5	5245.4	5163.7	5096.2	5051.7	5041.0	5055.8	5114.5	5158.9	5214.3
G25.0	5090.6	4987.6	4892.0	4824.5	4785.3	4767.0	4790.4	4862.6	4919.9	4982.1
G26.0	4812.0	4704.6	4607.8	4536.9	4498.1	4484.9	4515.3	4597.2	4675.4	4747.3
G27.0	4552.6	4426.9	4321.5	4240.4	4201.6	4199.5	4243.8	4331.3	4418.8	4499.3
G28.0	4258.7	4131.3	4021.3	3943.6	3907.2	3908.1	3959.4	4041.3	4146.1	4243.6
G29.0	3980.7	3850.1	3734.8	3661.0	3626.7	3631.6	3678.2	3772.9	3878.6	3988.9
G30.0	3700.9	3578.2	3471.9	3397.0	3368.9	3368.7	3429.9	3513.2	3615.3	3731.6
G31.0	3436.7	3321.6	3229.5	3165.5	3133.9	3142.0	3191.0	3269.6	3371.5	3480.5
G32.0	3186.1	3092.6	2999.8	2946.9	2918.1	2926.5	2978.0	3054.8	3136.2	3240.6
G33.0	2973.6	2884.3	2798.4	2743.2	2717.2	2723.0	2776.9	2852.7	2927.9	3023.7
G34.0	2763.4	2682.2	2603.6	2558.3	2538.8	2549.3	2593.8	2662.5	2734.9	2814.2
G35.0	2574.3	2501.5	2436.3	2390.6	2373.9	2384.3	2427.2	2494.1	2555.8	2631.6
G36.0	2405.4	2341.2	2280.8	2235.4	2218.0	2232.6	2283.2	2337.9	2398.7	2462.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	2253.2	2197.1	2137.0	2091.3	2076.4	2092.4	2137.7	2198.7	2246.3	2308.9
G38.0	2109.9	2057.4	1999.2	1953.7	1944.4	1960.2	2010.3	2065.8	2116.4	2162.1
G39.0	1976.9	1932.1	1881.8	1846.3	1833.3	1851.2	1894.8	1941.9	1984.1	2027.7
G40.0	1852.6	1824.9	1776.7	1735.2	1718.7	1741.7	1788.5	1836.8	1869.5	1903.8
G41.0	1754.4	1725.2	1671.4	1629.6	1616.4	1635.9	1686.7	1737.3	1764.4	1783.9
G42.0	1659.8	1626.1	1578.1	1541.0	1531.5	1554.2	1600.1	1643.8	1666.5	1674.1
G43.0	1573.9	1543.3	1499.9	1465.1	1459.1	1482.7	1526.4	1560.5	1567.9	1577.9
G44.0	1491.3	1478.6	1439.8	1410.1	1405.7	1428.7	1461.4	1480.0	1476.7	1482.5
G45.0	1401.8	1416.6	1392.3	1363.3	1358.4	1378.1	1396.9	1404.8	1394.3	1396.7
G46.0	1313.2	1346.1	1347.3	1327.5	1321.7	1333.3	1334.5	1328.7	1320.8	1320.8
G47.0	1226.4	1264.0	1296.0	1291.6	1280.7	1281.6	1271.6	1256.5	1250.7	1252.4
G48.0	1157.9	1191.1	1228.2	1231.0	1216.6	1214.8	1211.1	1201.1	1193.2	1195.3
G49.0	1111.1	1137.8	1150.1	1144.0	1133.6	1136.8	1152.8	1160.7	1149.1	1141.5
G50.0	1075.1	1093.2	1084.2	1070.7	1059.1	1070.2	1092.3	1118.0	1116.2	1099.7
G51.0	1042.6	1044.3	1030.3	1002.0	983.7	997.4	1036.1	1066.5	1080.7	1064.0
G52.0	1001.3	1000.4	971.6	936.4	917.6	932.4	972.1	1021.0	1039.2	1034.0
G53.0	965.1	947.0	914.3	877.7	862.8	874.7	910.8	964.4	998.3	1003.4
G54.0	921.1	898.1	861.2	827.6	819.0	828.0	853.1	905.0	952.8	970.2
G55.0	877.0	847.7	814.1	789.5	779.3	785.1	803.7	845.2	901.1	937.8
G56.0	830.8	800.0	765.4	745.9	735.2	735.9	751.5	788.3	845.0	898.3
G57.0	780.0	738.9	700.9	678.4	667.5	672.6	688.4	726.4	783.9	845.9
G58.0	710.6	662.6	625.0	613.0	600.9	604.1	613.4	655.4	715.3	785.6
G59.0	632.2	589.5	565.6	560.5	548.0	553.6	558.2	588.6	641.3	714.3
G60.0	571.0	541.0	517.6	513.9	503.9	506.5	512.7	542.9	584.0	645.7
G61.0	521.5	504.4	479.1	476.1	468.2	472.1	478.6	508.8	540.3	600.0
G62.0	489.3	465.2	450.1	449.6	440.8	443.1	444.1	474.5	508.1	568.9
G63.0	469.6	440.6	427.6	431.3	427.4	430.4	426.0	446.6	486.0	548.5
G64.0	446.6	452.2	455.2	457.3	455.4	455.7	450.3	449.6	459.1	529.2
G65.0	425.7	435.2	433.6	421.3	413.7	417.1	419.9	432.7	436.6	501.1
G66.0	399.5	382.3	376.8	377.5	372.1	374.0	371.9	385.8	416.5	484.4
G67.0	385.1	367.5	364.7	366.8	361.7	364.5	358.5	370.3	403.2	473.5
G68.0	373.3	354.5	352.4	355.7	349.6	351.7	346.1	357.0	395.6	472.4
G69.0	365.4	340.6	340.1	341.3	336.6	338.5	335.3	345.5	390.5	477.2
G70.0	361.5	329.5	326.4	326.9	323.4	324.1	322.5	334.5	389.1	480.3
G71.0	361.7	318.5	313.4	312.0	308.8	309.7	309.5	324.8	394.6	485.8
G72.0	362.9	306.0	299.5	298.6	293.7	295.6	294.9	314.8	395.1	491.6
G73.0	364.7	293.0	282.1	281.6	276.5	278.6	278.2	307.2	397.4	471.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	357.5	283.3	265.9	266.1	261.7	262.9	263.8	301.1	389.5	453.6
G75.0	360.1	271.7	251.0	250.6	245.9	247.8	248.2	290.9	392.3	426.2
G76.0	352.2	265.6	239.0	242.2	232.9	238.5	235.5	290.0	380.7	394.9
G77.0	335.3	263.8	232.7	233.4	224.4	232.2	232.7	287.0	348.2	364.0
G78.0	323.9	251.5	218.6	213.7	209.0	213.0	219.0	276.1	339.4	348.7
G79.0	308.1	241.3	196.7	189.3	183.8	187.0	196.5	256.8	313.4	317.1
G80.0	280.7	219.2	175.6	168.7	163.6	166.1	174.5	230.1	277.5	260.1
G81.0	244.8	193.7	153.8	145.9	142.4	143.6	155.0	201.6	240.8	216.0
G82.0	203.0	172.1	136.2	127.4	122.7	124.8	136.6	175.4	198.4	181.4
G83.0	174.0	146.9	120.9	109.7	105.8	108.8	122.3	148.9	166.6	150.3
G84.0	146.6	128.1	106.7	93.0	88.2	93.0	107.2	123.7	134.8	122.3
G85.0	111.1	100.2	90.5	79.6	73.6	80.7	91.2	96.3	107.2	102.3
G86.0	84.2	77.7	72.4	65.0	59.6	64.7	72.4	75.4	81.2	84.2
G87.0	68.7	60.3	56.6	52.7	48.0	52.7	55.9	58.9	66.8	76.3
G88.0	56.6	49.0	46.4	42.7	38.0	41.5	44.3	47.3	55.5	67.8
G89.0	45.5	39.2	37.3	32.9	29.7	32.3	35.3	37.1	44.1	60.1
G90.0	35.3	29.7	29.2	24.1	21.8	23.7	27.4	27.8	34.1	57.5
G91.0	30.4	28.8	28.5	23.9	21.3	22.7	27.1	25.3	29.7	55.9
G92.0	28.5	24.6	24.4	25.3	26.9	26.9	26.2	23.4	28.1	40.1
G93.0	27.1	22.5	21.1	19.3	19.0	18.3	19.7	21.8	26.5	32.3
G94.0	26.0	23.0	19.5	19.0	19.3	18.8	19.3	21.8	25.8	30.6
G95.0	26.0	21.3	20.2	20.2	19.5	20.0	18.8	22.7	23.7	28.1
G96.0	24.8	21.6	20.9	20.4	19.3	20.4	20.4	20.9	24.4	25.8
G97.0	22.3	20.6	21.1	20.6	20.4	21.1	20.2	20.4	20.6	23.9
G98.0	20.0	19.3	20.0	20.2	19.7	20.0	20.0	17.6	19.0	19.3
G99.0	18.1	17.4	18.1	18.6	17.9	18.6	17.6	15.8	16.7	17.4
G100.0	16.2	16.5	16.7	17.2	16.2	16.9	16.5	15.5	14.6	15.1
G101.0	13.7	14.4	16.0	15.3	15.1	16.0	15.3	14.1	12.8	12.5
G102.0	11.4	13.2	14.4	14.1	13.5	13.9	13.7	12.3	10.4	9.1
G103.0	7.7	9.7	11.4	10.9	11.1	10.7	10.0	9.1	6.5	5.3
G104.0	4.6	5.3	7.0	7.4	7.2	7.2	6.0	4.6	3.7	3.5
G105.0	3.9	3.5	3.7	3.9	4.4	4.6	3.7	3.5	3.9	3.5
G106.0	4.2	3.7	3.7	4.2	3.7	4.4	3.5	3.5	3.5	4.2
G107.0	4.2	4.6	4.4	3.9	4.2	3.7	3.9	3.7	3.7	3.9
G108.0	4.6	4.2	4.9	4.2	4.4	3.9	4.6	4.6	4.6	4.4
G109.0	4.6	4.4	5.1	4.4	4.6	5.1	4.4	4.2	4.4	4.6
G110.0	5.1	4.6	4.6	5.3	5.1	4.6	5.3	5.1	5.3	5.1

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	5.1	4.9	4.9	4.9	5.1	5.6	5.6	5.3	5.6	5.1
G112.0	5.3	5.1	5.8	5.3	5.6	5.1	5.8	5.1	5.8	5.6
G113.0	5.8	5.6	6.3	5.6	5.8	6.3	5.6	5.3	6.0	5.8
G114.0	6.5	6.5	5.8	5.8	6.3	6.5	6.3	6.5	6.5	6.3
G115.0	7.0	6.3	6.3	6.7	6.5	6.3	6.7	6.7	7.0	6.7
G116.0	7.0	6.7	6.7	7.2	7.0	6.5	6.7	7.2	7.2	7.0
G117.0	7.7	7.2	7.7	7.7	7.4	7.0	7.2	7.7	7.7	7.2
G118.0	7.7	7.4	8.1	7.4	7.7	7.4	7.7	7.4	8.1	7.7
G119.0	8.4	8.4	8.6	8.6	8.4	7.9	8.4	7.7	8.4	7.9
G120.0	8.4	8.8	8.4	9.1	8.6	8.1	8.6	8.8	8.8	8.4
G121.0	8.8	9.3	8.8	9.3	9.1	8.8	8.8	9.3	9.3	9.1
G122.0	10.0	9.3	10.0	9.7	9.5	9.3	9.3	9.7	9.7	9.5
G123.0	10.4	9.7	9.7	10.4	10.0	10.4	10.2	9.5	9.5	10.0
G124.0	10.2	10.4	10.2	10.2	10.7	10.2	10.7	10.2	10.0	10.4
G125.0	11.4	11.1	11.6	11.6	11.1	11.6	10.9	11.4	10.4	10.9
G126.0	11.4	11.6	12.1	12.1	11.6	12.1	11.4	11.8	11.1	11.6
G127.0	12.8	12.1	11.8	12.5	12.3	11.8	12.1	11.8	11.6	12.1
G128.0	13.0	12.5	13.2	12.5	12.8	12.5	13.0	12.3	13.0	12.5
G129.0	13.0	13.2	13.7	13.0	13.5	13.0	13.5	13.0	13.7	13.2
G130.0	14.1	13.9	13.7	13.7	13.9	13.7	13.7	13.5	13.5	13.7
G131.0	14.1	14.4	15.1	14.9	14.6	14.1	14.4	14.1	13.9	14.4
G132.0	15.5	15.1	15.5	15.5	15.1	15.5	14.9	14.6	14.6	14.9
G133.0	15.5	15.5	16.2	16.0	15.8	15.5	16.0	16.0	16.0	15.5
G134.0	16.0	16.5	16.7	16.7	16.5	16.7	16.0	16.7	15.8	16.0
G135.0	17.2	16.7	17.4	17.4	16.9	16.7	16.7	17.2	17.2	16.7
G136.0	17.9	17.9	17.2	18.1	17.6	17.9	17.4	17.9	17.6	17.4
G137.0	18.1	18.1	18.6	17.9	18.3	18.6	18.6	18.3	18.3	18.1
G138.0	18.6	19.0	19.3	18.6	18.8	18.6	19.0	19.0	18.8	18.6
G139.0	19.7	19.7	19.3	20.0	19.5	19.3	19.3	19.7	19.0	19.3
G140.0	20.0	20.0	20.0	20.0	20.2	20.0	20.4	20.2	20.0	20.0
G141.0	20.4	20.6	21.1	21.1	20.9	20.6	20.4	20.2	20.4	20.4
G142.0	21.1	21.3	21.1	21.8	21.6	21.6	21.6	20.9	21.1	21.1
G143.0	21.8	22.0	22.5	21.8	22.0	22.3	21.8	21.6	21.8	21.8
G144.0	22.7	22.5	22.3	23.0	22.7	23.0	23.0	22.7	22.5	22.5
G145.0	23.2	23.2	23.7	23.7	23.4	23.4	23.4	23.4	23.2	23.0
G146.0	23.9	23.9	24.4	24.4	23.9	23.9	24.1	23.4	23.7	23.7
G147.0	24.4	24.4	25.1	24.4	24.6	24.4	24.1	24.6	24.4	24.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	25.1	25.1	25.5	25.3	25.3	25.1	25.3	25.3	25.1	25.1
G149.0	25.5	25.5	25.5	26.0	25.8	25.8	26.0	25.3	25.8	25.5
G150.0	26.2	26.2	26.0	26.2	26.5	26.2	26.0	26.7	26.2	26.2
G151.0	26.7	26.9	27.1	26.7	26.9	26.9	26.7	26.7	26.9	26.9
G152.0	27.1	27.4	27.8	27.4	27.6	27.6	27.4	27.8	27.4	27.4
G153.0	27.8	28.1	28.3	27.8	28.1	28.1	27.8	28.3	28.1	28.1
G154.0	28.5	28.5	29.0	28.8	28.8	28.8	29.0	28.3	28.3	28.5
G155.0	28.8	29.0	28.8	29.0	29.2	29.2	29.0	29.0	29.2	29.0
G156.0	29.2	29.5	29.2	29.5	29.7	29.7	30.2	29.5	29.5	29.5
G157.0	29.7	29.9	29.7	30.2	30.2	30.4	29.9	30.4	29.9	30.2
G158.0	30.4	30.6	30.9	30.6	30.6	30.6	31.1	30.4	30.6	30.6
G159.0	31.1	31.1	31.5	31.1	31.1	31.5	31.1	31.1	31.1	31.3
G160.0	31.3	31.5	32.0	31.5	31.8	32.0	31.5	32.0	32.0	31.8
G161.0	32.3	32.0	31.8	32.0	32.3	32.5	32.0	32.5	32.0	32.0
G162.0	32.7	32.5	32.3	32.7	32.9	32.9	33.2	32.7	32.7	32.7
G163.0	32.7	32.9	33.4	32.9	33.4	32.9	32.9	32.9	32.9	33.2
G164.0	33.6	33.4	33.2	33.4	33.4	33.4	33.4	33.9	33.9	33.6
G165.0	33.4	33.6	34.3	33.9	34.3	34.3	33.9	33.9	34.3	34.1
G166.0	34.6	34.3	34.8	34.3	34.8	35.0	34.3	34.3	34.8	34.6
G167.0	34.3	34.6	34.6	34.8	34.8	35.5	34.8	34.8	34.8	35.0
G168.0	34.8	35.3	35.0	35.3	35.3	36.0	36.0	35.3	35.0	35.3
G169.0	36.0	35.5	36.0	35.7	36.2	36.4	36.4	35.5	36.2	35.7
G170.0	35.7	36.0	35.7	36.2	36.7	36.9	36.7	36.4	36.4	36.2
G171.0	36.2	36.7	36.9	36.7	37.1	37.1	36.4	36.9	36.2	36.7
G172.0	37.3	36.7	36.7	37.1	36.9	36.9	37.6	37.1	37.1	37.1
G173.0	37.8	37.3	37.6	37.6	37.3	38.0	37.1	37.6	37.6	37.3
G174.0	38.0	37.3	37.3	37.6	38.3	38.3	37.3	37.8	37.8	37.6
G175.0	38.3	37.6	38.3	38.3	38.5	38.5	38.3	37.3	38.0	37.8
G176.0	37.8	38.3	37.8	38.0	38.0	38.0	38.5	38.3	37.6	38.0
G177.0	38.0	38.5	38.0	38.3	39.0	38.0	37.8	38.5	38.3	38.0
G178.0	39.0	38.7	39.0	38.7	39.0	38.0	38.0	38.0	38.5	38.3
G179.0	38.3	38.3	39.0	38.5	38.5	38.3	38.7	38.5	38.5	38.3
G180.0	38.5	39.0	38.5	38.5	39.2	39.0	38.0	37.8	38.5	38.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	7862.2	7865.4	7867.5	7872.8	7877.5	7880.5	7887.0	7891.4	7894.4	7900.0
G1.0	7820.6	7826.2	7827.6	7832.0	7840.4	7843.1	7851.5	7858.5	7860.8	7870.8
G2.0	7772.1	7777.5	7781.7	7786.8	7798.4	7801.9	7814.1	7820.6	7828.3	7838.5
G3.0	7720.4	7727.1	7732.0	7739.2	7749.2	7756.1	7769.4	7779.8	7790.9	7803.0
G4.0	7666.8	7674.5	7678.9	7685.9	7699.3	7706.3	7723.9	7736.9	7748.0	7764.7
G5.0	7617.9	7622.5	7628.1	7634.8	7647.3	7657.8	7673.5	7689.3	7702.8	7723.7
G6.0	7563.6	7569.4	7573.3	7578.4	7591.0	7601.2	7620.6	7633.4	7650.6	7673.8
G7.0	7508.4	7512.1	7517.6	7521.6	7534.8	7544.3	7561.0	7576.1	7592.1	7616.2
G8.0	7446.0	7452.2	7456.9	7463.8	7475.6	7481.5	7497.2	7510.0	7527.9	7553.6
G9.0	7379.1	7384.9	7391.0	7397.9	7407.0	7412.5	7428.8	7437.8	7458.3	7483.8
G10.0	7297.0	7306.8	7313.0	7321.8	7333.0	7335.0	7351.5	7361.5	7378.4	7405.4
G11.0	7204.2	7219.3	7225.8	7237.9	7249.9	7255.0	7269.9	7278.2	7293.5	7320.2
G12.0	7106.5	7118.6	7130.9	7142.3	7158.0	7161.8	7178.5	7188.4	7200.5	7225.5
G13.0	7001.7	7014.4	7024.2	7038.1	7055.3	7064.8	7079.9	7086.6	7099.3	7117.9
G14.0	6881.5	6898.6	6912.8	6923.3	6946.5	6956.7	6969.2	6974.3	6982.2	6999.6
G15.0	6768.7	6779.2	6788.2	6802.1	6826.3	6838.8	6853.2	6854.1	6853.6	6864.8
G16.0	6643.5	6651.1	6657.8	6674.1	6695.6	6702.4	6714.0	6707.7	6701.5	6707.5
G17.0	6513.5	6517.2	6526.1	6534.6	6551.6	6555.1	6565.0	6552.5	6543.2	6537.9
G18.0	6369.0	6375.0	6379.2	6386.4	6397.5	6392.2	6391.7	6378.5	6353.0	6348.8
G19.0	6215.4	6223.8	6232.1	6226.1	6230.3	6216.8	6212.1	6193.4	6165.5	6143.5
G20.0	6045.3	6062.5	6064.8	6067.4	6054.2	6028.4	6015.0	5980.6	5951.1	5921.0
G21.0	5870.0	5898.0	5905.4	5888.7	5871.8	5824.0	5806.6	5769.5	5728.9	5688.8
G22.0	5676.0	5708.0	5721.0	5706.9	5671.6	5625.2	5586.4	5542.4	5493.9	5446.3
G23.0	5477.4	5522.4	5532.8	5501.1	5467.2	5404.3	5364.2	5306.4	5251.4	5195.0
G24.0	5271.4	5315.7	5326.4	5300.6	5257.0	5187.6	5131.0	5064.2	5000.2	4939.8
G25.0	5060.3	5108.0	5121.5	5093.0	5043.5	4960.3	4898.3	4818.5	4749.4	4679.3
G26.0	4828.5	4888.6	4909.2	4869.1	4820.4	4735.9	4655.2	4565.1	4493.2	4411.3
G27.0	4597.9	4664.0	4688.6	4657.3	4598.3	4497.4	4411.3	4314.8	4235.7	4148.2
G28.0	4355.6	4423.6	4450.5	4428.5	4369.8	4266.6	4164.5	4045.7	3961.0	3877.0
G29.0	4108.3	4189.3	4221.1	4200.2	4141.7	4026.0	3927.4	3810.4	3705.3	3621.8
G30.0	3860.1	3945.7	3984.2	3969.6	3912.1	3797.2	3682.6	3561.3	3460.6	3382.4
G31.0	3618.1	3701.2	3750.1	3733.6	3690.0	3561.7	3455.5	3328.6	3241.1	3163.4
G32.0	3368.0	3462.4	3514.9	3510.5	3459.6	3346.2	3226.7	3106.3	3027.4	2953.9
G33.0	3135.1	3227.9	3287.0	3279.6	3243.4	3126.3	3020.9	2911.2	2822.8	2761.1
G34.0	2910.5	3000.5	3055.7	3064.6	3027.0	2920.7	2824.7	2716.1	2640.9	2581.8
G35.0	2718.9	2789.4	2846.7	2850.2	2824.0	2731.6	2637.0	2546.0	2478.5	2422.1
G36.0	2534.9	2588.2	2639.1	2648.1	2623.5	2554.4	2470.1	2386.2	2324.2	2272.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	2368.8	2408.9	2446.5	2451.8	2442.1	2384.1	2318.2	2246.5	2190.1	2133.1
G38.0	2208.7	2242.1	2261.4	2271.6	2269.0	2230.0	2174.1	2109.1	2055.1	2006.1
G39.0	2065.8	2089.4	2098.9	2097.8	2111.9	2082.5	2046.3	1986.0	1934.0	1881.6
G40.0	1932.4	1948.1	1944.0	1942.6	1964.8	1954.6	1921.0	1863.7	1817.8	1770.4
G41.0	1817.1	1817.8	1810.6	1804.1	1828.9	1831.9	1807.3	1751.9	1711.3	1666.3
G42.0	1701.8	1699.0	1688.1	1679.5	1703.6	1722.4	1696.7	1641.7	1609.4	1570.0
G43.0	1593.9	1596.0	1573.2	1567.9	1597.1	1617.8	1592.9	1540.1	1517.8	1479.7
G44.0	1506.2	1501.8	1474.8	1470.2	1500.1	1518.5	1498.8	1451.2	1427.8	1401.8
G45.0	1421.5	1412.4	1384.8	1383.0	1408.3	1425.0	1406.4	1359.8	1341.2	1318.7
G46.0	1342.8	1329.8	1312.2	1302.7	1328.0	1339.8	1323.8	1280.2	1257.0	1241.9
G47.0	1269.1	1257.7	1244.2	1235.7	1252.4	1256.5	1241.7	1207.8	1183.0	1166.1
G48.0	1202.0	1196.2	1185.3	1174.4	1183.7	1180.4	1171.2	1141.9	1119.9	1095.1
G49.0	1144.5	1143.1	1132.9	1122.7	1119.9	1113.6	1106.2	1081.8	1064.9	1034.7
G50.0	1095.3	1094.6	1086.3	1076.0	1061.7	1050.3	1044.9	1032.9	1015.3	973.0
G51.0	1050.5	1049.6	1046.1	1033.6	1007.1	994.6	991.8	988.1	963.0	913.6
G52.0	1013.9	1009.9	1009.5	993.9	959.1	943.8	947.3	946.8	913.6	854.9
G53.0	979.3	971.9	971.4	955.4	915.3	898.8	904.6	907.6	861.7	801.3
G54.0	951.9	928.0	931.7	920.8	878.4	856.6	870.0	865.1	810.9	758.2
G55.0	924.5	890.2	894.4	883.2	841.9	819.2	835.2	820.6	761.9	717.4
G56.0	898.1	859.3	856.8	845.2	806.9	789.3	803.2	780.7	720.4	677.7
G57.0	864.2	834.8	818.3	804.8	771.0	764.7	770.5	736.2	679.1	636.2
G58.0	828.5	811.5	783.5	762.4	738.0	745.9	740.6	695.1	639.2	597.4
G59.0	779.3	787.7	752.4	723.4	711.6	729.9	707.6	653.1	601.4	567.7
G60.0	727.8	760.5	729.9	688.6	691.6	707.4	676.5	623.9	575.6	548.2
G61.0	684.2	731.0	713.9	659.4	675.4	681.6	653.8	601.1	560.1	545.4
G62.0	650.3	705.8	703.2	640.1	657.0	656.1	635.2	589.5	552.2	562.6
G63.0	622.2	684.2	688.4	631.5	634.1	636.2	624.1	579.5	536.4	574.2
G64.0	598.6	668.4	670.0	627.3	614.6	621.8	613.9	567.7	517.6	549.2
G65.0	578.2	648.2	652.4	609.9	602.3	606.5	603.4	556.3	501.4	489.3
G66.0	558.2	627.3	632.9	581.2	587.2	589.3	596.7	551.0	491.1	468.9
G67.0	541.5	603.9	609.9	555.2	558.2	577.5	587.9	546.6	485.8	456.6
G68.0	534.8	587.4	582.1	527.1	528.0	561.5	578.4	544.5	482.8	446.6
G69.0	537.1	571.0	552.4	497.6	492.3	535.5	566.3	542.2	480.7	438.3
G70.0	532.5	542.9	511.3	467.5	451.0	497.6	555.4	533.6	473.8	428.0
G71.0	515.3	498.4	465.4	436.9	411.3	457.0	525.5	520.6	468.0	413.0
G72.0	499.3	457.5	430.4	411.3	377.5	416.2	487.9	505.8	455.4	397.9
G73.0	448.9	421.8	403.0	387.2	352.2	377.7	444.8	503.9	451.9	380.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	408.8	390.2	378.4	359.8	331.1	345.9	406.0	503.5	458.4	362.2
G75.0	371.2	371.0	353.1	333.9	310.9	321.3	359.1	427.1	402.8	297.0
G76.0	344.5	351.0	330.6	308.6	290.0	296.7	318.3	332.0	348.5	276.1
G77.0	320.6	332.5	309.5	284.9	270.5	261.9	274.0	301.1	348.0	278.4
G78.0	307.9	309.7	288.6	263.3	242.9	243.1	270.3	306.7	370.5	296.3
G79.0	294.6	284.2	265.0	239.9	229.4	236.4	278.9	302.1	363.3	276.8
G80.0	254.5	260.8	233.4	222.0	213.0	217.6	261.5	264.3	320.6	227.4
G81.0	218.3	217.6	199.8	194.9	187.0	184.9	221.6	198.1	226.0	182.8
G82.0	182.8	180.0	169.6	164.3	155.4	154.5	182.6	168.2	181.7	154.5
G83.0	153.6	147.6	139.2	134.3	132.2	134.1	160.3	143.1	152.4	130.9
G84.0	129.2	122.5	115.3	113.9	112.1	119.3	146.6	125.5	135.7	116.2
G85.0	104.6	102.8	97.7	95.3	95.1	100.7	115.3	99.5	101.2	88.9
G86.0	81.7	89.8	83.3	80.7	81.0	80.0	80.5	74.5	77.0	73.3
G87.0	69.6	75.9	73.1	69.8	69.4	68.0	66.8	61.7	64.0	62.2
G88.0	61.3	63.8	64.0	62.0	61.0	59.6	59.9	55.5	58.2	57.3
G89.0	51.0	54.5	55.7	54.3	53.8	52.4	52.7	50.1	52.0	51.5
G90.0	42.5	48.5	49.4	49.0	46.6	45.7	47.6	44.5	46.9	46.4
G91.0	37.8	45.0	45.7	45.7	44.3	44.1	44.3	43.6	45.0	43.4
G92.0	36.7	41.8	42.7	43.2	42.5	42.2	44.5	44.3	44.3	42.0
G93.0	34.1	38.0	43.8	40.1	40.1	42.5	46.2	44.8	46.6	43.4
G94.0	33.9	40.4	38.3	36.4	37.3	39.2	42.0	40.6	41.8	41.5
G95.0	33.9	37.8	35.0	33.4	34.6	36.0	40.4	37.3	37.8	37.3
G96.0	28.8	35.0	35.5	32.9	31.5	32.0	37.1	34.8	37.1	34.3
G97.0	25.3	28.8	31.3	29.7	29.7	29.2	30.9	33.9	38.3	34.1
G98.0	21.6	26.0	26.9	27.1	28.8	27.6	29.5	30.4	31.5	31.1
G99.0	18.8	21.8	21.6	22.5	24.6	27.4	30.6	32.7	35.7	32.9
G100.0	16.5	18.8	19.3	20.0	24.4	25.5	31.8	37.1	42.9	45.9
G101.0	13.9	15.1	15.8	18.8	24.1	25.1	30.4	35.5	41.8	45.9
G102.0	9.7	10.9	12.8	13.5	16.5	19.0	23.0	26.5	28.1	34.6
G103.0	6.3	8.6	11.1	12.5	13.2	14.6	17.4	19.5	20.4	23.0
G104.0	4.9	7.4	9.3	10.9	12.3	13.7	14.1	15.8	16.0	19.7
G105.0	4.4	6.5	8.6	10.4	11.4	12.1	14.1	14.6	14.6	16.0
G106.0	4.2	5.3	7.2	9.3	10.4	12.1	13.2	15.3	13.9	14.4
G107.0	3.9	4.9	6.7	8.1	9.5	11.1	12.3	13.9	14.4	14.9
G108.0	4.4	4.6	6.0	7.2	8.6	10.0	11.4	12.5	13.0	14.1
G109.0	4.6	4.9	5.8	7.0	8.4	8.6	10.7	11.4	12.8	13.5
G110.0	5.1	4.9	5.6	6.0	7.9	9.1	10.0	11.1	11.6	12.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	5.3	5.1	5.1	5.8	7.2	8.6	9.5	10.0	10.7	11.4
G112.0	5.3	5.6	5.3	5.8	6.5	8.1	8.8	10.0	10.0	11.4
G113.0	5.8	5.8	6.0	5.8	6.3	7.4	8.4	9.1	9.7	10.9
G114.0	6.0	6.0	6.0	6.3	6.3	7.4	8.4	9.1	9.1	10.7
G115.0	6.5	6.5	6.5	6.5	6.7	6.7	7.9	7.9	8.4	9.1
G116.0	6.7	7.0	7.0	7.2	6.7	6.7	7.7	7.7	8.8	8.8
G117.0	7.2	7.2	7.4	7.4	7.7	7.7	7.2	7.4	8.6	8.6
G118.0	7.7	7.7	7.7	7.9	8.1	7.4	7.9	8.4	7.7	8.1
G119.0	8.1	8.1	8.1	8.1	8.6	7.9	7.9	7.9	8.8	8.8
G120.0	8.4	8.6	8.6	8.6	8.1	8.4	8.4	9.1	9.1	9.1
G121.0	9.1	8.8	9.1	9.1	8.8	9.3	9.3	9.5	9.5	8.6
G122.0	9.5	9.5	9.5	9.5	9.3	9.3	9.3	9.7	9.3	9.1
G123.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.4	9.7
G124.0	10.4	10.4	10.7	10.4	10.9	10.9	10.4	10.2	10.2	10.9
G125.0	10.9	10.9	11.1	11.1	11.6	11.4	10.9	10.9	10.7	11.6
G126.0	11.4	11.6	11.4	11.6	11.8	11.4	11.8	11.6	12.1	11.4
G127.0	12.1	12.1	12.1	12.1	11.8	11.8	12.1	12.1	11.8	11.8
G128.0	12.5	12.5	12.8	12.8	12.8	12.5	12.5	12.5	12.5	12.5
G129.0	13.2	13.0	13.2	13.2	13.7	13.5	13.2	13.7	13.9	13.9
G130.0	13.7	13.7	13.7	13.7	13.5	13.7	13.7	14.4	14.4	14.4
G131.0	14.1	14.1	14.1	14.4	14.1	14.1	14.4	14.9	15.1	14.1
G132.0	14.9	14.6	14.9	14.9	15.3	14.9	15.3	15.1	14.9	14.9
G133.0	15.3	15.8	15.3	15.5	15.3	16.0	15.5	16.0	15.3	16.2
G134.0	16.0	16.0	16.2	16.2	16.0	16.0	16.5	16.7	16.9	16.9
G135.0	16.7	16.9	16.7	16.9	16.7	16.7	17.2	17.2	16.7	16.9
G136.0	17.2	17.6	17.6	17.6	17.6	17.9	17.9	17.4	17.4	17.4
G137.0	18.1	17.9	17.9	18.1	17.9	17.9	18.1	18.6	18.8	18.1
G138.0	18.6	18.8	18.6	18.8	18.6	19.0	19.3	19.0	19.5	19.5
G139.0	19.3	19.0	19.3	19.3	19.7	19.3	19.5	19.5	19.3	19.3
G140.0	19.7	19.5	19.7	20.0	20.0	20.4	20.0	20.2	20.9	20.0
G141.0	20.4	20.9	20.9	20.6	20.9	21.1	20.6	21.1	21.3	21.6
G142.0	21.3	21.6	21.3	21.3	21.1	21.8	21.3	21.6	21.3	22.0
G143.0	21.6	22.0	21.6	22.0	21.8	21.8	22.3	22.3	22.7	22.7
G144.0	22.3	22.7	22.7	22.5	22.5	23.0	23.0	23.0	22.5	23.4
G145.0	23.0	23.2	23.2	23.2	23.2	23.7	23.2	23.7	23.9	23.9
G146.0	23.4	23.9	23.4	23.9	23.7	23.4	24.1	24.1	23.9	24.6
G147.0	24.6	23.9	24.6	24.6	24.6	24.8	24.4	24.6	24.4	25.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	24.8	24.6	24.6	25.3	25.1	24.8	25.1	25.3	25.8	26.0
G149.0	25.8	25.1	25.3	25.5	25.5	25.3	26.0	26.0	26.5	25.8
G150.0	26.0	25.8	26.5	26.2	26.2	26.0	26.5	26.5	26.2	26.9
G151.0	26.9	27.1	26.5	26.7	26.9	27.1	26.9	27.1	26.7	27.6
G152.0	27.6	26.9	27.4	27.1	27.4	27.6	27.6	27.6	27.4	27.4
G153.0	27.8	28.3	27.6	27.8	27.8	28.1	28.1	28.1	28.3	28.8
G154.0	28.3	28.1	28.3	28.3	28.3	28.1	28.3	28.5	29.0	28.5
G155.0	28.8	28.5	29.2	28.8	29.0	28.8	28.8	29.0	29.0	29.7
G156.0	29.9	29.9	29.7	29.7	29.5	29.5	29.5	29.7	30.2	30.4
G157.0	29.9	30.4	30.2	30.2	30.2	30.2	30.2	30.4	29.9	30.9
G158.0	30.9	31.1	30.4	30.9	30.6	30.6	30.4	30.9	31.1	31.3
G159.0	31.1	31.5	30.9	31.3	31.1	31.3	31.3	31.1	31.8	31.8
G160.0	32.0	32.0	31.8	31.5	31.5	31.8	31.3	31.5	32.3	32.3
G161.0	32.5	31.8	31.8	32.0	31.8	32.3	32.0	32.0	32.7	32.0
G162.0	32.9	32.9	32.3	32.5	32.3	32.7	32.7	32.7	32.9	32.9
G163.0	33.4	33.4	33.2	32.9	32.9	32.7	33.2	32.9	33.6	32.9
G164.0	33.9	33.4	33.6	33.4	33.4	33.4	33.6	33.6	33.2	33.9
G165.0	34.3	33.9	33.6	34.1	34.1	34.1	33.6	33.9	34.1	34.3
G166.0	34.1	35.0	34.8	34.6	34.1	34.3	34.3	34.6	34.8	34.1
G167.0	35.0	35.3	34.8	35.0	35.0	35.0	34.6	34.8	34.6	35.3
G168.0	35.3	35.0	35.3	35.5	35.0	35.3	35.0	35.3	35.0	35.0
G169.0	36.0	35.3	35.5	35.5	35.3	35.7	35.7	35.7	36.0	35.5
G170.0	36.0	36.7	36.0	36.4	36.2	36.0	36.0	36.0	36.0	36.4
G171.0	36.9	36.2	36.2	36.4	36.2	36.4	36.4	36.4	36.7	36.9
G172.0	36.7	36.7	37.3	36.7	37.1	36.7	36.9	37.1	36.7	36.7
G173.0	36.9	36.9	37.1	37.1	37.3	37.1	37.1	37.1	37.6	37.6
G174.0	37.8	37.8	37.8	37.8	37.1	37.3	37.6	37.6	37.3	37.8
G175.0	37.6	37.3	37.6	38.0	37.8	37.6	37.8	38.0	37.6	37.6
G176.0	37.6	38.3	37.8	38.3	38.3	37.8	38.0	37.8	38.3	38.3
G177.0	37.8	38.5	38.5	37.8	37.8	38.3	38.3	37.8	38.5	37.8
G178.0	38.0	38.0	38.7	38.5	38.5	38.3	38.0	38.5	38.0	38.0
G179.0	38.0	38.7	38.0	38.0	38.7	38.3	38.0	38.7	38.5	38.3
G180.0	38.3	38.3	38.7	38.0	38.0	38.5	38.3	38.0	38.3	38.7

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	7902.8	7907.4	7967.5						
G1.0	7876.1	7882.6	7947.5						
G2.0	7846.9	7853.1	7924.8						
G3.0	7814.1	7824.8	7900.9						
G4.0	7777.7	7791.6	7871.2						
G5.0	7742.2	7754.1	7840.8						
G6.0	7691.6	7710.9	7805.6						
G7.0	7642.0	7662.6	7765.4						
G8.0	7580.0	7601.4	7716.0						
G9.0	7512.8	7536.9	7659.9						
G10.0	7432.0	7461.3	7594.7						
G11.0	7348.3	7379.6	7523.7						
G12.0	7252.2	7283.8	7440.6						
G13.0	7144.6	7180.5	7350.1						
G14.0	7022.8	7055.0	7241.1						
G15.0	6886.1	6920.7	7123.7						
G16.0	6722.3	6755.3	6979.6						
G17.0	6545.5	6582.9	6820.5						
G18.0	6349.5	6380.6	6643.5						
G19.0	6143.5	6173.4	6448.1						
G20.0	5918.9	5938.4	6237.9						
G21.0	5678.8	5700.8	6012.2						
G22.0	5428.2	5440.0	5766.0						
G23.0	5161.2	5177.6	5516.8						
G24.0	4897.4	4901.1	5239.6						
G25.0	4632.0	4624.1	4969.5						
G26.0	4347.1	4337.8	4686.0						
G27.0	4071.7	4055.0	4391.4						
G28.0	3801.6	3779.4	4108.6						
G29.0	3542.7	3526.7	3834.1						
G30.0	3309.5	3281.9	3576.8						
G31.0	3088.9	3059.7	3343.4						
G32.0	2882.7	2852.5	3114.2						
G33.0	2695.4	2672.2	2906.8						
G34.0	2528.4	2495.2	2715.6						
G35.0	2369.7	2331.9	2538.8						
G36.0	2225.4	2180.8	2375.0						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	2087.1	2043.0	2224.5						
G38.0	1957.7	1918.4	2076.7						
G39.0	1838.6	1795.3	1945.6						
G40.0	1726.3	1687.6	1817.3						
G41.0	1634.0	1591.8	1710.8						
G42.0	1540.3	1502.2	1610.6						
G43.0	1451.0	1408.5	1511.3						
G44.0	1368.1	1323.8	1417.3						
G45.0	1292.0	1246.6	1327.5						
G46.0	1219.7	1182.8	1247.0						
G47.0	1148.0	1120.3	1181.1						
G48.0	1075.8	1053.1	1117.1						
G49.0	1003.7	982.1	1049.6						
G50.0	935.7	913.2	986.0						
G51.0	871.9	845.9	917.8						
G52.0	812.5	790.4	854.0						
G53.0	765.4	750.3	795.1						
G54.0	726.6	717.8	750.3						
G55.0	691.1	683.0	719.0						
G56.0	651.5	645.7	688.1						
G57.0	609.0	605.5	653.3						
G58.0	574.0	572.4	614.6						
G59.0	549.2	548.0	578.6						
G60.0	533.8	529.4	551.2						
G61.0	543.3	535.9	531.3						
G62.0	584.9	585.1	519.7						
G63.0	619.7	618.8	551.2						
G64.0	576.1	577.5	608.3						
G65.0	485.4	485.8	605.8						
G66.0	467.7	468.0	526.7						
G67.0	457.0	457.0	474.2						
G68.0	447.1	446.6	460.1						
G69.0	436.4	435.7	450.5						
G70.0	421.5	420.9	441.0						
G71.0	402.3	401.1	428.7						
G72.0	379.6	377.2	412.7						
G73.0	351.5	348.5	392.3						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	312.7	286.3	366.6						
G75.0	248.2	239.9	338.3						
G76.0	231.8	221.1	255.2						
G77.0	229.2	216.9	233.9						
G78.0	235.0	220.6	217.4						
G79.0	214.6	198.4	218.8						
G80.0	184.0	169.6	216.7						
G81.0	158.5	145.9	189.1						
G82.0	139.4	125.8	162.6						
G83.0	123.0	108.1	139.0						
G84.0	110.2	94.4	118.6						
G85.0	87.9	79.3	101.4						
G86.0	73.8	65.2	85.4						
G87.0	62.6	56.4	72.8						
G88.0	54.1	48.5	58.7						
G89.0	49.0	44.3	50.6						
G90.0	46.6	43.2	43.4						
G91.0	45.2	42.7	40.4						
G92.0	44.1	47.3	40.4						
G93.0	44.1	43.6	39.9						
G94.0	42.0	42.0	46.9						
G95.0	38.3	38.7	42.7						
G96.0	35.3	35.3	40.6						
G97.0	34.3	34.3	37.1						
G98.0	32.9	33.2	33.6						
G99.0	32.9	40.1	34.1						
G100.0	47.1	57.1	30.2						
G101.0	50.1	54.5	35.5						
G102.0	36.9	38.0	48.5						
G103.0	22.5	24.4	45.9						
G104.0	19.7	20.9	31.8						
G105.0	16.2	17.2	22.3						
G106.0	15.3	16.2	19.7						
G107.0	14.9	15.5	16.7						
G108.0	14.1	15.1	16.0						
G109.0	13.7	14.4	14.9						
G110.0	13.0	13.5	15.1						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	12.3	12.8	13.9							
G112.0	11.6	11.8	13.7							
G113.0	10.9	11.4	12.8							
G114.0	10.7	11.1	11.6							
G115.0	10.0	10.4	11.1							
G116.0	9.5	9.5	10.7							
G117.0	9.5	9.5	10.0							
G118.0	9.1	9.3	9.5							
G119.0	8.8	9.1	9.3							
G120.0	8.8	9.1	9.1							
G121.0	9.1	9.3	8.8							
G122.0	9.7	9.7	8.8							
G123.0	10.2	10.2	9.1							
G124.0	10.7	10.4	9.3							
G125.0	11.1	11.4	10.0							
G126.0	11.8	11.6	10.4							
G127.0	12.5	12.5	10.9							
G128.0	12.8	12.8	11.6							
G129.0	13.5	13.2	12.1							
G130.0	14.1	13.9	12.5							
G131.0	14.9	14.6	13.2							
G132.0	15.3	15.1	13.9							
G133.0	16.0	16.0	14.6							
G134.0	16.5	16.5	15.3							
G135.0	17.2	17.2	16.0							
G136.0	17.9	17.6	16.7							
G137.0	18.6	18.8	17.4							
G138.0	19.0	19.5	18.1							
G139.0	20.0	19.7	19.0							
G140.0	20.6	20.2	19.5							
G141.0	21.1	21.3	20.4							
G142.0	21.8	22.0	21.3							
G143.0	22.3	22.7	21.6							
G144.0	23.2	23.0	22.3							
G145.0	23.7	23.9	23.2							
G146.0	24.6	24.6	23.9							
G147.0	24.8	25.1	24.4							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	25.8	26.0	25.5							
G149.0	26.5	26.5	25.8							
G150.0	26.7	26.7	26.5							
G151.0	27.1	27.6	27.1							
G152.0	28.1	28.3	27.6							
G153.0	28.8	28.3	28.3							
G154.0	29.2	29.0	29.2							
G155.0	29.7	29.9	29.9							
G156.0	30.2	29.7	29.9							
G157.0	30.4	30.4	30.4							
G158.0	30.9	31.3	31.1							
G159.0	31.3	31.8	31.5							
G160.0	32.3	32.3	32.5							
G161.0	32.7	32.3	32.9							
G162.0	32.7	33.2	32.7							
G163.0	33.4	33.6	33.9							
G164.0	33.6	34.1	34.3							
G165.0	34.3	33.9	33.9							
G166.0	34.8	34.3	35.0							
G167.0	34.8	34.8	35.5							
G168.0	35.0	35.0	35.3							
G169.0	36.2	36.2	36.4							
G170.0	36.0	36.0	36.4							
G171.0	36.9	36.2	36.7							
G172.0	36.9	36.7	36.9							
G173.0	37.1	37.1	37.3							
G174.0	37.8	37.3	37.8							
G175.0	38.0	37.8	38.5							
G176.0	38.5	38.7	38.3							
G177.0	38.0	38.0	39.0							
G178.0	39.0	38.3	39.0							
G179.0	38.7	39.2	39.0							
G180.0	38.5	38.5	39.2							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector: