

Report No.:

Test Time: 2018-11-28 14:19

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: LINE 1000

Luminous Width (mm): 40

Voltage: 229.2 V

Power: 56.84 W

Luminous Length (mm): 1000

Luminous Height (mm): 70

Current: 0.252 A

Power Factor: 0.981

Photometric Results

CIE Class: Direct

Measurement Flux: 4615.5 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(50%): H87.8

Vertical Diffuse Angle(50%): V99.3

Luminaire Efficacy Rating (LER): 81

Max. Intensity: 2045.24 cd

Total Rated Lamp Lumens: 4615.5 lm


Efficiency: 100%

Upward Ratio: 1%


Central Intensity: 2044.24 cd

Pos of Max. Intensity: H180 V1

Picture Of Luminaire



Luminous Intensity Distribution Curve

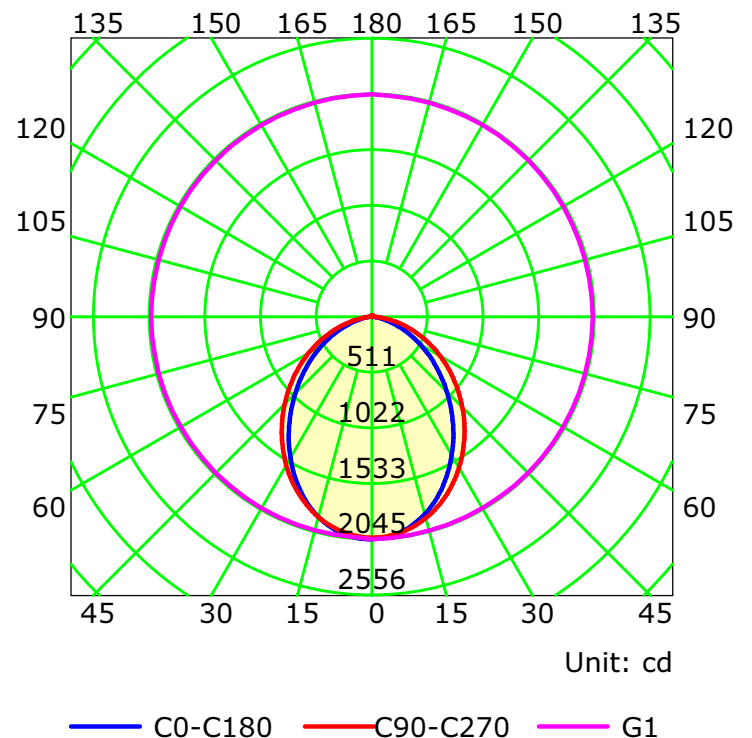

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Luminous Intensity Distribution Curve

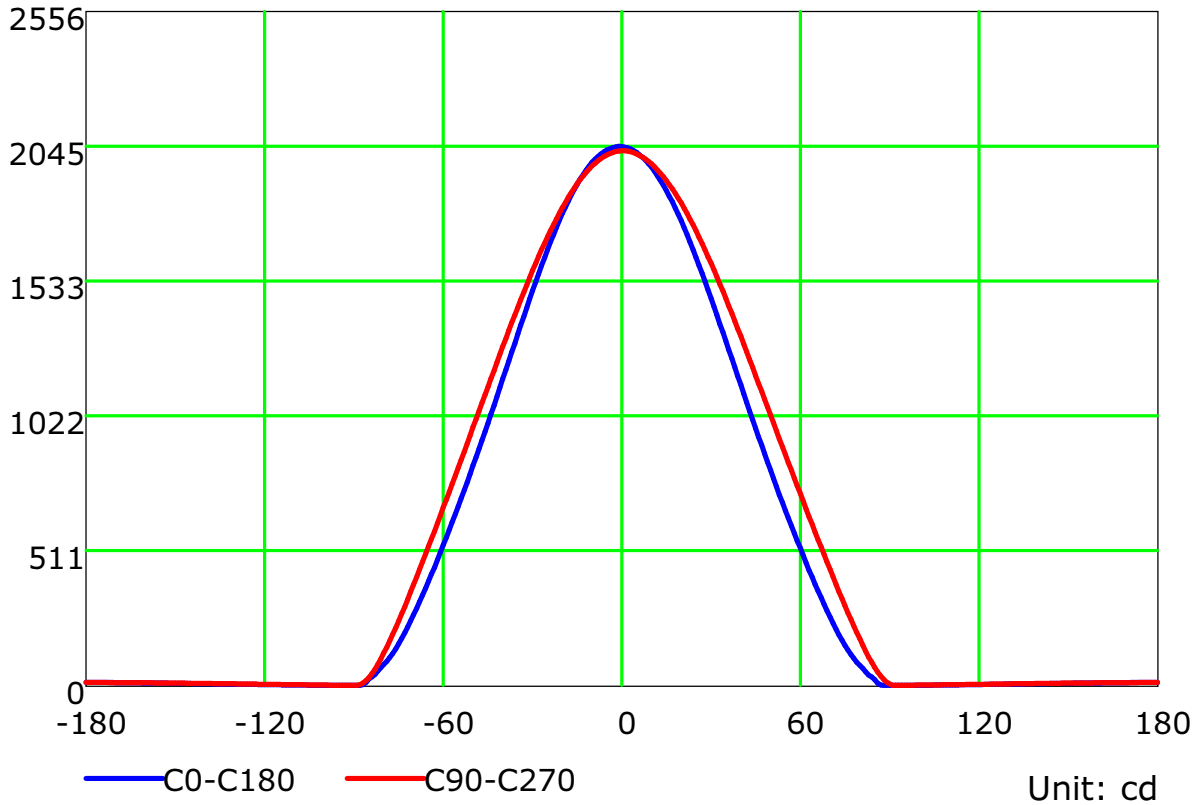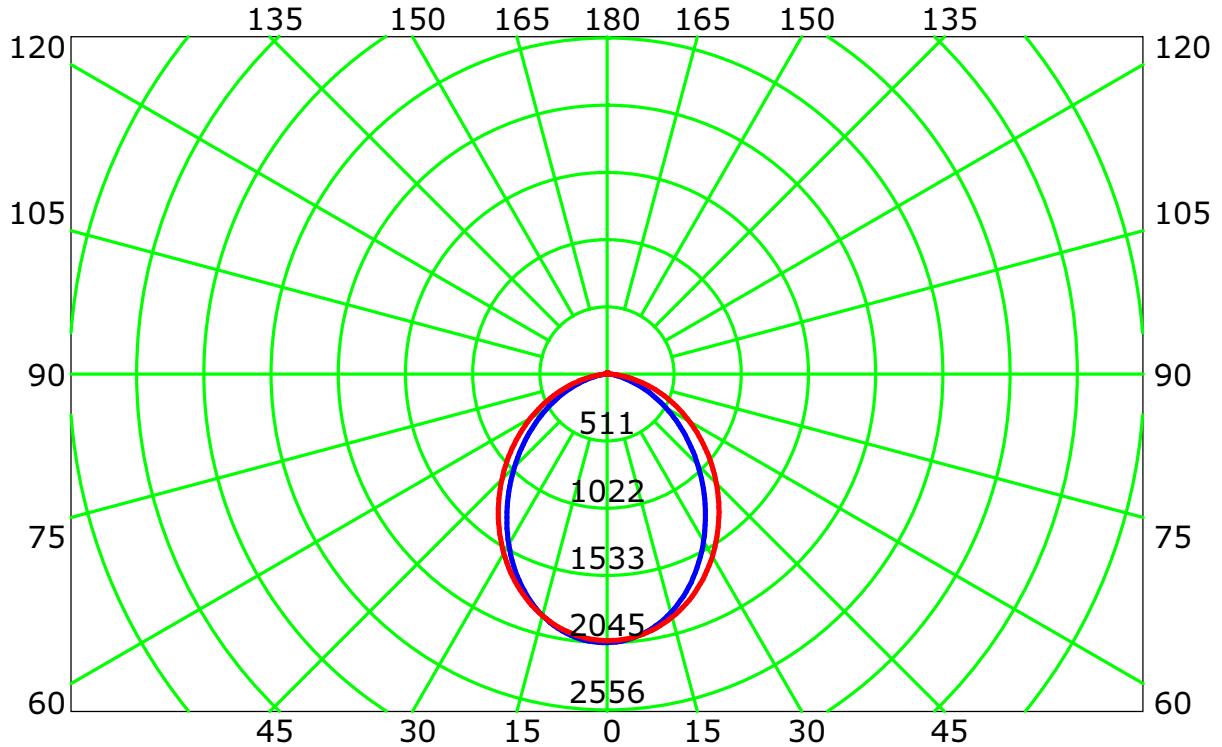


Unit: cd

C Plane (°): 0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

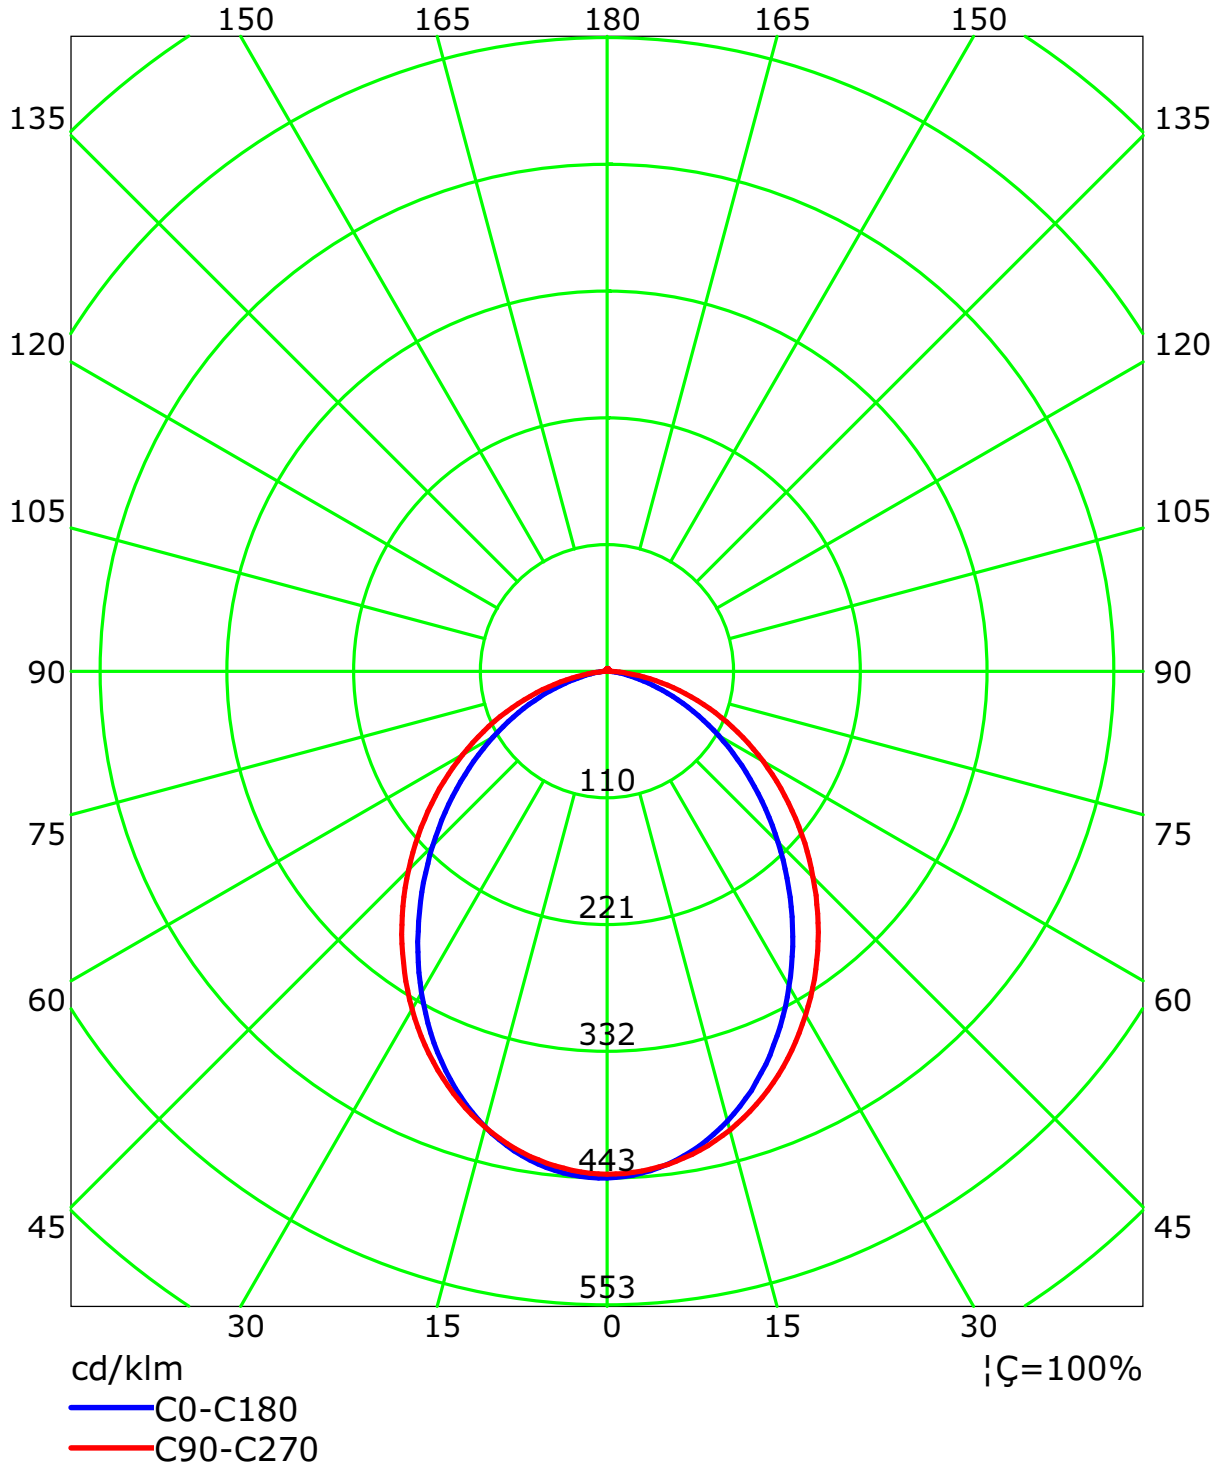

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m


Humidity: 40

Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99
1	110	105	101	98	107	103	100	96	99	96	93	95	92	90	91	89	88	85
2	100	93	87	81	98	91	85	80	87	83	78	84	80	77	81	78	75	73
3	92	82	75	69	90	81	74	68	78	72	67	75	70	66	72	68	64	62
4	85	74	65	59	83	72	64	58	70	63	58	67	62	57	65	60	56	54
5	78	66	58	51	76	65	57	51	63	56	50	61	55	50	59	54	49	47
6	73	60	51	45	71	59	51	45	57	50	45	55	49	44	54	48	44	42
7	67	55	46	40	66	54	46	40	52	45	40	51	44	39	49	44	39	37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	45	40	35	33
9	59	46	38	33	58	45	38	33	44	37	32	43	37	32	42	36	32	30
10	55	43	35	30	54	42	35	30	41	34	30	40	34	29	39	33	29	28


Spacing Criteria (0-180): 1.10
 Spacing Criteria (90-270): 1.17
 Spacing Criteria (Diagonal): 1.23

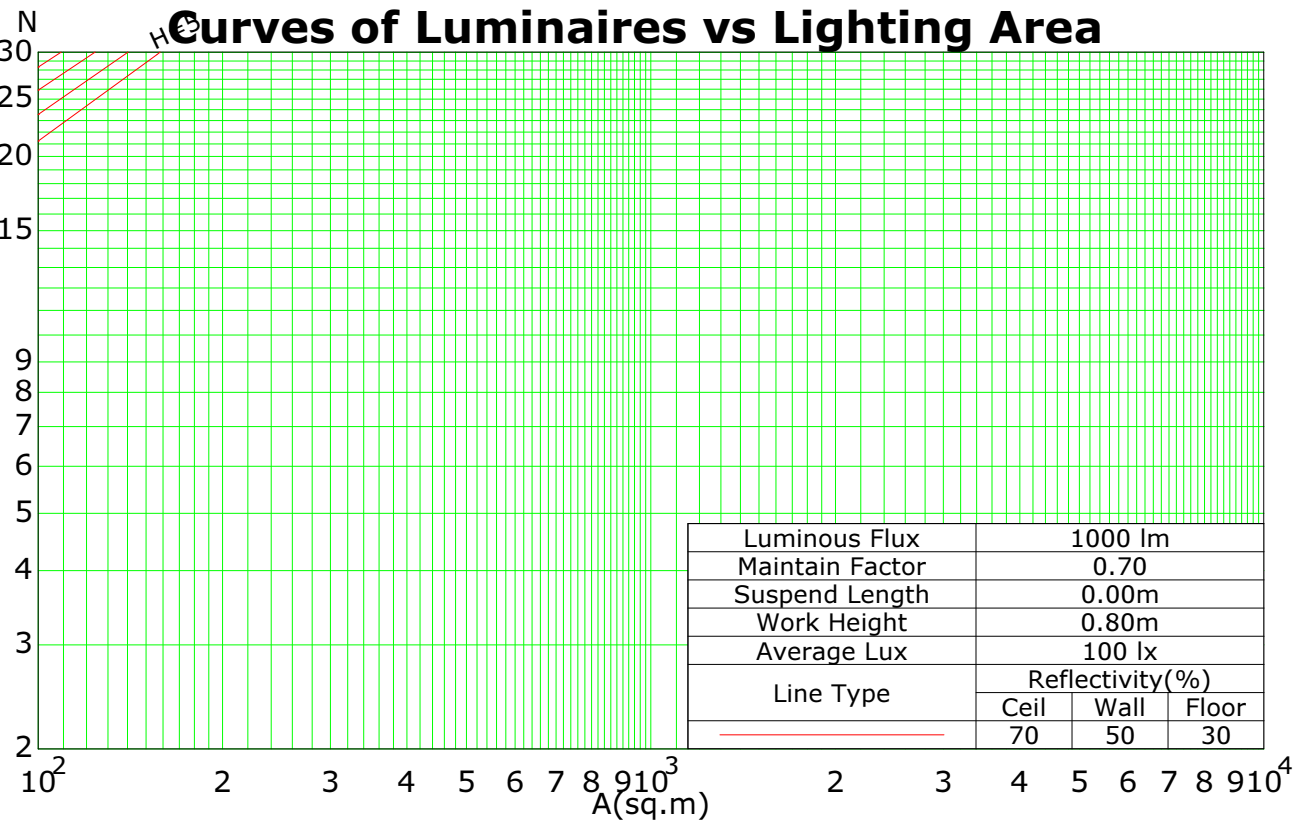

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

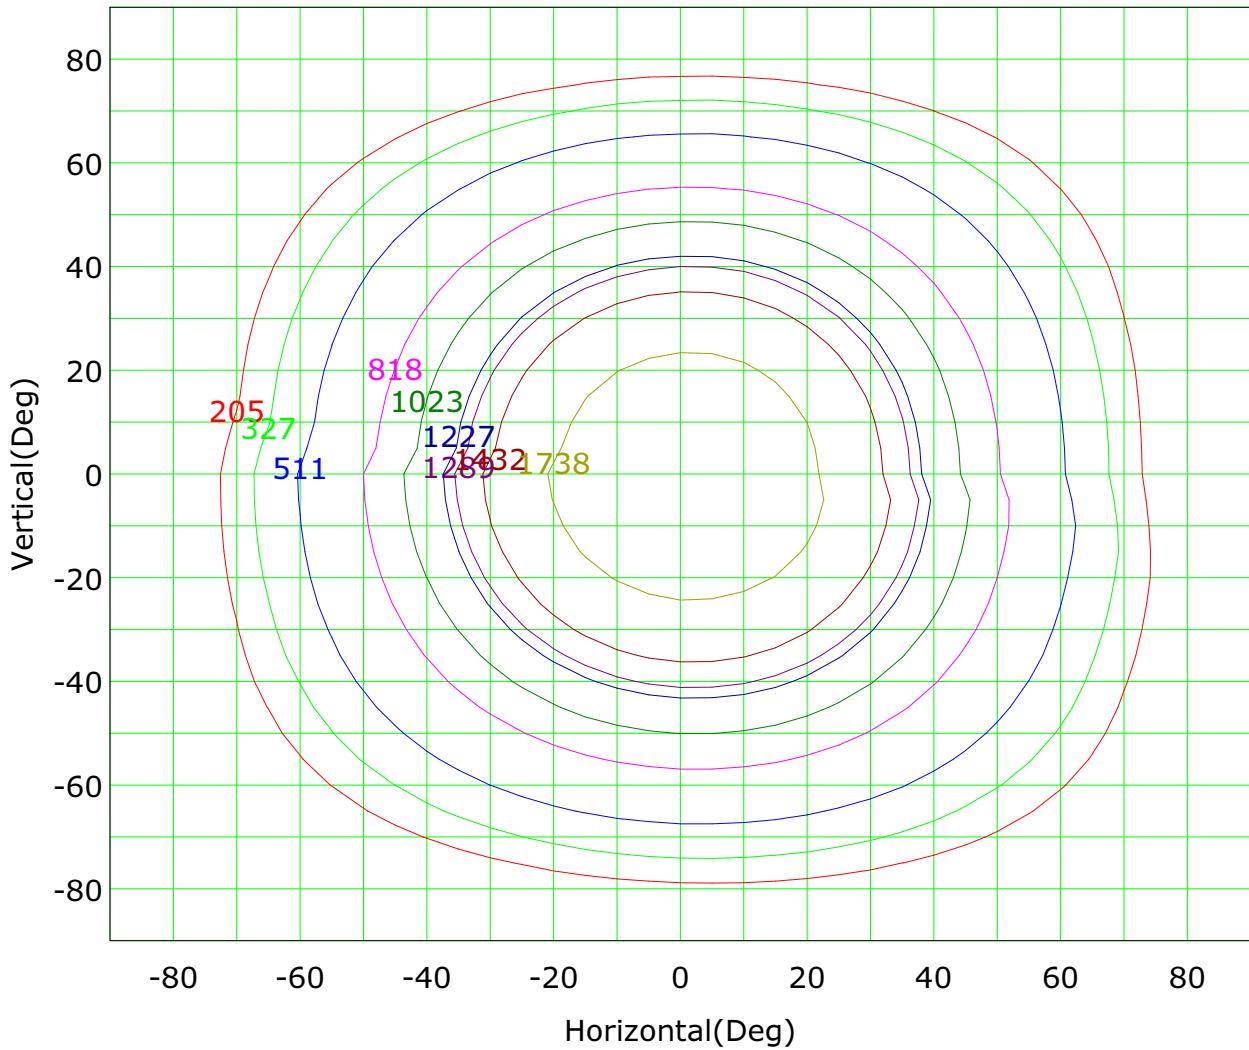

Imax (100%): 2045 cd

- | | |
|-------------------|-------------------|
| — (10%): 205 cd | — (16%): 327 cd |
| — (25%): 511 cd | — (40%): 818 cd |
| — (63%): 1289 cd | — (100%): 2045 cd |
| — (50%): 1023 cd | — (60%): 1227 cd |
| — (70%): 1432 cd | — (85%): 1738 cd |

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Isocandela (sphere)

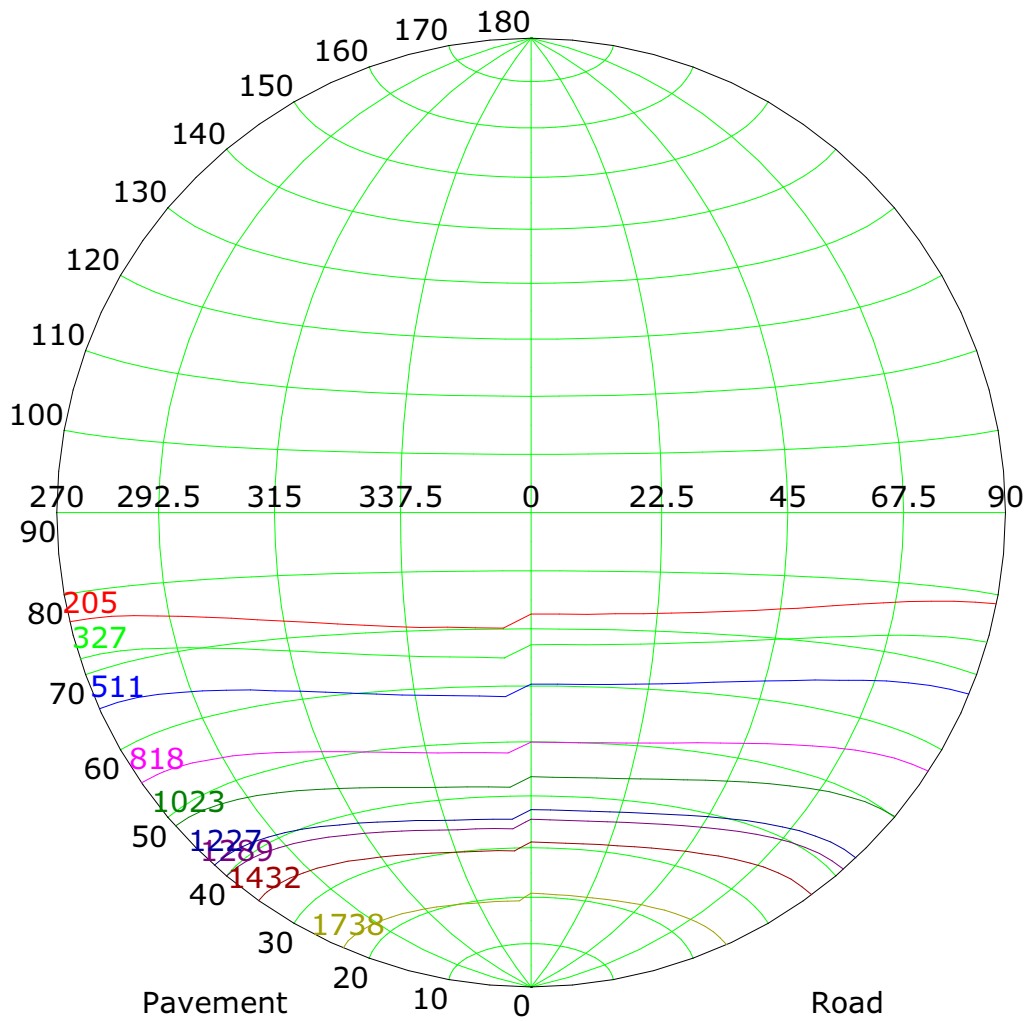

Imax (100%): 2045 cd

— (10%): 205 cd	— (16%): 327 cd
— (25%): 511 cd	— (40%): 818 cd
— (63%): 1289 cd	— (100%): 2045 cd
— (50%): 1023 cd	— (60%): 1227 cd
— (70%): 1432 cd	— (85%): 1738 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

IsoLux Plot

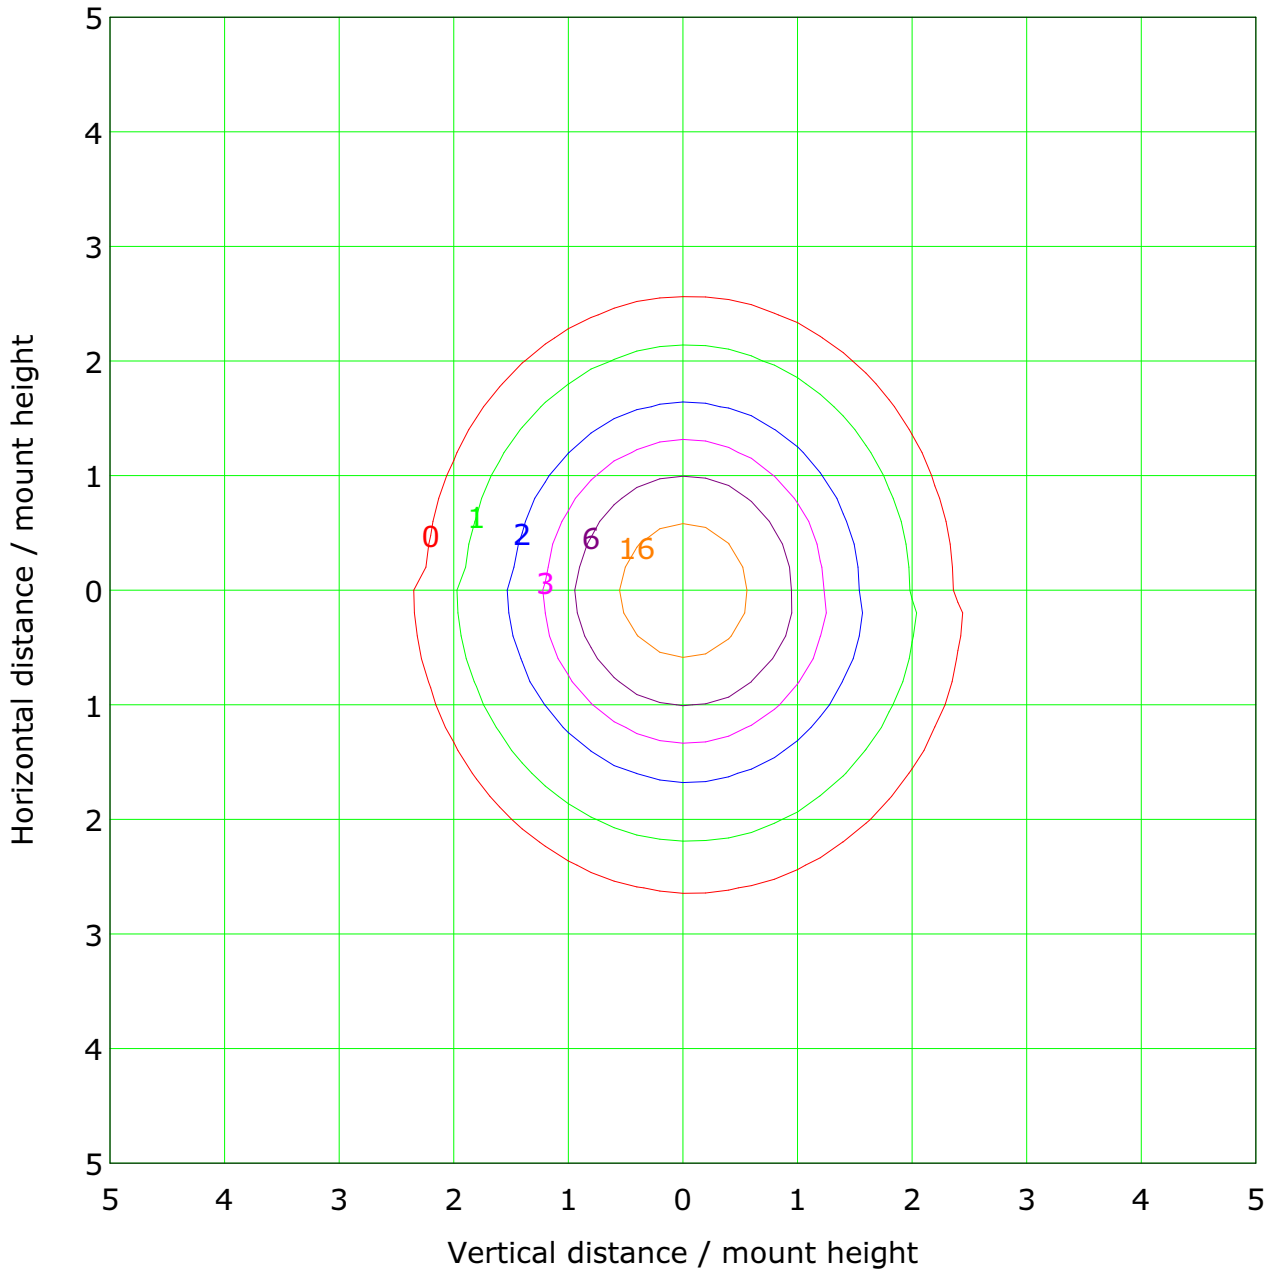


Mounting Height: 8.0m		Max Lux(100%): 31.9 lx	
—	(1%): 0.3 lx	—	(2%): 0.6 lx
—	(5%): 1.6 lx	—	(10%): 3.2 lx
—	(20%): 6.4 lx	—	(50%): 16.0 lx
—	(100%): 31.9 lx	—	(200%): 63.9 lx
—	(300%): 95.8 lx	—	(500%): 159.7 lx

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Roadway CU Curve

Efficiency(%)

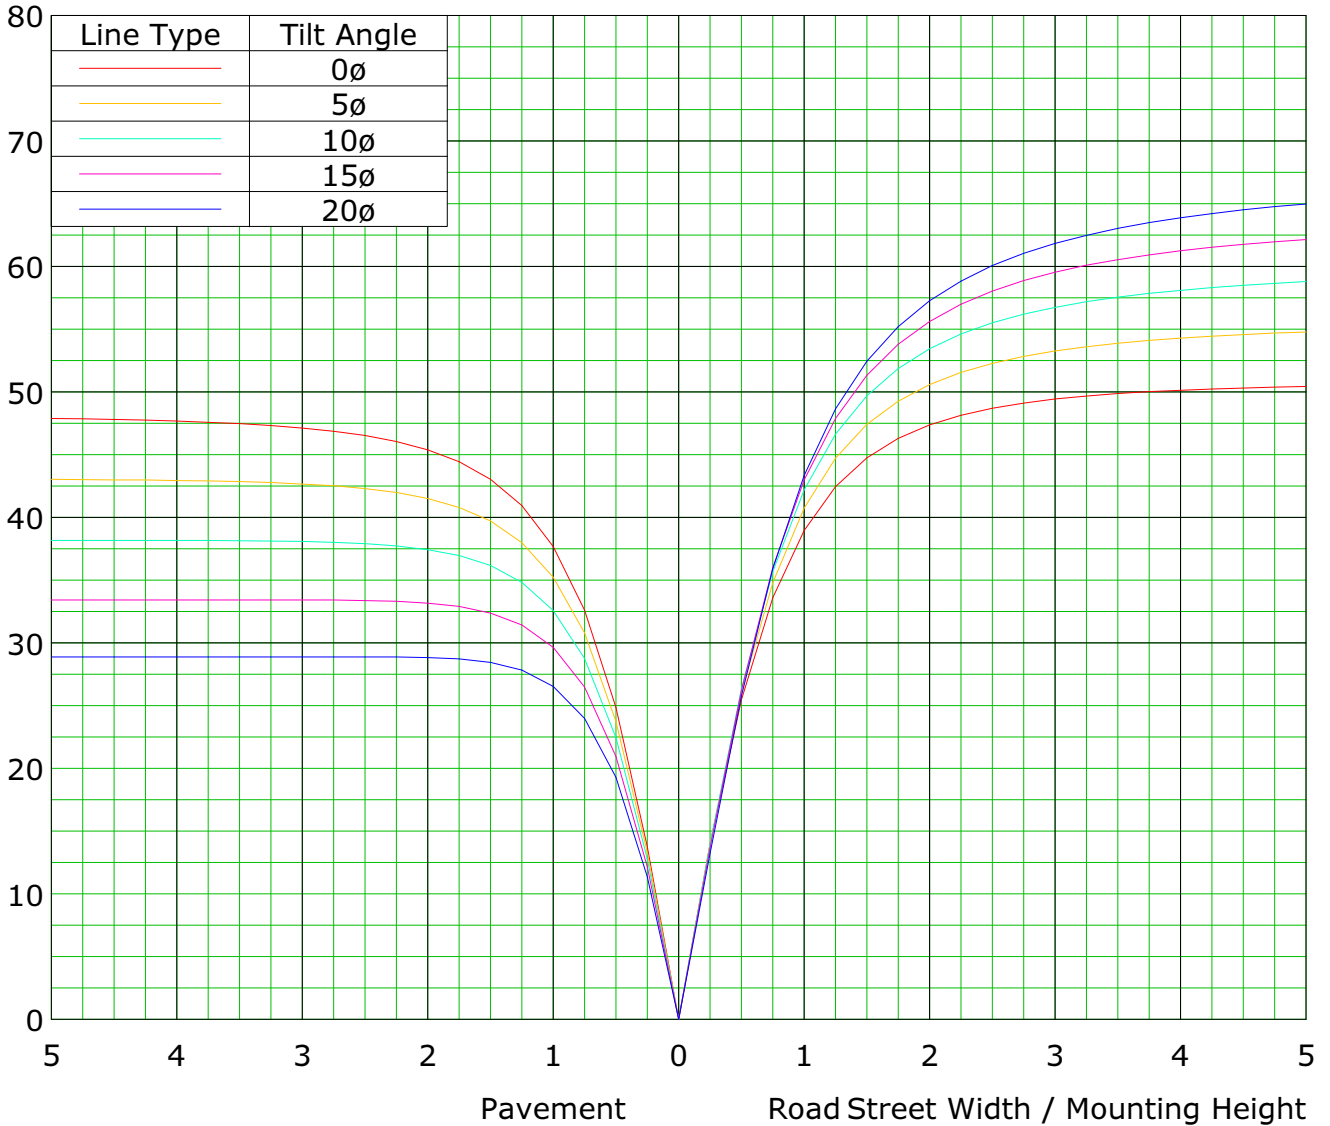

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

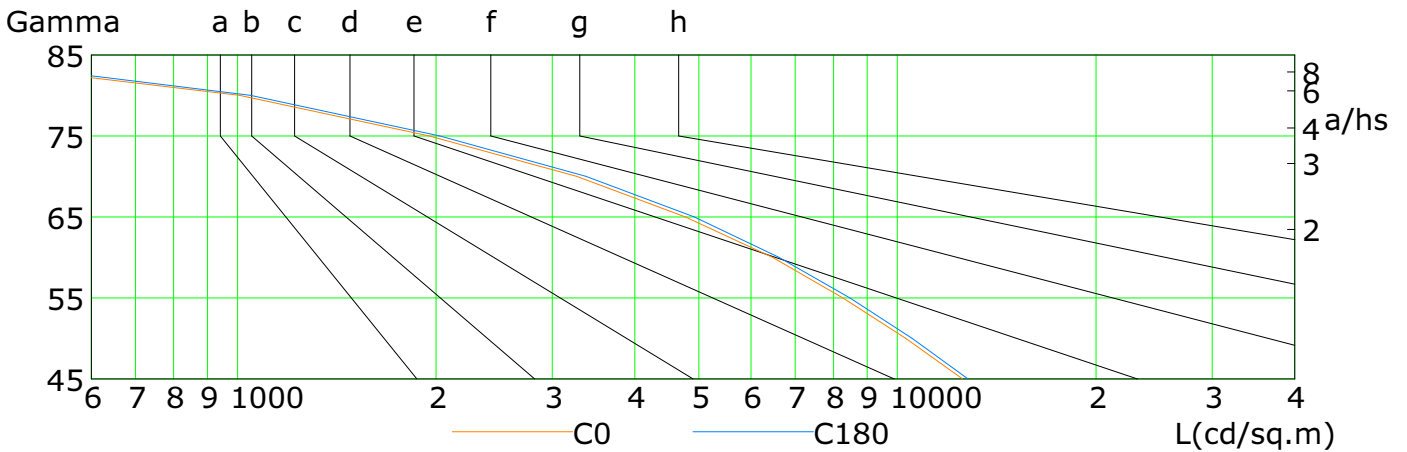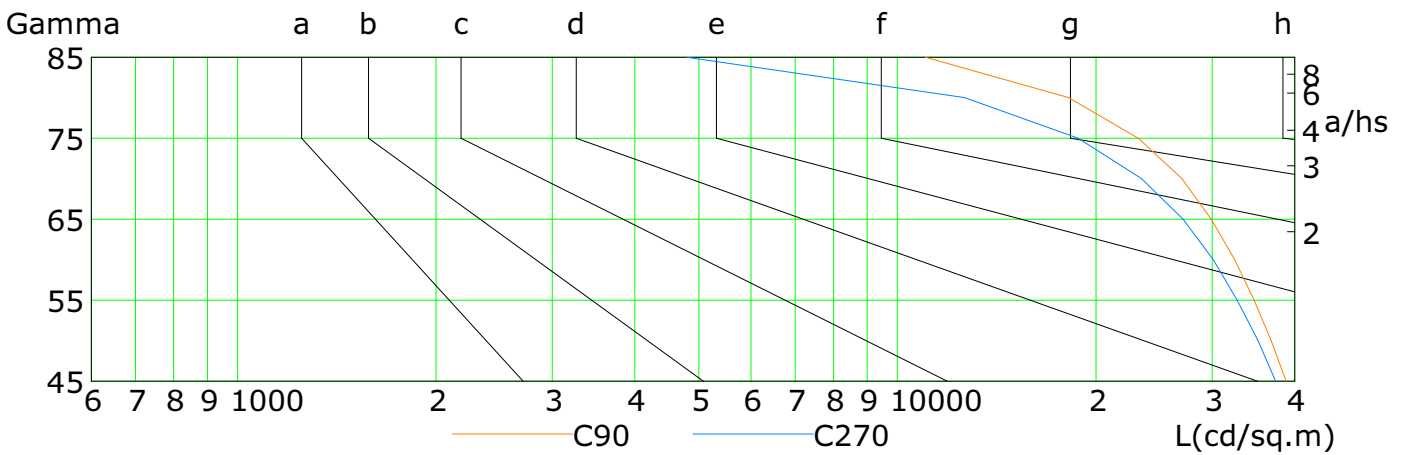

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	12548	10294	8271	6464	4773	3263	1953	1007	309
C90	38829	36830	34712	32453	29909	26975	23182	18166	11028
C180	12802	10526	8470	6609	4923	3372	2027	1045	333
C270	37420	35189	32729	30118	27117	23448	18786	12642	4792

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Illuminance at a Distance

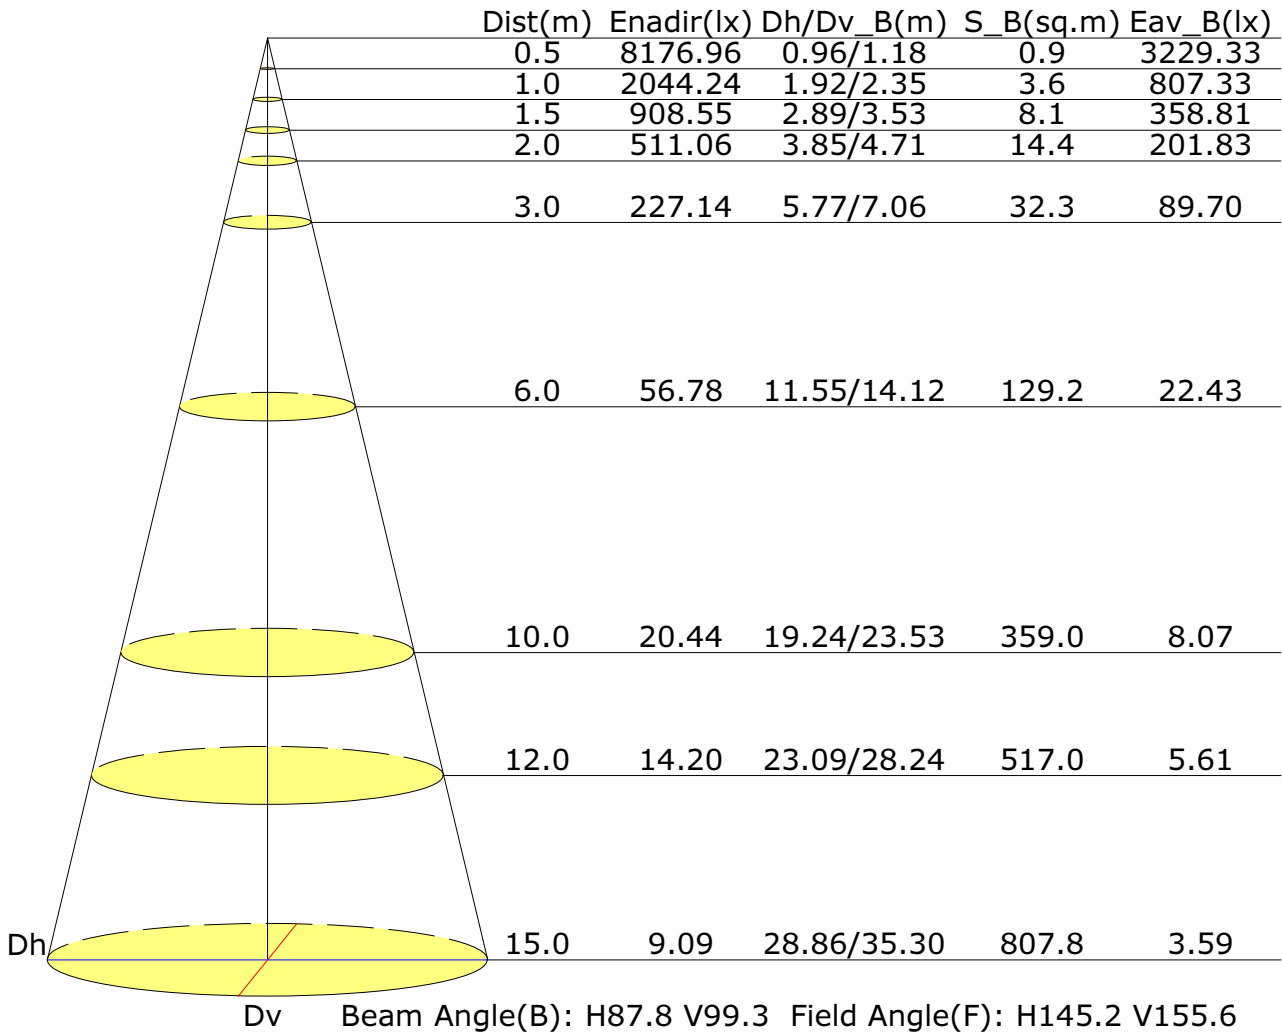

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Vertical IsoLux Plot

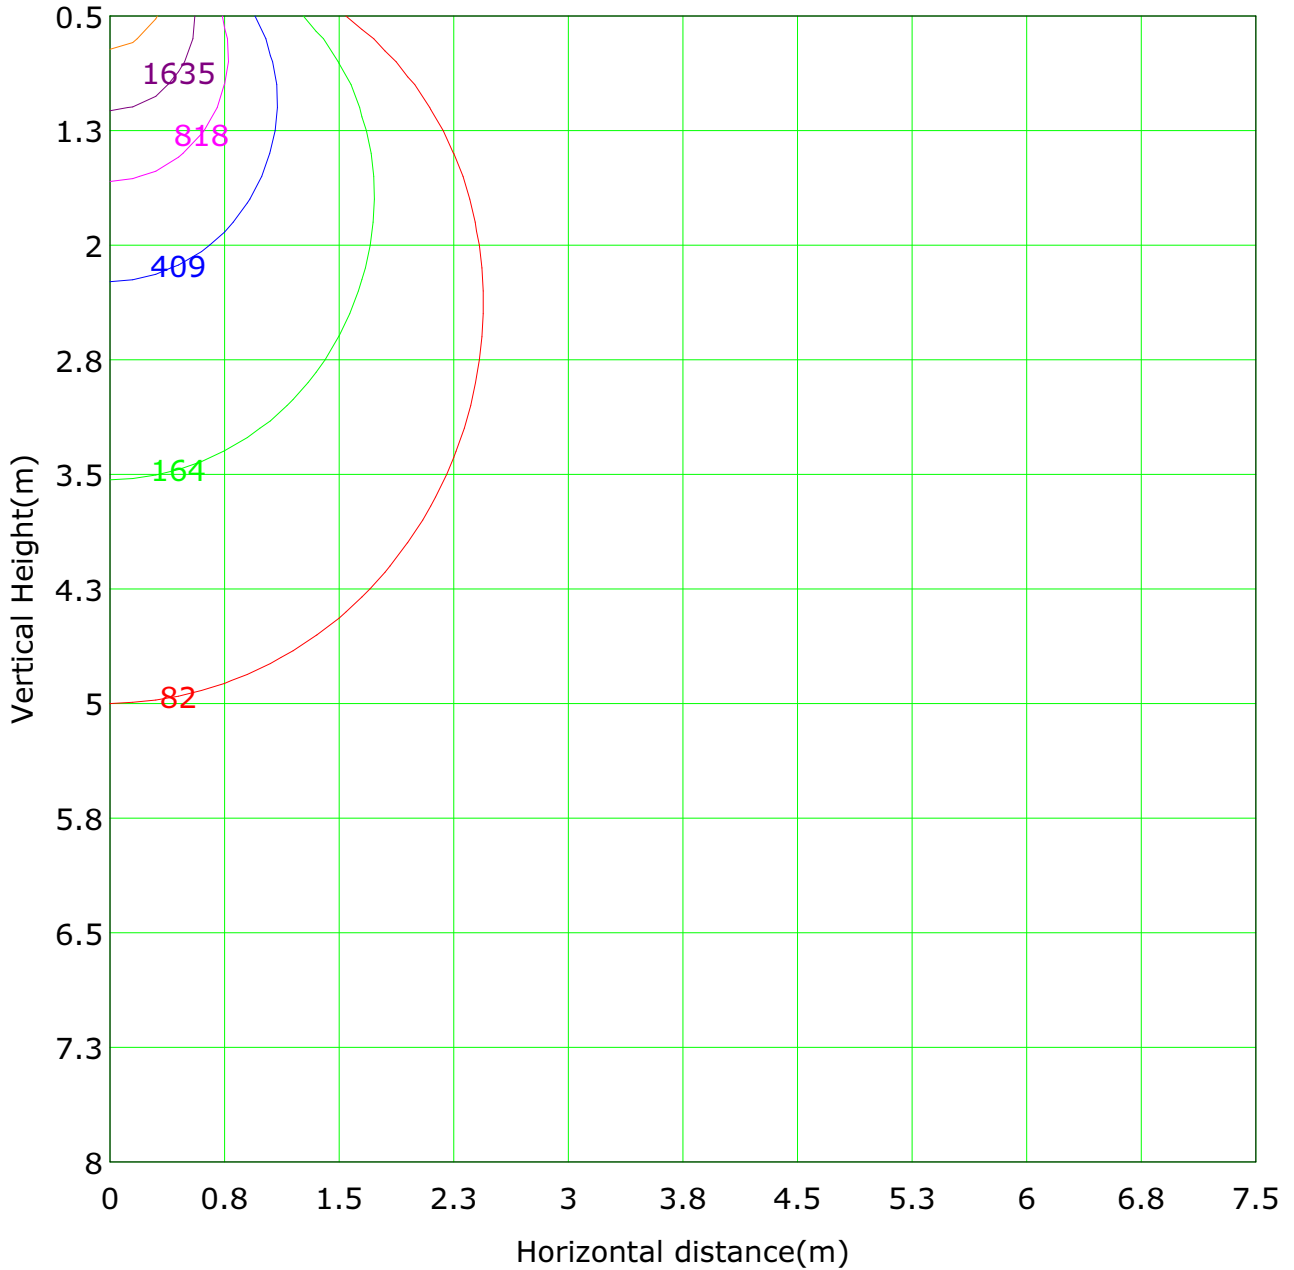


Lowest(m): 0.5m	Highest(m): 8.0m	Max Lux: 8177.0 lx
— (1%): 81.8 lx	— (2%): 163.5 lx	
— (5%): 408.8 lx	— (10%): 817.7 lx	
— (20%): 1635.4 lx	— (50%): 4088.5 lx	
— (100%): 8177.0 lx	— (200%): 16353.9 lx	
— (300%): 24530.9 lx	— (500%): 40884.8 lx	

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

The Average Illuminance Effective Figure

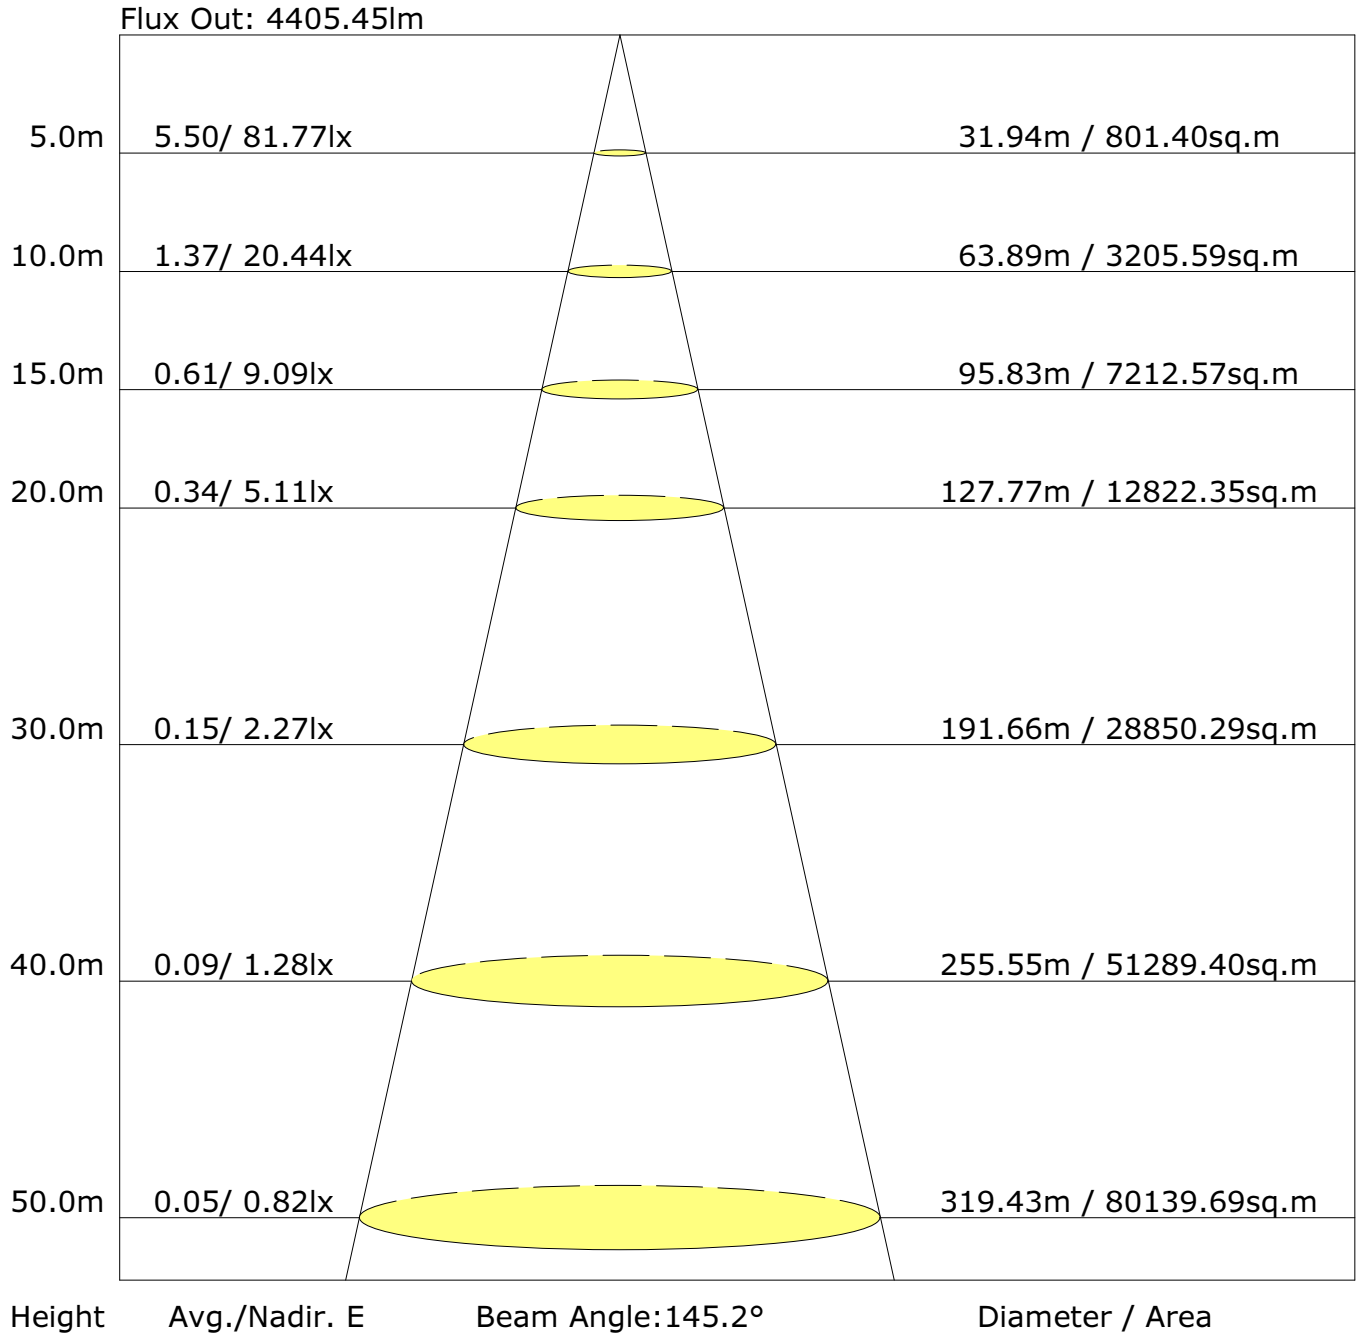

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

UGR Table


Reflectance:											
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
X=2H Y=2H	15.0	16.5	15.3	16.8	17.2	15.0	16.5	15.4	16.9	17.2	
3H	16.1	17.4	16.5	17.8	18.2	16.2	17.6	16.6	18.0	18.3	
4H	16.3	17.6	16.7	18.0	18.4	16.6	17.9	17.0	18.3	18.7	
6H	16.5	17.6	16.9	18.0	18.4	16.8	18.0	17.2	18.4	18.8	
8H	16.5	17.6	16.9	18.0	18.4	16.8	18.0	17.3	18.4	18.8	
12H	16.4	17.5	16.9	17.9	18.4	16.8	17.9	17.3	18.3	18.7	
X=4H Y=2H	15.3	16.6	15.7	16.9	17.3	15.4	16.7	15.8	17.1	17.5	
3H	16.5	17.5	16.9	17.9	18.4	16.8	17.9	17.2	18.3	18.7	
4H	16.8	17.7	17.2	18.1	18.6	17.3	18.2	17.7	18.7	19.1	
6H	16.9	17.7	17.4	18.2	18.7	17.5	18.4	18.0	18.8	19.3	
8H	16.9	17.7	17.4	18.2	18.6	17.6	18.3	18.0	18.8	19.3	
12H	16.9	17.6	17.4	18.1	18.6	17.6	18.3	18.1	18.8	19.3	
X=8H Y=4H	16.8	17.6	17.3	18.0	18.5	17.4	18.1	17.8	18.6	19.1	
6H	16.9	17.6	17.5	18.1	18.6	17.6	18.3	18.2	18.8	19.3	
8H	17.0	17.5	17.5	18.1	18.6	17.7	18.3	18.2	18.8	19.3	
12H	17.0	17.5	17.5	18.0	18.5	17.8	18.3	18.3	18.8	19.3	
X=12H Y=4H	16.8	17.5	17.3	18.0	18.4	17.3	18.0	17.8	18.5	19.0	
6H	16.9	17.5	17.5	18.0	18.5	17.6	18.2	18.2	18.7	19.3	
8H	17.0	17.5	17.5	18.0	18.5	17.7	18.2	18.2	18.7	19.3	

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

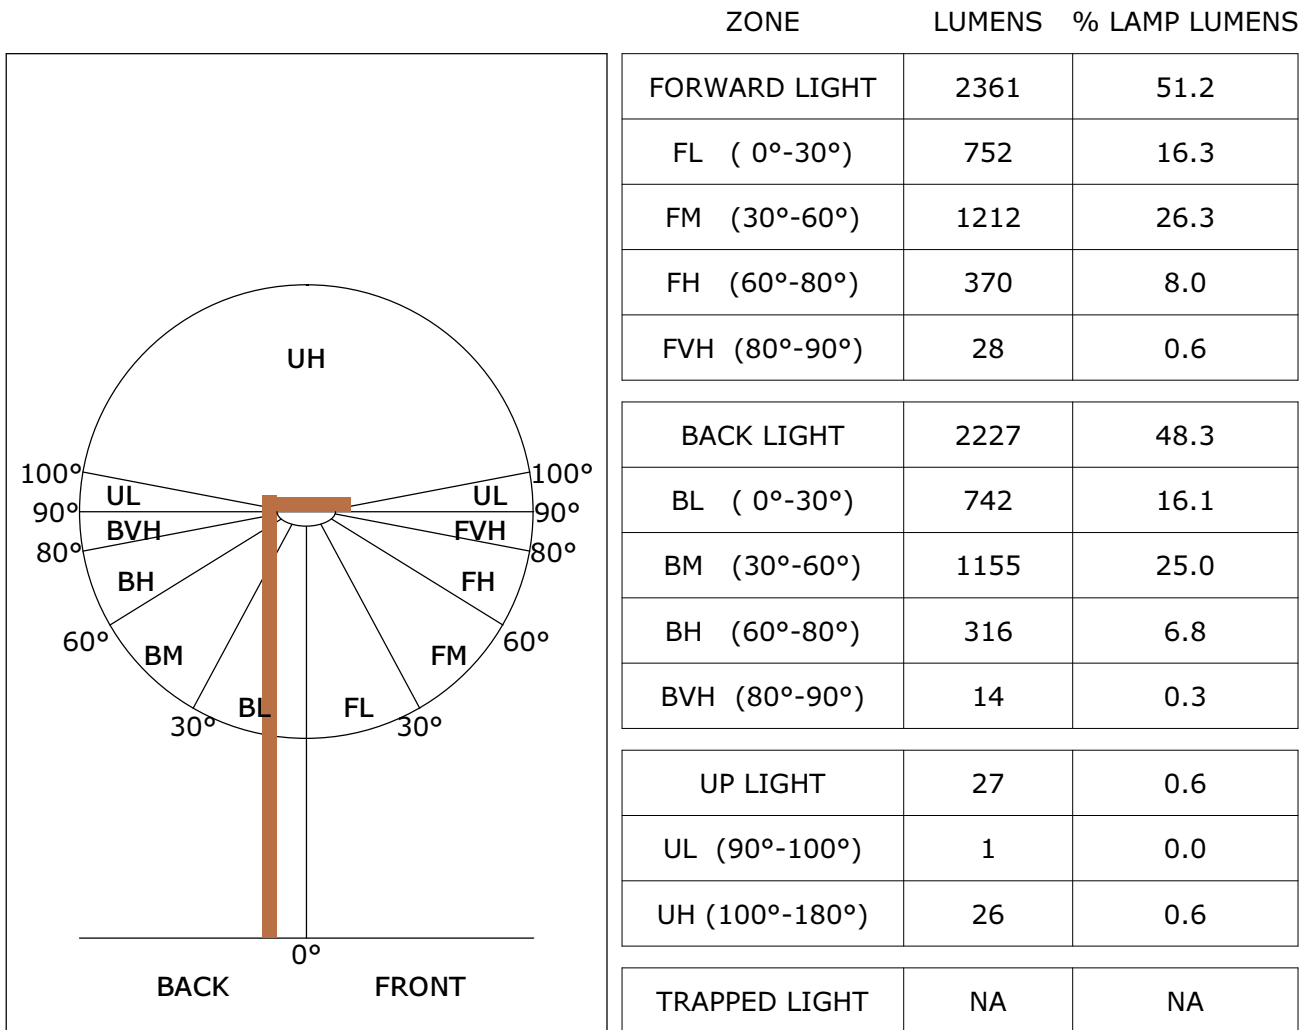


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U2 G1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

LCS Graph

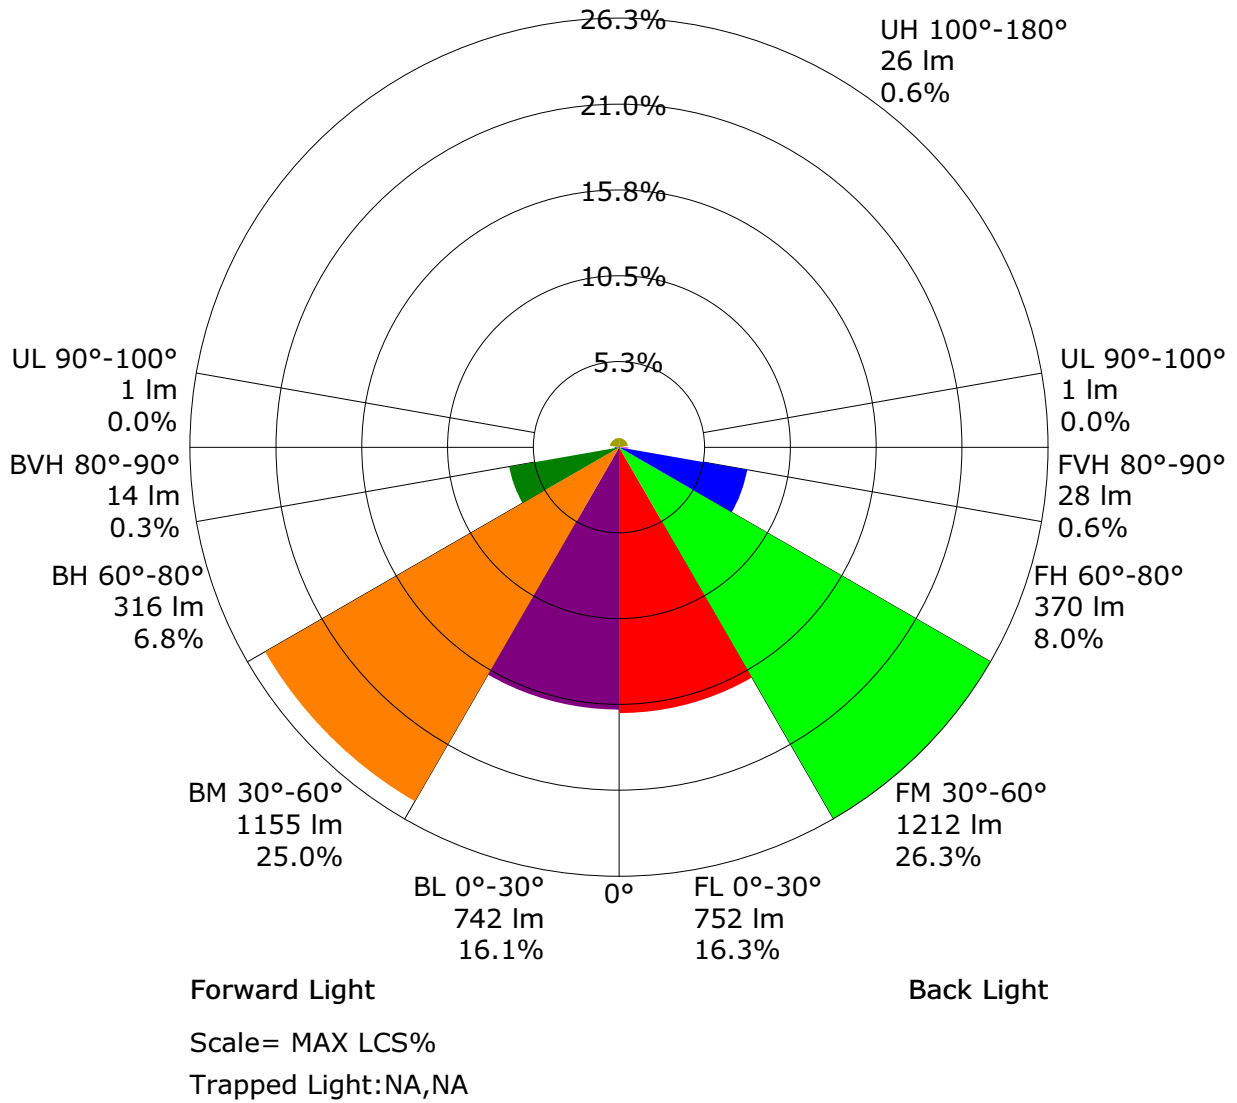

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	2031.7	1.9	1.9	0.04	0.04
1.0-2.0	2030.6	5.8	7.8	0.13	0.17
2.0-3.0	2028.1	9.7	17.5	0.21	0.38
3.0-4.0	2024.4	13.6	31.0	0.29	0.67
4.0-5.0	2019.6	17.4	48.4	0.38	1.05
5.0-6.0	2013.5	21.2	69.6	0.46	1.51
6.0-7.0	2006.2	24.9	94.5	0.54	2.05
7.0-8.0	1997.8	28.6	123.1	0.62	2.67
8.0-9.0	1988.1	32.2	155.3	0.70	3.36
9.0-10.0	1977.2	35.8	191.1	0.78	4.14
10.0-11.0	1965.0	39.3	230.3	0.85	4.99
11.0-12.0	1951.8	42.7	273.0	0.92	5.92
12.0-13.0	1937.4	46.0	319.0	1.00	6.91
13.0-14.0	1921.9	49.2	368.2	1.07	7.98
14.0-15.0	1905.4	52.3	420.5	1.13	9.11
15.0-16.0	1887.9	55.3	475.8	1.20	10.31
16.0-17.0	1869.2	58.2	534.1	1.26	11.57
17.0-18.0	1849.6	61.0	595.1	1.32	12.89
18.0-19.0	1829.0	63.6	658.7	1.38	14.27
19.0-20.0	1807.5	66.2	724.9	1.43	15.70
20.0-21.0	1784.9	68.5	793.4	1.49	17.19
21.0-22.0	1761.6	70.8	864.2	1.53	18.72
22.0-23.0	1737.4	72.9	937.1	1.58	20.30
23.0-24.0	1712.5	74.9	1012.0	1.62	21.93
24.0-25.0	1686.9	76.7	1088.7	1.66	23.59
25.0-26.0	1660.7	78.4	1167.1	1.70	25.29
26.0-27.0	1633.6	79.9	1247.0	1.73	27.02
27.0-28.0	1605.9	81.3	1328.4	1.76	28.78
28.0-29.0	1577.7	82.6	1410.9	1.79	30.57
29.0-30.0	1549.0	83.6	1494.6	1.81	32.38
30.0-31.0	1519.8	84.6	1579.2	1.83	34.21
31.0-32.0	1490.4	85.4	1664.6	1.85	36.06
32.0-33.0	1460.4	86.0	1750.6	1.86	37.93
33.0-34.0	1430.2	86.6	1837.2	1.88	39.80
34.0-35.0	1399.5	86.9	1924.1	1.88	41.69
35.0-36.0	1368.4	87.1	2011.2	1.89	43.58

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1337.4	87.2	2098.5	1.89	45.47
37.0-38.0	1306.1	87.2	2185.7	1.89	47.35
38.0-39.0	1274.6	87.0	2272.7	1.89	49.24
39.0-40.0	1243.0	86.7	2359.4	1.88	51.12
40.0-41.0	1211.3	86.3	2445.6	1.87	52.99
41.0-42.0	1179.5	85.7	2531.3	1.86	54.84
42.0-43.0	1147.6	85.0	2616.4	1.84	56.69
43.0-44.0	1115.8	84.2	2700.6	1.82	58.51
44.0-45.0	1084.0	83.3	2783.9	1.81	60.32
45.0-46.0	1052.4	82.3	2866.2	1.78	62.10
46.0-47.0	1021.0	81.2	2947.4	1.76	63.86
47.0-48.0	989.6	80.0	3027.4	1.73	65.59
48.0-49.0	958.2	78.7	3106.1	1.71	67.30
49.0-50.0	927.0	77.3	3183.4	1.67	68.97
50.0-51.0	896.0	75.8	3259.3	1.64	70.62
51.0-52.0	865.1	74.2	3333.5	1.61	72.22
52.0-53.0	834.3	72.6	3406.1	1.57	73.80
53.0-54.0	803.7	70.8	3476.9	1.53	75.33
54.0-55.0	773.3	69.0	3546.0	1.50	76.83
55.0-56.0	743.0	67.1	3613.1	1.45	78.28
56.0-57.0	713.1	65.2	3678.3	1.41	79.70
57.0-58.0	683.3	63.2	3741.5	1.37	81.06
58.0-59.0	653.6	61.1	3802.6	1.32	82.39
59.0-60.0	624.2	59.0	3861.6	1.28	83.67
60.0-61.0	595.2	56.8	3918.4	1.23	84.90
61.0-62.0	566.2	54.6	3973.0	1.18	86.08
62.0-63.0	537.5	52.3	4025.3	1.13	87.21
63.0-64.0	509.0	50.0	4075.2	1.08	88.29
64.0-65.0	481.0	47.6	4122.8	1.03	89.33
65.0-66.0	453.2	45.2	4168.1	0.98	90.31
66.0-67.0	425.7	42.8	4210.9	0.93	91.23
67.0-68.0	398.3	40.4	4251.2	0.87	92.11
68.0-69.0	371.4	37.9	4289.1	0.82	92.93
69.0-70.0	344.8	35.4	4324.5	0.77	93.70
70.0-71.0	318.6	32.9	4357.5	0.71	94.41
71.0-72.0	292.9	30.5	4387.9	0.66	95.07

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	267.6	28.0	4415.9	0.61	95.68
73.0-74.0	242.9	25.5	4441.4	0.55	96.23
74.0-75.0	219.0	23.1	4464.6	0.50	96.73
75.0-76.0	196.0	20.8	4485.4	0.45	97.18
76.0-77.0	173.8	18.5	4503.9	0.40	97.58
77.0-78.0	152.6	16.3	4520.3	0.35	97.94
78.0-79.0	132.5	14.2	4534.5	0.31	98.25
79.0-80.0	113.4	12.2	4546.7	0.26	98.51
80.0-81.0	95.5	10.3	4557.1	0.22	98.73
81.0-82.0	79.0	8.6	4565.6	0.19	98.92
82.0-83.0	63.6	6.9	4572.5	0.15	99.07
83.0-84.0	49.4	5.4	4577.9	0.12	99.19
84.0-85.0	37.2	4.1	4582.0	0.09	99.27
85.0-86.0	26.3	2.9	4584.9	0.06	99.34
86.0-87.0	16.9	1.8	4586.7	0.04	99.38
87.0-88.0	9.8	1.1	4587.8	0.02	99.40
88.0-89.0	5.1	0.6	4588.3	0.01	99.41
89.0-90.0	2.2	0.2	4588.6	0.01	99.42
90.0-91.0	0.7	0.1	4588.7	0.00	99.42
91.0-92.0	0.2	0.0	4588.7	0.00	99.42
92.0-93.0	0.2	0.0	4588.7	0.00	99.42
93.0-94.0	0.3	0.0	4588.7	0.00	99.42
94.0-95.0	0.4	0.0	4588.8	0.00	99.42
95.0-96.0	0.5	0.1	4588.8	0.00	99.42
96.0-97.0	0.6	0.1	4588.9	0.00	99.42
97.0-98.0	0.7	0.1	4589.0	0.00	99.43
98.0-99.0	0.8	0.1	4589.1	0.00	99.43
99.0-100.0	0.9	0.1	4589.2	0.00	99.43
100.0-101.0	1.0	0.1	4589.3	0.00	99.43
101.0-102.0	1.2	0.1	4589.4	0.00	99.43
102.0-103.0	1.3	0.1	4589.5	0.00	99.44
103.0-104.0	1.4	0.1	4589.7	0.00	99.44
104.0-105.0	1.5	0.2	4589.8	0.00	99.44
105.0-106.0	1.7	0.2	4590.0	0.00	99.45
106.0-107.0	1.8	0.2	4590.2	0.00	99.45
107.0-108.0	1.9	0.2	4590.4	0.00	99.46

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	2.1	0.2	4590.6	0.00	99.46
109.0-110.0	2.2	0.2	4590.9	0.00	99.47
110.0-111.0	2.3	0.2	4591.1	0.01	99.47
111.0-112.0	2.5	0.3	4591.3	0.01	99.48
112.0-113.0	2.6	0.3	4591.6	0.01	99.48
113.0-114.0	2.8	0.3	4591.9	0.01	99.49
114.0-115.0	2.9	0.3	4592.2	0.01	99.50
115.0-116.0	3.1	0.3	4592.5	0.01	99.50
116.0-117.0	3.2	0.3	4592.8	0.01	99.51
117.0-118.0	3.4	0.3	4593.1	0.01	99.52
118.0-119.0	3.5	0.3	4593.5	0.01	99.52
119.0-120.0	3.7	0.4	4593.8	0.01	99.53
120.0-121.0	3.9	0.4	4594.2	0.01	99.54
121.0-122.0	4.0	0.4	4594.6	0.01	99.55
122.0-123.0	4.2	0.4	4595.0	0.01	99.56
123.0-124.0	4.3	0.4	4595.4	0.01	99.56
124.0-125.0	4.5	0.4	4595.8	0.01	99.57
125.0-126.0	4.6	0.4	4596.2	0.01	99.58
126.0-127.0	4.8	0.4	4596.6	0.01	99.59
127.0-128.0	5.0	0.4	4597.0	0.01	99.60
128.0-129.0	5.1	0.4	4597.5	0.01	99.61
129.0-130.0	5.3	0.4	4597.9	0.01	99.62
130.0-131.0	5.4	0.5	4598.4	0.01	99.63
131.0-132.0	5.6	0.5	4598.8	0.01	99.64
132.0-133.0	5.8	0.5	4599.3	0.01	99.65
133.0-134.0	5.9	0.5	4599.8	0.01	99.66
134.0-135.0	6.1	0.5	4600.2	0.01	99.67
135.0-136.0	6.2	0.5	4600.7	0.01	99.68
136.0-137.0	6.4	0.5	4601.2	0.01	99.69
137.0-138.0	6.5	0.5	4601.7	0.01	99.70
138.0-139.0	6.7	0.5	4602.2	0.01	99.71
139.0-140.0	6.9	0.5	4602.7	0.01	99.72
140.0-141.0	7.0	0.5	4603.1	0.01	99.73
141.0-142.0	7.2	0.5	4603.6	0.01	99.74
142.0-143.0	7.3	0.5	4604.1	0.01	99.75
143.0-144.0	7.4	0.5	4604.6	0.01	99.76

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	7.6	0.5	4605.1	0.01	99.77
145.0-146.0	7.7	0.5	4605.6	0.01	99.79
146.0-147.0	7.9	0.5	4606.0	0.01	99.80
147.0-148.0	8.0	0.5	4606.5	0.01	99.81
148.0-149.0	8.1	0.5	4607.0	0.01	99.82
149.0-150.0	8.3	0.5	4607.4	0.01	99.83
150.0-151.0	8.4	0.5	4607.9	0.01	99.84
151.0-152.0	8.5	0.4	4608.3	0.01	99.85
152.0-153.0	8.7	0.4	4608.8	0.01	99.85
153.0-154.0	8.8	0.4	4609.2	0.01	99.86
154.0-155.0	8.9	0.4	4609.6	0.01	99.87
155.0-156.0	9.1	0.4	4610.1	0.01	99.88
156.0-157.0	9.2	0.4	4610.5	0.01	99.89
157.0-158.0	9.3	0.4	4610.8	0.01	99.90
158.0-159.0	9.4	0.4	4611.2	0.01	99.91
159.0-160.0	9.5	0.4	4611.6	0.01	99.92
160.0-161.0	9.6	0.4	4611.9	0.01	99.92
161.0-162.0	9.8	0.3	4612.3	0.01	99.93
162.0-163.0	9.9	0.3	4612.6	0.01	99.94
163.0-164.0	10.0	0.3	4612.9	0.01	99.94
164.0-165.0	10.1	0.3	4613.2	0.01	99.95
165.0-166.0	10.2	0.3	4613.5	0.01	99.96
166.0-167.0	10.3	0.3	4613.8	0.01	99.96
167.0-168.0	10.4	0.2	4614.0	0.01	99.97
168.0-169.0	10.5	0.2	4614.2	0.00	99.97
169.0-170.0	10.6	0.2	4614.4	0.00	99.98
170.0-171.0	10.7	0.2	4614.6	0.00	99.98
171.0-172.0	10.8	0.2	4614.8	0.00	99.99
172.0-173.0	10.8	0.2	4615.0	0.00	99.99
173.0-174.0	10.9	0.1	4615.1	0.00	99.99
174.0-175.0	11.0	0.1	4615.2	0.00	99.99
175.0-176.0	11.0	0.1	4615.3	0.00	100.00
176.0-177.0	11.1	0.1	4615.4	0.00	100.00
177.0-178.0	11.1	0.1	4615.4	0.00	100.00
178.0-179.0	11.2	0.0	4615.5	0.00	100.00
179.0-180.0	11.2	0.0	4615.5	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	2044.2	2040.2	2038.1	2036.3	2035.1	2034.5	2033.1	2031.9	2031.9	2030.1
G1.0	2042.5	2039.1	2036.5	2034.8	2033.4	2032.7	2031.5	2030.4	2030.0	2031.4
G2.0	2039.8	2036.0	2033.5	2032.4	2030.4	2029.7	2028.4	2027.6	2028.2	2027.5
G3.0	2035.9	2031.3	2029.1	2027.4	2026.3	2025.2	2024.1	2023.6	2023.6	2022.7
G4.0	2029.4	2025.8	2023.0	2022.1	2020.8	2019.7	2018.3	2017.9	2018.0	2017.2
G5.0	2022.6	2019.2	2016.0	2015.0	2013.3	2012.9	2011.7	2011.3	2011.7	2013.5
G6.0	2013.5	2010.4	2007.6	2006.8	2004.8	2004.4	2003.1	2003.1	2003.4	2004.1
G7.0	2003.9	2000.5	1998.0	1996.6	1995.5	1994.8	1994.3	1994.6	1994.4	1995.1
G8.0	1993.1	1989.8	1986.7	1986.2	1984.9	1983.5	1983.2	1983.9	1985.6	1985.8
G9.0	1980.1	1976.6	1974.5	1972.9	1972.1	1972.2	1971.7	1972.5	1973.3	1975.9
G10.0	1966.5	1963.4	1960.0	1959.7	1958.6	1958.0	1958.1	1959.1	1960.8	1961.7
G11.0	1951.5	1947.5	1945.1	1944.7	1943.5	1943.3	1943.9	1945.3	1947.1	1947.8
G12.0	1934.5	1931.4	1928.7	1928.6	1927.2	1928.7	1928.4	1929.2	1930.8	1933.9
G13.0	1917.0	1913.6	1911.1	1911.2	1910.7	1910.6	1911.3	1912.9	1915.9	1919.2
G14.0	1897.6	1894.7	1892.4	1892.4	1892.8	1892.4	1893.3	1895.7	1897.9	1901.1
G15.0	1878.4	1874.8	1872.1	1872.8	1872.1	1873.2	1874.5	1877.1	1880.4	1882.3
G16.0	1856.7	1854.0	1851.3	1851.9	1851.0	1852.9	1854.9	1857.2	1861.2	1865.3
G17.0	1835.3	1831.4	1829.8	1830.3	1829.4	1831.3	1833.3	1836.9	1841.3	1846.3
G18.0	1811.3	1808.9	1806.3	1807.3	1807.2	1808.6	1811.4	1814.9	1819.2	1825.1
G19.0	1789.0	1784.4	1783.1	1782.6	1784.1	1786.8	1788.7	1792.6	1797.7	1803.6
G20.0	1762.4	1759.5	1757.2	1758.7	1758.7	1761.0	1764.4	1768.8	1773.8	1780.5
G21.0	1736.3	1733.1	1732.0	1733.2	1733.7	1736.5	1739.9	1744.6	1749.8	1759.2
G22.0	1710.2	1706.6	1705.2	1706.4	1706.7	1711.0	1715.1	1719.4	1726.2	1733.2
G23.0	1682.2	1678.6	1677.3	1678.0	1679.8	1683.7	1688.8	1694.1	1701.0	1708.3
G24.0	1652.2	1650.8	1648.4	1650.5	1652.0	1655.5	1660.8	1666.4	1674.1	1682.3
G25.0	1623.7	1621.8	1620.1	1621.3	1624.2	1628.4	1633.2	1640.5	1648.2	1657.7
G26.0	1593.6	1591.8	1589.4	1592.0	1594.6	1598.5	1604.4	1611.7	1620.4	1630.7
G27.0	1563.6	1561.9	1560.1	1562.5	1565.1	1570.8	1575.9	1583.8	1591.4	1601.8
G28.0	1533.5	1530.6	1528.9	1532.0	1534.1	1540.0	1546.1	1554.5	1563.7	1573.1
G29.0	1501.8	1498.8	1498.7	1501.1	1504.3	1509.9	1516.9	1526.2	1534.3	1546.5
G30.0	1469.1	1467.1	1466.3	1470.0	1473.6	1478.5	1486.0	1494.4	1503.9	1516.5
G31.0	1437.4	1436.1	1434.9	1439.0	1442.0	1448.0	1456.1	1465.4	1475.5	1487.4
G32.0	1405.2	1403.8	1403.2	1406.8	1409.5	1416.7	1425.1	1433.9	1445.1	1457.4
G33.0	1372.3	1371.3	1370.8	1373.7	1378.2	1385.2	1393.7	1403.6	1415.3	1427.8
G34.0	1340.2	1338.8	1338.1	1341.5	1345.5	1353.6	1361.4	1371.7	1383.8	1398.7
G35.0	1307.2	1305.7	1305.3	1308.2	1313.6	1320.8	1330.1	1340.4	1353.7	1367.3
G36.0	1273.3	1271.8	1272.3	1275.4	1280.2	1288.2	1297.3	1309.1	1321.8	1334.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	1240.8	1238.6	1239.0	1243.9	1248.5	1256.0	1265.7	1277.0	1289.1	1303.7
G38.0	1207.4	1205.3	1205.3	1208.9	1214.7	1222.5	1232.8	1244.4	1258.7	1273.1
G39.0	1173.9	1172.1	1172.7	1177.1	1181.8	1190.8	1200.0	1213.0	1226.4	1242.0
G40.0	1140.8	1139.0	1139.6	1143.2	1149.2	1157.4	1168.0	1180.9	1194.4	1209.4
G41.0	1106.8	1105.7	1106.5	1110.3	1116.2	1126.3	1136.4	1148.8	1163.4	1178.1
G42.0	1073.7	1072.9	1073.6	1077.4	1083.6	1092.3	1103.4	1116.1	1130.1	1146.6
G43.0	1041.5	1039.7	1039.3	1044.9	1051.0	1060.8	1071.2	1084.5	1099.0	1116.6
G44.0	1008.0	1006.4	1007.6	1012.2	1017.6	1026.9	1039.1	1052.1	1067.3	1083.6
G45.0	976.0	974.7	975.2	980.3	985.4	995.4	1006.7	1020.1	1035.7	1051.7
G46.0	943.2	942.2	943.7	947.7	954.2	963.1	975.6	988.9	1003.3	1019.8
G47.0	912.4	911.0	911.7	916.6	922.4	932.3	943.9	958.2	973.0	990.3
G48.0	880.0	878.7	879.4	884.3	891.0	900.8	911.9	926.1	943.0	959.4
G49.0	847.8	847.9	848.2	853.9	859.4	868.7	880.7	894.2	909.4	928.6
G50.0	816.6	816.0	817.7	822.0	828.5	837.6	849.5	864.5	878.8	895.7
G51.0	785.6	785.3	786.3	791.8	797.1	806.9	819.3	832.3	848.6	866.0
G52.0	755.1	754.6	756.4	760.7	766.6	776.5	788.2	801.8	817.7	835.6
G53.0	723.8	725.0	725.3	730.3	736.2	745.4	757.3	771.6	786.4	806.0
G54.0	693.9	694.2	695.4	700.2	706.2	715.3	728.5	741.5	757.6	774.6
G55.0	664.0	664.5	665.5	670.5	677.2	686.1	698.1	711.6	727.2	743.4
G56.0	635.2	635.0	636.2	641.7	646.7	656.5	668.4	682.0	697.3	714.6
G57.0	606.0	606.6	606.9	612.5	617.6	627.3	639.1	652.5	667.7	685.8
G58.0	577.2	577.2	578.2	583.1	588.7	599.3	610.0	623.3	638.9	655.2
G59.0	548.0	548.7	549.0	555.2	560.0	569.5	581.1	594.4	609.0	626.7
G60.0	521.1	520.4	521.6	526.2	532.4	540.7	552.6	566.3	580.6	597.6
G61.0	492.1	492.8	493.8	499.0	503.9	513.3	524.4	536.7	551.9	568.9
G62.0	464.6	465.4	466.4	470.8	476.9	485.4	496.5	509.2	523.3	541.2
G63.0	437.0	438.3	438.6	443.7	449.0	457.5	468.3	480.6	495.2	512.5
G64.0	411.5	411.7	412.0	416.2	422.6	430.3	440.9	453.2	467.6	483.7
G65.0	383.5	385.5	385.7	390.0	395.5	403.6	414.0	425.3	439.4	456.0
G66.0	358.4	359.1	360.5	364.0	370.0	377.8	387.3	399.0	412.2	428.4
G67.0	333.6	333.8	334.6	339.1	343.1	350.7	361.6	372.4	385.5	401.8
G68.0	308.1	309.0	309.6	314.0	318.5	325.6	335.1	346.3	359.6	374.1
G69.0	283.7	284.5	285.2	289.4	293.0	300.0	309.1	321.0	332.6	347.3
G70.0	259.3	260.7	260.8	264.7	268.7	276.0	284.7	295.1	308.0	322.0
G71.0	236.8	237.6	237.6	241.8	245.0	251.8	259.6	269.5	281.1	296.4
G72.0	214.4	214.7	215.1	218.1	222.1	227.9	236.2	245.7	257.3	270.3
G73.0	192.4	193.7	193.6	196.1	199.3	205.1	211.9	221.9	231.8	245.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	172.4	172.1	172.8	175.2	177.9	183.2	189.5	198.2	208.8	220.6
G75.0	152.3	153.2	152.9	155.4	157.1	161.4	167.9	175.9	184.7	197.2
G76.0	135.0	135.0	135.0	136.7	138.4	142.5	147.8	154.6	163.0	174.2
G77.0	117.5	117.8	117.7	119.3	120.2	123.6	128.0	133.9	141.5	152.0
G78.0	102.3	102.6	102.3	103.1	104.3	107.3	110.0	115.4	121.9	130.4
G79.0	88.5	89.0	88.6	89.0	89.3	90.9	93.8	97.5	102.9	111.2
G80.0	76.4	76.8	76.1	76.2	76.6	77.2	79.2	81.6	86.1	92.5
G81.0	64.9	64.9	64.7	64.7	64.7	64.9	65.9	67.9	71.0	75.3
G82.0	52.1	52.6	52.0	52.6	52.7	53.3	54.6	55.8	58.0	61.5
G83.0	39.3	39.6	39.4	39.3	39.7	41.2	42.2	43.9	45.9	48.5
G84.0	31.6	31.5	31.0	30.7	30.3	30.0	30.5	31.8	34.3	37.0
G85.0	22.7	23.0	22.7	23.0	23.0	23.2	23.3	23.2	23.6	25.7
G86.0	9.7	9.8	10.3	10.9	11.3	12.4	13.5	15.2	16.8	17.6
G87.0	2.4	2.4	2.5	2.8	3.1	3.6	4.5	5.5	7.0	9.0
G88.0	0.5	0.5	0.5	0.6	0.6	0.8	1.0	1.3	1.7	2.5
G89.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.5
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
G92.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.2
G93.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3
G94.0	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.4
G95.0	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5
G96.0	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.5	0.6	0.6
G97.0	0.4	0.4	0.4	0.4	0.5	0.5	0.5	0.6	0.6	0.7
G98.0	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.7	0.7	0.8
G99.0	0.6	0.6	0.6	0.6	0.6	0.7	0.7	0.8	0.9	1.0
G100.0	0.7	0.7	0.7	0.7	0.8	0.8	0.9	0.9	1.0	1.0
G101.0	0.8	0.8	0.8	0.8	0.9	0.9	1.0	1.0	1.1	1.2
G102.0	0.9	0.9	0.9	1.0	1.0	1.0	1.1	1.2	1.2	1.3
G103.0	1.0	1.0	1.0	1.0	1.1	1.2	1.2	1.3	1.4	1.4
G104.0	1.1	1.1	1.1	1.2	1.2	1.3	1.4	1.5	1.5	1.6
G105.0	1.3	1.3	1.3	1.3	1.4	1.4	1.5	1.6	1.6	1.7
G106.0	1.4	1.4	1.4	1.4	1.5	1.6	1.6	1.7	1.8	1.9
G107.0	1.5	1.5	1.5	1.6	1.6	1.6	1.7	1.8	1.9	2.0
G108.0	1.6	1.6	1.7	1.7	1.7	1.8	1.9	2.0	2.1	2.2
G109.0	1.8	1.8	1.8	1.8	1.9	2.0	2.1	2.1	2.2	2.3
G110.0	1.9	1.9	2.0	2.0	2.0	2.1	2.2	2.2	2.3	2.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	2.1	2.1	2.1	2.1	2.2	2.2	2.3	2.4	2.5	2.6
G112.0	2.2	2.2	2.2	2.2	2.3	2.4	2.5	2.6	2.7	2.8
G113.0	2.3	2.3	2.4	2.4	2.5	2.5	2.7	2.7	2.8	2.9
G114.0	2.5	2.5	2.5	2.6	2.7	2.7	2.8	2.9	3.0	3.1
G115.0	2.7	2.7	2.7	2.7	2.8	2.8	2.9	3.0	3.1	3.2
G116.0	2.8	2.8	2.8	2.8	2.9	3.0	3.1	3.2	3.3	3.3
G117.0	3.0	3.0	3.0	3.0	3.1	3.2	3.3	3.3	3.4	3.5
G118.0	3.1	3.1	3.1	3.2	3.3	3.3	3.4	3.5	3.6	3.7
G119.0	3.3	3.3	3.3	3.3	3.4	3.5	3.6	3.7	3.8	3.8
G120.0	3.4	3.4	3.5	3.5	3.6	3.7	3.7	3.8	3.9	4.0
G121.0	3.6	3.6	3.7	3.7	3.8	3.8	3.9	4.0	4.1	4.2
G122.0	3.8	3.8	3.8	3.8	3.9	4.0	4.1	4.2	4.3	4.3
G123.0	3.9	3.9	4.0	4.0	4.1	4.1	4.3	4.3	4.4	4.5
G124.0	4.1	4.1	4.1	4.2	4.2	4.3	4.4	4.5	4.6	4.7
G125.0	4.3	4.3	4.3	4.3	4.4	4.5	4.6	4.6	4.8	4.8
G126.0	4.4	4.4	4.5	4.5	4.6	4.6	4.7	4.8	4.9	5.0
G127.0	4.6	4.6	4.6	4.7	4.7	4.8	4.9	5.0	5.1	5.2
G128.0	4.7	4.8	4.8	4.8	4.9	5.0	5.0	5.2	5.2	5.3
G129.0	4.9	4.9	5.0	5.0	5.1	5.1	5.2	5.3	5.4	5.5
G130.0	5.1	5.1	5.1	5.2	5.3	5.3	5.4	5.5	5.6	5.6
G131.0	5.2	5.3	5.3	5.4	5.4	5.5	5.5	5.7	5.8	5.8
G132.0	5.4	5.4	5.4	5.5	5.6	5.6	5.7	5.8	5.9	5.9
G133.0	5.6	5.6	5.6	5.7	5.7	5.8	5.9	5.9	6.1	6.1
G134.0	5.8	5.8	5.8	5.9	5.9	6.0	6.0	6.1	6.2	6.3
G135.0	5.9	5.9	6.0	6.0	6.1	6.1	6.2	6.3	6.4	6.4
G136.0	6.1	6.1	6.1	6.2	6.2	6.3	6.4	6.4	6.6	6.6
G137.0	6.3	6.3	6.3	6.4	6.4	6.4	6.6	6.6	6.7	6.8
G138.0	6.4	6.4	6.4	6.5	6.6	6.6	6.7	6.8	6.9	6.9
G139.0	6.6	6.6	6.6	6.7	6.7	6.8	6.9	7.0	7.0	7.1
G140.0	6.7	6.8	6.8	6.8	6.9	7.0	7.0	7.1	7.1	7.2
G141.0	6.9	6.9	7.0	7.0	7.1	7.1	7.2	7.2	7.3	7.4
G142.0	7.1	7.1	7.1	7.1	7.2	7.3	7.3	7.4	7.5	7.5
G143.0	7.2	7.2	7.3	7.3	7.4	7.4	7.5	7.6	7.6	7.7
G144.0	7.3	7.4	7.4	7.5	7.5	7.6	7.6	7.7	7.7	7.8
G145.0	7.5	7.5	7.6	7.6	7.6	7.7	7.8	7.8	7.9	7.9
G146.0	7.6	7.7	7.7	7.7	7.8	7.8	7.9	8.0	8.0	8.1
G147.0	7.8	7.8	7.9	7.9	7.9	8.0	8.1	8.1	8.2	8.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	8.0	8.0	8.0	8.1	8.1	8.1	8.2	8.2	8.3	8.3
G149.0	8.1	8.1	8.1	8.2	8.2	8.2	8.3	8.4	8.4	8.5
G150.0	8.2	8.2	8.3	8.3	8.4	8.4	8.4	8.5	8.6	8.6
G151.0	8.4	8.4	8.4	8.5	8.5	8.5	8.6	8.6	8.6	8.7
G152.0	8.5	8.5	8.6	8.6	8.6	8.6	8.7	8.7	8.8	8.8
G153.0	8.6	8.6	8.7	8.7	8.7	8.8	8.8	8.8	8.9	8.9
G154.0	8.8	8.8	8.8	8.8	8.9	8.9	8.9	9.0	9.0	9.0
G155.0	8.9	8.9	9.0	9.0	9.0	9.0	9.1	9.1	9.1	9.1
G156.0	9.0	9.1	9.1	9.1	9.1	9.1	9.2	9.2	9.3	9.3
G157.0	9.1	9.1	9.2	9.2	9.3	9.3	9.3	9.3	9.3	9.3
G158.0	9.3	9.3	9.3	9.3	9.3	9.4	9.4	9.4	9.5	9.5
G159.0	9.4	9.4	9.4	9.4	9.5	9.5	9.5	9.6	9.6	9.6
G160.0	9.5	9.5	9.6	9.6	9.6	9.6	9.7	9.7	9.7	9.7
G161.0	9.7	9.7	9.7	9.7	9.7	9.7	9.8	9.8	9.8	9.8
G162.0	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.9	9.9	9.9
G163.0	9.8	9.9	9.9	9.9	9.9	9.9	10.0	10.0	10.1	10.0
G164.0	10.0	10.0	10.0	10.0	10.1	10.1	10.1	10.1	10.1	10.2
G165.0	10.1	10.1	10.1	10.1	10.2	10.2	10.2	10.3	10.3	10.3
G166.0	10.3	10.3	10.2	10.3	10.3	10.3	10.3	10.3	10.3	10.3
G167.0	10.4	10.3	10.3	10.3	10.4	10.4	10.4	10.4	10.5	10.5
G168.0	10.5	10.4	10.4	10.4	10.5	10.5	10.5	10.5	10.6	10.6
G169.0	10.7	10.6	10.6	10.5	10.6	10.6	10.6	10.6	10.7	10.7
G170.0	10.8	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
G171.0	10.9	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8
G172.0	11.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G173.0	11.1	10.9	10.9	10.9	11.0	10.9	10.9	11.0	11.0	10.9
G174.0	11.3	11.0	11.0	11.0	11.1	11.0	11.0	11.0	11.0	11.0
G175.0	11.4	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1
G176.0	11.4	11.2	11.2	11.2	11.2	11.1	11.1	11.1	11.1	11.1
G177.0	11.5	11.3	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2
G178.0	11.6	11.4	11.3	11.3	11.3	11.2	11.2	11.2	11.2	11.2
G179.0	11.7	11.4	11.4	11.3	11.3	11.3	11.2	11.2	11.2	11.2
G180.0	11.7	11.4	11.4	11.4	11.3	11.3	11.2	11.2	11.2	11.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	2030.6	2030.6	2029.8	2029.8	2029.4	2029.1	2028.5	2028.8	2028.7	2027.9
G1.0	2029.4	2029.4	2028.6	2028.7	2028.6	2029.1	2028.0	2028.0	2028.3	2028.1
G2.0	2027.3	2026.7	2026.1	2026.8	2026.6	2026.2	2026.4	2026.7	2027.3	2027.0
G3.0	2023.2	2022.9	2021.8	2023.2	2023.2	2023.7	2023.8	2023.5	2024.6	2025.2
G4.0	2018.0	2018.5	2017.4	2019.1	2019.2	2019.6	2019.7	2020.2	2021.1	2021.5
G5.0	2012.1	2012.5	2011.7	2012.9	2013.6	2014.2	2014.9	2016.0	2016.4	2017.0
G6.0	2004.1	2004.9	2004.7	2006.3	2007.4	2008.2	2009.0	2010.1	2010.8	2011.6
G7.0	1995.9	1996.8	1997.0	1998.4	1999.6	2000.7	2001.9	2002.8	2004.8	2005.5
G8.0	1986.3	1987.4	1987.6	1990.7	1991.6	1992.7	1993.9	1995.0	1997.3	1997.7
G9.0	1975.3	1976.5	1977.7	1979.6	1981.8	1983.3	1986.0	1986.2	1988.3	1989.3
G10.0	1963.3	1965.1	1965.9	1968.8	1971.5	1972.2	1975.0	1976.0	1978.9	1979.6
G11.0	1949.9	1952.1	1953.9	1956.6	1958.9	1961.0	1963.3	1964.9	1967.8	1969.7
G12.0	1935.5	1938.3	1939.8	1943.3	1946.3	1949.9	1951.2	1953.3	1956.4	1957.5
G13.0	1920.3	1923.3	1926.1	1929.3	1932.6	1935.3	1937.6	1941.2	1943.7	1945.2
G14.0	1904.2	1908.1	1910.4	1914.1	1917.9	1920.8	1925.2	1926.5	1930.5	1932.2
G15.0	1886.5	1890.8	1893.9	1898.2	1902.4	1906.1	1909.0	1912.4	1915.7	1917.2
G16.0	1868.3	1873.4	1877.0	1880.6	1885.7	1888.8	1893.3	1896.2	1900.4	1902.0
G17.0	1849.5	1854.3	1858.2	1863.7	1868.2	1872.2	1876.1	1879.7	1884.1	1886.1
G18.0	1829.4	1834.9	1839.7	1844.5	1850.7	1854.6	1859.7	1862.5	1866.9	1868.2
G19.0	1809.1	1814.1	1819.2	1825.1	1830.7	1835.9	1840.9	1844.4	1848.6	1850.8
G20.0	1785.0	1792.3	1798.6	1804.0	1811.8	1816.0	1821.1	1825.2	1830.5	1832.2
G21.0	1762.5	1770.0	1776.8	1783.2	1790.5	1795.6	1801.0	1805.5	1810.7	1812.8
G22.0	1738.8	1747.3	1753.3	1760.6	1769.2	1774.0	1780.6	1785.0	1790.6	1791.8
G23.0	1715.4	1722.8	1730.4	1739.3	1746.7	1752.0	1758.7	1763.1	1768.9	1770.9
G24.0	1690.5	1698.9	1705.7	1715.1	1723.7	1729.6	1737.0	1741.7	1747.6	1749.1
G25.0	1664.3	1674.3	1682.3	1690.8	1698.8	1706.1	1713.8	1718.6	1724.9	1727.5
G26.0	1637.9	1647.9	1655.8	1665.2	1675.6	1681.8	1689.7	1695.1	1700.9	1703.2
G27.0	1611.2	1621.0	1631.2	1640.6	1650.6	1658.1	1665.0	1670.3	1677.2	1680.3
G28.0	1583.3	1593.6	1603.2	1614.1	1625.0	1632.1	1640.8	1645.8	1652.8	1655.8
G29.0	1555.8	1566.3	1576.3	1587.8	1599.4	1606.3	1614.7	1621.5	1627.2	1630.3
G30.0	1526.1	1538.3	1549.0	1561.0	1571.8	1579.9	1589.4	1594.9	1602.7	1604.5
G31.0	1498.5	1510.3	1521.5	1533.5	1545.5	1554.1	1564.0	1569.5	1576.6	1580.1
G32.0	1468.7	1481.6	1493.3	1505.5	1518.3	1525.8	1536.8	1542.7	1550.1	1553.5
G33.0	1439.6	1452.4	1464.7	1478.2	1489.7	1499.4	1508.6	1516.2	1523.7	1526.4
G34.0	1408.6	1423.4	1436.5	1448.7	1463.0	1471.8	1481.6	1488.7	1497.3	1498.6
G35.0	1379.6	1394.1	1407.7	1420.3	1432.8	1444.2	1453.6	1461.3	1468.6	1472.3
G36.0	1349.3	1363.2	1376.6	1389.9	1403.3	1414.4	1424.4	1432.3	1439.7	1444.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	1318.0	1333.5	1347.4	1362.7	1374.9	1385.2	1396.6	1403.3	1411.9	1414.5
G38.0	1287.0	1301.6	1315.9	1330.7	1344.7	1356.6	1367.2	1374.5	1382.4	1386.1
G39.0	1256.9	1271.0	1285.8	1302.3	1315.0	1326.6	1337.9	1345.7	1354.2	1357.1
G40.0	1224.9	1240.7	1256.0	1270.6	1285.3	1296.8	1308.8	1316.3	1325.1	1328.2
G41.0	1193.8	1209.3	1225.6	1240.4	1255.7	1267.2	1279.0	1287.2	1295.7	1298.6
G42.0	1162.5	1178.4	1194.3	1209.9	1224.9	1237.6	1250.0	1257.7	1265.6	1269.0
G43.0	1131.9	1147.4	1163.5	1180.0	1194.8	1207.5	1219.3	1228.0	1236.7	1239.5
G44.0	1099.3	1116.2	1132.7	1149.1	1164.6	1176.9	1188.4	1197.5	1206.3	1208.9
G45.0	1068.6	1085.2	1101.8	1118.4	1134.4	1147.2	1159.3	1168.0	1175.1	1179.2
G46.0	1037.3	1054.5	1071.8	1087.9	1103.7	1116.8	1129.4	1137.9	1145.9	1149.9
G47.0	1007.2	1025.1	1041.1	1058.5	1074.8	1087.4	1099.2	1108.5	1116.6	1120.6
G48.0	976.1	993.3	1010.1	1027.2	1043.8	1056.5	1069.1	1077.9	1086.8	1090.0
G49.0	944.5	962.4	979.0	996.2	1013.5	1025.4	1039.1	1047.0	1057.5	1059.1
G50.0	913.6	931.1	949.3	967.2	982.4	996.0	1008.7	1017.5	1026.0	1030.9
G51.0	883.1	901.1	918.6	935.3	952.7	966.5	978.8	986.9	996.8	998.8
G52.0	852.4	869.9	888.3	905.7	921.9	936.8	948.7	957.6	965.7	969.4
G53.0	821.3	839.5	857.3	875.0	891.6	905.4	918.7	926.8	935.6	939.5
G54.0	791.6	808.6	827.2	844.7	861.0	875.5	888.9	897.0	905.7	909.0
G55.0	760.8	779.2	797.1	814.7	831.6	845.0	858.8	866.3	876.0	879.1
G56.0	732.2	749.5	767.9	785.4	801.7	815.7	828.2	837.2	845.8	849.6
G57.0	702.3	720.3	737.3	755.0	772.7	785.5	799.2	808.0	816.9	819.8
G58.0	673.0	689.9	708.6	725.3	742.4	756.3	769.7	778.6	786.5	790.1
G59.0	642.5	660.7	678.2	695.3	712.8	726.4	740.1	748.3	757.1	760.6
G60.0	614.0	632.1	649.5	666.5	683.4	697.3	709.9	719.7	727.8	731.0
G61.0	585.9	603.2	619.6	638.0	655.0	667.8	681.5	689.8	698.4	701.8
G62.0	556.6	574.5	590.8	608.9	625.8	639.3	651.8	662.0	669.2	672.5
G63.0	527.9	545.3	561.5	578.7	596.8	609.6	622.8	632.2	639.9	642.8
G64.0	499.4	517.0	533.5	550.6	567.4	580.7	593.9	603.4	611.1	613.7
G65.0	470.9	488.9	504.7	521.7	538.8	551.3	564.6	572.7	581.5	584.3
G66.0	443.9	460.3	476.5	493.3	510.6	523.7	536.2	544.8	553.0	556.4
G67.0	417.0	433.4	448.9	465.7	482.2	495.4	508.5	516.5	525.2	527.3
G68.0	389.8	405.5	421.2	437.2	454.0	467.2	479.5	488.8	496.8	499.5
G69.0	361.8	378.1	393.8	409.6	425.6	438.5	451.5	460.6	468.0	471.2
G70.0	336.0	351.3	366.8	382.4	398.0	411.4	423.9	432.7	440.0	442.5
G71.0	309.2	324.8	339.4	354.8	370.6	383.3	396.3	403.8	412.8	414.7
G72.0	283.4	298.7	313.5	328.6	343.6	355.9	368.3	377.0	384.0	387.1
G73.0	257.6	273.5	286.8	301.6	316.9	328.3	341.8	349.8	356.1	359.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	233.4	247.7	260.7	275.7	290.1	301.7	313.8	322.4	329.9	332.1
G75.0	208.2	223.1	235.7	250.2	264.3	275.6	287.4	296.0	302.7	305.5
G76.0	185.7	198.4	211.1	224.7	238.9	250.5	261.4	269.8	276.4	279.3
G77.0	162.4	175.0	187.2	199.7	214.0	224.8	236.4	243.5	251.3	252.7
G78.0	141.0	151.8	163.9	176.5	189.2	200.1	210.9	218.3	225.3	228.4
G79.0	119.2	130.1	141.0	153.0	165.7	175.6	186.4	193.9	200.4	202.3
G80.0	99.7	109.5	120.0	131.4	143.0	152.5	162.8	169.9	176.3	178.1
G81.0	81.8	89.8	98.8	109.8	120.3	130.2	139.0	146.1	151.8	154.1
G82.0	65.4	72.2	80.3	89.8	100.1	108.5	117.6	123.9	129.8	131.4
G83.0	52.0	56.3	62.8	71.0	80.3	88.5	96.9	102.3	107.8	109.2
G84.0	39.9	43.2	47.9	54.5	62.6	70.0	77.4	82.4	87.6	89.3
G85.0	28.4	31.8	35.3	40.1	46.6	53.1	59.6	64.4	69.2	69.8
G86.0	18.3	20.6	24.6	28.2	33.2	37.8	43.8	47.9	51.2	52.8
G87.0	11.0	12.9	14.1	17.4	21.6	25.4	29.8	32.8	36.1	36.8
G88.0	3.5	4.9	7.0	9.3	11.9	15.2	18.9	21.2	23.3	24.2
G89.0	0.7	1.0	1.5	2.6	4.4	6.6	9.8	11.5	12.9	13.9
G90.0	0.2	0.2	0.3	0.5	0.7	1.1	2.4	4.6	6.0	6.3
G91.0	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.8	0.8
G92.0	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.5
G93.0	0.3	0.4	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5
G94.0	0.5	0.5	0.6	0.6	0.6	0.7	0.6	0.6	0.6	0.6
G95.0	0.6	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.7	0.7
G96.0	0.6	0.7	0.8	0.8	0.8	0.9	0.9	0.9	0.8	0.8
G97.0	0.8	0.8	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.9
G98.0	0.9	1.0	1.0	1.0	1.1	1.1	1.1	1.1	1.0	1.0
G99.0	1.0	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.2	1.1
G100.0	1.1	1.2	1.2	1.3	1.3	1.4	1.4	1.4	1.3	1.3
G101.0	1.2	1.3	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.4
G102.0	1.4	1.5	1.5	1.6	1.6	1.6	1.6	1.6	1.6	1.6
G103.0	1.5	1.6	1.6	1.7	1.7	1.7	1.8	1.7	1.7	1.7
G104.0	1.6	1.7	1.8	1.8	1.9	1.9	1.9	1.9	1.8	1.8
G105.0	1.8	1.9	1.9	2.0	2.0	2.0	2.0	2.1	2.0	2.0
G106.0	1.9	2.0	2.1	2.2	2.2	2.2	2.2	2.2	2.2	2.1
G107.0	2.1	2.2	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.2
G108.0	2.2	2.3	2.4	2.4	2.4	2.5	2.5	2.5	2.5	2.4
G109.0	2.4	2.4	2.5	2.6	2.6	2.6	2.6	2.6	2.6	2.5
G110.0	2.5	2.6	2.7	2.7	2.8	2.8	2.8	2.8	2.8	2.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	2.7	2.8	2.8	2.8	2.9	2.9	2.9	2.9	2.9	2.8
G112.0	2.8	2.9	3.0	3.0	3.1	3.1	3.1	3.1	3.1	3.0
G113.0	3.0	3.1	3.1	3.2	3.2	3.3	3.3	3.3	3.2	3.2
G114.0	3.2	3.2	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.3
G115.0	3.3	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.4
G116.0	3.5	3.5	3.6	3.6	3.7	3.7	3.7	3.7	3.7	3.6
G117.0	3.6	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.9	3.8
G118.0	3.8	3.8	3.9	3.9	4.0	4.0	4.0	4.0	4.0	3.9
G119.0	3.9	4.0	4.1	4.1	4.1	4.2	4.2	4.2	4.2	4.1
G120.0	4.1	4.2	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
G121.0	4.3	4.3	4.3	4.4	4.5	4.5	4.4	4.5	4.5	4.4
G122.0	4.4	4.5	4.6	4.6	4.6	4.6	4.6	4.6	4.7	4.6
G123.0	4.6	4.7	4.7	4.8	4.8	4.8	4.8	4.8	4.8	4.7
G124.0	4.8	4.8	4.8	4.9	4.9	4.9	4.9	5.0	5.0	4.9
G125.0	4.9	4.9	5.0	5.0	5.1	5.1	5.1	5.1	5.1	5.0
G126.0	5.1	5.1	5.2	5.2	5.2	5.3	5.3	5.3	5.3	5.2
G127.0	5.2	5.3	5.3	5.4	5.4	5.4	5.4	5.5	5.5	5.4
G128.0	5.4	5.4	5.5	5.5	5.5	5.6	5.6	5.6	5.6	5.5
G129.0	5.6	5.6	5.7	5.7	5.7	5.7	5.7	5.8	5.8	5.7
G130.0	5.7	5.8	5.8	5.8	5.9	5.9	5.9	5.9	5.9	5.8
G131.0	5.9	5.9	5.9	6.0	6.0	6.0	6.1	6.1	6.1	6.0
G132.0	6.0	6.1	6.1	6.1	6.1	6.2	6.2	6.2	6.3	6.2
G133.0	6.2	6.2	6.3	6.3	6.3	6.4	6.4	6.4	6.4	6.3
G134.0	6.4	6.4	6.4	6.4	6.4	6.5	6.6	6.6	6.6	6.4
G135.0	6.5	6.6	6.6	6.6	6.6	6.6	6.7	6.7	6.7	6.6
G136.0	6.7	6.7	6.7	6.7	6.7	6.8	6.9	6.9	6.9	6.8
G137.0	6.8	6.8	6.9	6.9	6.9	7.0	7.0	7.1	7.1	7.0
G138.0	7.0	7.0	7.1	7.0	7.1	7.1	7.2	7.2	7.2	7.1
G139.0	7.1	7.2	7.2	7.2	7.2	7.3	7.3	7.4	7.4	7.3
G140.0	7.3	7.3	7.3	7.3	7.4	7.4	7.5	7.6	7.6	7.4
G141.0	7.4	7.4	7.5	7.5	7.5	7.6	7.6	7.6	7.6	7.6
G142.0	7.6	7.6	7.6	7.6	7.6	7.7	7.7	7.8	7.8	7.7
G143.0	7.7	7.7	7.7	7.7	7.8	7.8	7.9	8.0	7.9	7.8
G144.0	7.8	7.9	7.9	7.9	7.9	8.0	8.0	8.1	8.1	8.0
G145.0	8.0	8.0	8.0	8.0	8.1	8.1	8.2	8.2	8.2	8.1
G146.0	8.1	8.1	8.1	8.1	8.2	8.2	8.3	8.4	8.3	8.2
G147.0	8.2	8.3	8.3	8.3	8.3	8.4	8.4	8.5	8.5	8.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	8.4	8.4	8.4	8.4	8.5	8.5	8.6	8.6	8.6	8.5
G149.0	8.5	8.5	8.5	8.6	8.6	8.6	8.7	8.7	8.7	8.6
G150.0	8.6	8.6	8.6	8.7	8.7	8.8	8.8	8.8	8.8	8.7
G151.0	8.7	8.7	8.8	8.8	8.8	8.9	8.9	9.0	9.0	8.8
G152.0	8.8	8.9	8.9	9.0	9.0	9.0	9.0	9.1	9.1	9.0
G153.0	8.9	9.0	9.1	9.1	9.1	9.1	9.1	9.2	9.1	9.1
G154.0	9.1	9.1	9.1	9.2	9.3	9.3	9.3	9.3	9.3	9.2
G155.0	9.2	9.2	9.3	9.3	9.4	9.4	9.4	9.4	9.4	9.3
G156.0	9.3	9.3	9.4	9.5	9.5	9.5	9.5	9.5	9.5	9.4
G157.0	9.4	9.5	9.5	9.6	9.6	9.6	9.6	9.6	9.6	9.5
G158.0	9.6	9.6	9.6	9.7	9.7	9.8	9.8	9.8	9.7	9.6
G159.0	9.7	9.7	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.7
G160.0	9.8	9.8	9.8	9.9	9.9	9.9	10.0	9.9	9.9	9.8
G161.0	9.9	9.9	9.9	10.0	10.0	10.1	10.1	10.0	10.0	9.9
G162.0	10.0	10.0	10.1	10.1	10.2	10.2	10.2	10.1	10.1	10.0
G163.0	10.1	10.1	10.2	10.2	10.2	10.3	10.3	10.2	10.1	10.1
G164.0	10.2	10.2	10.3	10.3	10.3	10.3	10.3	10.3	10.2	10.2
G165.0	10.3	10.3	10.3	10.4	10.4	10.4	10.4	10.4	10.3	10.3
G166.0	10.4	10.4	10.4	10.4	10.5	10.5	10.5	10.5	10.4	10.3
G167.0	10.4	10.5	10.5	10.5	10.6	10.6	10.6	10.6	10.5	10.4
G168.0	10.5	10.6	10.6	10.6	10.7	10.7	10.7	10.6	10.5	10.4
G169.0	10.6	10.6	10.7	10.7	10.7	10.8	10.7	10.7	10.6	10.5
G170.0	10.7	10.7	10.8	10.8	10.8	10.8	10.9	10.8	10.7	10.6
G171.0	10.8	10.8	10.8	10.8	10.9	10.9	10.9	10.9	10.8	10.7
G172.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.8	10.7
G173.0	10.9	10.9	10.9	10.9	10.9	11.0	11.0	10.9	10.9	10.8
G174.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	10.9	10.9
G175.0	11.0	11.1	11.0	11.0	11.0	11.1	11.1	11.0	11.0	10.9
G176.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.0	10.9
G177.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.0
G178.0	11.1	11.1	11.1	11.1	11.1	11.1	11.2	11.1	11.1	11.0
G179.0	11.2	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1
G180.0	11.2	11.1	11.1	11.1	11.1	11.1	11.2	11.2	11.2	11.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	2027.3	2027.6	2028.4	2029.0	2029.4	2030.9	2030.2	2031.2	2032.0	2032.4
G1.0	2027.6	2027.3	2029.1	2029.3	2030.0	2031.7	2031.3	2032.8	2033.5	2034.5
G2.0	2026.8	2027.4	2028.9	2029.3	2030.2	2031.6	2031.8	2033.5	2034.0	2034.8
G3.0	2024.6	2025.2	2027.1	2027.6	2029.1	2030.6	2030.9	2032.1	2033.1	2034.3
G4.0	2021.8	2022.5	2024.8	2025.0	2026.4	2028.0	2028.4	2030.0	2030.3	2032.3
G5.0	2017.7	2018.4	2020.5	2021.8	2022.9	2024.4	2025.2	2026.1	2027.3	2028.7
G6.0	2012.6	2013.4	2015.6	2016.7	2017.8	2019.9	2020.7	2022.4	2022.7	2024.2
G7.0	2006.3	2007.5	2009.5	2010.9	2012.5	2014.4	2015.3	2016.7	2017.1	2018.2
G8.0	1999.2	2000.0	2002.5	2004.0	2005.7	2007.1	2008.5	2009.4	2010.1	2011.3
G9.0	1990.7	1992.0	1994.7	1995.7	1997.8	1999.2	2000.1	2001.5	2001.6	2003.3
G10.0	1981.0	1982.2	1986.0	1986.8	1988.1	1989.9	1991.2	1992.2	1992.5	1994.0
G11.0	1970.9	1972.5	1975.1	1976.2	1977.9	1979.9	1980.5	1981.5	1981.8	1982.7
G12.0	1959.5	1960.9	1964.6	1964.9	1966.5	1968.3	1969.2	1969.4	1969.6	1971.5
G13.0	1947.2	1949.0	1952.1	1953.2	1954.7	1956.0	1956.4	1957.3	1956.7	1957.6
G14.0	1933.2	1936.1	1938.5	1939.6	1941.1	1942.5	1943.3	1942.8	1942.6	1942.8
G15.0	1919.9	1921.7	1924.7	1924.9	1926.2	1928.2	1928.4	1928.5	1928.3	1927.9
G16.0	1903.7	1906.3	1909.3	1909.7	1911.7	1912.6	1912.3	1911.8	1912.2	1912.1
G17.0	1888.2	1890.3	1894.0	1894.3	1895.4	1897.4	1895.0	1894.9	1893.8	1893.6
G18.0	1871.2	1873.4	1877.2	1877.3	1878.9	1878.4	1878.2	1876.5	1875.3	1874.9
G19.0	1854.0	1855.6	1859.1	1859.4	1859.7	1861.0	1859.4	1858.1	1854.9	1854.8
G20.0	1835.2	1837.1	1840.1	1840.3	1841.7	1841.2	1839.9	1837.7	1835.1	1834.8
G21.0	1815.7	1818.3	1820.5	1820.9	1821.2	1820.4	1819.4	1816.3	1813.8	1812.0
G22.0	1794.9	1797.7	1800.6	1800.3	1800.6	1799.1	1798.3	1794.8	1790.9	1789.3
G23.0	1773.6	1776.9	1778.8	1777.9	1778.6	1777.4	1775.2	1771.8	1768.0	1766.1
G24.0	1751.8	1754.9	1757.5	1756.2	1756.4	1754.1	1751.8	1748.4	1743.3	1741.4
G25.0	1730.2	1732.3	1735.2	1734.9	1733.5	1731.2	1727.8	1724.0	1720.7	1715.6
G26.0	1706.7	1709.1	1712.0	1709.7	1710.7	1706.6	1703.7	1697.9	1694.3	1689.9
G27.0	1683.3	1685.7	1687.6	1685.7	1684.9	1681.8	1677.5	1672.6	1667.5	1663.5
G28.0	1658.5	1660.7	1663.7	1660.4	1660.4	1656.0	1652.6	1645.7	1639.5	1635.3
G29.0	1633.5	1636.1	1638.1	1635.7	1634.6	1630.4	1625.7	1618.6	1614.0	1605.8
G30.0	1608.0	1609.6	1612.7	1608.4	1607.3	1602.8	1598.6	1589.9	1583.2	1578.0
G31.0	1582.9	1584.8	1585.8	1583.3	1581.6	1576.9	1570.3	1563.4	1555.9	1548.4
G32.0	1555.7	1558.1	1560.4	1556.2	1553.6	1548.9	1542.7	1534.7	1524.9	1520.9
G33.0	1529.1	1530.9	1532.5	1528.9	1525.8	1520.1	1513.4	1505.3	1495.8	1489.9
G34.0	1502.7	1504.6	1504.8	1501.5	1497.7	1492.3	1484.4	1476.0	1466.1	1460.9
G35.0	1475.5	1476.3	1477.6	1472.8	1468.8	1463.1	1455.3	1445.9	1436.7	1427.4
G36.0	1446.3	1447.3	1447.3	1444.1	1439.3	1432.0	1425.2	1414.5	1406.2	1396.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	1418.2	1419.4	1419.8	1415.1	1410.6	1402.7	1394.9	1385.9	1375.0	1366.9
G38.0	1389.0	1390.8	1390.8	1385.6	1379.6	1372.9	1364.8	1353.5	1342.8	1333.8
G39.0	1360.0	1361.5	1362.0	1355.5	1350.5	1343.0	1333.9	1323.9	1311.7	1302.4
G40.0	1330.2	1331.7	1331.7	1325.7	1320.2	1311.9	1302.2	1291.4	1279.3	1270.0
G41.0	1300.7	1302.7	1301.8	1296.5	1289.8	1281.0	1272.8	1260.7	1249.3	1240.1
G42.0	1271.9	1272.3	1271.3	1265.3	1259.4	1250.0	1239.9	1227.8	1217.6	1205.8
G43.0	1241.7	1243.1	1241.8	1235.3	1228.7	1218.6	1209.6	1197.6	1185.3	1174.7
G44.0	1212.7	1212.5	1211.1	1204.9	1198.0	1187.8	1177.4	1165.7	1152.0	1141.9
G45.0	1182.8	1182.7	1180.7	1174.2	1167.1	1157.3	1146.3	1134.1	1122.0	1109.7
G46.0	1152.6	1152.3	1150.9	1144.4	1136.2	1125.4	1114.9	1102.8	1088.9	1077.6
G47.0	1122.7	1123.8	1120.4	1113.7	1106.2	1096.4	1085.1	1071.8	1058.7	1046.4
G48.0	1092.5	1093.8	1090.0	1082.7	1075.3	1064.3	1053.2	1040.5	1027.9	1014.3
G49.0	1061.8	1063.0	1060.2	1051.7	1044.5	1032.9	1022.5	1008.3	994.1	982.6
G50.0	1032.1	1031.9	1029.7	1020.9	1013.0	1001.9	990.9	976.1	963.8	951.1
G51.0	1001.4	1001.2	999.0	990.3	982.8	971.3	960.5	945.1	932.2	921.1
G52.0	971.9	971.9	968.1	959.8	952.4	940.0	928.3	914.9	901.9	888.7
G53.0	940.4	940.7	937.8	928.6	920.6	908.7	898.3	883.4	869.7	858.4
G54.0	911.2	911.3	906.7	898.0	890.2	878.1	866.9	854.0	840.3	826.3
G55.0	881.8	880.4	877.8	867.5	859.6	847.6	837.1	822.7	808.5	797.8
G56.0	851.2	851.0	846.1	838.3	829.2	817.8	806.6	791.4	779.9	765.6
G57.0	821.4	820.1	818.1	807.8	799.4	787.5	776.3	762.0	748.7	736.2
G58.0	792.0	791.2	786.8	778.0	769.5	757.0	746.3	732.0	719.6	706.4
G59.0	761.8	760.7	757.0	747.5	739.5	727.0	716.3	701.7	689.2	676.8
G60.0	733.1	731.0	727.3	718.3	709.7	698.1	686.0	672.9	660.3	646.6
G61.0	703.0	701.5	697.7	688.2	680.8	667.3	656.7	643.4	630.6	618.2
G62.0	674.4	672.0	667.4	658.5	650.7	638.6	627.4	614.5	601.5	590.0
G63.0	644.5	642.7	638.3	629.5	620.7	609.4	598.4	584.9	572.0	560.0
G64.0	616.0	613.5	608.5	600.3	592.3	579.8	569.0	556.0	544.7	531.8
G65.0	585.3	583.9	580.0	570.8	562.8	551.2	541.8	527.0	515.1	503.5
G66.0	558.1	555.1	551.8	542.8	534.1	522.9	512.3	499.4	487.7	476.1
G67.0	529.2	526.4	522.6	513.5	505.8	494.5	484.5	470.8	459.2	449.1
G68.0	500.9	498.1	494.2	485.8	477.5	465.9	455.9	443.1	431.7	420.0
G69.0	472.0	469.7	465.8	457.6	449.6	438.5	428.8	415.5	403.8	393.6
G70.0	443.7	441.5	437.1	429.8	421.2	411.0	401.5	388.3	377.4	365.7
G71.0	415.8	413.5	409.9	401.4	393.6	383.1	373.5	361.3	349.6	340.0
G72.0	387.4	386.5	381.7	374.6	367.0	357.2	346.7	334.9	323.9	314.5
G73.0	360.0	357.9	354.9	346.4	339.5	329.2	320.7	308.5	296.8	290.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	333.0	330.8	326.8	320.2	312.3	302.8	293.4	282.6	273.2	262.9
G75.0	306.1	303.5	300.3	293.8	286.6	276.3	267.3	256.8	246.0	238.5
G76.0	279.8	277.8	274.2	267.3	260.7	250.8	242.5	232.0	223.9	214.7
G77.0	253.7	251.4	248.5	241.7	235.5	225.7	217.8	208.3	199.6	191.5
G78.0	228.2	226.0	223.7	216.7	210.1	201.2	193.7	184.7	176.6	169.6
G79.0	202.7	200.6	199.1	191.6	185.8	176.9	170.3	161.4	152.6	147.4
G80.0	179.1	177.2	174.0	167.9	161.9	154.4	147.2	139.6	132.5	126.8
G81.0	154.9	153.9	150.2	144.9	138.7	131.7	124.7	118.4	111.9	108.0
G82.0	131.8	130.7	127.8	122.4	117.0	110.1	104.4	99.0	94.5	90.8
G83.0	110.2	108.9	106.2	101.5	96.5	89.9	85.6	80.9	76.9	75.2
G84.0	89.5	89.6	86.6	81.9	77.5	72.3	68.6	65.3	62.9	62.1
G85.0	71.0	70.3	68.0	63.8	59.8	56.2	53.8	51.8	50.8	50.0
G86.0	53.7	53.1	50.8	47.6	45.3	42.8	41.5	40.1	39.0	38.2
G87.0	38.1	37.3	36.0	33.5	31.9	30.6	29.9	28.2	27.4	26.5
G88.0	25.4	24.5	23.6	22.4	21.3	19.6	18.8	18.2	19.0	19.4
G89.0	14.6	14.3	14.1	12.4	11.7	11.4	11.6	10.8	10.0	9.7
G90.0	6.7	6.1	5.8	5.2	4.6	3.9	3.7	3.3	2.8	2.5
G91.0	0.8	0.8	0.8	0.7	0.8	0.7	0.6	0.6	0.5	0.4
G92.0	0.4	0.4	0.4	0.3	0.2	0.2	0.1	0.1	0.0	0.0
G93.0	0.5	0.5	0.4	0.3	0.3	0.2	0.1	0.1	0.1	0.0
G94.0	0.6	0.6	0.5	0.5	0.4	0.3	0.2	0.2	0.1	0.1
G95.0	0.7	0.6	0.6	0.5	0.5	0.4	0.3	0.3	0.2	0.2
G96.0	0.8	0.8	0.7	0.6	0.6	0.5	0.4	0.4	0.3	0.2
G97.0	0.9	0.9	0.8	0.7	0.6	0.6	0.5	0.5	0.4	0.3
G98.0	1.0	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.5	0.4
G99.0	1.1	1.1	1.0	1.0	0.9	0.8	0.7	0.6	0.6	0.6
G100.0	1.3	1.2	1.1	1.0	1.0	0.9	0.8	0.8	0.7	0.6
G101.0	1.4	1.3	1.2	1.2	1.1	1.0	0.9	0.9	0.8	0.7
G102.0	1.5	1.5	1.4	1.3	1.2	1.1	1.0	1.0	0.9	0.8
G103.0	1.6	1.6	1.5	1.5	1.3	1.2	1.2	1.1	1.0	1.0
G104.0	1.8	1.7	1.6	1.6	1.5	1.4	1.3	1.2	1.1	1.0
G105.0	1.9	1.8	1.8	1.7	1.6	1.5	1.4	1.3	1.3	1.2
G106.0	2.0	2.0	1.9	1.8	1.7	1.6	1.6	1.5	1.4	1.3
G107.0	2.2	2.1	2.0	2.0	1.9	1.8	1.6	1.6	1.5	1.4
G108.0	2.3	2.2	2.2	2.1	2.0	1.9	1.8	1.7	1.6	1.6
G109.0	2.4	2.4	2.3	2.2	2.1	2.0	1.9	1.8	1.7	1.6
G110.0	2.6	2.5	2.4	2.4	2.2	2.2	2.1	2.0	1.9	1.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	2.8	2.7	2.6	2.5	2.4	2.3	2.2	2.1	2.0	1.9
G112.0	2.9	2.8	2.8	2.7	2.6	2.4	2.3	2.2	2.2	2.1
G113.0	3.1	2.9	2.8	2.8	2.7	2.6	2.5	2.4	2.3	2.2
G114.0	3.2	3.1	3.0	2.9	2.8	2.7	2.6	2.5	2.4	2.3
G115.0	3.3	3.3	3.2	3.1	3.0	2.8	2.8	2.7	2.6	2.5
G116.0	3.5	3.4	3.3	3.2	3.1	3.0	2.9	2.8	2.8	2.6
G117.0	3.6	3.5	3.4	3.4	3.3	3.2	3.1	3.0	2.8	2.8
G118.0	3.8	3.7	3.6	3.5	3.4	3.3	3.2	3.1	3.0	2.9
G119.0	4.0	3.8	3.8	3.7	3.6	3.5	3.3	3.3	3.2	3.1
G120.0	4.1	4.0	3.9	3.8	3.7	3.6	3.5	3.4	3.3	3.2
G121.0	4.3	4.2	4.1	3.9	3.8	3.8	3.7	3.6	3.5	3.3
G122.0	4.4	4.3	4.2	4.1	4.0	3.9	3.8	3.7	3.6	3.5
G123.0	4.6	4.4	4.3	4.3	4.1	4.1	3.9	3.8	3.8	3.7
G124.0	4.7	4.6	4.5	4.4	4.3	4.2	4.1	4.0	3.9	3.8
G125.0	4.9	4.7	4.7	4.5	4.4	4.3	4.2	4.1	4.0	4.0
G126.0	5.1	4.9	4.8	4.7	4.6	4.5	4.4	4.3	4.2	4.1
G127.0	5.2	5.1	4.9	4.8	4.7	4.6	4.5	4.4	4.3	4.3
G128.0	5.4	5.2	5.1	5.0	4.9	4.8	4.7	4.6	4.5	4.4
G129.0	5.5	5.4	5.2	5.1	5.0	4.9	4.8	4.7	4.6	4.6
G130.0	5.7	5.5	5.4	5.3	5.2	5.1	5.0	4.9	4.8	4.7
G131.0	5.9	5.7	5.5	5.4	5.3	5.2	5.1	5.0	4.9	4.9
G132.0	6.0	5.9	5.7	5.6	5.5	5.4	5.3	5.2	5.1	5.0
G133.0	6.2	6.0	5.9	5.7	5.6	5.5	5.4	5.3	5.3	5.2
G134.0	6.3	6.2	6.0	5.9	5.8	5.7	5.6	5.5	5.4	5.4
G135.0	6.4	6.3	6.1	6.0	5.9	5.8	5.7	5.6	5.5	5.5
G136.0	6.6	6.5	6.3	6.2	6.0	6.0	5.9	5.8	5.7	5.6
G137.0	6.8	6.6	6.4	6.3	6.2	6.1	6.0	5.9	5.9	5.8
G138.0	6.9	6.8	6.6	6.5	6.4	6.3	6.2	6.1	6.0	5.9
G139.0	7.1	6.9	6.8	6.6	6.5	6.4	6.3	6.3	6.2	6.1
G140.0	7.2	7.1	6.9	6.8	6.7	6.6	6.5	6.4	6.4	6.3
G141.0	7.4	7.2	7.1	7.0	6.8	6.7	6.6	6.6	6.4	6.4
G142.0	7.5	7.4	7.2	7.1	7.0	6.9	6.8	6.7	6.6	6.6
G143.0	7.7	7.5	7.4	7.2	7.1	7.1	6.9	6.9	6.8	6.7
G144.0	7.8	7.6	7.5	7.4	7.2	7.2	7.1	7.0	7.0	6.9
G145.0	8.0	7.8	7.6	7.5	7.4	7.3	7.2	7.1	7.1	7.0
G146.0	8.1	7.9	7.8	7.6	7.5	7.5	7.4	7.3	7.2	7.2
G147.0	8.2	8.1	7.9	7.8	7.7	7.6	7.5	7.5	7.4	7.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	8.3	8.2	8.1	7.9	7.8	7.7	7.6	7.6	7.5	7.5
G149.0	8.5	8.3	8.2	8.1	7.9	7.9	7.8	7.7	7.6	7.6
G150.0	8.6	8.5	8.3	8.2	8.1	8.0	7.9	7.8	7.8	7.7
G151.0	8.7	8.6	8.4	8.3	8.2	8.1	8.0	8.0	7.9	7.9
G152.0	8.8	8.7	8.6	8.5	8.4	8.2	8.1	8.1	8.1	8.0
G153.0	9.0	8.8	8.7	8.6	8.5	8.4	8.3	8.2	8.2	8.1
G154.0	9.1	8.9	8.8	8.7	8.6	8.5	8.4	8.4	8.3	8.3
G155.0	9.2	9.1	8.9	8.8	8.7	8.6	8.6	8.5	8.5	8.4
G156.0	9.3	9.2	9.1	9.0	8.9	8.8	8.7	8.6	8.6	8.6
G157.0	9.4	9.3	9.2	9.1	9.0	8.9	8.8	8.7	8.7	8.7
G158.0	9.5	9.4	9.3	9.2	9.1	9.0	9.0	8.9	8.8	8.8
G159.0	9.6	9.5	9.4	9.3	9.3	9.1	9.1	9.0	9.0	8.9
G160.0	9.7	9.6	9.5	9.4	9.3	9.3	9.2	9.1	9.1	9.1
G161.0	9.8	9.7	9.6	9.6	9.5	9.4	9.3	9.3	9.2	9.2
G162.0	9.9	9.8	9.7	9.7	9.6	9.5	9.5	9.4	9.3	9.3
G163.0	10.0	9.9	9.8	9.8	9.7	9.7	9.6	9.5	9.5	9.5
G164.0	10.1	10.0	9.9	9.9	9.8	9.8	9.7	9.6	9.6	9.6
G165.0	10.2	10.1	10.0	10.0	9.9	9.9	9.8	9.8	9.7	9.7
G166.0	10.3	10.2	10.1	10.1	10.0	10.0	9.9	9.9	9.8	9.8
G167.0	10.3	10.3	10.2	10.2	10.1	10.1	10.0	10.0	9.9	9.9
G168.0	10.4	10.3	10.3	10.3	10.2	10.2	10.2	10.1	10.1	10.1
G169.0	10.5	10.4	10.3	10.3	10.3	10.3	10.3	10.2	10.2	10.2
G170.0	10.6	10.5	10.4	10.4	10.4	10.4	10.3	10.3	10.3	10.3
G171.0	10.6	10.6	10.5	10.5	10.5	10.5	10.4	10.4	10.4	10.4
G172.0	10.7	10.6	10.6	10.6	10.6	10.6	10.6	10.5	10.5	10.5
G173.0	10.8	10.7	10.7	10.7	10.7	10.7	10.7	10.6	10.6	10.6
G174.0	10.8	10.8	10.8	10.8	10.8	10.8	10.7	10.7	10.7	10.7
G175.0	10.9	10.9	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8
G176.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G177.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G178.0	11.0	10.9	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.0
G179.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.0	11.1	11.1
G180.0	11.0	11.0	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	2033.3	2033.3	2033.5	2033.8	2034.4	2034.5	2044.2	2040.2	2038.1	2036.3
G1.0	2034.8	2035.4	2035.6	2035.5	2036.2	2036.4	2045.2	2040.8	2038.3	2036.9
G2.0	2035.4	2037.0	2036.7	2036.2	2036.8	2037.2	2043.1	2040.5	2037.3	2035.6
G3.0	2034.2	2035.2	2036.0	2034.7	2035.7	2036.3	2040.7	2037.1	2034.8	2033.4
G4.0	2032.1	2033.0	2033.7	2033.1	2033.5	2033.7	2036.6	2032.9	2031.1	2029.6
G5.0	2029.8	2029.7	2030.4	2029.4	2030.1	2030.5	2032.0	2028.1	2026.3	2025.1
G6.0	2024.6	2024.9	2025.8	2024.9	2025.3	2025.6	2025.1	2021.5	2019.8	2017.8
G7.0	2019.8	2019.1	2019.7	2019.0	2020.7	2019.6	2016.8	2013.9	2011.9	2010.5
G8.0	2011.6	2012.1	2012.2	2011.6	2011.6	2011.6	2007.6	2004.1	2002.6	2001.0
G9.0	2003.2	2003.8	2003.9	2002.7	2002.7	2002.4	1996.8	1993.5	1992.0	1990.3
G10.0	1993.8	1994.1	1993.5	1992.2	1991.9	1993.0	1984.6	1980.8	1979.4	1978.5
G11.0	1982.5	1982.7	1982.5	1980.7	1980.2	1981.8	1970.5	1967.4	1966.0	1964.8
G12.0	1970.4	1971.1	1970.6	1968.1	1966.8	1967.2	1956.0	1952.8	1950.7	1950.5
G13.0	1957.2	1956.9	1956.5	1953.5	1953.3	1952.7	1939.5	1935.9	1934.9	1934.3
G14.0	1942.3	1942.0	1941.0	1939.0	1937.2	1937.4	1921.7	1919.3	1917.4	1917.6
G15.0	1926.5	1926.1	1924.6	1922.3	1921.1	1921.2	1903.0	1899.6	1898.6	1899.0
G16.0	1909.3	1908.8	1907.6	1903.8	1902.4	1902.5	1883.2	1879.2	1878.9	1879.1
G17.0	1890.4	1890.6	1888.4	1884.9	1883.2	1882.3	1861.7	1858.3	1858.0	1857.3
G18.0	1871.7	1871.3	1868.7	1864.2	1862.7	1862.7	1838.7	1835.9	1835.9	1835.7
G19.0	1851.4	1850.3	1847.9	1842.9	1842.0	1842.3	1815.5	1812.0	1813.1	1812.8
G20.0	1830.4	1829.1	1826.1	1821.2	1819.1	1818.1	1790.9	1787.1	1788.3	1788.7
G21.0	1808.1	1806.0	1802.5	1797.6	1795.5	1793.9	1765.3	1761.4	1763.0	1763.2
G22.0	1784.5	1782.3	1778.2	1772.4	1770.1	1769.5	1738.6	1735.5	1735.4	1736.5
G23.0	1761.3	1757.6	1753.6	1748.0	1745.0	1743.3	1711.1	1707.8	1708.5	1710.3
G24.0	1735.5	1732.4	1727.4	1720.9	1718.4	1717.5	1682.6	1679.6	1680.4	1682.4
G25.0	1709.9	1706.1	1700.5	1694.6	1691.1	1689.1	1654.1	1650.5	1652.2	1653.2
G26.0	1683.5	1679.0	1672.7	1666.5	1662.9	1661.7	1623.5	1620.8	1622.5	1624.9
G27.0	1655.8	1651.9	1645.9	1638.5	1635.1	1633.2	1592.9	1590.2	1592.2	1594.5
G28.0	1626.8	1623.5	1616.6	1609.7	1604.9	1603.8	1561.8	1559.2	1560.6	1563.3
G29.0	1599.5	1595.0	1588.2	1579.2	1575.2	1572.5	1530.8	1527.4	1529.3	1532.8
G30.0	1569.4	1565.1	1557.1	1548.8	1545.0	1542.1	1498.5	1496.2	1497.4	1501.0
G31.0	1540.5	1535.2	1528.3	1519.3	1514.0	1512.2	1466.0	1463.0	1465.7	1468.9
G32.0	1510.5	1504.6	1497.1	1488.4	1482.6	1481.1	1432.9	1430.7	1432.8	1436.6
G33.0	1481.7	1473.9	1465.5	1456.1	1451.2	1448.8	1399.9	1397.6	1400.2	1403.6
G34.0	1450.1	1442.6	1433.9	1424.5	1418.3	1417.6	1366.4	1364.2	1366.9	1371.2
G35.0	1417.8	1411.2	1401.6	1392.3	1387.0	1384.5	1332.9	1330.0	1333.4	1337.2
G36.0	1386.4	1378.6	1369.6	1360.0	1353.7	1350.1	1297.3	1296.9	1300.3	1303.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	1354.3	1346.7	1338.1	1327.2	1322.6	1318.9	1265.2	1262.8	1266.5	1270.9
G38.0	1322.2	1313.7	1305.3	1294.4	1288.4	1285.4	1230.8	1230.8	1232.9	1239.1
G39.0	1290.3	1282.1	1272.6	1262.3	1255.6	1252.1	1197.7	1195.9	1199.3	1203.7
G40.0	1258.2	1249.8	1240.3	1230.3	1221.9	1220.1	1163.8	1162.2	1165.4	1170.7
G41.0	1226.7	1217.0	1207.2	1196.0	1189.4	1185.6	1129.8	1128.5	1131.8	1136.0
G42.0	1193.7	1184.2	1173.9	1163.2	1156.9	1153.2	1095.9	1094.5	1097.7	1103.2
G43.0	1162.1	1151.8	1143.0	1131.2	1125.1	1120.1	1061.8	1060.4	1063.7	1069.1
G44.0	1128.6	1118.6	1108.9	1097.2	1091.0	1086.9	1029.8	1028.4	1031.9	1036.9
G45.0	1097.2	1086.3	1076.1	1065.2	1059.0	1054.1	995.8	994.5	997.1	1003.3
G46.0	1065.6	1056.2	1044.4	1032.6	1026.1	1022.2	963.6	962.2	965.9	971.0
G47.0	1033.9	1023.5	1012.3	1001.4	994.3	990.4	930.1	928.7	932.4	937.8
G48.0	1002.0	991.5	980.3	969.3	962.3	957.0	898.3	897.2	900.0	905.3
G49.0	969.4	959.7	948.5	936.0	929.8	925.9	867.0	865.1	868.5	874.0
G50.0	937.9	927.2	917.4	906.0	898.2	893.9	835.1	833.4	837.5	842.9
G51.0	906.5	895.9	885.5	873.8	866.9	862.5	802.8	802.3	805.9	810.3
G52.0	876.2	864.8	854.3	842.6	835.9	832.2	771.0	771.0	774.3	779.7
G53.0	843.9	834.0	822.9	811.2	804.5	800.7	741.3	739.9	743.3	748.6
G54.0	813.9	803.5	792.2	781.1	774.4	770.2	709.7	710.0	713.0	717.7
G55.0	782.8	773.7	761.9	749.5	743.2	740.1	680.0	678.5	682.6	687.1
G56.0	753.2	742.7	731.7	720.9	713.2	709.5	649.8	648.5	653.0	656.9
G57.0	722.7	713.3	702.5	690.9	683.3	680.5	619.9	618.6	622.4	627.0
G58.0	692.8	683.7	672.7	661.2	654.5	650.4	590.3	589.0	593.0	597.2
G59.0	664.0	653.4	642.8	631.2	625.5	621.8	561.2	561.1	563.9	568.5
G60.0	634.7	624.2	614.3	602.9	596.5	592.3	532.8	531.8	535.6	540.0
G61.0	605.0	595.3	584.2	573.7	567.2	563.9	504.3	503.4	507.2	510.9
G62.0	576.8	567.3	556.9	545.3	539.0	535.7	476.2	475.2	479.0	482.8
G63.0	548.2	538.2	527.5	517.4	510.5	508.5	448.0	448.3	450.5	454.7
G64.0	518.6	509.5	500.9	488.9	483.7	480.5	421.9	420.9	424.3	427.8
G65.0	490.7	482.5	472.0	461.6	455.3	452.7	395.5	395.1	397.4	401.3
G66.0	463.0	453.7	445.5	435.2	429.2	426.0	369.1	368.1	371.6	374.4
G67.0	435.8	427.9	418.1	408.0	402.0	400.3	342.4	342.8	344.7	348.2
G68.0	409.3	399.8	390.9	381.7	376.5	373.1	317.4	315.9	319.7	322.9
G69.0	382.0	374.6	365.3	355.9	350.9	348.2	292.4	292.0	294.0	297.6
G70.0	356.2	347.2	339.5	330.5	325.7	323.1	268.0	267.1	270.5	272.2
G71.0	329.7	322.4	313.6	304.9	300.9	299.0	244.2	244.3	246.5	249.1
G72.0	304.1	296.5	288.8	281.5	276.6	273.8	221.5	221.3	223.7	225.1
G73.0	279.0	271.2	263.9	256.1	252.4	250.4	199.8	198.6	200.4	202.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	253.4	247.1	240.3	233.3	229.1	227.3	178.1	177.4	179.5	180.7
G75.0	230.0	223.7	217.4	210.4	207.4	205.8	158.0	157.7	158.7	160.5
G76.0	206.2	201.0	195.7	189.3	186.2	184.6	139.1	139.2	140.4	141.1
G77.0	183.8	179.1	173.9	168.2	165.8	164.2	121.3	121.8	123.0	123.0
G78.0	161.7	158.2	153.6	149.4	146.2	145.1	106.4	105.8	106.5	106.5
G79.0	141.2	138.4	134.5	130.2	127.9	128.0	91.8	91.6	92.0	92.0
G80.0	122.0	119.1	116.4	112.8	111.9	111.0	79.3	78.7	79.2	78.8
G81.0	104.2	101.7	100.2	97.1	96.7	96.4	67.3	67.0	67.1	66.7
G82.0	88.0	86.8	85.8	83.7	83.3	83.6	55.0	54.4	55.1	54.6
G83.0	73.5	73.0	72.3	71.2	70.9	71.4	41.5	41.6	41.7	41.8
G84.0	61.0	61.1	60.8	59.7	59.6	60.0	32.1	31.7	31.8	30.9
G85.0	49.4	49.4	48.8	47.2	47.0	46.6	24.4	24.6	24.5	24.2
G86.0	37.2	37.2	36.4	35.0	34.9	35.1	11.7	11.2	11.9	11.8
G87.0	26.2	26.9	27.5	27.6	27.9	28.6	2.6	2.6	2.7	3.0
G88.0	19.3	19.8	19.4	17.9	17.3	17.2	0.4	0.4	0.5	0.5
G89.0	8.7	8.5	7.6	6.3	5.6	5.3	0.0	0.0	0.0	0.0
G90.0	2.2	2.2	1.9	1.5	1.3	1.3	0.0	0.0	0.0	0.0
G91.0	0.4	0.4	0.3	0.2	0.2	0.1	0.0	0.0	0.0	0.0
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G94.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G95.0	0.1	0.1	0.1	0.1	0.1	0.0	0.1	0.0	0.0	0.1
G96.0	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
G97.0	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
G98.0	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
G99.0	0.5	0.5	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
G100.0	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6
G101.0	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
G102.0	0.8	0.7	0.7	0.7	0.7	0.6	0.7	0.7	0.7	0.7
G103.0	0.9	0.9	0.8	0.8	0.8	0.8	0.9	0.8	0.8	0.8
G104.0	1.0	0.9	0.9	0.9	0.9	0.9	1.0	0.9	1.0	1.0
G105.0	1.1	1.1	1.0	1.0	1.0	1.0	1.1	1.0	1.0	1.1
G106.0	1.2	1.2	1.1	1.1	1.1	1.1	1.2	1.2	1.1	1.2
G107.0	1.4	1.3	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3
G108.0	1.5	1.4	1.4	1.4	1.3	1.3	1.5	1.4	1.4	1.4
G109.0	1.6	1.6	1.5	1.5	1.5	1.5	1.6	1.6	1.6	1.6
G110.0	1.7	1.6	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	1.9	1.8	1.8	1.7	1.7	1.7	1.8	1.8	1.8	1.8
G112.0	2.0	2.0	1.9	1.9	1.9	1.8	2.0	2.0	1.9	2.0
G113.0	2.2	2.1	2.1	2.1	2.0	2.0	2.1	2.1	2.1	2.1
G114.0	2.3	2.2	2.2	2.2	2.2	2.1	2.3	2.2	2.2	2.2
G115.0	2.4	2.3	2.3	2.3	2.3	2.2	2.4	2.4	2.4	2.4
G116.0	2.6	2.5	2.5	2.5	2.4	2.4	2.6	2.5	2.5	2.5
G117.0	2.7	2.7	2.6	2.6	2.6	2.6	2.8	2.7	2.7	2.7
G118.0	2.8	2.8	2.8	2.8	2.8	2.7	2.9	2.8	2.8	2.8
G119.0	3.0	2.9	2.9	2.9	2.9	2.8	3.0	3.0	3.0	3.0
G120.0	3.2	3.1	3.1	3.1	3.0	3.0	3.2	3.2	3.1	3.1
G121.0	3.3	3.3	3.3	3.2	3.2	3.2	3.4	3.3	3.3	3.3
G122.0	3.4	3.4	3.4	3.4	3.3	3.3	3.5	3.5	3.4	3.4
G123.0	3.6	3.6	3.5	3.5	3.5	3.5	3.7	3.7	3.6	3.6
G124.0	3.8	3.7	3.7	3.7	3.7	3.7	3.8	3.8	3.8	3.8
G125.0	3.9	3.9	3.8	3.8	3.8	3.8	4.0	4.0	3.9	3.9
G126.0	4.1	4.0	4.0	4.0	4.0	4.0	4.2	4.1	4.1	4.1
G127.0	4.2	4.2	4.2	4.2	4.2	4.1	4.3	4.3	4.3	4.3
G128.0	4.3	4.3	4.3	4.3	4.3	4.3	4.5	4.4	4.4	4.4
G129.0	4.5	4.5	4.4	4.4	4.5	4.4	4.7	4.6	4.6	4.6
G130.0	4.7	4.6	4.6	4.6	4.6	4.6	4.8	4.8	4.8	4.7
G131.0	4.8	4.8	4.8	4.8	4.8	4.8	5.0	5.0	4.9	4.9
G132.0	5.0	4.9	4.9	4.9	4.9	4.9	5.2	5.1	5.1	5.0
G133.0	5.1	5.1	5.0	5.1	5.1	5.1	5.4	5.3	5.3	5.2
G134.0	5.3	5.3	5.3	5.2	5.3	5.3	5.5	5.5	5.4	5.4
G135.0	5.4	5.4	5.4	5.4	5.4	5.4	5.7	5.6	5.6	5.5
G136.0	5.6	5.6	5.5	5.6	5.6	5.6	5.9	5.8	5.8	5.7
G137.0	5.8	5.7	5.7	5.7	5.7	5.8	6.0	6.0	5.9	5.9
G138.0	5.9	5.9	5.9	5.9	5.9	5.9	6.2	6.2	6.1	6.0
G139.0	6.1	6.0	6.0	6.0	6.0	6.1	6.4	6.3	6.3	6.2
G140.0	6.2	6.2	6.2	6.2	6.2	6.2	6.6	6.5	6.4	6.4
G141.0	6.4	6.4	6.4	6.4	6.4	6.4	6.8	6.6	6.6	6.6
G142.0	6.5	6.5	6.5	6.6	6.6	6.6	6.9	6.8	6.7	6.7
G143.0	6.7	6.6	6.6	6.7	6.7	6.7	7.1	7.0	6.9	6.9
G144.0	6.8	6.8	6.8	6.8	6.9	6.9	7.2	7.1	7.1	7.1
G145.0	7.0	6.9	7.0	7.0	7.0	7.0	7.4	7.3	7.2	7.2
G146.0	7.1	7.1	7.1	7.1	7.1	7.2	7.5	7.4	7.4	7.3
G147.0	7.3	7.2	7.2	7.3	7.3	7.3	7.7	7.6	7.6	7.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	7.4	7.4	7.4	7.4	7.5	7.5	7.8	7.7	7.7	7.7
G149.0	7.6	7.5	7.5	7.6	7.6	7.6	8.0	7.9	7.8	7.8
G150.0	7.7	7.6	7.6	7.7	7.7	7.7	8.1	8.0	8.0	8.0
G151.0	7.9	7.8	7.8	7.9	7.9	7.9	8.3	8.1	8.1	8.1
G152.0	8.0	8.0	8.0	8.0	8.0	8.0	8.4	8.3	8.3	8.2
G153.0	8.1	8.1	8.1	8.1	8.1	8.1	8.5	8.4	8.5	8.4
G154.0	8.3	8.2	8.2	8.3	8.3	8.3	8.7	8.6	8.6	8.6
G155.0	8.4	8.4	8.4	8.4	8.5	8.4	8.8	8.7	8.7	8.7
G156.0	8.6	8.6	8.5	8.6	8.6	8.6	9.0	8.9	8.9	8.9
G157.0	8.7	8.7	8.6	8.7	8.7	8.7	9.1	9.0	9.0	9.0
G158.0	8.8	8.8	8.8	8.8	8.9	8.8	9.2	9.1	9.1	9.1
G159.0	8.9	8.9	9.0	9.0	9.0	9.0	9.3	9.3	9.3	9.3
G160.0	9.1	9.1	9.1	9.1	9.1	9.1	9.5	9.4	9.4	9.4
G161.0	9.2	9.2	9.3	9.3	9.3	9.3	9.6	9.6	9.6	9.6
G162.0	9.3	9.3	9.4	9.4	9.4	9.4	9.8	9.8	9.8	9.7
G163.0	9.5	9.5	9.5	9.5	9.5	9.5	9.9	9.9	9.9	9.8
G164.0	9.6	9.6	9.7	9.7	9.7	9.7	10.0	10.0	10.1	10.0
G165.0	9.8	9.8	9.8	9.8	9.8	9.8	10.2	10.2	10.2	10.2
G166.0	9.8	9.9	9.9	10.0	10.0	9.9	10.3	10.3	10.3	10.3
G167.0	10.0	10.0	10.0	10.1	10.1	10.1	10.4	10.5	10.5	10.4
G168.0	10.1	10.1	10.2	10.3	10.3	10.3	10.6	10.6	10.6	10.5
G169.0	10.2	10.3	10.3	10.4	10.4	10.4	10.7	10.8	10.8	10.6
G170.0	10.3	10.3	10.4	10.5	10.5	10.5	10.8	10.9	10.9	10.7
G171.0	10.4	10.5	10.5	10.6	10.7	10.7	10.9	11.0	10.9	10.8
G172.0	10.5	10.6	10.6	10.7	10.8	10.8	11.0	11.2	11.0	10.9
G173.0	10.6	10.7	10.8	10.8	10.9	10.9	11.2	11.3	11.1	11.0
G174.0	10.7	10.8	10.9	10.9	11.0	11.0	11.3	11.3	11.2	11.0
G175.0	10.8	10.9	10.9	10.9	11.1	11.1	11.4	11.4	11.3	11.1
G176.0	10.9	10.9	10.9	11.0	11.1	11.2	11.4	11.4	11.3	11.2
G177.0	10.9	10.9	11.0	11.1	11.2	11.3	11.5	11.5	11.4	11.3
G178.0	11.0	11.0	11.1	11.1	11.3	11.3	11.6	11.5	11.4	11.3
G179.0	11.1	11.1	11.1	11.2	11.3	11.4	11.7	11.5	11.4	11.4
G180.0	11.1	11.2	11.2	11.3	11.4	11.4	11.7	11.5	11.4	11.4

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	2035.1	2034.5	2033.1	2031.9	2031.9	2030.1	2030.6	2030.6	2029.8	2029.8
G1.0	2035.4	2034.7	2033.4	2032.6	2033.2	2031.7	2031.1	2031.8	2029.8	2029.7
G2.0	2034.7	2034.0	2032.6	2031.7	2031.5	2032.7	2030.3	2029.7	2028.7	2028.9
G3.0	2033.3	2031.6	2030.2	2029.2	2029.7	2027.9	2027.9	2027.4	2026.7	2026.0
G4.0	2029.0	2028.2	2027.0	2025.9	2025.6	2024.8	2024.7	2024.1	2023.3	2023.2
G5.0	2023.9	2023.2	2021.9	2020.9	2021.7	2020.7	2020.5	2019.8	2018.8	2018.9
G6.0	2017.6	2017.2	2016.4	2015.4	2016.0	2016.2	2014.8	2013.9	2013.3	2012.7
G7.0	2009.9	2009.2	2009.4	2008.0	2007.9	2007.4	2008.3	2007.3	2007.0	2006.2
G8.0	2000.5	2001.0	1998.9	1999.6	2000.2	1999.1	1999.7	1998.7	1998.5	1998.0
G9.0	1990.4	1990.6	1990.1	1990.0	1991.2	1990.7	1990.4	1989.9	1989.4	1989.1
G10.0	1978.2	1978.7	1978.8	1978.8	1979.4	1979.2	1979.5	1979.4	1979.3	1979.3
G11.0	1965.4	1966.2	1966.3	1966.3	1968.8	1966.8	1967.9	1967.8	1968.0	1968.0
G12.0	1950.9	1952.1	1952.1	1952.5	1953.4	1954.7	1955.0	1955.4	1955.0	1955.6
G13.0	1935.5	1936.3	1936.9	1937.9	1939.7	1940.9	1941.6	1941.3	1941.7	1942.1
G14.0	1917.4	1919.6	1920.1	1921.9	1923.9	1922.8	1926.2	1926.7	1927.4	1927.6
G15.0	1900.1	1902.4	1903.2	1905.1	1906.9	1907.8	1910.8	1910.9	1912.1	1913.1
G16.0	1880.3	1883.0	1883.7	1887.1	1889.5	1891.1	1892.6	1894.3	1895.7	1895.8
G17.0	1860.1	1863.2	1864.8	1866.8	1870.1	1871.4	1874.7	1876.3	1878.1	1878.7
G18.0	1838.4	1840.8	1843.0	1846.5	1849.3	1851.4	1855.2	1857.4	1859.6	1860.1
G19.0	1815.5	1819.2	1821.9	1824.8	1828.8	1830.8	1835.1	1836.2	1839.5	1841.0
G20.0	1791.4	1795.3	1797.9	1802.2	1805.8	1811.0	1813.7	1815.7	1819.5	1820.6
G21.0	1766.7	1770.8	1773.8	1778.8	1783.5	1785.3	1791.6	1793.9	1797.8	1800.0
G22.0	1740.4	1744.4	1748.2	1753.9	1758.2	1762.7	1768.1	1771.5	1775.4	1777.8
G23.0	1714.3	1718.2	1722.3	1728.3	1734.6	1739.7	1744.5	1747.6	1752.4	1755.4
G24.0	1686.1	1692.0	1695.6	1701.7	1708.9	1711.2	1719.4	1723.4	1728.9	1731.6
G25.0	1659.2	1663.1	1669.7	1674.5	1681.3	1687.1	1694.3	1698.5	1703.7	1708.4
G26.0	1629.4	1635.1	1640.8	1646.7	1654.3	1661.3	1667.2	1672.7	1678.7	1683.1
G27.0	1600.4	1605.7	1612.7	1618.8	1627.2	1633.4	1640.2	1646.2	1652.8	1657.8
G28.0	1570.4	1575.9	1582.3	1589.0	1597.2	1603.9	1612.3	1619.8	1625.8	1631.4
G29.0	1539.8	1545.9	1551.9	1560.3	1568.4	1575.4	1584.3	1590.3	1599.2	1604.6
G30.0	1506.9	1513.4	1521.0	1529.3	1537.5	1547.5	1555.7	1563.4	1571.0	1576.9
G31.0	1475.7	1482.1	1490.3	1499.0	1508.7	1515.4	1526.5	1533.6	1542.8	1549.2
G32.0	1443.1	1450.1	1458.2	1467.4	1477.6	1486.0	1496.7	1505.0	1513.8	1520.0
G33.0	1411.2	1418.9	1426.3	1436.3	1446.5	1455.9	1466.7	1473.9	1484.7	1492.0
G34.0	1378.5	1385.9	1394.1	1404.5	1414.8	1425.2	1435.8	1445.0	1454.7	1462.0
G35.0	1345.1	1352.9	1361.5	1372.2	1382.9	1392.5	1404.7	1413.9	1423.8	1432.1
G36.0	1312.0	1319.9	1328.8	1339.2	1350.4	1361.2	1372.7	1383.6	1393.8	1402.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	1278.9	1287.5	1296.8	1307.3	1320.7	1331.3	1343.0	1352.3	1363.2	1372.8
G38.0	1244.8	1254.9	1263.5	1274.6	1286.9	1296.8	1310.9	1321.0	1333.1	1341.5
G39.0	1211.8	1221.5	1231.0	1242.2	1254.8	1265.5	1279.4	1290.3	1302.0	1310.5
G40.0	1178.5	1187.4	1197.9	1209.4	1221.3	1234.0	1246.8	1258.3	1270.1	1280.1
G41.0	1145.0	1154.0	1165.0	1176.6	1188.4	1199.8	1215.3	1226.6	1238.7	1248.9
G42.0	1110.8	1120.6	1131.0	1142.8	1156.5	1169.0	1183.1	1194.6	1207.0	1216.8
G43.0	1077.5	1087.6	1098.0	1110.0	1124.2	1136.6	1150.1	1162.5	1175.1	1185.1
G44.0	1045.0	1054.1	1065.7	1078.0	1092.3	1104.5	1119.1	1131.7	1143.9	1153.5
G45.0	1011.2	1020.4	1032.1	1045.0	1058.5	1071.6	1086.1	1097.8	1111.5	1122.7
G46.0	979.6	988.2	1000.1	1013.1	1026.7	1039.9	1053.9	1067.3	1080.3	1090.9
G47.0	946.1	956.3	966.6	979.7	993.9	1008.3	1021.4	1033.7	1048.3	1059.4
G48.0	913.9	924.0	935.0	947.5	961.6	975.2	989.9	1004.2	1016.7	1027.5
G49.0	881.6	891.8	903.6	915.8	929.4	943.4	957.7	971.4	985.0	996.7
G50.0	850.6	860.5	870.9	884.1	898.3	912.8	926.7	940.2	954.0	965.8
G51.0	819.0	829.0	839.2	852.5	866.5	881.1	895.7	907.4	922.4	933.5
G52.0	788.7	797.5	808.6	821.6	834.7	848.5	864.2	877.2	890.3	902.9
G53.0	757.1	767.0	776.6	790.5	803.4	817.5	832.8	845.9	859.5	871.5
G54.0	727.1	735.3	747.0	760.1	773.7	787.5	801.5	815.5	829.7	840.2
G55.0	695.5	705.3	716.3	728.8	742.3	755.8	770.5	784.3	797.8	809.2
G56.0	665.4	674.9	685.9	698.8	711.4	724.7	740.4	752.7	767.8	778.2
G57.0	635.3	645.1	655.7	667.9	681.0	694.8	709.8	722.7	736.3	748.1
G58.0	606.2	615.6	625.5	637.4	651.5	663.0	679.3	691.5	705.7	717.5
G59.0	576.0	585.4	595.9	607.6	621.6	634.5	648.6	661.8	675.2	686.4
G60.0	548.2	556.0	567.0	578.9	592.6	604.4	619.2	631.9	645.9	656.6
G61.0	518.2	527.0	537.9	549.6	561.8	574.5	589.1	602.0	614.9	626.0
G62.0	491.0	499.1	509.1	521.1	533.7	545.3	560.6	572.3	585.8	596.6
G63.0	462.3	470.8	481.1	491.7	504.7	516.5	530.6	542.9	555.5	567.4
G64.0	435.7	442.7	452.3	464.4	476.5	488.4	502.8	513.4	527.3	537.7
G65.0	407.7	415.7	425.1	436.2	448.1	460.2	473.8	485.7	498.0	508.9
G66.0	381.3	389.2	398.2	409.0	420.7	430.9	445.7	456.7	469.7	480.4
G67.0	353.6	361.6	371.0	380.3	392.2	403.6	415.9	428.1	440.9	451.0
G68.0	329.2	336.4	344.1	353.7	365.3	376.0	389.2	399.7	413.0	422.6
G69.0	302.5	309.9	317.8	326.9	337.5	348.5	361.2	371.6	384.0	393.7
G70.0	277.9	284.9	292.5	301.3	310.9	321.0	333.8	344.0	356.7	366.3
G71.0	253.4	260.0	266.5	275.3	284.5	295.1	306.7	317.2	328.9	338.2
G72.0	229.5	235.7	242.4	250.1	259.8	268.5	280.7	290.2	301.5	310.7
G73.0	207.0	211.6	217.6	225.9	233.9	242.8	254.3	263.4	274.6	283.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	184.8	189.4	194.8	201.9	209.9	217.9	228.7	237.4	248.7	256.7
G75.0	163.6	167.6	172.9	178.8	185.6	193.9	203.6	212.4	222.9	231.2
G76.0	144.1	147.3	151.6	157.2	163.6	169.6	179.7	187.5	197.6	205.5
G77.0	125.4	128.1	131.0	135.7	141.3	147.5	155.8	164.0	172.9	180.5
G78.0	108.7	110.5	113.2	116.1	121.6	126.1	133.8	140.3	149.6	156.4
G79.0	93.2	94.1	95.4	98.6	102.1	106.2	112.6	118.7	126.4	133.1
G80.0	79.1	79.7	80.6	82.3	85.1	87.4	92.9	97.6	104.8	111.4
G81.0	67.1	67.2	67.2	68.1	69.4	71.3	74.6	78.9	85.0	90.5
G82.0	55.3	55.6	55.5	55.6	56.4	56.4	59.7	61.9	66.7	71.2
G83.0	42.4	42.6	43.2	43.6	44.8	45.0	46.3	47.7	50.6	53.9
G84.0	31.1	30.9	30.9	31.6	32.5	33.0	34.8	35.4	37.4	39.4
G85.0	24.2	23.9	23.2	22.6	22.0	21.8	23.0	24.2	26.2	27.3
G86.0	12.8	13.4	13.9	14.5	14.7	14.8	14.9	14.5	15.2	16.8
G87.0	3.4	3.8	4.1	4.6	5.4	5.8	6.3	7.2	8.1	8.6
G88.0	0.6	0.6	0.8	0.9	1.0	1.2	1.4	1.6	1.9	2.1
G89.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.3	0.3
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2
G92.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.3
G93.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.3	0.4
G94.0	0.0	0.0	0.1	0.1	0.1	0.2	0.3	0.4	0.4	0.5
G95.0	0.1	0.1	0.1	0.2	0.2	0.3	0.4	0.5	0.6	0.6
G96.0	0.1	0.2	0.2	0.3	0.3	0.4	0.5	0.6	0.6	0.7
G97.0	0.2	0.3	0.3	0.4	0.4	0.5	0.6	0.7	0.7	0.8
G98.0	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8	0.8	0.9
G99.0	0.4	0.5	0.5	0.6	0.6	0.7	0.8	0.9	1.0	1.0
G100.0	0.6	0.6	0.6	0.7	0.7	0.8	0.9	1.0	1.0	1.1
G101.0	0.6	0.7	0.7	0.8	0.9	1.0	1.0	1.1	1.2	1.3
G102.0	0.8	0.8	0.8	0.9	1.0	1.0	1.1	1.2	1.3	1.4
G103.0	0.9	0.9	1.0	1.0	1.1	1.2	1.3	1.4	1.4	1.5
G104.0	1.0	1.0	1.1	1.1	1.2	1.3	1.4	1.5	1.6	1.6
G105.0	1.1	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.7	1.8
G106.0	1.2	1.2	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.9
G107.0	1.3	1.4	1.5	1.5	1.6	1.6	1.8	1.9	2.0	2.0
G108.0	1.5	1.5	1.6	1.6	1.7	1.8	1.9	2.0	2.1	2.2
G109.0	1.6	1.6	1.7	1.8	1.8	1.9	2.0	2.2	2.2	2.3
G110.0	1.7	1.7	1.8	1.9	2.0	2.1	2.2	2.2	2.4	2.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	1.8	1.9	2.0	2.0	2.1	2.2	2.3	2.4	2.5	2.6
G112.0	2.0	2.0	2.1	2.2	2.2	2.3	2.5	2.6	2.7	2.8
G113.0	2.1	2.2	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9
G114.0	2.2	2.3	2.4	2.4	2.5	2.6	2.8	2.8	2.9	3.0
G115.0	2.4	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2
G116.0	2.6	2.6	2.7	2.7	2.8	2.9	3.0	3.1	3.2	3.3
G117.0	2.7	2.8	2.8	2.9	2.9	3.1	3.2	3.3	3.3	3.4
G118.0	2.8	2.9	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
G119.0	3.0	3.0	3.1	3.1	3.2	3.3	3.4	3.6	3.6	3.8
G120.0	3.2	3.2	3.2	3.3	3.4	3.5	3.6	3.7	3.8	3.9
G121.0	3.3	3.3	3.3	3.4	3.5	3.7	3.8	3.8	3.9	4.0
G122.0	3.4	3.5	3.5	3.6	3.7	3.8	3.9	4.0	4.1	4.2
G123.0	3.6	3.6	3.7	3.7	3.8	3.9	4.0	4.1	4.2	4.3
G124.0	3.8	3.8	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.4
G125.0	3.9	3.9	4.0	4.0	4.1	4.2	4.3	4.4	4.5	4.6
G126.0	4.1	4.1	4.1	4.2	4.3	4.4	4.5	4.6	4.7	4.8
G127.0	4.2	4.3	4.3	4.3	4.4	4.5	4.6	4.8	4.8	4.9
G128.0	4.4	4.4	4.4	4.5	4.6	4.7	4.8	4.9	5.0	5.1
G129.0	4.5	4.6	4.6	4.7	4.8	4.8	4.9	5.0	5.1	5.2
G130.0	4.7	4.7	4.8	4.8	4.9	5.0	5.1	5.2	5.3	5.4
G131.0	4.9	4.9	4.9	5.0	5.0	5.2	5.3	5.4	5.4	5.5
G132.0	5.0	5.0	5.1	5.2	5.2	5.3	5.4	5.5	5.6	5.7
G133.0	5.2	5.2	5.3	5.3	5.4	5.5	5.6	5.7	5.8	5.8
G134.0	5.4	5.4	5.4	5.4	5.5	5.6	5.7	5.8	5.9	5.9
G135.0	5.5	5.5	5.6	5.6	5.7	5.8	5.9	5.9	6.0	6.1
G136.0	5.7	5.7	5.7	5.8	5.8	5.9	6.0	6.1	6.2	6.3
G137.0	5.9	5.9	5.9	5.9	6.0	6.1	6.2	6.3	6.3	6.4
G138.0	6.0	6.0	6.0	6.1	6.1	6.2	6.3	6.4	6.4	6.6
G139.0	6.2	6.2	6.2	6.3	6.3	6.4	6.4	6.6	6.6	6.7
G140.0	6.4	6.4	6.4	6.4	6.4	6.6	6.6	6.7	6.8	6.8
G141.0	6.6	6.5	6.5	6.6	6.6	6.7	6.8	6.8	6.9	7.0
G142.0	6.7	6.6	6.7	6.7	6.8	6.8	6.9	7.0	7.1	7.1
G143.0	6.9	6.8	6.9	6.9	7.0	7.0	7.1	7.1	7.2	7.3
G144.0	7.0	7.0	7.0	7.1	7.1	7.1	7.2	7.2	7.3	7.4
G145.0	7.2	7.1	7.1	7.2	7.2	7.3	7.3	7.4	7.5	7.6
G146.0	7.3	7.3	7.3	7.3	7.4	7.4	7.5	7.5	7.6	7.7
G147.0	7.5	7.4	7.5	7.5	7.5	7.6	7.6	7.6	7.7	7.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	7.6	7.6	7.6	7.6	7.6	7.7	7.7	7.8	7.8	7.9
G149.0	7.8	7.7	7.8	7.8	7.8	7.8	7.9	7.9	8.0	8.1
G150.0	7.9	7.9	7.9	7.9	7.9	8.0	8.0	8.0	8.1	8.2
G151.0	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.2	8.2	8.4
G152.0	8.2	8.2	8.2	8.2	8.1	8.2	8.2	8.3	8.4	8.5
G153.0	8.4	8.3	8.3	8.3	8.3	8.3	8.4	8.5	8.5	8.6
G154.0	8.5	8.5	8.5	8.5	8.5	8.5	8.5	8.6	8.6	8.7
G155.0	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.7	8.7	8.9
G156.0	8.8	8.8	8.7	8.7	8.7	8.7	8.8	8.8	8.9	9.0
G157.0	9.0	8.9	8.9	8.8	8.8	8.9	8.9	9.0	9.0	9.1
G158.0	9.1	9.0	9.0	8.9	9.0	9.0	9.1	9.1	9.1	9.3
G159.0	9.2	9.1	9.1	9.1	9.1	9.1	9.1	9.2	9.3	9.3
G160.0	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.4	9.5
G161.0	9.5	9.4	9.4	9.4	9.4	9.4	9.4	9.5	9.5	9.6
G162.0	9.7	9.6	9.5	9.5	9.5	9.5	9.6	9.6	9.7	9.7
G163.0	9.8	9.7	9.7	9.6	9.6	9.7	9.7	9.7	9.8	9.8
G164.0	9.9	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.9
G165.0	10.0	9.9	9.9	9.9	9.9	9.9	9.9	9.9	10.0	10.0
G166.0	10.2	10.1	10.0	10.0	10.0	10.0	10.0	10.0	10.1	10.1
G167.0	10.3	10.2	10.2	10.1	10.1	10.1	10.1	10.1	10.2	10.2
G168.0	10.4	10.3	10.3	10.2	10.3	10.3	10.3	10.2	10.3	10.3
G169.0	10.5	10.4	10.4	10.3	10.3	10.3	10.3	10.3	10.4	10.4
G170.0	10.6	10.5	10.5	10.5	10.4	10.4	10.4	10.4	10.5	10.5
G171.0	10.7	10.6	10.6	10.6	10.5	10.5	10.5	10.5	10.6	10.6
G172.0	10.8	10.8	10.7	10.7	10.7	10.7	10.6	10.6	10.7	10.7
G173.0	10.9	10.9	10.8	10.8	10.7	10.7	10.7	10.7	10.7	10.8
G174.0	11.0	10.9	10.9	10.9	10.8	10.8	10.8	10.8	10.9	10.8
G175.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G176.0	11.1	11.1	11.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9
G177.0	11.2	11.2	11.1	11.1	11.1	11.0	11.0	11.0	11.0	11.0
G178.0	11.3	11.2	11.2	11.2	11.1	11.1	11.1	11.1	11.1	11.0
G179.0	11.3	11.3	11.2	11.2	11.2	11.1	11.1	11.1	11.1	11.1
G180.0	11.3	11.3	11.2	11.2	11.2	11.2	11.2	11.1	11.1	11.1

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	2029.4	2029.1	2028.5	2028.8	2028.7	2027.9	2027.3	2027.6	2028.4	2029.0
G1.0	2029.0	2028.7	2028.2	2028.1	2028.1	2027.0	2025.9	2026.2	2027.2	2027.3
G2.0	2028.0	2027.1	2026.4	2025.8	2026.2	2024.8	2023.6	2023.6	2024.3	2024.1
G3.0	2025.4	2024.5	2023.7	2023.3	2022.5	2021.8	2020.5	2019.6	2020.1	2020.1
G4.0	2022.0	2021.4	2020.3	2019.3	2018.5	2017.3	2016.2	2015.3	2014.8	2014.4
G5.0	2017.7	2017.6	2015.6	2014.5	2012.8	2012.0	2010.4	2010.0	2008.8	2008.3
G6.0	2012.1	2010.8	2009.5	2008.3	2007.0	2005.6	2003.8	2003.1	2001.1	2000.7
G7.0	2005.9	2004.2	2002.5	2000.8	1999.6	1998.1	1996.5	1994.6	1992.7	1992.4
G8.0	1996.5	1995.2	1994.6	1993.1	1990.8	1989.6	1987.6	1985.6	1983.1	1982.7
G9.0	1987.7	1987.1	1985.2	1984.9	1981.8	1980.0	1977.9	1975.6	1973.5	1972.1
G10.0	1977.6	1976.8	1975.1	1973.2	1971.6	1968.8	1966.7	1964.5	1962.0	1960.3
G11.0	1966.2	1965.9	1963.8	1962.8	1960.2	1957.5	1954.8	1952.2	1949.7	1947.5
G12.0	1953.9	1953.2	1951.5	1950.3	1947.5	1945.4	1942.3	1939.0	1935.8	1933.6
G13.0	1940.9	1940.6	1938.6	1937.5	1933.9	1931.4	1928.1	1924.9	1921.3	1918.8
G14.0	1926.9	1926.3	1924.0	1922.7	1919.6	1916.7	1913.8	1909.3	1905.7	1902.7
G15.0	1911.7	1911.2	1908.6	1907.3	1904.5	1901.6	1897.5	1893.8	1890.0	1886.5
G16.0	1896.0	1895.1	1893.1	1891.2	1887.7	1885.0	1880.7	1877.3	1872.6	1868.2
G17.0	1878.4	1878.2	1875.4	1874.3	1870.3	1867.5	1863.2	1859.4	1853.4	1850.1
G18.0	1859.9	1860.0	1857.7	1856.8	1852.3	1848.2	1844.9	1839.9	1834.6	1830.4
G19.0	1840.2	1840.7	1838.7	1837.6	1832.4	1829.8	1825.5	1820.4	1814.1	1809.9
G20.0	1820.8	1820.9	1819.9	1817.7	1812.5	1809.7	1805.0	1799.5	1794.6	1788.3
G21.0	1799.8	1800.5	1798.3	1797.1	1791.9	1789.6	1783.9	1778.7	1771.4	1766.3
G22.0	1778.9	1779.1	1777.7	1775.7	1770.6	1767.0	1762.1	1756.1	1750.2	1743.2
G23.0	1755.9	1757.6	1754.9	1753.6	1748.7	1745.3	1739.8	1733.8	1725.9	1720.2
G24.0	1733.0	1733.8	1732.3	1731.3	1725.7	1722.0	1716.9	1709.5	1702.4	1695.3
G25.0	1709.4	1710.8	1708.6	1707.7	1702.3	1699.8	1692.8	1686.0	1677.8	1670.8
G26.0	1684.4	1686.5	1684.9	1682.9	1678.3	1674.3	1668.3	1661.8	1653.1	1645.3
G27.0	1658.5	1661.4	1659.0	1658.6	1653.1	1648.7	1643.6	1636.2	1627.0	1618.9
G28.0	1633.2	1634.9	1634.8	1633.2	1627.7	1623.3	1617.3	1610.0	1599.9	1591.5
G29.0	1606.0	1610.3	1607.9	1605.7	1601.7	1597.9	1591.5	1584.2	1573.1	1564.6
G30.0	1580.1	1582.4	1581.5	1580.6	1575.1	1571.0	1563.9	1556.3	1546.0	1536.1
G31.0	1551.9	1555.0	1553.6	1552.3	1547.1	1543.3	1537.0	1528.9	1517.5	1508.1
G32.0	1524.2	1527.1	1526.6	1526.0	1519.3	1516.3	1509.2	1500.3	1489.7	1479.2
G33.0	1494.8	1499.4	1498.5	1497.0	1491.5	1488.1	1481.0	1471.0	1459.9	1450.7
G34.0	1466.4	1470.1	1470.8	1469.1	1463.3	1459.1	1452.0	1443.1	1431.7	1420.5
G35.0	1436.3	1441.6	1440.1	1440.3	1433.9	1430.8	1423.3	1413.9	1401.3	1391.5
G36.0	1407.3	1411.2	1411.6	1411.1	1405.5	1400.4	1394.2	1384.1	1372.4	1360.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	1377.2	1382.8	1382.6	1382.1	1376.4	1372.4	1365.5	1355.1	1342.1	1331.6
G38.0	1347.5	1351.5	1353.7	1351.6	1347.4	1342.5	1335.1	1325.1	1312.6	1300.3
G39.0	1315.8	1322.6	1323.1	1322.3	1316.1	1312.6	1304.9	1294.8	1281.3	1268.9
G40.0	1285.9	1292.1	1293.1	1291.7	1287.4	1282.4	1274.6	1264.1	1251.5	1239.1
G41.0	1255.5	1261.8	1262.2	1261.5	1256.8	1252.0	1244.2	1234.5	1220.4	1208.0
G42.0	1223.6	1230.1	1231.7	1231.8	1226.2	1221.1	1213.0	1203.8	1189.8	1177.3
G43.0	1193.4	1198.8	1200.4	1199.6	1194.9	1190.9	1183.1	1172.1	1157.8	1145.3
G44.0	1161.0	1168.4	1170.0	1168.8	1164.5	1160.5	1152.7	1142.1	1127.4	1114.4
G45.0	1129.9	1136.4	1138.3	1137.9	1132.5	1129.1	1121.0	1110.5	1096.3	1081.8
G46.0	1099.0	1104.9	1107.8	1106.8	1102.9	1097.9	1090.9	1079.6	1065.4	1051.9
G47.0	1067.3	1074.3	1077.4	1076.6	1072.1	1067.6	1058.9	1047.9	1032.6	1019.9
G48.0	1035.9	1043.2	1046.0	1045.4	1041.2	1036.0	1028.7	1017.0	1003.1	988.8
G49.0	1004.5	1012.5	1014.8	1015.0	1010.8	1006.1	998.5	986.8	972.1	958.0
G50.0	972.9	981.1	983.7	984.7	980.2	975.2	966.7	955.7	941.7	927.6
G51.0	942.1	949.9	952.8	953.1	948.0	944.9	935.8	924.1	910.8	895.7
G52.0	910.9	919.5	922.4	922.2	917.8	914.6	905.8	894.4	880.5	865.4
G53.0	879.6	888.2	891.4	892.1	887.0	883.2	874.9	864.4	849.5	835.4
G54.0	849.2	857.0	860.3	861.2	856.0	853.0	844.8	833.7	818.6	804.4
G55.0	817.5	825.6	829.3	829.7	826.0	820.9	813.6	802.1	786.7	773.3
G56.0	786.5	795.9	798.0	799.8	795.5	792.5	783.7	772.5	757.6	743.2
G57.0	756.7	765.0	768.0	770.0	764.9	760.6	753.4	741.3	727.2	712.8
G58.0	725.9	734.4	737.1	740.1	734.5	731.9	723.0	711.8	697.0	683.0
G59.0	695.3	703.0	707.6	709.1	705.0	700.8	692.7	681.0	667.4	652.1
G60.0	664.4	673.3	677.1	678.9	675.4	671.3	663.3	652.1	637.1	622.9
G61.0	634.7	643.1	647.7	649.4	644.6	640.6	632.8	622.1	607.5	592.8
G62.0	604.5	613.7	616.1	618.8	614.6	611.4	603.4	592.2	576.8	562.6
G63.0	574.6	583.0	587.5	589.6	584.9	581.0	573.9	562.7	547.2	533.8
G64.0	545.6	553.8	557.7	560.4	555.3	552.1	544.9	533.9	518.5	504.9
G65.0	516.7	524.8	528.6	530.8	527.2	523.3	516.1	504.6	489.9	475.3
G66.0	487.4	495.5	498.4	502.0	498.1	494.6	486.8	475.9	461.6	447.4
G67.0	458.4	466.7	469.2	472.0	468.7	464.8	457.1	446.3	432.0	418.7
G68.0	430.0	437.6	440.7	443.1	439.7	437.2	429.5	418.1	403.9	389.9
G69.0	400.6	408.9	412.5	414.9	411.0	407.1	400.3	389.6	375.5	362.3
G70.0	373.0	381.1	383.9	386.2	382.5	379.9	372.6	362.2	347.4	335.1
G71.0	345.1	352.1	355.6	358.0	354.8	351.9	343.4	332.7	319.7	307.5
G72.0	316.8	324.1	327.4	330.5	326.2	324.0	316.8	305.8	292.9	281.2
G73.0	290.0	296.6	300.3	302.1	298.7	296.3	289.3	279.1	266.5	254.0

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	262.5	269.5	272.5	275.4	271.4	269.3	262.3	252.3	239.0	227.9
G75.0	237.3	242.9	246.4	248.5	245.3	242.1	235.9	226.0	214.4	203.0
G76.0	211.5	218.1	219.5	222.7	219.6	216.6	210.0	200.9	188.6	178.3
G77.0	186.3	192.6	195.1	197.1	194.1	191.7	184.6	174.9	164.7	154.3
G78.0	161.8	168.5	170.4	172.7	169.3	167.0	161.2	152.0	141.2	131.8
G79.0	138.3	144.1	146.9	147.4	145.2	142.6	137.1	128.9	119.2	109.4
G80.0	116.4	121.3	123.5	124.8	122.7	120.3	114.5	106.9	97.9	89.2
G81.0	95.4	99.2	101.6	102.8	100.8	99.0	93.2	86.7	77.9	69.6
G82.0	75.1	79.8	81.2	82.6	80.3	78.7	73.8	68.0	59.7	52.7
G83.0	57.0	61.2	62.9	63.3	61.4	59.7	55.8	50.8	43.5	37.8
G84.0	41.5	45.0	46.0	47.1	44.8	43.7	40.6	35.6	30.0	25.8
G85.0	28.5	30.7	31.8	32.2	30.1	29.3	26.7	23.1	19.2	15.4
G86.0	17.6	19.0	19.5	20.2	18.3	17.8	16.1	13.5	9.5	7.4
G87.0	8.7	9.8	10.7	10.6	9.1	9.1	7.8	5.0	2.6	1.6
G88.0	2.2	2.7	3.0	3.6	3.1	2.8	1.2	0.6	0.4	0.3
G89.0	0.4	0.4	0.4	0.3	0.2	0.2	0.3	0.2	0.2	0.2
G90.0	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
G91.0	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.4	0.4
G92.0	0.4	0.4	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
G93.0	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
G94.0	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.6
G95.0	0.6	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8
G96.0	0.8	0.8	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.9
G97.0	0.9	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
G98.0	1.0	1.0	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.1
G99.0	1.1	1.2	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.3
G100.0	1.2	1.3	1.3	1.4	1.4	1.5	1.5	1.5	1.4	1.4
G101.0	1.4	1.4	1.5	1.5	1.6	1.6	1.6	1.6	1.6	1.5
G102.0	1.5	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.6
G103.0	1.6	1.7	1.7	1.8	1.9	1.8	1.8	1.8	1.8	1.8
G104.0	1.7	1.8	1.9	1.9	2.0	2.0	2.0	2.0	2.0	1.9
G105.0	1.9	1.9	2.0	2.1	2.1	2.2	2.2	2.1	2.1	2.1
G106.0	2.0	2.1	2.2	2.2	2.2	2.3	2.3	2.2	2.2	2.2
G107.0	2.2	2.2	2.2	2.3	2.4	2.4	2.4	2.4	2.4	2.4
G108.0	2.3	2.3	2.4	2.5	2.6	2.6	2.6	2.6	2.5	2.5
G109.0	2.4	2.5	2.6	2.7	2.7	2.8	2.7	2.7	2.7	2.7
G110.0	2.5	2.6	2.7	2.8	2.8	2.9	2.8	2.8	2.8	2.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	2.7	2.8	2.8	2.9	3.0	3.0	3.0	3.0	3.0	3.0
G112.0	2.8	2.9	3.0	3.1	3.2	3.2	3.2	3.2	3.1	3.1
G113.0	3.0	3.0	3.1	3.3	3.3	3.3	3.3	3.3	3.3	3.3
G114.0	3.1	3.2	3.3	3.3	3.5	3.5	3.4	3.4	3.4	3.4
G115.0	3.3	3.3	3.4	3.5	3.7	3.6	3.6	3.6	3.6	3.6
G116.0	3.4	3.5	3.6	3.7	3.8	3.8	3.8	3.8	3.8	3.7
G117.0	3.6	3.6	3.7	3.8	4.0	4.0	3.9	3.9	3.9	3.8
G118.0	3.7	3.8	3.8	4.0	4.1	4.1	4.1	4.1	4.0	4.0
G119.0	3.8	3.9	4.0	4.1	4.3	4.3	4.3	4.2	4.2	4.2
G120.0	4.0	4.1	4.2	4.3	4.4	4.4	4.4	4.3	4.3	4.3
G121.0	4.1	4.2	4.3	4.4	4.6	4.6	4.5	4.5	4.5	4.5
G122.0	4.3	4.3	4.5	4.6	4.8	4.8	4.7	4.7	4.7	4.6
G123.0	4.4	4.5	4.7	4.8	4.9	4.9	4.8	4.8	4.8	4.8
G124.0	4.6	4.7	4.8	4.9	5.1	5.1	5.0	5.0	5.0	5.0
G125.0	4.8	4.8	5.0	5.1	5.3	5.3	5.2	5.2	5.1	5.1
G126.0	4.8	5.0	5.1	5.3	5.4	5.4	5.4	5.3	5.3	5.3
G127.0	5.0	5.1	5.3	5.4	5.6	5.6	5.5	5.5	5.5	5.4
G128.0	5.2	5.3	5.4	5.6	5.7	5.8	5.7	5.6	5.6	5.6
G129.0	5.3	5.4	5.6	5.8	5.9	5.9	5.9	5.8	5.8	5.8
G130.0	5.5	5.6	5.8	5.9	6.1	6.1	6.0	5.9	5.9	5.9
G131.0	5.6	5.8	5.9	6.1	6.2	6.3	6.2	6.1	6.1	6.1
G132.0	5.8	5.9	6.1	6.3	6.4	6.4	6.3	6.3	6.2	6.2
G133.0	5.9	6.1	6.3	6.4	6.6	6.6	6.5	6.4	6.4	6.4
G134.0	6.1	6.2	6.4	6.6	6.7	6.7	6.7	6.6	6.5	6.5
G135.0	6.2	6.4	6.6	6.7	6.9	6.9	6.8	6.8	6.7	6.7
G136.0	6.4	6.6	6.7	6.9	7.0	7.1	7.0	6.9	6.9	6.8
G137.0	6.6	6.7	6.9	7.1	7.1	7.2	7.1	7.1	7.0	7.0
G138.0	6.7	6.9	7.0	7.1	7.3	7.3	7.3	7.2	7.1	7.1
G139.0	6.8	7.0	7.2	7.3	7.5	7.5	7.4	7.3	7.3	7.2
G140.0	7.0	7.1	7.3	7.5	7.6	7.6	7.6	7.5	7.4	7.4
G141.0	7.1	7.3	7.5	7.6	7.7	7.7	7.7	7.6	7.6	7.6
G142.0	7.2	7.4	7.6	7.7	7.8	7.9	7.8	7.8	7.7	7.7
G143.0	7.4	7.6	7.7	7.9	8.0	8.0	8.0	7.9	7.9	7.8
G144.0	7.6	7.7	7.9	8.0	8.1	8.1	8.1	8.1	8.0	8.0
G145.0	7.7	7.8	8.0	8.1	8.2	8.3	8.2	8.2	8.1	8.1
G146.0	7.8	8.0	8.1	8.2	8.3	8.4	8.4	8.3	8.3	8.2
G147.0	8.0	8.1	8.2	8.4	8.5	8.6	8.5	8.5	8.5	8.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	8.1	8.2	8.4	8.5	8.6	8.6	8.6	8.6	8.6	8.5
G149.0	8.2	8.4	8.5	8.6	8.7	8.8	8.8	8.7	8.7	8.6
G150.0	8.3	8.5	8.6	8.7	8.8	8.9	8.9	8.8	8.8	8.8
G151.0	8.5	8.6	8.7	8.8	9.0	9.0	9.0	9.0	9.0	8.9
G152.0	8.6	8.7	8.8	9.0	9.1	9.1	9.1	9.1	9.1	9.1
G153.0	8.7	8.8	9.0	9.1	9.2	9.3	9.3	9.3	9.2	9.1
G154.0	8.9	9.0	9.1	9.2	9.3	9.4	9.4	9.4	9.3	9.3
G155.0	9.0	9.1	9.2	9.3	9.4	9.5	9.5	9.5	9.5	9.4
G156.0	9.1	9.2	9.3	9.4	9.5	9.6	9.6	9.6	9.6	9.5
G157.0	9.3	9.3	9.4	9.5	9.6	9.7	9.8	9.7	9.7	9.7
G158.0	9.3	9.4	9.5	9.6	9.8	9.8	9.8	9.8	9.8	9.8
G159.0	9.4	9.6	9.6	9.8	9.8	9.9	9.9	9.9	9.9	9.9
G160.0	9.6	9.6	9.7	9.8	9.9	10.0	10.0	10.0	10.0	10.0
G161.0	9.7	9.8	9.8	9.9	10.0	10.1	10.1	10.1	10.1	10.1
G162.0	9.8	9.8	9.9	10.0	10.1	10.2	10.3	10.2	10.2	10.2
G163.0	9.8	9.9	10.0	10.1	10.2	10.3	10.3	10.3	10.3	10.3
G164.0	10.0	10.1	10.1	10.2	10.3	10.4	10.4	10.4	10.4	10.3
G165.0	10.1	10.2	10.2	10.3	10.4	10.5	10.5	10.5	10.5	10.4
G166.0	10.2	10.3	10.3	10.4	10.5	10.6	10.6	10.6	10.6	10.5
G167.0	10.3	10.3	10.4	10.5	10.6	10.6	10.7	10.7	10.6	10.6
G168.0	10.4	10.4	10.5	10.6	10.6	10.7	10.8	10.7	10.7	10.7
G169.0	10.4	10.5	10.6	10.6	10.7	10.8	10.8	10.8	10.8	10.8
G170.0	10.5	10.6	10.7	10.7	10.8	10.9	10.9	10.9	10.9	10.8
G171.0	10.6	10.7	10.7	10.8	10.9	10.9	10.9	10.9	10.9	10.9
G172.0	10.7	10.7	10.8	10.9	10.9	10.9	11.0	10.9	10.9	10.9
G173.0	10.8	10.8	10.9	10.9	10.9	11.0	11.0	11.0	10.9	11.0
G174.0	10.8	10.9	10.9	10.9	11.0	11.0	11.0	11.0	11.0	11.0
G175.0	10.9	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
G176.0	11.0	11.0	11.0	11.1	11.1	11.1	11.0	11.0	11.0	11.1
G177.0	11.0	11.0	11.0	11.1	11.1	11.1	11.1	11.0	11.0	11.1
G178.0	11.1	11.1	11.1	11.1	11.2	11.1	11.1	11.0	11.1	11.1
G179.0	11.1	11.1	11.1	11.1	11.2	11.1	11.1	11.0	11.1	11.1
G180.0	11.1	11.1	11.1	11.1	11.2	11.1	11.0	11.0	11.0	11.1

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	2029.4	2030.9	2030.2	2031.2	2032.0	2032.4	2033.3	2033.3	2033.5	2033.8
G1.0	2027.2	2028.3	2027.7	2028.7	2029.2	2029.5	2030.1	2030.2	2030.2	2030.4
G2.0	2024.1	2024.8	2024.2	2024.9	2025.0	2025.4	2025.4	2025.8	2026.0	2026.1
G3.0	2019.5	2020.3	2019.6	2020.1	2020.1	2019.5	2020.4	2019.8	2019.9	2020.2
G4.0	2014.0	2013.4	2013.3	2014.2	2013.5	2012.8	2012.4	2012.9	2012.6	2013.1
G5.0	2007.8	2007.8	2006.1	2006.4	2006.8	2005.6	2005.0	2004.8	2004.3	2004.7
G6.0	1999.6	1999.8	1997.4	1997.3	1996.7	1996.1	1994.7	1994.0	1994.1	1994.6
G7.0	1991.3	1991.3	1988.0	1988.0	1986.7	1985.1	1984.4	1983.4	1982.8	1983.3
G8.0	1980.9	1979.9	1977.6	1977.3	1975.1	1973.4	1972.4	1971.5	1969.5	1970.6
G9.0	1970.9	1968.7	1965.4	1964.8	1962.3	1960.8	1959.4	1957.7	1956.6	1956.4
G10.0	1957.8	1955.5	1952.3	1951.3	1948.3	1946.1	1944.2	1942.6	1941.5	1941.0
G11.0	1944.4	1942.1	1937.9	1936.3	1934.0	1930.9	1929.3	1926.0	1925.2	1924.8
G12.0	1930.2	1927.2	1923.3	1920.9	1917.7	1913.6	1911.3	1910.1	1906.8	1906.6
G13.0	1914.7	1912.2	1906.6	1904.5	1900.3	1896.0	1893.3	1890.5	1888.4	1887.7
G14.0	1898.7	1894.9	1889.7	1886.2	1881.9	1877.6	1874.3	1870.7	1867.4	1867.4
G15.0	1881.3	1877.9	1871.2	1868.3	1863.3	1857.3	1854.2	1850.4	1848.1	1846.8
G16.0	1863.3	1858.9	1852.4	1848.7	1842.3	1836.8	1832.2	1827.7	1826.1	1824.3
G17.0	1843.3	1838.9	1831.2	1825.9	1821.1	1814.5	1810.9	1805.1	1802.1	1800.9
G18.0	1824.0	1818.1	1809.6	1804.9	1799.0	1792.2	1786.8	1782.0	1777.4	1776.0
G19.0	1802.7	1796.9	1788.0	1781.6	1775.7	1768.4	1763.7	1756.6	1752.5	1751.2
G20.0	1781.2	1774.4	1766.0	1759.2	1750.9	1743.4	1737.3	1731.4	1726.7	1725.4
G21.0	1757.8	1751.6	1742.0	1734.2	1726.5	1717.6	1710.5	1704.3	1699.6	1697.8
G22.0	1734.5	1727.2	1716.8	1709.0	1700.7	1692.4	1685.1	1676.9	1671.3	1669.4
G23.0	1710.6	1702.9	1691.4	1683.5	1674.7	1664.7	1657.4	1648.3	1643.3	1642.0
G24.0	1685.6	1677.3	1665.3	1656.5	1647.1	1636.8	1628.2	1620.2	1613.6	1611.4
G25.0	1660.4	1651.0	1639.2	1629.6	1619.5	1608.3	1600.1	1590.1	1584.9	1582.7
G26.0	1634.0	1624.7	1611.9	1602.0	1590.8	1580.3	1570.6	1561.8	1554.5	1551.2
G27.0	1606.9	1597.5	1584.7	1574.2	1562.7	1549.9	1540.0	1530.3	1523.7	1520.7
G28.0	1580.2	1568.6	1556.3	1545.0	1532.1	1520.4	1509.8	1499.8	1491.0	1488.1
G29.0	1552.3	1541.1	1526.4	1515.0	1502.1	1489.4	1478.7	1467.4	1460.6	1455.6
G30.0	1523.8	1512.3	1497.0	1485.1	1471.9	1458.3	1447.6	1435.7	1428.0	1423.0
G31.0	1494.1	1482.7	1467.5	1455.5	1441.0	1427.1	1416.0	1404.0	1396.1	1390.8
G32.0	1465.7	1453.1	1437.8	1423.8	1408.9	1395.9	1383.8	1372.1	1362.1	1358.7
G33.0	1435.9	1423.7	1406.6	1392.9	1378.9	1363.2	1351.2	1338.4	1329.7	1324.4
G34.0	1406.5	1392.0	1376.2	1361.3	1346.3	1331.7	1319.1	1306.1	1296.7	1291.3
G35.0	1375.8	1362.3	1344.2	1331.6	1315.3	1299.3	1286.2	1272.3	1262.8	1257.6
G36.0	1345.4	1331.0	1312.3	1298.8	1283.2	1266.9	1253.8	1240.1	1229.0	1223.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	1315.3	1300.7	1282.2	1266.8	1251.4	1233.4	1221.7	1206.4	1197.0	1191.1
G38.0	1285.1	1269.2	1250.8	1235.7	1218.4	1201.5	1187.7	1173.5	1162.9	1157.2
G39.0	1254.0	1237.8	1219.2	1203.5	1186.6	1168.6	1154.9	1140.1	1129.1	1124.2
G40.0	1222.8	1207.3	1186.4	1170.7	1154.0	1136.8	1121.8	1107.6	1096.6	1090.3
G41.0	1191.5	1175.8	1155.6	1139.3	1121.3	1103.1	1088.9	1074.1	1063.0	1057.0
G42.0	1159.9	1142.5	1124.2	1106.6	1088.5	1071.0	1055.8	1041.0	1030.2	1024.1
G43.0	1128.0	1111.6	1091.6	1073.9	1055.9	1038.3	1022.3	1007.3	996.4	990.0
G44.0	1097.0	1079.8	1059.5	1041.3	1023.5	1006.6	990.3	976.2	964.3	957.1
G45.0	1065.5	1047.8	1028.4	1010.1	992.0	973.5	957.7	942.8	931.3	924.4
G46.0	1035.2	1016.4	996.5	978.3	959.6	941.1	925.3	910.3	899.6	892.6
G47.0	1002.0	984.8	964.1	946.2	927.0	908.5	893.1	877.6	866.3	859.8
G48.0	971.2	953.5	933.2	914.5	895.0	877.6	861.2	846.9	835.0	828.5
G49.0	941.2	921.9	900.7	882.9	864.4	846.1	830.2	815.4	803.6	796.3
G50.0	910.3	891.3	871.6	851.4	833.2	815.4	799.1	783.2	772.9	765.6
G51.0	878.3	860.2	839.5	820.3	801.5	783.4	767.7	752.0	740.9	734.8
G52.0	847.8	829.6	809.2	789.8	771.7	753.1	737.3	722.0	710.8	704.5
G53.0	817.0	797.9	777.2	758.8	739.8	722.5	707.3	692.0	680.3	674.0
G54.0	786.7	767.8	747.1	728.0	710.0	691.3	676.4	661.6	650.8	643.7
G55.0	755.1	736.9	715.8	697.4	678.8	661.0	646.3	631.5	620.1	613.2
G56.0	725.3	707.2	685.5	667.8	649.5	631.0	616.5	601.1	591.2	584.4
G57.0	695.0	675.9	655.8	637.7	618.9	601.8	586.2	572.3	561.1	555.2
G58.0	663.8	645.7	626.5	607.9	589.8	572.2	557.4	543.1	532.6	526.9
G59.0	633.7	615.7	596.0	577.5	559.6	542.2	527.6	514.2	504.0	498.4
G60.0	604.5	586.6	565.9	548.6	531.2	514.0	499.5	486.2	476.3	470.1
G61.0	574.7	555.9	537.8	520.3	502.7	485.2	471.5	457.4	447.7	441.7
G62.0	545.1	528.5	507.4	491.4	473.9	456.8	443.5	429.5	420.5	414.7
G63.0	516.5	497.9	479.0	462.0	445.0	429.3	415.6	402.6	393.4	387.8
G64.0	486.5	470.4	449.6	434.1	417.7	401.4	388.7	375.9	366.4	361.1
G65.0	458.9	442.3	423.3	406.6	389.7	374.6	361.6	349.8	340.6	335.5
G66.0	429.9	414.6	395.0	378.9	363.4	347.4	335.3	322.9	314.6	310.3
G67.0	401.8	385.8	366.8	351.3	335.7	320.7	308.5	297.6	289.1	285.1
G68.0	373.7	358.6	340.4	324.2	309.0	293.9	283.3	271.7	264.1	260.4
G69.0	346.5	330.5	312.1	296.8	282.7	268.1	257.4	246.9	240.4	236.9
G70.0	319.1	304.0	287.0	271.9	257.5	243.5	233.3	222.8	216.1	213.6
G71.0	291.3	276.6	260.8	245.3	232.3	218.8	209.8	199.9	193.9	191.3
G72.0	265.1	250.9	233.8	220.7	207.0	195.4	186.4	177.5	172.1	169.8
G73.0	239.0	224.6	210.3	195.5	182.7	172.3	164.2	156.4	151.2	149.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	212.8	200.1	184.2	171.8	160.7	149.8	142.5	135.7	132.1	130.6
G75.0	189.0	176.2	161.1	149.4	138.7	129.8	123.1	116.9	113.8	113.1
G76.0	164.8	153.1	138.3	128.6	119.0	109.4	105.1	100.1	98.1	97.3
G77.0	141.9	129.0	117.2	107.1	98.8	92.5	88.2	84.6	82.9	83.5
G78.0	119.2	108.4	96.4	88.6	81.5	76.6	73.9	71.4	70.3	71.1
G79.0	98.5	88.3	78.7	71.6	66.6	62.8	61.0	59.3	58.5	59.3
G80.0	78.8	70.4	61.8	57.3	53.6	50.5	49.1	47.1	46.2	46.5
G81.0	61.0	54.2	47.7	44.8	41.6	38.6	36.5	34.5	33.8	34.2
G82.0	45.4	40.0	35.8	32.9	29.7	26.8	25.9	25.7	26.1	27.1
G83.0	32.8	28.6	23.9	21.7	19.9	19.3	18.6	17.3	16.5	16.7
G84.0	21.6	17.9	15.1	14.2	12.4	9.9	8.2	6.3	5.7	5.8
G85.0	11.9	10.5	7.8	5.4	3.8	2.7	2.0	1.4	1.1	1.1
G86.0	4.8	3.1	1.8	1.2	0.8	0.4	0.3	0.1	0.0	0.0
G87.0	0.9	0.6	0.3	0.1	0.0	0.0	0.0	0.0	0.0	0.0
G88.0	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G89.0	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
G90.0	0.2	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0
G91.0	0.3	0.3	0.3	0.2	0.1	0.1	0.1	0.0	0.0	0.0
G92.0	0.4	0.4	0.3	0.3	0.2	0.2	0.1	0.1	0.1	0.1
G93.0	0.5	0.5	0.5	0.4	0.3	0.3	0.2	0.2	0.1	0.1
G94.0	0.6	0.6	0.6	0.5	0.5	0.4	0.3	0.3	0.3	0.2
G95.0	0.8	0.7	0.6	0.6	0.6	0.5	0.4	0.4	0.4	0.3
G96.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6	0.5	0.5	0.4
G97.0	1.0	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6	0.5
G98.0	1.1	1.0	1.0	1.0	0.9	0.8	0.8	0.7	0.7	0.6
G99.0	1.2	1.2	1.1	1.0	1.0	1.0	0.9	0.8	0.8	0.7
G100.0	1.4	1.3	1.2	1.2	1.1	1.0	1.0	1.0	0.9	0.9
G101.0	1.5	1.5	1.4	1.3	1.3	1.2	1.1	1.1	1.0	1.0
G102.0	1.6	1.6	1.6	1.5	1.4	1.3	1.2	1.2	1.1	1.1
G103.0	1.8	1.7	1.6	1.6	1.5	1.4	1.4	1.3	1.2	1.2
G104.0	1.9	1.9	1.8	1.7	1.6	1.6	1.5	1.5	1.4	1.3
G105.0	2.1	2.0	1.9	1.9	1.8	1.7	1.6	1.6	1.5	1.5
G106.0	2.2	2.1	2.1	2.0	1.9	1.8	1.8	1.7	1.6	1.6
G107.0	2.3	2.3	2.2	2.2	2.1	2.0	1.9	1.8	1.8	1.7
G108.0	2.5	2.4	2.4	2.3	2.2	2.2	2.1	2.0	1.9	1.8
G109.0	2.6	2.6	2.5	2.4	2.4	2.3	2.2	2.2	2.1	2.0
G110.0	2.8	2.7	2.7	2.6	2.5	2.4	2.3	2.3	2.2	2.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	2.9	2.8	2.8	2.8	2.7	2.6	2.5	2.4	2.3	2.3
G112.0	3.1	3.0	2.9	2.9	2.8	2.8	2.7	2.6	2.5	2.4
G113.0	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.8	2.7	2.6
G114.0	3.3	3.3	3.3	3.2	3.1	3.1	3.0	2.9	2.8	2.8
G115.0	3.5	3.5	3.4	3.3	3.3	3.2	3.1	3.0	3.0	2.9
G116.0	3.7	3.6	3.6	3.5	3.4	3.3	3.3	3.2	3.1	3.1
G117.0	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.3	3.2
G118.0	4.0	3.9	3.9	3.8	3.8	3.7	3.6	3.5	3.4	3.3
G119.0	4.2	4.1	4.0	4.0	3.9	3.8	3.8	3.7	3.6	3.5
G120.0	4.3	4.3	4.2	4.2	4.1	4.0	3.9	3.8	3.8	3.7
G121.0	4.4	4.4	4.3	4.3	4.3	4.2	4.1	4.0	3.9	3.8
G122.0	4.6	4.6	4.5	4.5	4.4	4.3	4.2	4.2	4.1	4.0
G123.0	4.8	4.8	4.7	4.7	4.6	4.5	4.4	4.3	4.3	4.2
G124.0	4.9	4.9	4.8	4.8	4.7	4.7	4.6	4.5	4.4	4.3
G125.0	5.1	5.0	5.0	4.9	4.9	4.8	4.8	4.7	4.6	4.5
G126.0	5.3	5.2	5.2	5.1	5.0	5.0	4.9	4.8	4.8	4.7
G127.0	5.4	5.4	5.4	5.3	5.2	5.1	5.1	5.0	4.9	4.8
G128.0	5.6	5.5	5.5	5.4	5.4	5.3	5.2	5.2	5.1	5.0
G129.0	5.7	5.7	5.7	5.6	5.5	5.5	5.4	5.4	5.3	5.2
G130.0	5.9	5.9	5.8	5.8	5.7	5.7	5.6	5.5	5.4	5.4
G131.0	6.1	6.0	6.0	5.9	5.9	5.8	5.7	5.7	5.6	5.5
G132.0	6.2	6.2	6.1	6.1	6.0	6.0	5.9	5.9	5.8	5.7
G133.0	6.4	6.4	6.3	6.3	6.2	6.1	6.1	6.0	5.9	5.9
G134.0	6.5	6.5	6.4	6.4	6.4	6.3	6.2	6.2	6.1	6.0
G135.0	6.6	6.6	6.6	6.6	6.5	6.4	6.4	6.3	6.3	6.2
G136.0	6.8	6.8	6.8	6.7	6.7	6.6	6.6	6.5	6.4	6.4
G137.0	7.0	7.0	6.9	6.9	6.8	6.8	6.7	6.7	6.6	6.6
G138.0	7.1	7.1	7.1	7.1	7.0	7.0	6.9	6.8	6.8	6.7
G139.0	7.3	7.2	7.2	7.2	7.1	7.1	7.0	7.0	6.9	6.9
G140.0	7.4	7.4	7.4	7.3	7.3	7.2	7.2	7.1	7.1	7.1
G141.0	7.5	7.5	7.5	7.5	7.5	7.4	7.4	7.3	7.2	7.2
G142.0	7.6	7.6	7.6	7.6	7.6	7.6	7.5	7.4	7.4	7.4
G143.0	7.8	7.8	7.8	7.7	7.7	7.7	7.6	7.6	7.6	7.5
G144.0	8.0	7.9	7.9	7.9	7.9	7.8	7.8	7.7	7.7	7.6
G145.0	8.1	8.1	8.1	8.1	8.0	8.0	7.9	7.9	7.9	7.8
G146.0	8.2	8.2	8.2	8.1	8.1	8.1	8.1	8.0	8.0	8.0
G147.0	8.3	8.3	8.3	8.3	8.3	8.2	8.2	8.1	8.1	8.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	8.5	8.4	8.5	8.5	8.4	8.4	8.3	8.3	8.3	8.2
G149.0	8.6	8.6	8.6	8.6	8.6	8.5	8.5	8.4	8.4	8.4
G150.0	8.7	8.7	8.7	8.7	8.6	8.6	8.6	8.6	8.6	8.5
G151.0	8.9	8.8	8.8	8.8	8.7	8.7	8.7	8.7	8.6	8.6
G152.0	9.0	9.0	9.0	8.9	8.9	8.9	8.8	8.8	8.8	8.8
G153.0	9.1	9.1	9.1	9.1	9.0	9.0	9.0	8.9	8.9	8.9
G154.0	9.3	9.3	9.2	9.2	9.1	9.1	9.1	9.1	9.1	9.0
G155.0	9.4	9.3	9.3	9.3	9.3	9.2	9.2	9.2	9.1	9.1
G156.0	9.5	9.5	9.4	9.4	9.4	9.3	9.3	9.3	9.3	9.3
G157.0	9.6	9.6	9.6	9.5	9.5	9.4	9.4	9.4	9.4	9.4
G158.0	9.8	9.7	9.7	9.7	9.6	9.6	9.5	9.5	9.5	9.5
G159.0	9.8	9.8	9.8	9.8	9.8	9.7	9.7	9.7	9.6	9.6
G160.0	9.9	9.9	9.9	9.9	9.8	9.8	9.8	9.8	9.8	9.7
G161.0	10.0	10.0	10.0	10.0	10.0	9.9	9.9	9.9	9.8	9.8
G162.0	10.1	10.1	10.1	10.1	10.0	10.0	10.0	10.0	10.0	9.9
G163.0	10.2	10.2	10.2	10.2	10.2	10.1	10.1	10.1	10.1	10.0
G164.0	10.3	10.3	10.3	10.3	10.3	10.2	10.2	10.2	10.2	10.2
G165.0	10.4	10.4	10.4	10.3	10.3	10.3	10.3	10.3	10.3	10.3
G166.0	10.5	10.5	10.5	10.5	10.4	10.4	10.4	10.4	10.4	10.4
G167.0	10.6	10.6	10.6	10.6	10.6	10.5	10.5	10.5	10.5	10.5
G168.0	10.7	10.7	10.7	10.7	10.6	10.6	10.6	10.6	10.6	10.6
G169.0	10.8	10.7	10.8	10.8	10.7	10.7	10.7	10.7	10.8	10.7
G170.0	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8
G171.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G172.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0
G173.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
G174.0	11.0	11.0	11.0	11.1	11.1	11.0	11.1	11.1	11.1	11.1
G175.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2
G176.0	11.1	11.1	11.2	11.1	11.1	11.1	11.1	11.2	11.2	11.2
G177.0	11.1	11.1	11.1	11.2	11.2	11.2	11.2	11.2	11.2	11.3
G178.0	11.1	11.1	11.2	11.1	11.2	11.2	11.2	11.2	11.3	11.3
G179.0	11.1	11.1	11.1	11.1	11.2	11.2	11.2	11.2	11.3	11.3
G180.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2	11.2	11.3

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	2034.4	2034.5	2044.2						
G1.0	2031.3	2030.6	2042.5						
G2.0	2026.3	2026.7	2039.8						
G3.0	2020.5	2020.7	2035.9						
G4.0	2013.8	2013.1	2029.4						
G5.0	2005.2	2004.6	2022.6						
G6.0	1994.8	1995.0	2013.5						
G7.0	1983.6	1982.5	2003.9						
G8.0	1970.9	1969.7	1993.1						
G9.0	1956.8	1955.3	1980.1						
G10.0	1940.7	1939.8	1966.5						
G11.0	1924.3	1922.7	1951.5						
G12.0	1906.4	1904.9	1934.5						
G13.0	1887.1	1885.1	1917.0						
G14.0	1867.2	1865.1	1897.6						
G15.0	1845.6	1843.3	1878.4						
G16.0	1823.1	1820.8	1856.7						
G17.0	1799.8	1797.0	1835.3						
G18.0	1776.2	1772.8	1811.3						
G19.0	1749.3	1746.1	1789.0						
G20.0	1721.4	1719.9	1762.4						
G21.0	1695.0	1691.6	1736.3						
G22.0	1666.4	1663.3	1710.2						
G23.0	1638.1	1633.2	1682.2						
G24.0	1608.7	1605.2	1652.2						
G25.0	1579.4	1574.3	1623.7						
G26.0	1548.1	1543.4	1593.6						
G27.0	1516.2	1511.9	1563.6						
G28.0	1483.5	1479.7	1533.5						
G29.0	1451.4	1447.8	1501.8						
G30.0	1418.9	1414.5	1469.1						
G31.0	1386.6	1381.3	1437.4						
G32.0	1353.3	1347.8	1405.2						
G33.0	1320.0	1313.9	1372.3						
G34.0	1286.4	1280.2	1340.2						
G35.0	1252.7	1246.8	1307.2						
G36.0	1218.0	1213.0	1273.3						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	1185.7	1179.8	1240.8						
G38.0	1151.0	1145.8	1207.4						
G39.0	1117.3	1112.1	1173.9						
G40.0	1083.8	1079.0	1140.8						
G41.0	1050.3	1044.1	1106.8						
G42.0	1017.0	1012.1	1073.7						
G43.0	983.2	978.0	1041.5						
G44.0	950.6	945.7	1008.0						
G45.0	917.8	913.2	976.0						
G46.0	886.5	880.8	943.2						
G47.0	853.5	847.8	912.4						
G48.0	822.4	816.7	880.0						
G49.0	790.5	785.1	847.8						
G50.0	760.0	754.5	816.6						
G51.0	728.2	723.5	785.6						
G52.0	698.0	692.3	755.1						
G53.0	667.5	661.7	723.8						
G54.0	637.4	633.0	693.9						
G55.0	607.6	602.4	664.0						
G56.0	578.9	573.2	635.2						
G57.0	549.3	544.3	606.0						
G58.0	520.9	516.1	577.2						
G59.0	491.8	487.3	548.0						
G60.0	464.4	459.2	521.1						
G61.0	436.2	432.3	492.1						
G62.0	409.4	404.5	464.6						
G63.0	381.9	377.7	437.0						
G64.0	356.6	352.6	411.5						
G65.0	330.7	326.8	383.5						
G66.0	305.7	301.4	358.4						
G67.0	280.1	276.6	333.6						
G68.0	255.8	252.6	308.1						
G69.0	232.8	229.7	283.7						
G70.0	210.2	207.1	259.3						
G71.0	187.3	185.8	236.8						
G72.0	166.7	164.6	214.4						
G73.0	146.9	145.5	192.4						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	128.9	127.0	172.4						
G75.0	111.9	111.1	152.3						
G76.0	96.9	95.9	135.0						
G77.0	83.0	82.9	117.5						
G78.0	71.1	70.7	102.3						
G79.0	59.3	59.1	88.5						
G80.0	46.1	45.4	76.4						
G81.0	34.4	34.4	64.9						
G82.0	27.6	27.5	52.1						
G83.0	16.3	16.0	39.3						
G84.0	5.3	4.4	31.6						
G85.0	1.0	0.9	22.7						
G86.0	0.0	0.0	9.7						
G87.0	0.0	0.0	2.4						
G88.0	0.0	0.0	0.5						
G89.0	0.0	0.0	0.0						
G90.0	0.0	0.0	0.0						
G91.0	0.0	0.0	0.0						
G92.0	0.0	0.0	0.0						
G93.0	0.1	0.1	0.1						
G94.0	0.2	0.2	0.1						
G95.0	0.3	0.3	0.2						
G96.0	0.4	0.4	0.3						
G97.0	0.5	0.5	0.4						
G98.0	0.6	0.6	0.5						
G99.0	0.7	0.7	0.6						
G100.0	0.8	0.8	0.7						
G101.0	0.9	0.9	0.8						
G102.0	1.0	1.0	0.9						
G103.0	1.2	1.1	1.0						
G104.0	1.3	1.3	1.1						
G105.0	1.4	1.4	1.3						
G106.0	1.6	1.6	1.4						
G107.0	1.7	1.7	1.5						
G108.0	1.8	1.8	1.6						
G109.0	2.0	2.0	1.8						
G110.0	2.1	2.1	1.9						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	2.2	2.2	2.1							
G112.0	2.4	2.4	2.2							
G113.0	2.6	2.6	2.3							
G114.0	2.7	2.7	2.5							
G115.0	2.8	2.8	2.7							
G116.0	3.0	3.0	2.8							
G117.0	3.2	3.2	3.0							
G118.0	3.3	3.3	3.1							
G119.0	3.5	3.5	3.3							
G120.0	3.7	3.6	3.4							
G121.0	3.8	3.8	3.6							
G122.0	4.0	4.0	3.8							
G123.0	4.2	4.1	3.9							
G124.0	4.3	4.3	4.1							
G125.0	4.5	4.5	4.3							
G126.0	4.7	4.6	4.4							
G127.0	4.8	4.8	4.6							
G128.0	5.0	5.0	4.7							
G129.0	5.2	5.2	4.9							
G130.0	5.4	5.3	5.1							
G131.0	5.5	5.5	5.2							
G132.0	5.7	5.7	5.4							
G133.0	5.9	5.8	5.6							
G134.0	6.0	6.0	5.8							
G135.0	6.2	6.2	5.9							
G136.0	6.4	6.3	6.1							
G137.0	6.5	6.5	6.3							
G138.0	6.7	6.7	6.4							
G139.0	6.8	6.8	6.6							
G140.0	7.0	7.0	6.7							
G141.0	7.1	7.1	6.9							
G142.0	7.3	7.3	7.1							
G143.0	7.5	7.5	7.2							
G144.0	7.6	7.6	7.3							
G145.0	7.8	7.8	7.5							
G146.0	7.9	7.9	7.6							
G147.0	8.1	8.1	7.8							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	8.2	8.2	8.0							
G149.0	8.4	8.3	8.1							
G150.0	8.5	8.5	8.2							
G151.0	8.6	8.6	8.4							
G152.0	8.7	8.7	8.5							
G153.0	8.9	8.9	8.6							
G154.0	9.0	9.0	8.8							
G155.0	9.1	9.1	8.9							
G156.0	9.3	9.3	9.0							
G157.0	9.3	9.3	9.1							
G158.0	9.5	9.5	9.3							
G159.0	9.6	9.6	9.4							
G160.0	9.7	9.7	9.5							
G161.0	9.8	9.8	9.7							
G162.0	9.9	9.9	9.8							
G163.0	10.0	10.1	9.8							
G164.0	10.1	10.2	10.0							
G165.0	10.3	10.3	10.1							
G166.0	10.3	10.4	10.3							
G167.0	10.4	10.5	10.4							
G168.0	10.6	10.6	10.5							
G169.0	10.7	10.7	10.7							
G170.0	10.8	10.8	10.8							
G171.0	10.9	10.9	10.9							
G172.0	10.9	11.0	11.0							
G173.0	11.0	11.1	11.1							
G174.0	11.1	11.2	11.3							
G175.0	11.2	11.2	11.4							
G176.0	11.3	11.3	11.4							
G177.0	11.3	11.3	11.5							
G178.0	11.4	11.4	11.6							
G179.0	11.4	11.4	11.7							
G180.0	11.4	11.4	11.7							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector: