

Report No.:

Test Time: 2019-10-09 14:32

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: SLIM-2 prom 100-1000 cl

Luminous Length (mm): 130

Luminous Width (mm): 1020

Luminous Height (mm): 50

Voltage: 229.4 V

Current: 0.377 A

Power: 85.74 W

Power Factor: 0.989

Photometric Results

CIE Class: Direct

Total Rated Lamp Lumens: 12919.6 lm

Measurement Flux: 12919.6 lm

Efficiency: 100%

Downward Ratio: 99%

Upward Ratio: 1%

Horizontal Diffuse Angle(50%): H115.7

Vertical Diffuse Angle(50%): V114.9


Luminaire Efficacy Rating (LER): 151

Central Intensity: 4433.84 cd


Max. Intensity: 4433.84 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

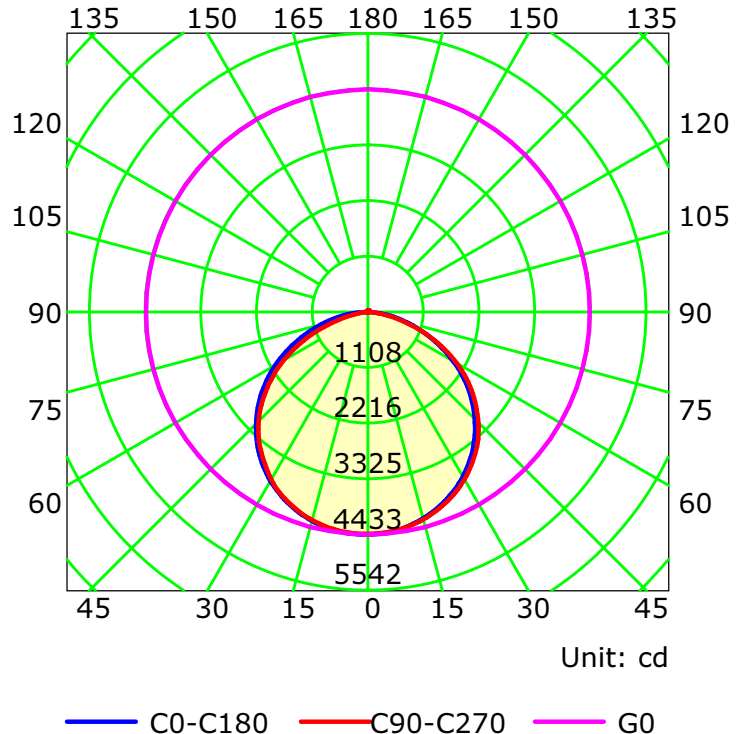

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:


Luminous Intensity Distribution Curve

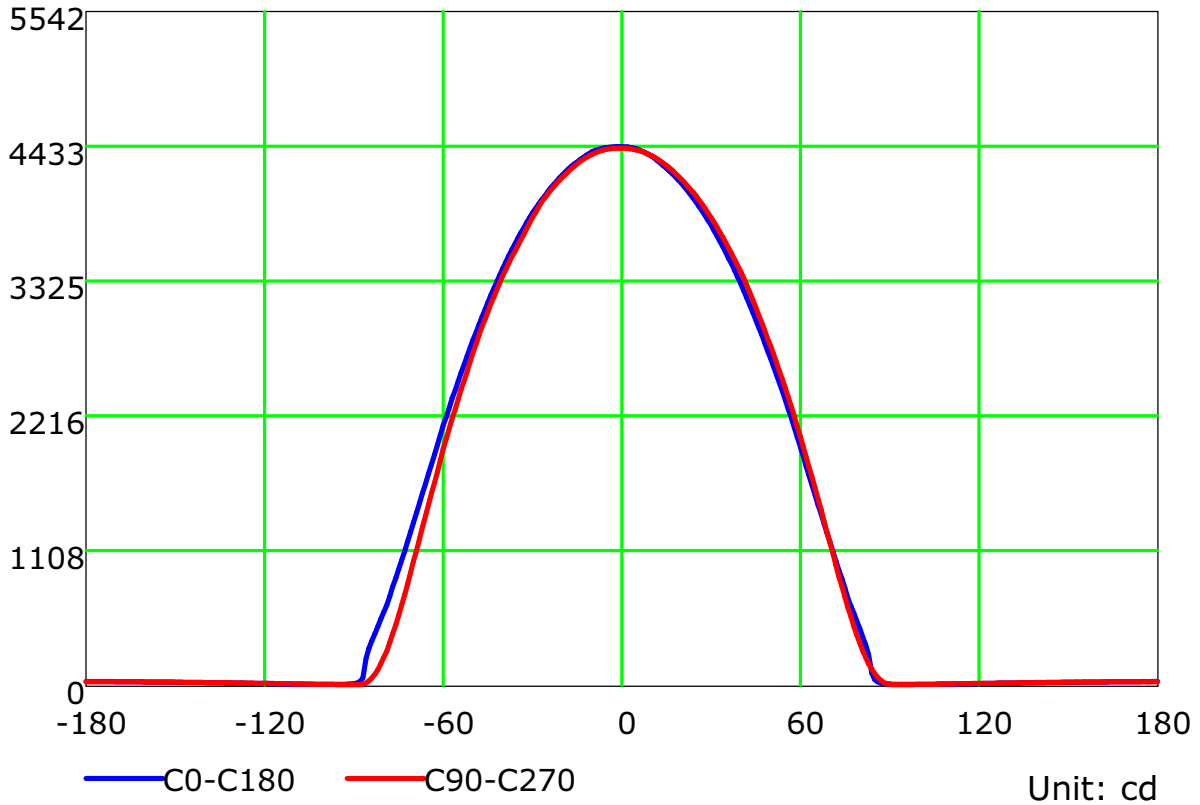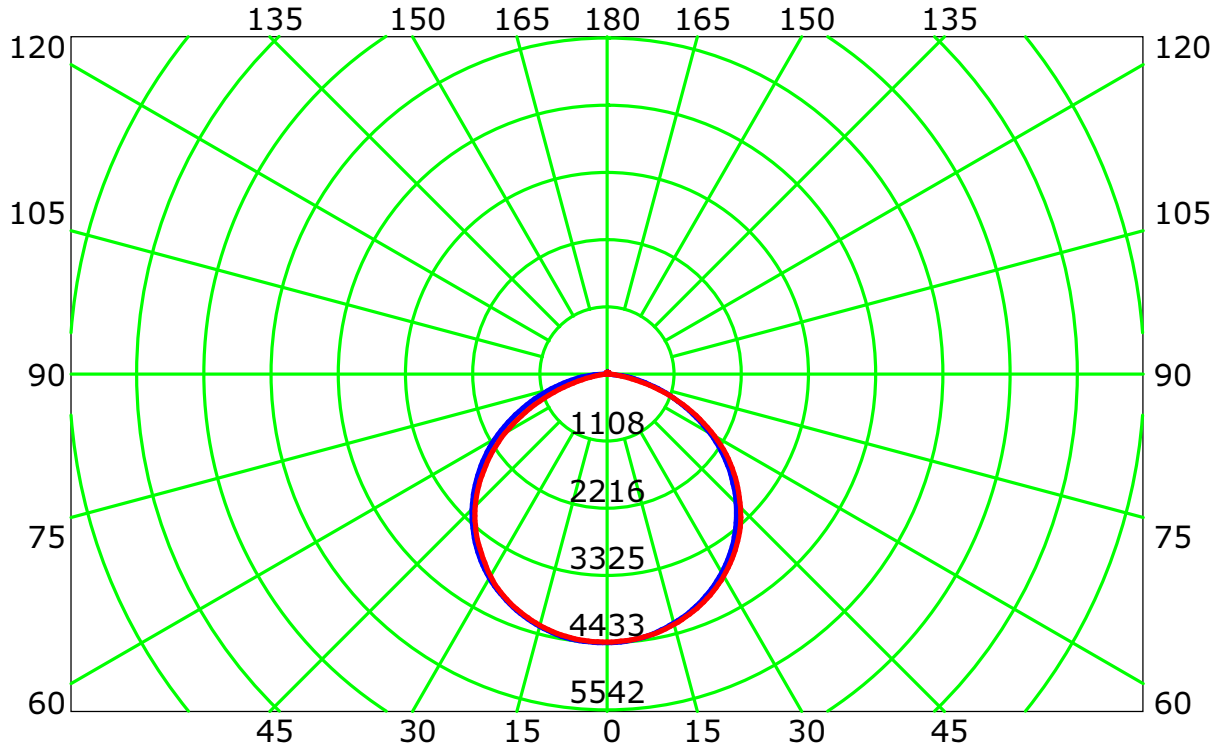

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

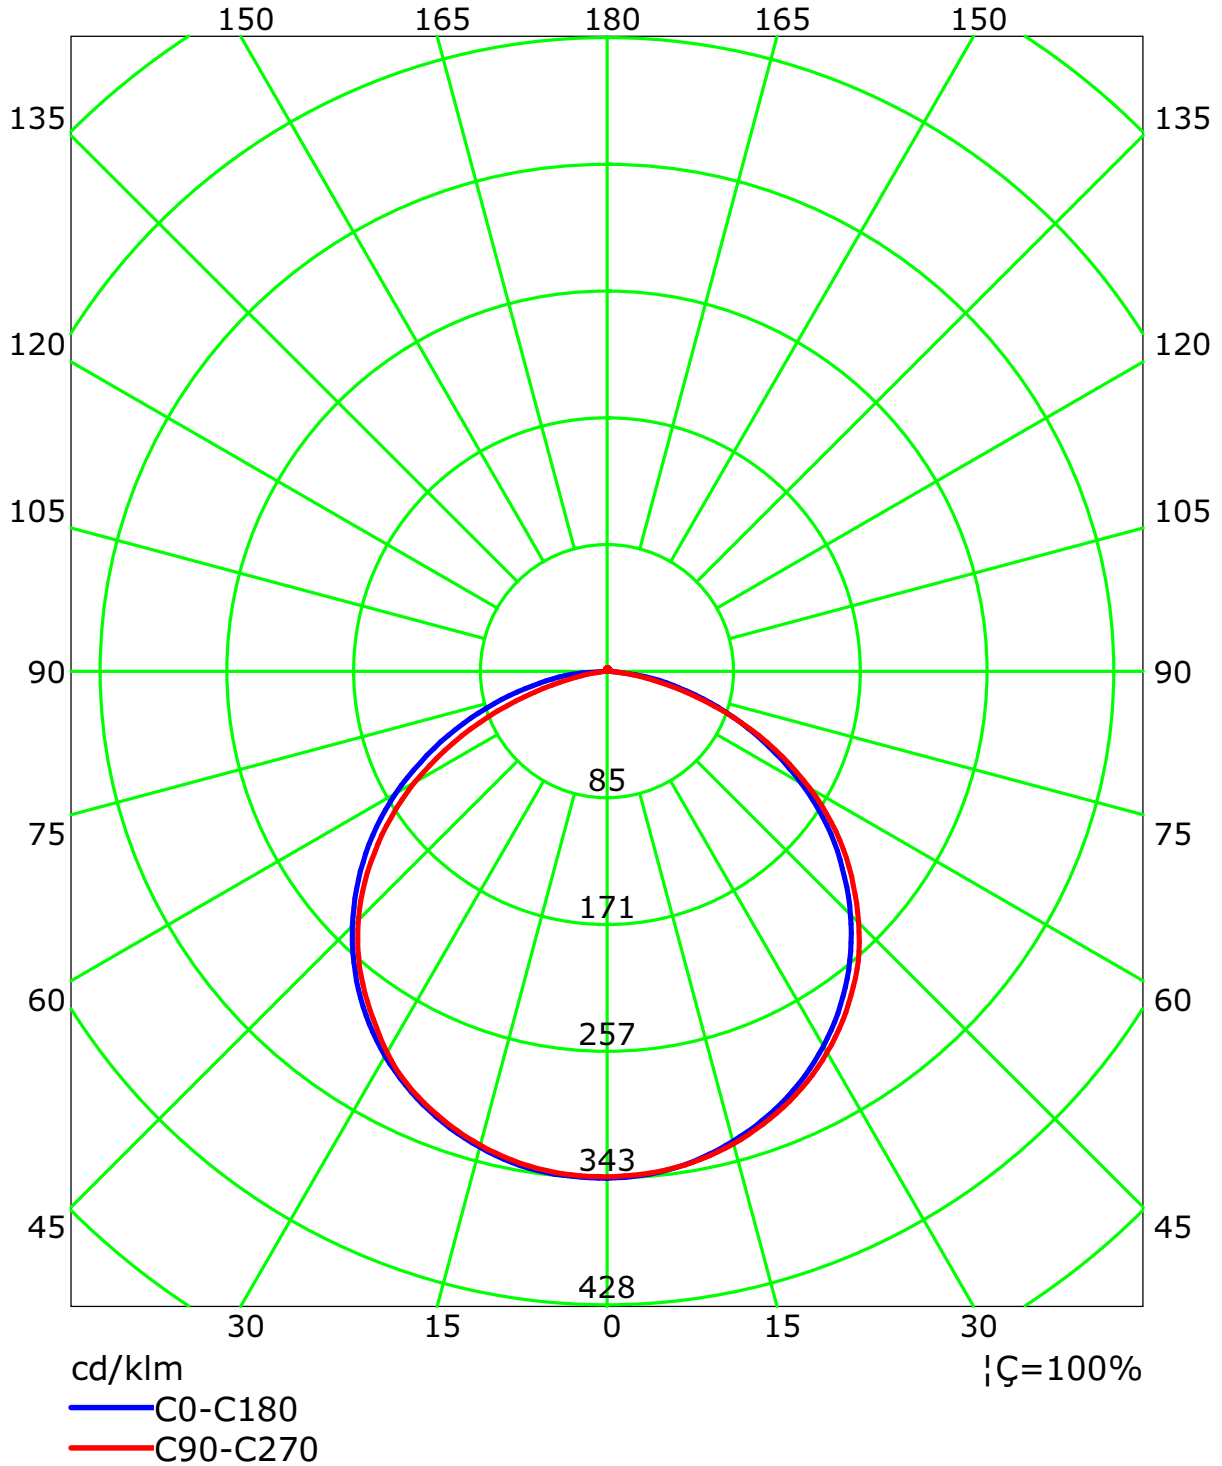

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40


Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	89	87	86	83
2	99	91	84	78	96	89	82	77	85	80	75	82	77	73	78	75	72	69
3	90	80	71	65	88	78	70	64	75	68	63	72	66	62	69	65	61	58
4	82	70	62	55	80	69	61	55	66	59	54	64	58	53	62	56	52	50
5	76	63	54	47	74	62	53	47	60	52	46	57	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	44	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	35	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24

Spacing Criteria (0-180): 1.28
 Spacing Criteria (90-270): 1.29
 Spacing Criteria (Diagonal): 1.40


Curves of Luminaires vs Lighting Area

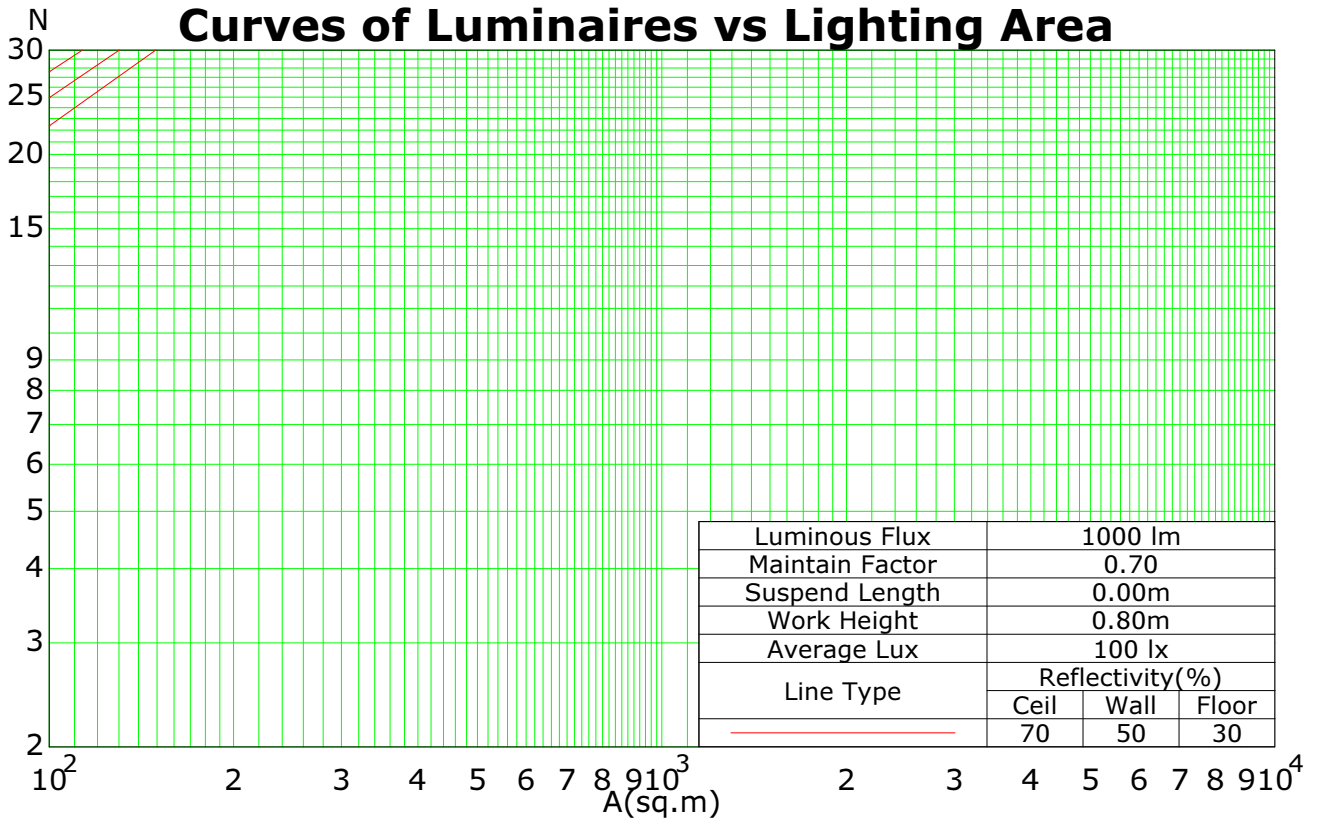

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

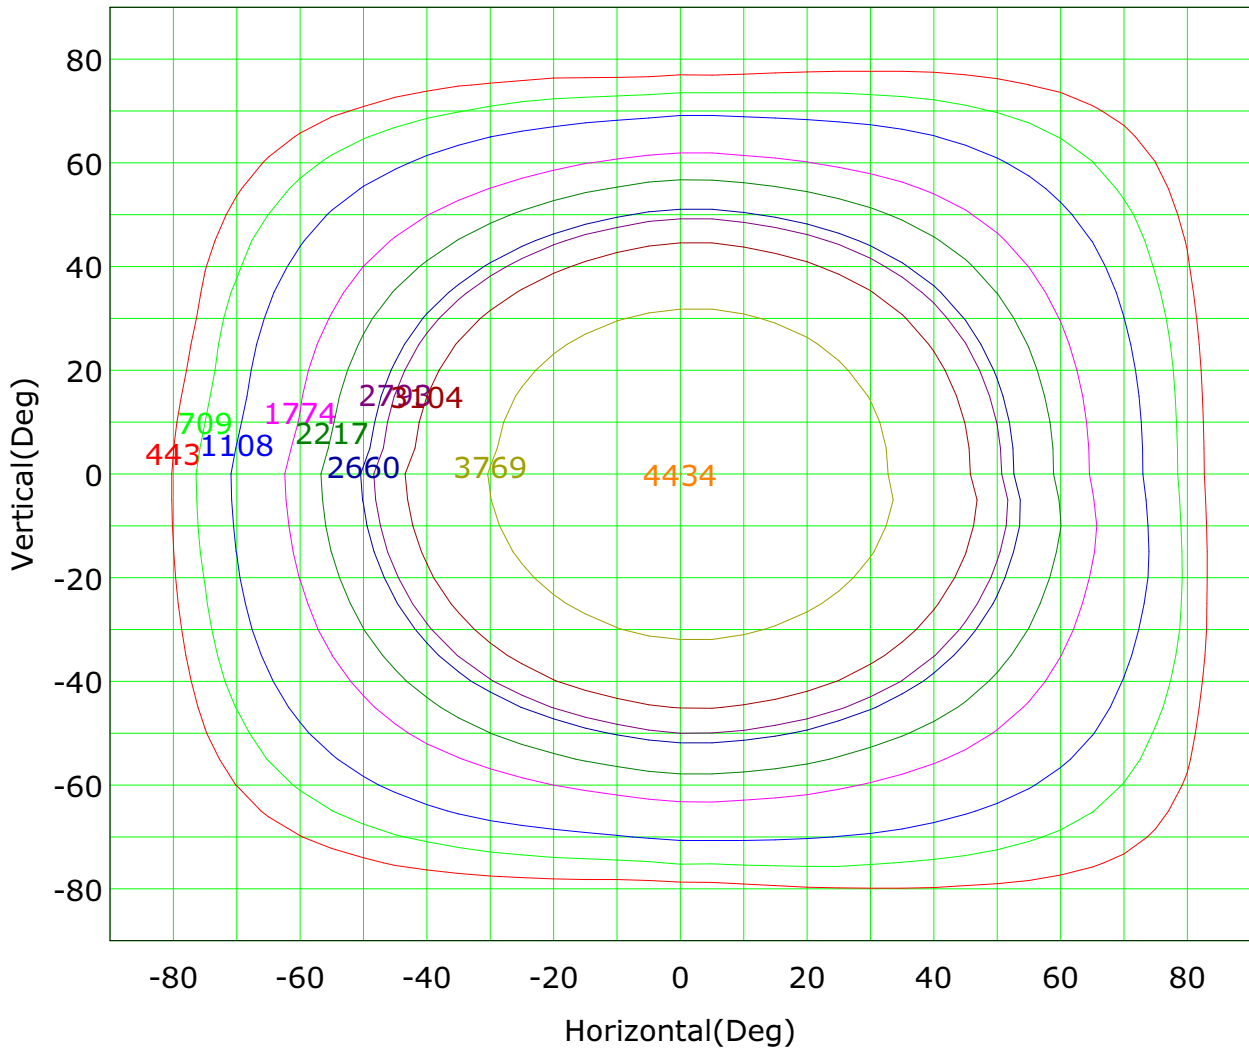

Imax (100%): 4434 cd

— (10%): 443 cd	— (16%): 709 cd
— (25%): 1108 cd	— (40%): 1774 cd
— (63%): 2793 cd	— (100%): 4434 cd
— (50%): 2217 cd	— (60%): 2660 cd
— (70%): 3104 cd	— (85%): 3769 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Isocandela (sphere)

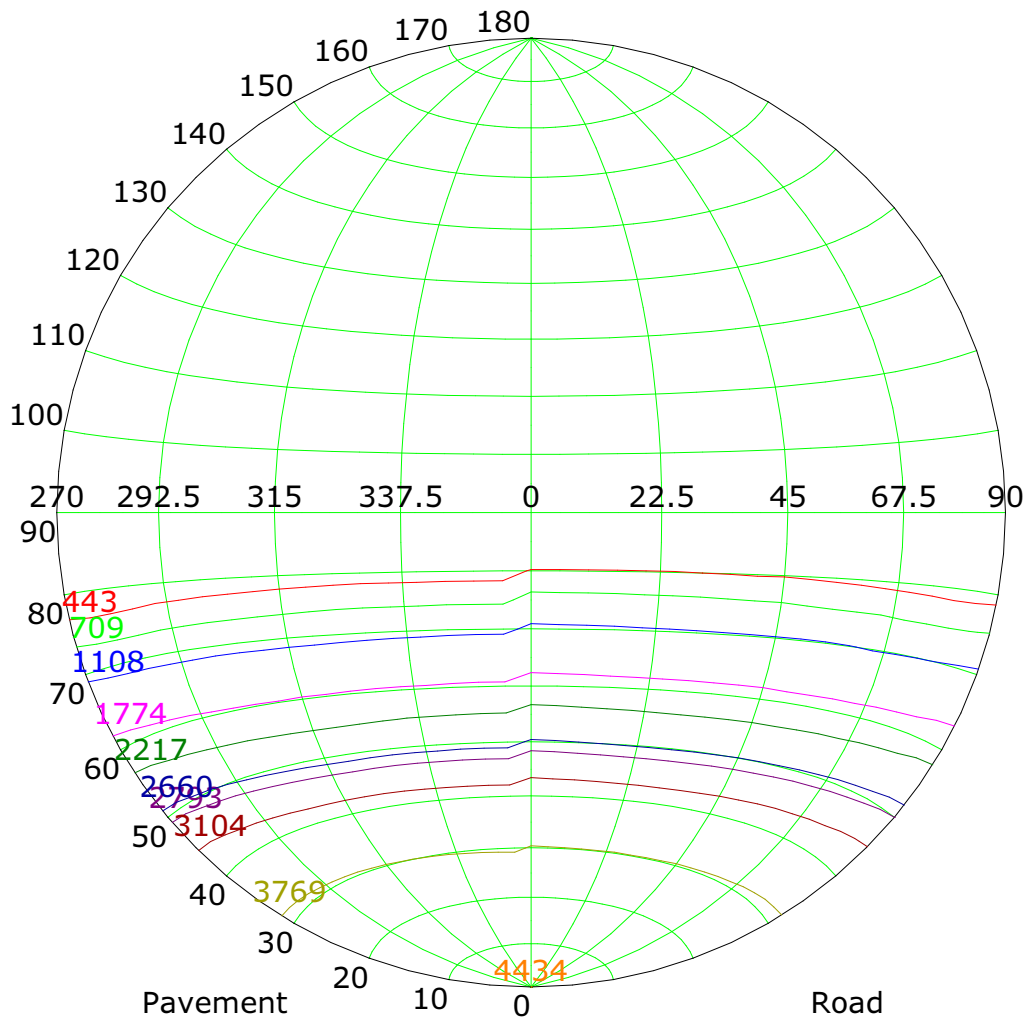

Imax (100%): 4434 cd

— (10%): 443 cd	— (16%): 709 cd
— (25%): 1108 cd	— (40%): 1774 cd
— (63%): 2793 cd	— (100%): 4434 cd
— (50%): 2217 cd	— (60%): 2660 cd
— (70%): 3104 cd	— (85%): 3769 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

IsoLux Plot

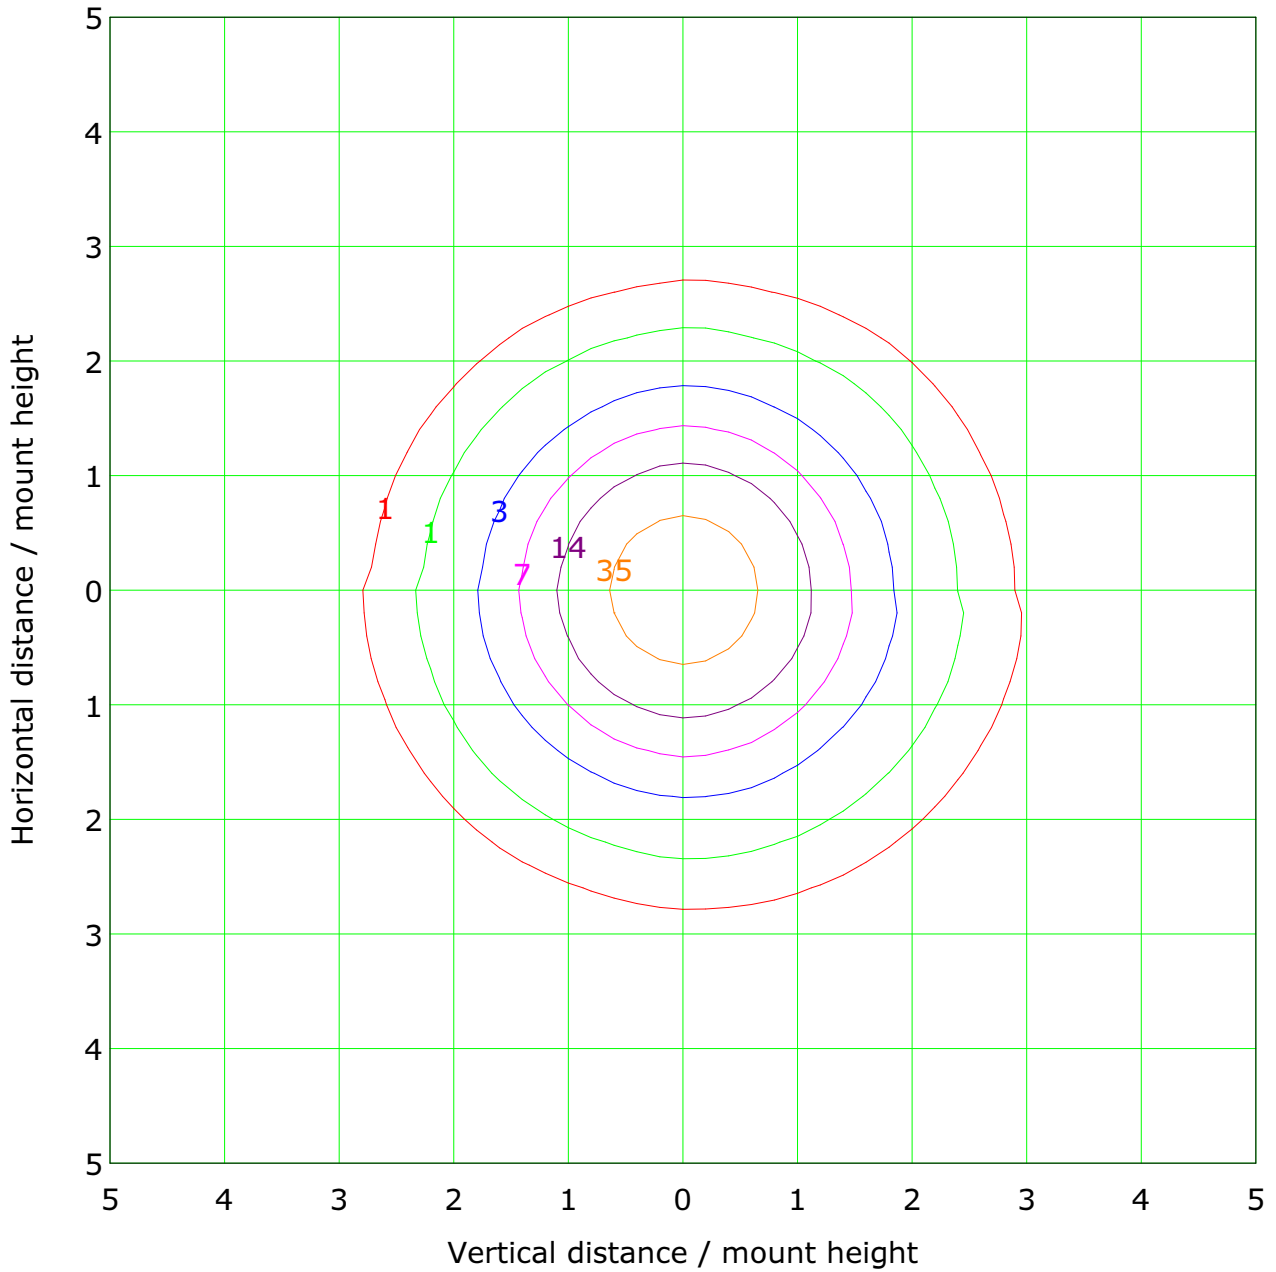

Mounting Height: 8.0m		Max Lux(100%): 69.3 lx
<ul style="list-style-type: none"> — (1%): 0.7 lx — (5%): 3.5 lx — (20%): 13.9 lx — (100%): 69.3 lx — (300%): 207.8 lx 	<ul style="list-style-type: none"> — (2%): 1.4 lx — (10%): 6.9 lx — (50%): 34.6 lx — (200%): 138.6 lx — (500%): 346.4 lx 	

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.000 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

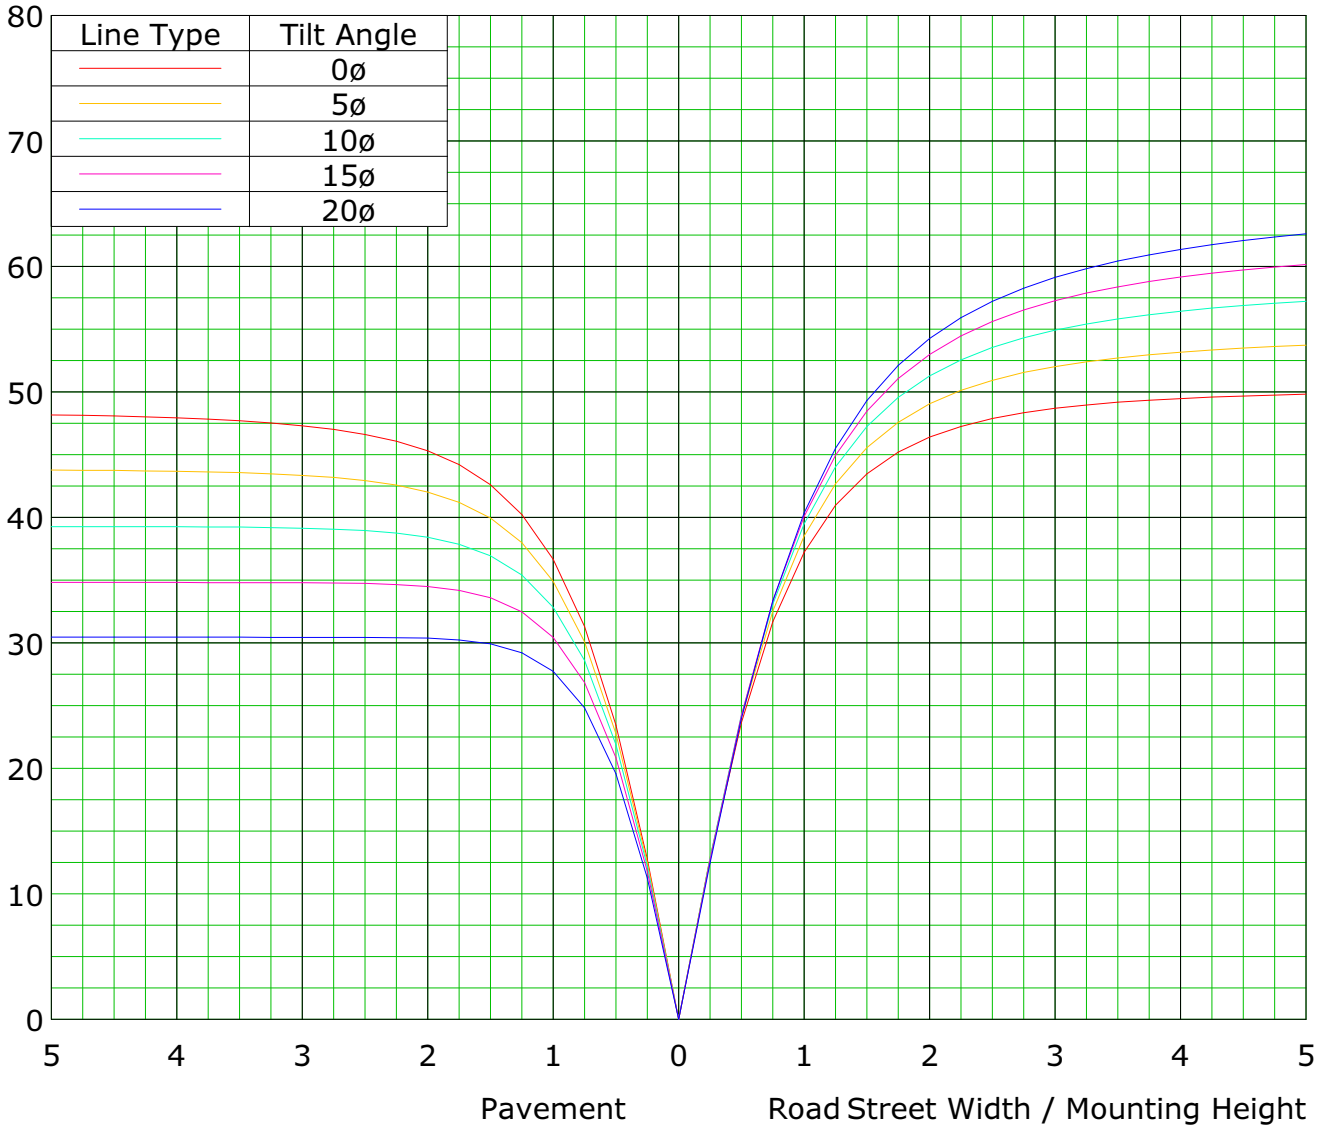

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

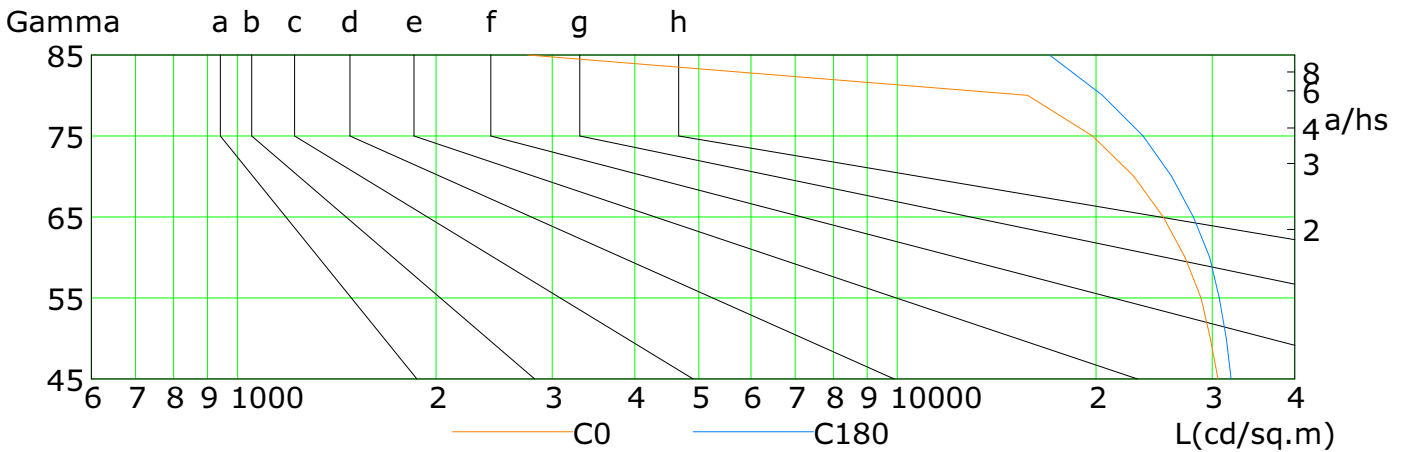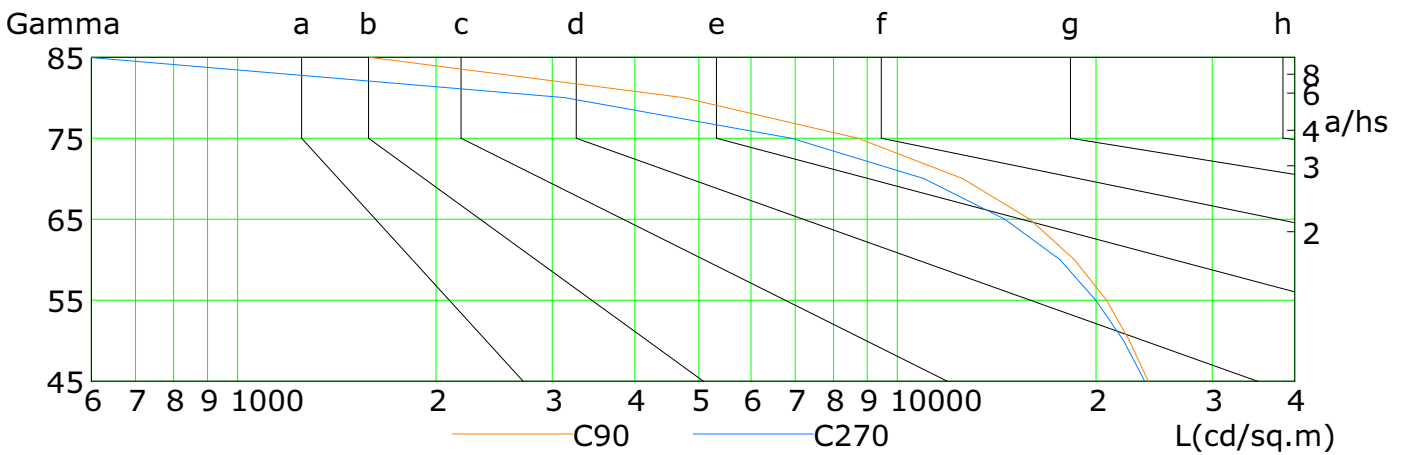

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	30614	29808	28852	27287	25278	22822	19761	15748	2753
C90	23993	22472	20744	18542	15871	12557	8716	4735	1583
C180	32043	31500	30751	29742	28104	26039	23559	20463	17009
C270	23703	22023	19984	17625	14545	10961	6905	3129	593

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Illuminance at a Distance

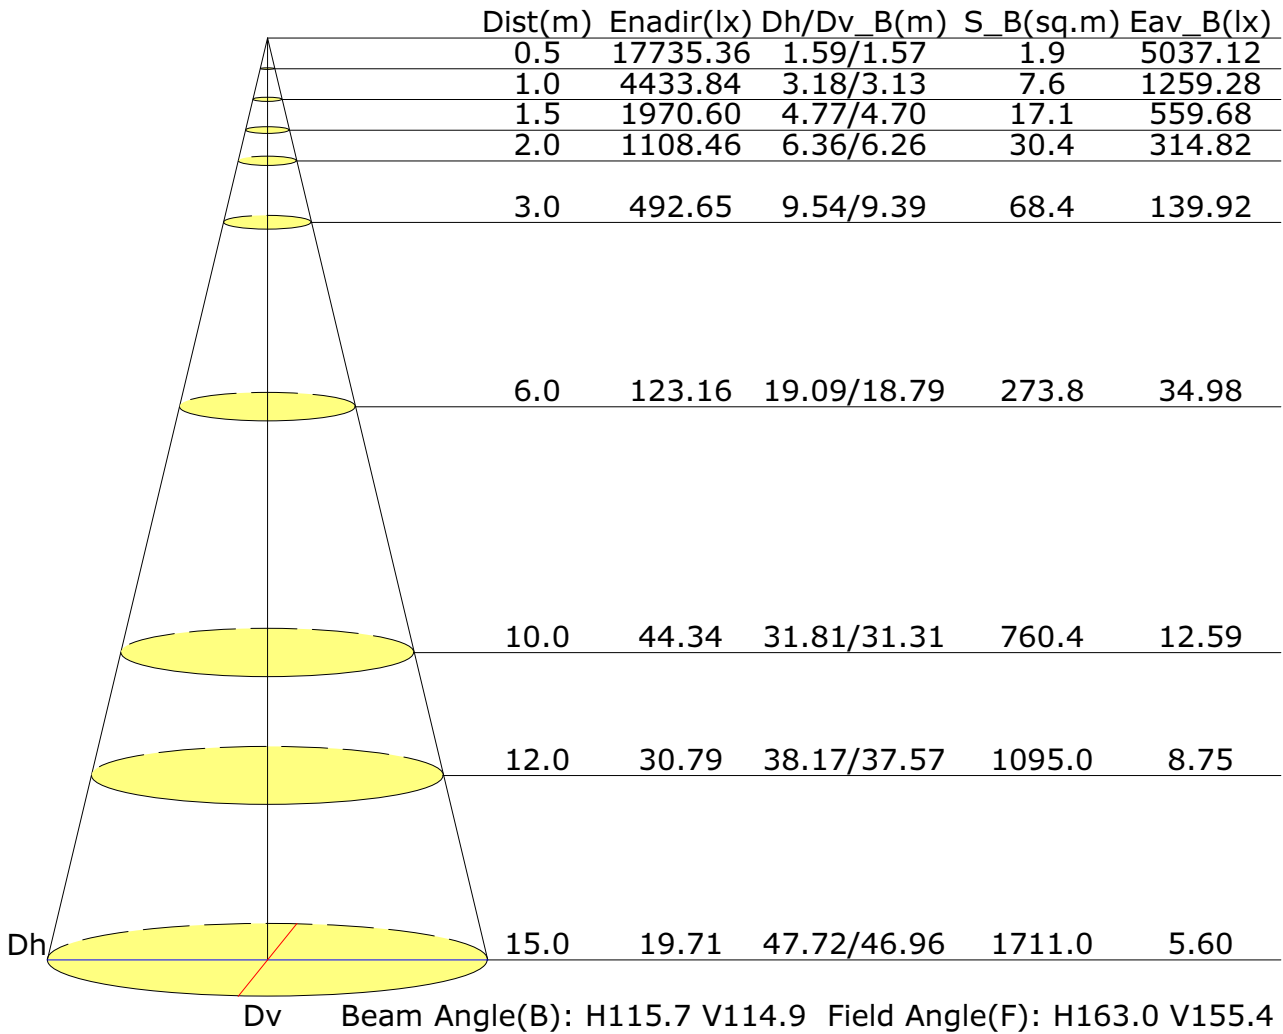

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Vertical IsoLux Plot

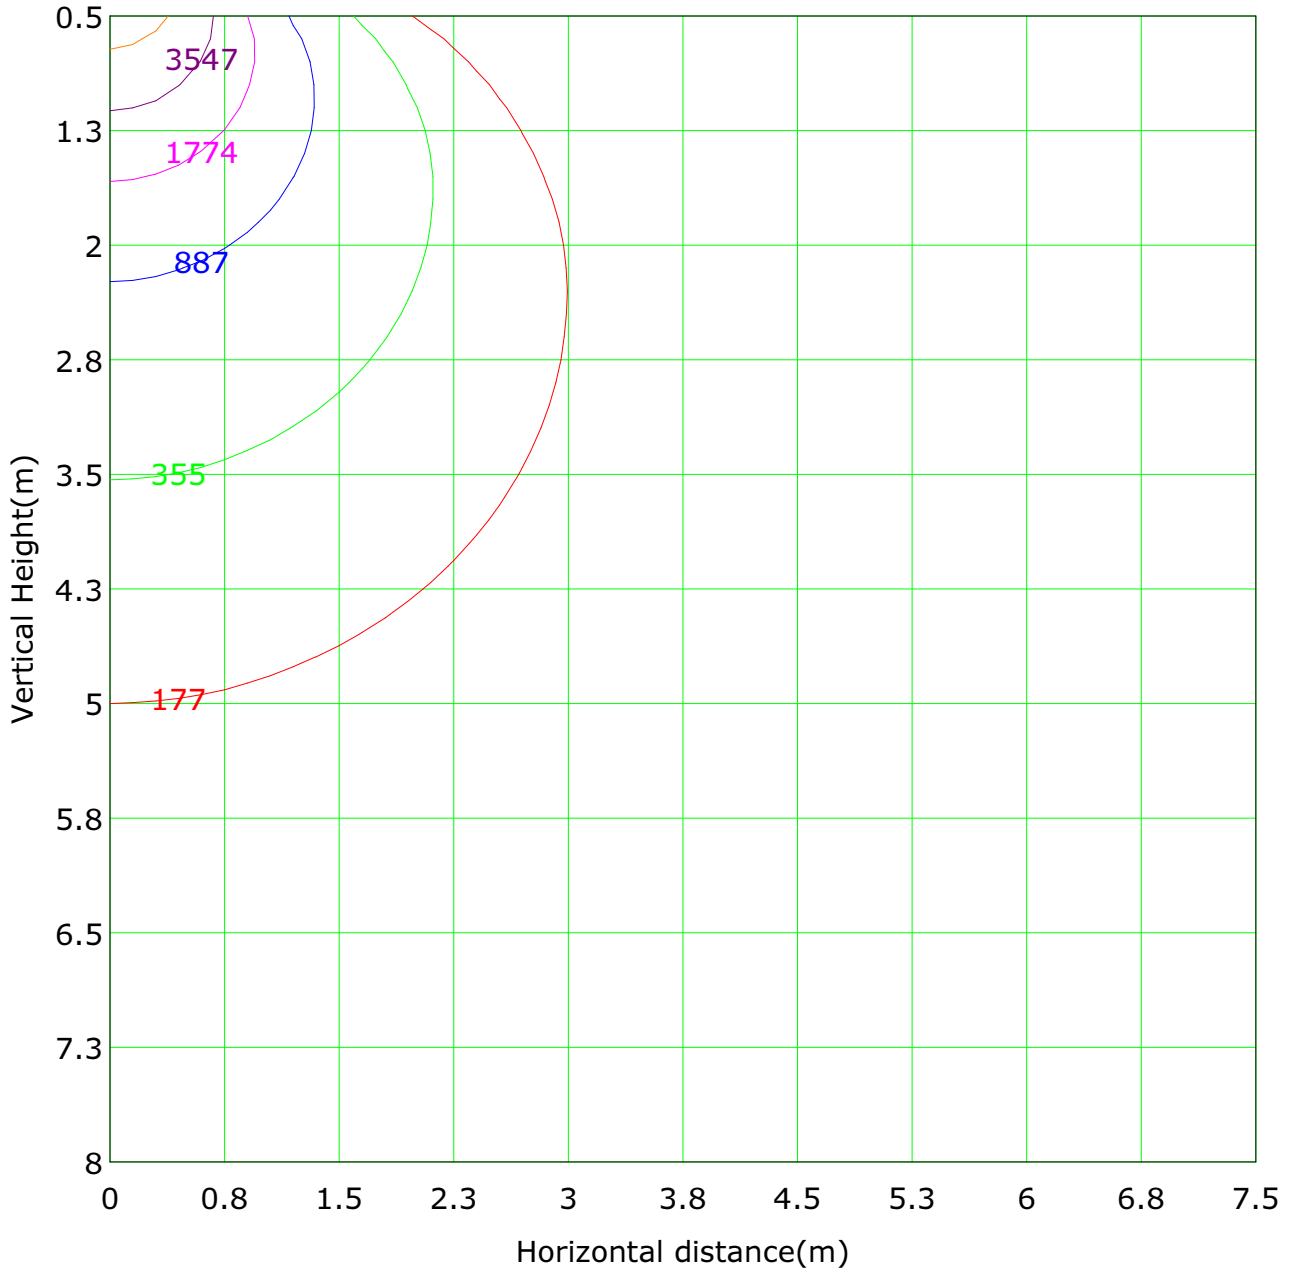


Lowest(m): 0.5m		Highest(m): 8.0m		Max Lux: 17735.4 lx	
— (1%): 177.4 lx	— (2%): 354.7 lx	— (5%): 886.8 lx	— (10%): 1773.5 lx	— (50%): 8867.7 lx	— (200%): 35470.7 lx
— (20%): 3547.1 lx	— (100%): 17735.4 lx	— (300%): 53206.1 lx	— (500%): 88676.8 lx		

C Plane (°): 0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

The Average Illuminance Effective Figure

Flux Out: 12678.95lm

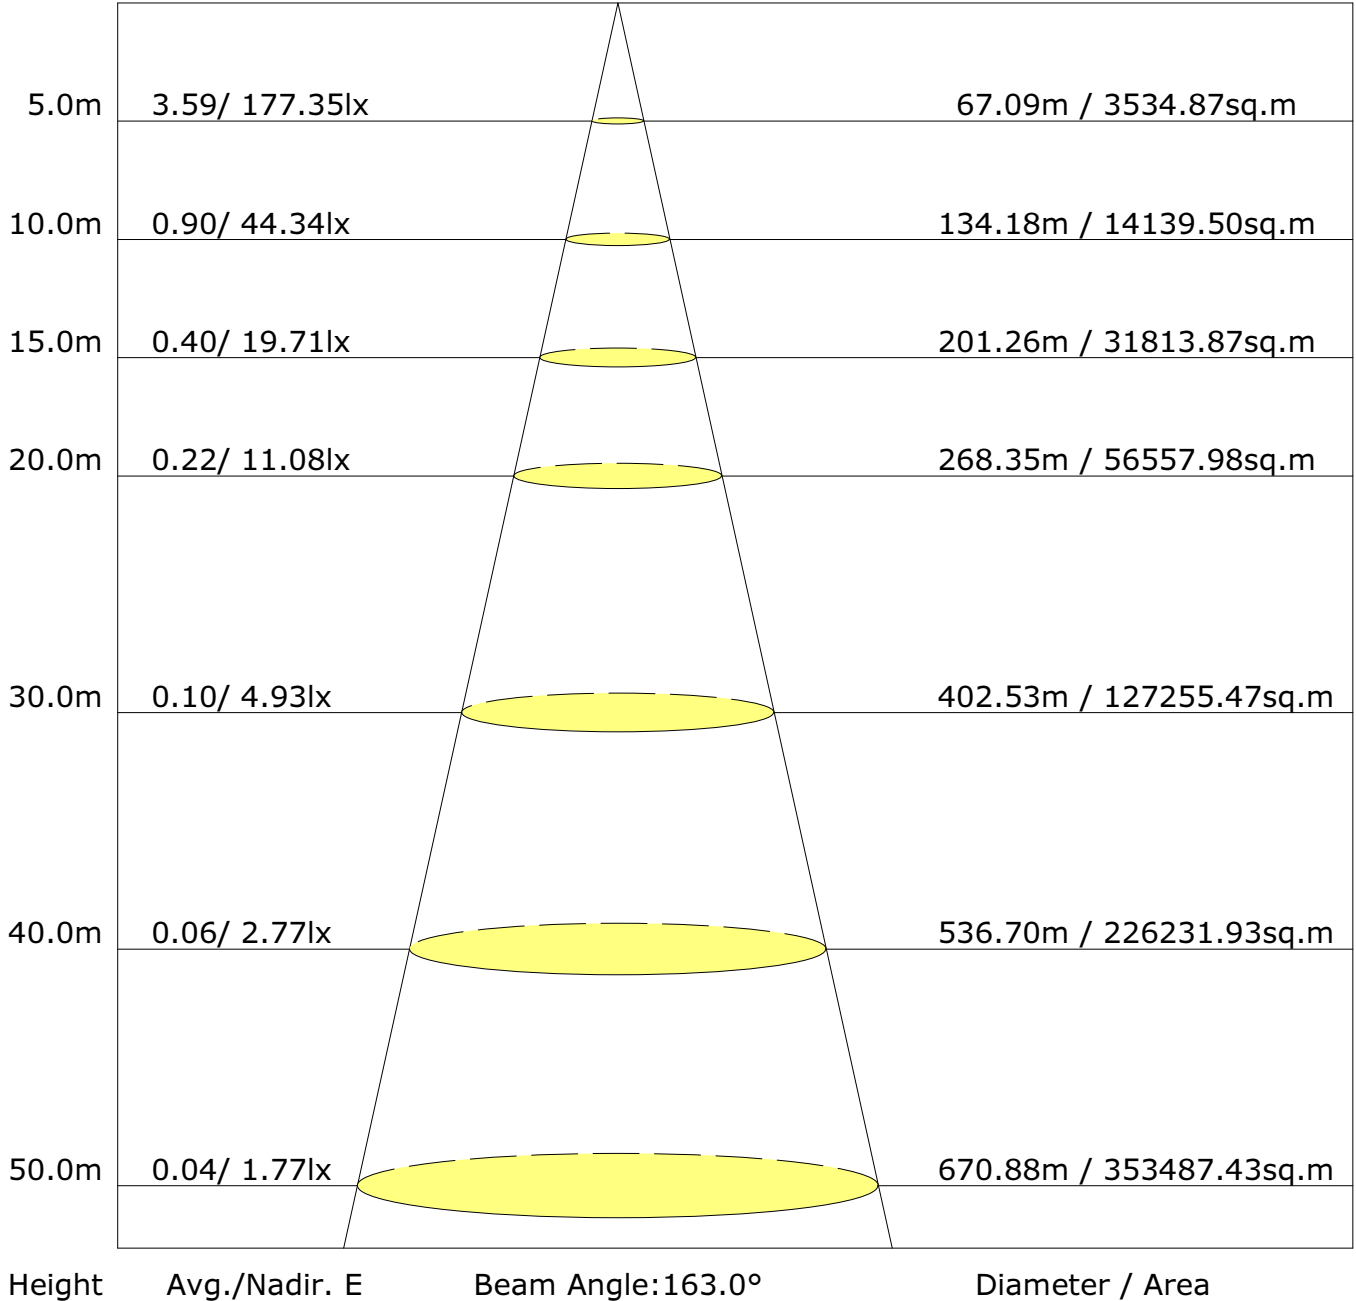

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	13.2	14.8	13.6	15.2	15.5	14.5	16.1	14.9	16.4	16.8
3H	14.6	16.0	15.0	16.4	16.8	16.1	17.5	16.5	17.9	18.2
4H	15.0	16.4	15.4	16.7	17.1	16.5	17.9	16.9	18.3	18.7
6H	15.2	16.5	15.6	16.9	17.3	16.8	18.0	17.2	18.4	18.8
8H	15.2	16.4	15.7	16.9	17.3	16.8	18.0	17.2	18.4	18.8
12H	15.2	16.4	15.7	16.8	17.2	16.8	18.0	17.2	18.4	18.8
X=4H Y=2H	13.8	15.1	14.2	15.5	15.9	15.0	16.3	15.4	16.7	17.1
3H	15.3	16.5	15.7	16.9	17.3	16.7	17.8	17.1	18.3	18.7
4H	15.8	16.8	16.2	17.3	17.7	17.3	18.3	17.7	18.7	19.2
6H	16.1	17.0	16.6	17.5	17.9	17.6	18.5	18.1	18.9	19.4
8H	16.1	17.0	16.6	17.4	17.9	17.6	18.5	18.1	18.9	19.4
12H	16.1	16.9	16.6	17.4	17.9	17.7	18.4	18.2	18.9	19.4
X=8H Y=4H	16.0	16.8	16.5	17.3	17.8	17.4	18.3	17.9	18.8	19.2
6H	16.3	17.0	16.8	17.5	18.0	17.8	18.5	18.3	19.0	19.5
8H	16.4	17.0	16.9	17.5	18.0	17.9	18.6	18.5	19.1	19.6
12H	16.4	16.9	16.9	17.5	18.0	18.0	18.5	18.5	19.0	19.6
X=12H Y=4H	16.0	16.7	16.5	17.2	17.7	17.5	18.2	18.0	18.7	19.2
6H	16.3	17.0	16.9	17.5	18.0	17.9	18.5	18.4	19.0	19.5
8H	16.4	17.0	16.9	17.5	18.1	18.0	18.5	18.5	19.0	19.6

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

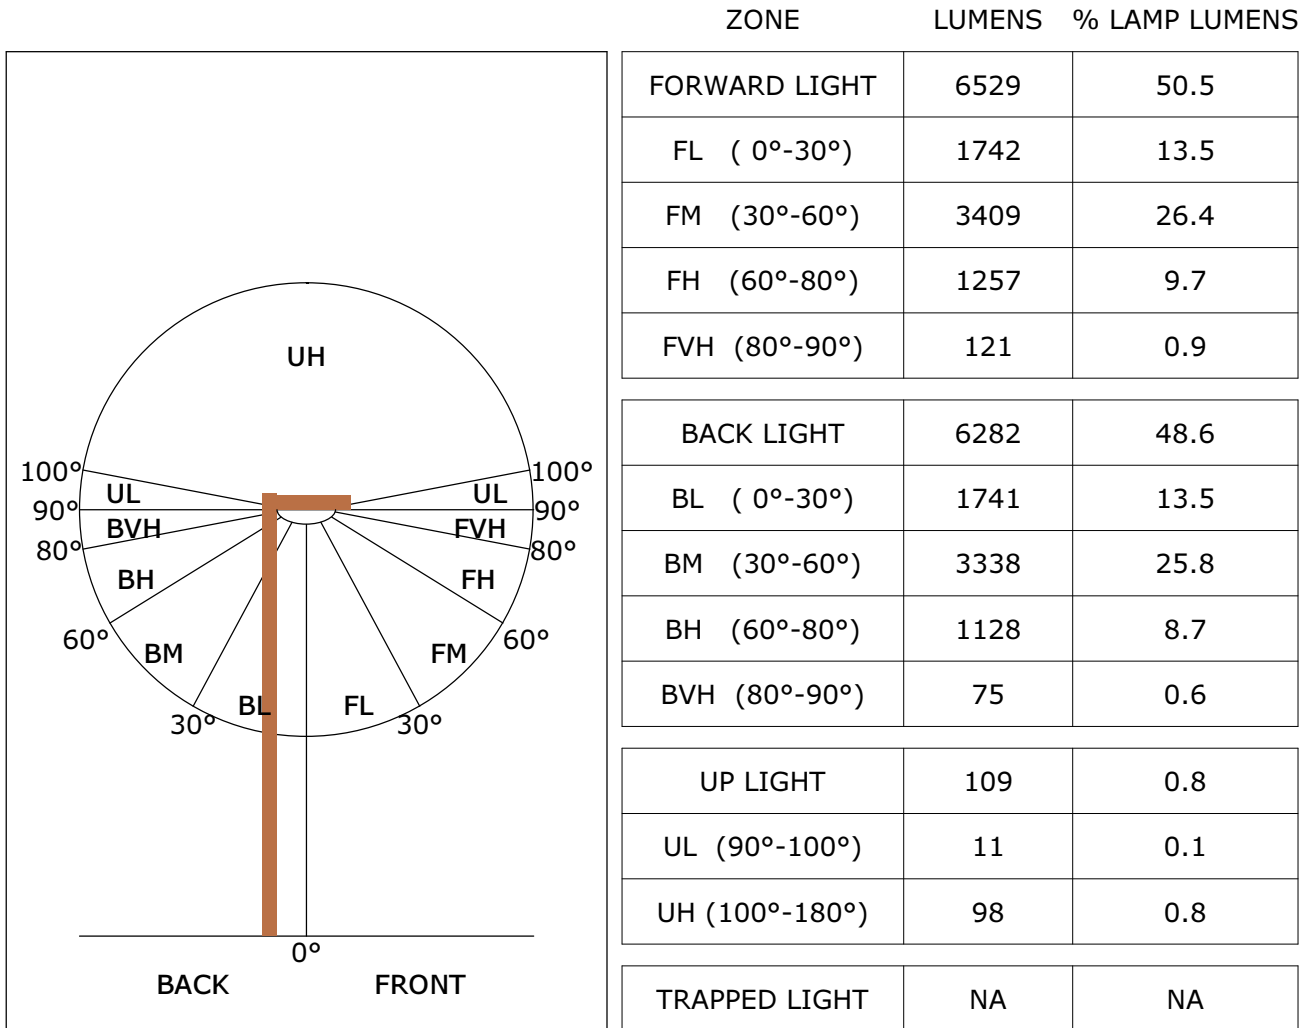


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U2 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U2 G1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.000 m
Humidity: 40
Inspector:

LCS Graph

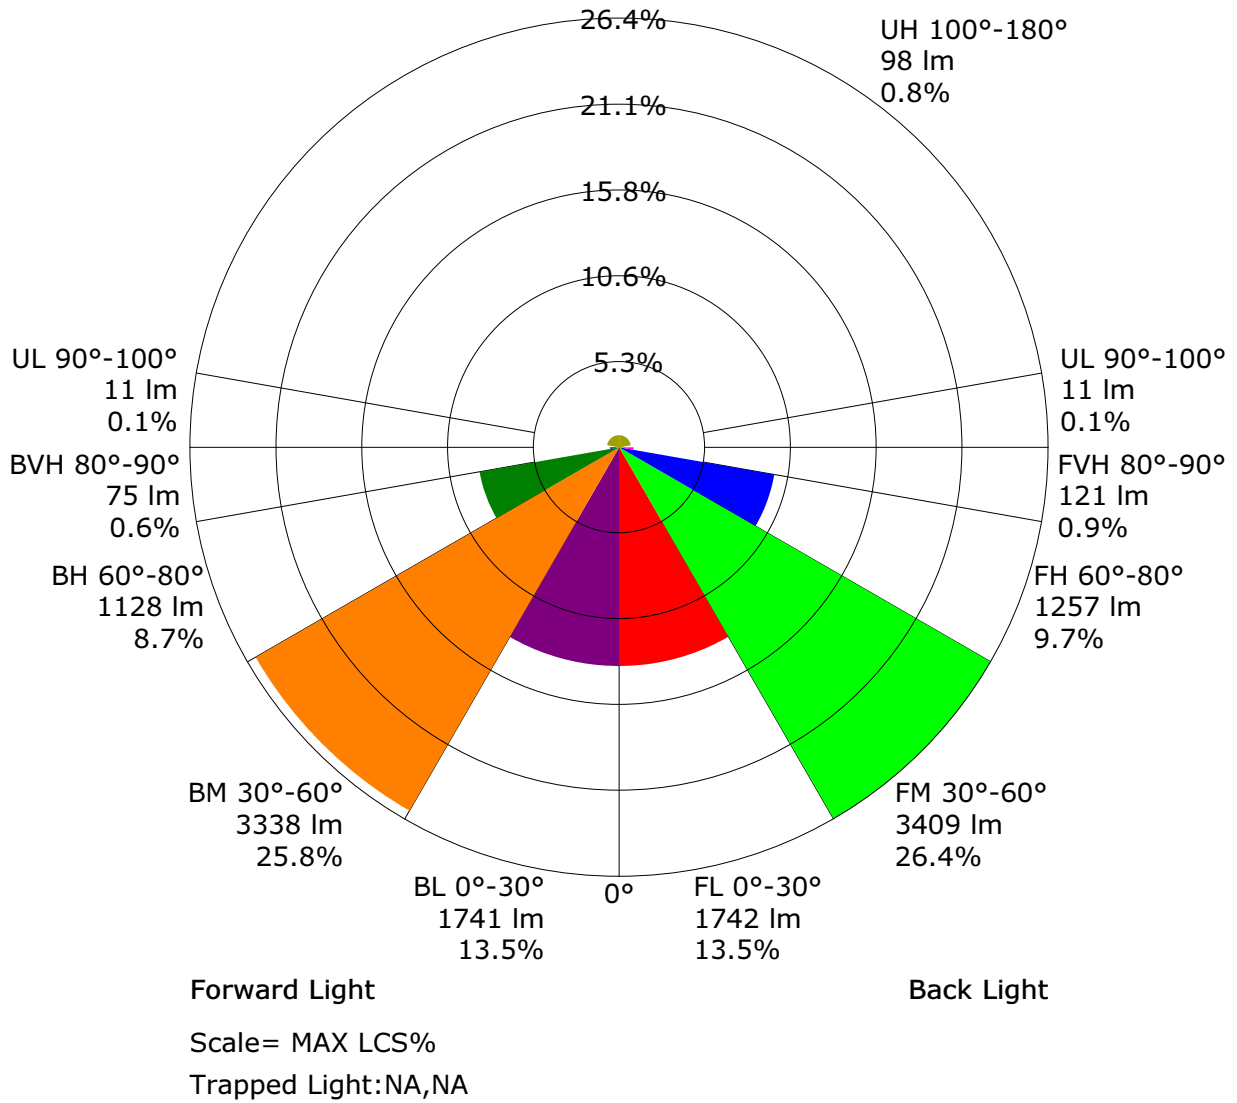

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	4426.5	4.2	4.2	0.03	0.03
1.0-2.0	4425.5	12.7	16.9	0.10	0.13
2.0-3.0	4423.4	21.2	38.1	0.16	0.29
3.0-4.0	4420.2	29.6	67.7	0.23	0.52
4.0-5.0	4415.8	38.0	105.7	0.29	0.82
5.0-6.0	4410.3	46.4	152.0	0.36	1.18
6.0-7.0	4403.5	54.7	206.7	0.42	1.60
7.0-8.0	4395.1	62.9	269.6	0.49	2.09
8.0-9.0	4385.2	71.1	340.7	0.55	2.64
9.0-10.0	4373.6	79.2	419.9	0.61	3.25
10.0-11.0	4360.5	87.1	507.0	0.67	3.92
11.0-12.0	4345.8	95.0	602.0	0.74	4.66
12.0-13.0	4329.6	102.8	704.8	0.80	5.46
13.0-14.0	4311.9	110.4	815.2	0.85	6.31
14.0-15.0	4293.1	117.9	933.0	0.91	7.22
15.0-16.0	4273.3	125.2	1058.3	0.97	8.19
16.0-17.0	4252.1	132.4	1190.7	1.03	9.22
17.0-18.0	4229.6	139.5	1330.2	1.08	10.30
18.0-19.0	4205.9	146.3	1476.5	1.13	11.43
19.0-20.0	4181.1	153.0	1629.6	1.18	12.61
20.0-21.0	4154.9	159.6	1789.1	1.24	13.85
21.0-22.0	4127.6	165.9	1955.0	1.28	15.13
22.0-23.0	4098.9	172.0	2127.0	1.33	16.46
23.0-24.0	4068.8	177.9	2305.0	1.38	17.84
24.0-25.0	4037.3	183.6	2488.6	1.42	19.26
25.0-26.0	4004.6	189.1	2677.6	1.46	20.73
26.0-27.0	3970.4	194.3	2871.9	1.50	22.23
27.0-28.0	3934.5	199.2	3071.1	1.54	23.77
28.0-29.0	3897.0	203.9	3275.0	1.58	25.35
29.0-30.0	3858.0	208.3	3483.4	1.61	26.96
30.0-31.0	3817.7	212.5	3695.8	1.64	28.61
31.0-32.0	3775.7	216.3	3912.2	1.67	30.28
32.0-33.0	3732.2	219.9	4132.1	1.70	31.98
33.0-34.0	3687.3	223.2	4355.3	1.73	33.71
34.0-35.0	3640.9	226.1	4581.4	1.75	35.46
35.0-36.0	3593.0	228.8	4810.2	1.77	37.23

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	3544.1	231.2	5041.4	1.79	39.02
37.0-38.0	3493.8	233.2	5274.6	1.81	40.83
38.0-39.0	3441.8	235.0	5509.6	1.82	42.65
39.0-40.0	3388.3	236.3	5745.9	1.83	44.47
40.0-41.0	3333.6	237.4	5983.3	1.84	46.31
41.0-42.0	3277.1	238.1	6221.5	1.84	48.16
42.0-43.0	3218.8	238.5	6459.9	1.85	50.00
43.0-44.0	3159.1	238.5	6698.4	1.85	51.85
44.0-45.0	3097.9	238.1	6936.5	1.84	53.69
45.0-46.0	3035.4	237.4	7173.9	1.84	55.53
46.0-47.0	2971.7	236.4	7410.3	1.83	57.36
47.0-48.0	2906.3	235.0	7645.3	1.82	59.18
48.0-49.0	2839.4	233.2	7878.5	1.81	60.98
49.0-50.0	2771.4	231.1	8109.6	1.79	62.77
50.0-51.0	2701.8	228.6	8338.2	1.77	64.54
51.0-52.0	2631.0	225.8	8564.0	1.75	66.29
52.0-53.0	2559.4	222.7	8786.6	1.72	68.01
53.0-54.0	2486.7	219.2	9005.9	1.70	69.71
54.0-55.0	2412.9	215.4	9221.3	1.67	71.37
55.0-56.0	2338.0	211.3	9432.6	1.64	73.01
56.0-57.0	2262.0	206.9	9639.4	1.60	74.61
57.0-58.0	2184.8	202.1	9841.5	1.56	76.17
58.0-59.0	2106.1	196.9	10038.4	1.52	77.70
59.0-60.0	2026.6	191.5	10229.9	1.48	79.18
60.0-61.0	1946.4	185.8	10415.7	1.44	80.62
61.0-62.0	1865.1	179.7	10595.4	1.39	82.01
62.0-63.0	1783.4	173.5	10768.9	1.34	83.35
63.0-64.0	1701.3	167.0	10935.8	1.29	84.65
64.0-65.0	1618.9	160.2	11096.1	1.24	85.89
65.0-66.0	1536.6	153.3	11249.4	1.19	87.07
66.0-67.0	1453.9	146.2	11395.6	1.13	88.20
67.0-68.0	1371.1	138.9	11534.5	1.08	89.28
68.0-69.0	1288.4	131.5	11666.0	1.02	90.30
69.0-70.0	1206.3	123.9	11789.9	0.96	91.26
70.0-71.0	1125.4	116.3	11906.2	0.90	92.16
71.0-72.0	1045.3	108.7	12014.9	0.84	93.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	966.0	101.0	12116.0	0.78	93.78
73.0-74.0	887.9	93.4	12209.3	0.72	94.50
74.0-75.0	811.4	85.7	12295.1	0.66	95.17
75.0-76.0	737.3	78.3	12373.4	0.61	95.77
76.0-77.0	665.7	71.0	12444.4	0.55	96.32
77.0-78.0	596.2	63.8	12508.2	0.49	96.82
78.0-79.0	529.1	56.9	12565.0	0.44	97.26
79.0-80.0	464.7	50.1	12615.1	0.39	97.64
80.0-81.0	403.1	43.6	12658.7	0.34	97.98
81.0-82.0	342.4	37.1	12695.9	0.29	98.27
82.0-83.0	283.5	30.8	12726.7	0.24	98.51
83.0-84.0	228.2	24.9	12751.6	0.19	98.70
84.0-85.0	178.8	19.5	12771.1	0.15	98.85
85.0-86.0	137.5	15.0	12786.1	0.12	98.97
86.0-87.0	98.1	10.7	12796.9	0.08	99.05
87.0-88.0	64.8	7.1	12804.0	0.05	99.10
88.0-89.0	40.5	4.4	12808.4	0.03	99.14
89.0-90.0	22.6	2.5	12810.9	0.02	99.16
90.0-91.0	14.2	1.6	12812.4	0.01	99.17
91.0-92.0	11.3	1.2	12813.7	0.01	99.18
92.0-93.0	10.1	1.1	12814.8	0.01	99.19
93.0-94.0	9.5	1.0	12815.8	0.01	99.20
94.0-95.0	9.1	1.0	12816.8	0.01	99.20
95.0-96.0	8.9	1.0	12817.8	0.01	99.21
96.0-97.0	8.8	1.0	12818.7	0.01	99.22
97.0-98.0	8.8	1.0	12819.7	0.01	99.23
98.0-99.0	8.9	1.0	12820.7	0.01	99.23
99.0-100.0	9.1	1.0	12821.7	0.01	99.24
100.0-101.0	9.2	1.0	12822.7	0.01	99.25
101.0-102.0	9.5	1.0	12823.7	0.01	99.26
102.0-103.0	9.8	1.0	12824.7	0.01	99.27
103.0-104.0	10.1	1.1	12825.8	0.01	99.27
104.0-105.0	10.4	1.1	12826.9	0.01	99.28
105.0-106.0	10.7	1.1	12828.0	0.01	99.29
106.0-107.0	11.0	1.2	12829.2	0.01	99.30
107.0-108.0	11.4	1.2	12830.4	0.01	99.31

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	11.8	1.2	12831.6	0.01	99.32
109.0-110.0	12.1	1.3	12832.9	0.01	99.33
110.0-111.0	12.5	1.3	12834.1	0.01	99.34
111.0-112.0	12.9	1.3	12835.5	0.01	99.35
112.0-113.0	13.3	1.3	12836.8	0.01	99.36
113.0-114.0	13.7	1.4	12838.2	0.01	99.37
114.0-115.0	14.1	1.4	12839.6	0.01	99.38
115.0-116.0	14.5	1.4	12841.0	0.01	99.39
116.0-117.0	14.9	1.5	12842.5	0.01	99.40
117.0-118.0	15.3	1.5	12844.0	0.01	99.41
118.0-119.0	15.7	1.5	12845.5	0.01	99.43
119.0-120.0	16.1	1.5	12847.0	0.01	99.44
120.0-121.0	16.4	1.6	12848.6	0.01	99.45
121.0-122.0	16.8	1.6	12850.2	0.01	99.46
122.0-123.0	17.2	1.6	12851.8	0.01	99.47
123.0-124.0	17.6	1.6	12853.4	0.01	99.49
124.0-125.0	18.0	1.6	12855.0	0.01	99.50
125.0-126.0	18.4	1.6	12856.6	0.01	99.51
126.0-127.0	18.7	1.6	12858.3	0.01	99.53
127.0-128.0	19.1	1.7	12859.9	0.01	99.54
128.0-129.0	19.5	1.7	12861.6	0.01	99.55
129.0-130.0	19.8	1.7	12863.3	0.01	99.56
130.0-131.0	20.2	1.7	12865.0	0.01	99.58
131.0-132.0	20.5	1.7	12866.6	0.01	99.59
132.0-133.0	20.9	1.7	12868.3	0.01	99.60
133.0-134.0	21.2	1.7	12870.0	0.01	99.62
134.0-135.0	21.6	1.7	12871.7	0.01	99.63
135.0-136.0	21.9	1.7	12873.4	0.01	99.64
136.0-137.0	22.2	1.7	12875.1	0.01	99.66
137.0-138.0	22.6	1.7	12876.7	0.01	99.67
138.0-139.0	22.9	1.7	12878.4	0.01	99.68
139.0-140.0	23.2	1.7	12880.1	0.01	99.69
140.0-141.0	23.5	1.6	12881.7	0.01	99.71
141.0-142.0	23.8	1.6	12883.3	0.01	99.72
142.0-143.0	24.1	1.6	12884.9	0.01	99.73
143.0-144.0	24.4	1.6	12886.5	0.01	99.74

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	24.7	1.6	12888.1	0.01	99.76
145.0-146.0	25.0	1.6	12889.7	0.01	99.77
146.0-147.0	25.3	1.5	12891.2	0.01	99.78
147.0-148.0	25.5	1.5	12892.7	0.01	99.79
148.0-149.0	25.8	1.5	12894.2	0.01	99.80
149.0-150.0	26.1	1.5	12895.6	0.01	99.81
150.0-151.0	26.3	1.4	12897.0	0.01	99.83
151.0-152.0	26.6	1.4	12898.4	0.01	99.84
152.0-153.0	26.9	1.4	12899.8	0.01	99.85
153.0-154.0	27.1	1.3	12901.1	0.01	99.86
154.0-155.0	27.3	1.3	12902.4	0.01	99.87
155.0-156.0	27.6	1.3	12903.7	0.01	99.88
156.0-157.0	27.9	1.2	12904.9	0.01	99.89
157.0-158.0	28.1	1.2	12906.1	0.01	99.90
158.0-159.0	28.3	1.1	12907.2	0.01	99.90
159.0-160.0	28.5	1.1	12908.3	0.01	99.91
160.0-161.0	28.8	1.1	12909.4	0.01	99.92
161.0-162.0	29.0	1.0	12910.4	0.01	99.93
162.0-163.0	29.2	1.0	12911.3	0.01	99.94
163.0-164.0	29.4	0.9	12912.2	0.01	99.94
164.0-165.0	29.6	0.9	12913.1	0.01	99.95
165.0-166.0	29.8	0.8	12913.9	0.01	99.96
166.0-167.0	30.0	0.8	12914.7	0.01	99.96
167.0-168.0	30.1	0.7	12915.4	0.01	99.97
168.0-169.0	30.2	0.7	12916.1	0.01	99.97
169.0-170.0	30.4	0.6	12916.7	0.00	99.98
170.0-171.0	30.5	0.6	12917.2	0.00	99.98
171.0-172.0	30.6	0.5	12917.7	0.00	99.99
172.0-173.0	30.7	0.4	12918.2	0.00	99.99
173.0-174.0	30.8	0.4	12918.5	0.00	99.99
174.0-175.0	30.9	0.3	12918.9	0.00	99.99
175.0-176.0	30.9	0.3	12919.1	0.00	100.00
176.0-177.0	30.9	0.2	12919.3	0.00	100.00
177.0-178.0	31.0	0.1	12919.5	0.00	100.00
178.0-179.0	31.0	0.1	12919.6	0.00	100.00
179.0-180.0	31.1	0.0	12919.6	0.00	100.00

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	4433.8	4431.4	4429.8	4432.5	4429.9	4429.9	4429.2	4426.5	4427.8	4427.9
G1.0	4430.0	4430.0	4429.0	4428.9	4426.9	4428.1	4427.1	4426.5	4426.3	4425.7
G2.0	4428.7	4427.0	4426.5	4424.2	4424.2	4425.5	4423.3	4422.2	4422.7	4422.5
G3.0	4424.4	4423.2	4421.4	4420.7	4421.1	4421.2	4418.6	4417.7	4417.4	4417.7
G4.0	4418.4	4418.5	4415.7	4415.6	4414.2	4415.4	4412.8	4413.8	4411.1	4413.3
G5.0	4413.0	4410.3	4411.0	4409.8	4408.7	4407.9	4407.2	4404.7	4402.3	4406.0
G6.0	4404.7	4402.6	4400.8	4401.5	4400.0	4399.7	4400.3	4397.2	4397.5	4398.0
G7.0	4393.4	4392.3	4392.0	4393.5	4390.2	4390.9	4389.5	4387.4	4388.5	4388.5
G8.0	4382.5	4381.2	4379.5	4378.6	4377.7	4378.0	4378.2	4376.4	4376.1	4378.0
G9.0	4368.8	4367.0	4366.3	4367.5	4365.0	4365.4	4364.8	4363.4	4363.3	4366.3
G10.0	4352.9	4349.4	4349.2	4349.5	4349.4	4347.8	4349.7	4347.2	4349.2	4351.4
G11.0	4337.0	4331.9	4331.4	4332.2	4331.8	4332.0	4332.6	4330.9	4329.5	4334.0
G12.0	4315.6	4313.8	4312.4	4311.8	4311.5	4315.0	4313.9	4314.4	4313.4	4318.5
G13.0	4298.5	4294.4	4293.6	4290.5	4290.5	4293.1	4294.1	4294.9	4294.4	4298.1
G14.0	4275.4	4272.4	4272.8	4269.8	4271.8	4272.9	4270.9	4271.3	4273.3	4279.2
G15.0	4255.2	4252.0	4250.4	4250.8	4249.7	4250.9	4249.6	4252.1	4252.2	4255.7
G16.0	4232.8	4229.9	4227.7	4229.0	4228.4	4228.5	4226.8	4227.1	4229.2	4233.6
G17.0	4209.4	4206.2	4205.9	4205.7	4202.9	4204.9	4203.9	4204.0	4206.0	4209.4
G18.0	4185.9	4181.3	4180.7	4179.3	4179.1	4180.1	4178.8	4179.7	4179.9	4184.0
G19.0	4159.0	4156.9	4154.6	4153.8	4154.3	4153.2	4153.2	4152.5	4155.7	4158.3
G20.0	4132.1	4129.0	4125.2	4124.7	4123.4	4125.6	4125.3	4123.1	4125.5	4131.5
G21.0	4102.9	4099.5	4098.6	4097.2	4096.7	4098.7	4096.5	4098.1	4099.2	4101.7
G22.0	4073.5	4069.6	4067.3	4068.4	4066.1	4067.2	4066.6	4067.0	4068.2	4073.3
G23.0	4042.2	4038.1	4036.2	4034.7	4036.2	4036.9	4034.8	4035.5	4037.6	4040.7
G24.0	4008.6	4005.2	4004.3	4002.3	4003.1	4002.7	4000.8	4002.2	4003.7	4008.9
G25.0	3976.1	3972.4	3970.2	3968.8	3968.8	3969.7	3967.4	3968.2	3968.7	3975.5
G26.0	3940.5	3937.1	3933.3	3933.4	3931.2	3933.4	3931.7	3931.7	3934.0	3940.5
G27.0	3904.5	3898.9	3897.0	3896.9	3895.9	3894.9	3894.9	3895.8	3897.4	3903.1
G28.0	3866.2	3861.7	3859.2	3858.1	3858.7	3858.8	3856.6	3858.6	3858.4	3867.1
G29.0	3826.0	3820.6	3819.6	3818.1	3818.0	3818.4	3816.8	3817.5	3821.7	3826.1
G30.0	3786.2	3779.7	3776.6	3776.9	3775.4	3778.8	3774.7	3776.3	3778.3	3784.6
G31.0	3743.6	3739.2	3736.0	3733.8	3734.3	3735.0	3733.4	3735.9	3737.8	3742.9
G32.0	3700.8	3696.2	3692.0	3690.4	3688.3	3690.5	3690.4	3690.5	3694.1	3700.6
G33.0	3655.6	3650.1	3648.4	3644.3	3644.4	3643.5	3643.8	3645.5	3647.6	3653.8
G34.0	3609.5	3602.6	3600.8	3598.0	3595.5	3596.4	3597.2	3598.5	3601.8	3611.1
G35.0	3561.6	3557.3	3553.7	3551.5	3547.9	3548.6	3548.3	3548.5	3552.3	3557.2
G36.0	3512.2	3506.8	3504.9	3500.3	3499.8	3497.7	3497.7	3498.5	3502.2	3510.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	3464.8	3458.1	3454.1	3450.6	3446.4	3445.5	3444.9	3446.2	3450.1	3456.8
G38.0	3411.2	3404.9	3399.7	3396.4	3393.8	3393.1	3392.0	3394.1	3394.8	3403.2
G39.0	3358.6	3352.0	3346.4	3341.9	3339.7	3339.6	3338.7	3339.6	3342.8	3349.4
G40.0	3302.1	3292.4	3289.7	3284.1	3284.3	3281.5	3281.7	3283.6	3286.1	3295.5
G41.0	3247.3	3238.9	3234.6	3230.6	3226.6	3225.0	3226.0	3227.8	3230.8	3237.4
G42.0	3190.8	3180.7	3176.3	3168.9	3166.4	3167.7	3164.2	3166.3	3171.1	3179.0
G43.0	3133.2	3124.6	3117.4	3111.6	3106.2	3108.1	3106.3	3109.4	3112.7	3119.3
G44.0	3070.8	3061.9	3057.7	3049.9	3045.8	3044.0	3042.0	3046.8	3050.9	3059.8
G45.0	3011.2	3001.1	2993.4	2988.0	2982.5	2982.3	2978.8	2983.5	2989.3	2996.0
G46.0	2949.8	2938.4	2931.3	2923.0	2919.4	2919.1	2917.0	2919.5	2925.7	2935.2
G47.0	2887.1	2875.7	2869.1	2860.7	2856.8	2853.3	2854.0	2858.5	2861.2	2872.0
G48.0	2821.9	2813.4	2801.0	2794.3	2787.2	2786.5	2785.4	2790.0	2792.6	2803.1
G49.0	2755.5	2747.8	2737.0	2724.4	2718.2	2718.4	2716.7	2722.6	2726.8	2735.3
G50.0	2689.1	2679.1	2667.8	2657.8	2651.6	2649.5	2651.0	2652.5	2657.4	2662.7
G51.0	2623.7	2611.1	2600.3	2587.6	2581.6	2580.6	2578.6	2582.9	2587.2	2592.6
G52.0	2559.0	2545.4	2531.5	2521.4	2512.3	2508.2	2507.9	2511.0	2516.6	2518.9
G53.0	2491.5	2480.7	2464.5	2450.9	2442.2	2438.9	2433.1	2435.7	2441.3	2448.8
G54.0	2418.5	2410.2	2393.8	2383.4	2372.8	2364.8	2362.5	2365.9	2367.8	2373.2
G55.0	2348.0	2336.1	2321.6	2309.4	2302.9	2294.1	2290.2	2291.6	2291.6	2300.1
G56.0	2272.9	2264.4	2249.6	2234.1	2229.8	2223.2	2219.1	2218.7	2219.9	2224.2
G57.0	2197.8	2186.1	2175.2	2161.7	2153.8	2151.0	2147.9	2145.4	2143.5	2150.9
G58.0	2121.4	2113.1	2098.4	2083.9	2082.1	2074.9	2074.2	2072.3	2067.9	2073.3
G59.0	2045.0	2033.4	2022.7	2005.6	2002.2	2001.6	1998.5	1998.6	1994.1	1997.6
G60.0	1962.8	1950.0	1944.4	1932.1	1929.2	1922.2	1923.9	1921.7	1921.2	1920.8
G61.0	1885.3	1870.1	1860.4	1849.5	1849.4	1845.3	1844.1	1844.3	1846.2	1844.4
G62.0	1802.9	1791.1	1782.0	1771.9	1766.3	1766.4	1766.3	1768.2	1768.4	1766.7
G63.0	1725.2	1711.2	1701.2	1690.6	1687.4	1683.7	1686.6	1686.4	1692.2	1692.6
G64.0	1642.7	1631.2	1624.6	1616.4	1605.4	1605.6	1605.4	1610.0	1614.6	1610.6
G65.0	1565.4	1551.3	1544.1	1532.7	1524.5	1524.4	1523.7	1525.2	1534.3	1535.8
G66.0	1485.2	1475.9	1465.5	1455.9	1448.4	1445.8	1443.4	1448.2	1453.2	1453.5
G67.0	1409.1	1397.7	1387.5	1379.2	1371.0	1368.9	1364.2	1366.2	1368.8	1375.1
G68.0	1331.1	1320.8	1313.4	1304.9	1294.3	1291.7	1286.6	1287.1	1288.8	1290.3
G69.0	1253.5	1240.4	1235.2	1224.3	1218.7	1217.3	1207.2	1206.8	1207.0	1207.2
G70.0	1174.4	1166.2	1161.2	1153.2	1143.4	1140.9	1133.9	1130.9	1128.2	1125.8
G71.0	1098.0	1091.7	1085.6	1074.5	1073.7	1065.4	1058.5	1056.6	1047.6	1049.5
G72.0	1022.8	1015.3	1012.1	1004.9	994.8	991.7	986.8	982.8	972.3	973.6
G73.0	949.4	939.3	938.0	931.3	922.7	917.8	912.7	910.0	901.2	898.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	874.8	869.4	863.6	859.1	854.6	849.5	844.8	836.4	829.9	825.9
G75.0	802.3	795.0	791.6	789.9	782.7	780.1	774.9	764.7	758.8	756.5
G76.0	721.4	714.3	714.6	717.7	716.0	714.7	708.0	700.5	693.0	687.3
G77.0	651.2	644.0	640.7	640.0	638.0	642.9	638.8	632.0	628.0	621.5
G78.0	592.9	585.8	582.0	579.9	574.1	569.6	566.6	566.1	563.4	556.8
G79.0	530.7	525.0	523.8	521.1	517.4	509.3	498.7	494.2	495.6	493.2
G80.0	463.4	461.2	461.6	458.2	455.4	451.9	443.4	435.8	427.1	429.3
G81.0	397.4	394.1	394.4	392.1	391.3	391.7	386.2	379.1	372.0	365.4
G82.0	332.7	329.1	330.5	331.2	329.9	330.8	324.2	323.2	318.0	311.0
G83.0	255.2	254.6	260.3	264.4	266.2	269.7	264.4	261.8	258.6	255.8
G84.0	101.5	99.8	117.3	136.3	169.4	198.0	204.7	207.3	203.9	202.5
G85.0	49.7	49.2	52.1	55.6	59.6	71.8	92.9	134.1	150.0	153.5
G86.0	29.5	29.7	31.1	32.9	35.0	39.3	41.6	45.5	55.8	93.2
G87.0	20.9	21.5	22.5	24.0	25.4	27.1	27.7	29.2	29.8	31.7
G88.0	16.0	16.4	17.0	17.8	19.5	20.8	21.3	22.4	22.9	23.2
G89.0	12.8	13.0	13.9	14.3	15.2	16.7	17.3	18.0	18.3	19.0
G90.0	10.9	11.1	11.5	12.1	12.8	13.6	14.4	15.1	15.7	16.0
G91.0	10.1	10.4	11.0	11.1	12.2	12.6	13.0	13.0	13.8	13.7
G92.0	9.6	9.9	10.4	10.9	11.5	11.4	11.6	11.9	12.1	12.3
G93.0	9.3	9.5	10.0	10.0	10.3	11.1	11.3	11.4	11.5	11.5
G94.0	8.9	9.4	9.4	9.6	9.9	10.1	10.8	10.8	10.7	10.4
G95.0	8.8	9.2	9.2	9.9	10.1	9.7	10.3	9.9	10.2	10.0
G96.0	8.7	9.1	9.1	9.2	9.9	9.4	9.5	9.5	9.3	9.5
G97.0	8.7	9.1	8.8	8.9	9.7	9.6	9.2	9.4	9.1	8.9
G98.0	8.8	8.7	8.7	9.5	9.5	9.6	9.5	9.5	8.9	8.8
G99.0	8.8	8.8	8.9	8.9	9.6	9.2	9.6	9.5	9.4	9.3
G100.0	8.9	8.9	9.4	9.1	9.6	9.2	9.6	9.2	9.5	9.4
G101.0	9.3	9.5	9.2	9.2	9.9	9.4	9.3	9.4	9.6	9.2
G102.0	9.5	9.3	9.9	9.9	9.5	9.5	9.5	10.1	9.9	9.4
G103.0	9.6	10.1	10.1	10.1	10.3	9.9	10.3	9.7	10.1	9.6
G104.0	10.1	10.3	10.3	10.4	10.0	10.4	10.6	10.7	10.4	10.0
G105.0	10.2	10.1	10.7	10.1	10.3	10.9	10.3	10.9	10.8	10.8
G106.0	10.6	10.3	10.4	11.0	10.6	10.7	10.7	10.8	10.8	11.1
G107.0	10.8	11.3	10.8	11.4	11.0	11.4	11.6	11.6	11.3	11.6
G108.0	11.3	11.7	11.7	11.8	11.8	11.8	11.4	11.5	11.8	11.6
G109.0	11.5	11.5	11.5	11.5	11.7	11.7	12.4	11.9	12.1	12.4
G110.0	11.9	12.4	12.4	11.9	12.2	12.2	12.2	12.4	12.6	12.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	12.3	12.8	12.8	12.3	12.9	13.0	12.5	13.2	12.9	12.6
G112.0	13.0	12.6	13.2	13.2	12.9	13.0	13.5	13.6	13.3	13.1
G113.0	13.1	13.6	13.6	13.7	13.7	13.3	13.3	14.0	13.8	13.6
G114.0	13.7	13.5	13.9	14.0	13.7	14.3	14.3	14.4	14.1	14.4
G115.0	13.9	14.4	14.3	14.5	14.5	14.6	14.1	14.7	14.5	14.9
G116.0	14.3	14.1	14.4	14.9	14.7	15.1	15.1	14.7	15.0	15.3
G117.0	14.9	15.2	15.1	15.3	15.0	14.9	15.0	15.5	15.4	15.2
G118.0	15.1	15.7	15.5	15.7	15.4	15.4	15.4	15.9	15.8	15.7
G119.0	15.8	16.0	15.5	16.0	15.8	15.8	15.8	15.9	16.2	16.5
G120.0	15.8	15.8	15.9	16.4	16.1	16.1	16.1	16.4	16.6	16.8
G121.0	16.1	16.1	16.2	16.8	16.8	17.0	16.5	16.7	16.9	17.3
G122.0	16.5	16.5	16.9	17.3	17.0	17.3	17.5	17.5	17.3	17.2
G123.0	16.8	16.8	17.0	17.5	17.6	17.8	17.9	18.0	17.8	18.0
G124.0	17.6	17.3	17.8	17.5	17.9	17.8	17.6	18.4	18.1	18.4
G125.0	17.6	18.2	17.9	18.2	18.3	18.6	18.1	18.8	18.4	18.3
G126.0	18.3	18.6	18.4	18.3	18.6	18.4	18.9	18.6	19.0	19.1
G127.0	18.7	18.9	18.7	18.7	19.0	19.3	18.9	19.5	19.3	19.5
G128.0	18.8	18.8	19.3	19.0	19.4	19.1	19.7	20.0	19.6	19.6
G129.0	19.5	19.1	19.6	19.7	19.7	20.1	20.2	20.2	20.0	20.0
G130.0	19.8	19.5	19.7	20.1	20.1	20.4	20.1	20.2	20.3	20.3
G131.0	20.3	20.4	20.3	20.2	20.4	20.3	20.4	20.5	20.8	21.1
G132.0	20.6	20.8	20.5	20.8	20.8	20.6	20.8	21.5	21.2	21.3
G133.0	20.5	21.1	20.8	21.1	21.2	21.0	21.6	21.8	21.7	21.7
G134.0	20.9	21.3	21.3	21.5	21.6	21.9	21.5	22.2	21.7	21.8
G135.0	21.2	21.7	21.6	21.8	21.7	22.3	21.8	21.9	22.0	22.2
G136.0	21.9	21.6	21.8	22.2	22.3	22.5	22.6	22.7	22.4	22.7
G137.0	21.8	21.8	22.3	22.2	22.5	22.3	22.9	22.6	23.1	23.0
G138.0	22.0	22.6	22.5	22.5	22.9	22.6	23.2	23.3	23.1	23.1
G139.0	22.7	22.4	22.9	22.9	23.2	23.3	23.5	23.7	23.8	23.5
G140.0	22.6	22.9	23.1	23.2	23.5	23.1	23.4	23.9	23.7	23.8
G141.0	23.0	23.1	23.3	23.4	23.4	24.0	23.7	23.8	23.9	24.1
G142.0	23.7	23.4	23.5	23.8	23.8	24.2	24.0	24.1	24.2	24.6
G143.0	23.8	23.7	23.9	24.0	24.0	24.0	24.7	24.5	24.6	24.8
G144.0	23.8	24.0	24.1	24.2	24.7	24.2	24.9	24.6	25.2	25.2
G145.0	24.4	24.2	24.5	24.6	24.6	25.1	24.7	25.3	25.4	25.4
G146.0	24.7	24.8	24.7	24.8	24.7	25.4	25.1	25.2	25.3	25.6
G147.0	24.9	24.6	24.9	25.1	24.9	25.5	25.6	25.4	26.0	25.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	25.2	24.9	25.2	25.3	25.4	25.3	25.9	26.1	26.2	26.2
G149.0	25.4	25.4	25.4	25.5	25.9	26.0	26.1	26.0	26.5	26.5
G150.0	25.2	25.4	25.8	25.8	26.1	26.2	26.3	26.7	26.8	26.6
G151.0	26.0	25.9	25.9	26.1	26.0	26.6	26.2	26.3	26.6	27.0
G152.0	26.1	26.1	26.1	26.2	26.6	26.8	26.5	27.1	26.8	27.3
G153.0	26.3	26.3	26.3	26.6	26.8	26.9	26.7	27.3	27.5	27.6
G154.0	26.1	26.5	26.5	26.8	27.0	27.4	27.5	27.6	27.8	27.7
G155.0	26.7	26.7	26.8	27.0	27.4	27.1	27.3	27.5	28.1	27.8
G156.0	27.0	27.0	26.9	27.3	27.7	27.8	28.0	28.2	27.8	28.4
G157.0	26.8	27.3	27.4	27.5	28.0	27.6	28.2	28.0	28.5	28.4
G158.0	27.7	27.6	27.6	27.6	28.2	28.0	28.1	28.6	28.8	28.6
G159.0	27.8	27.7	28.0	28.0	28.1	28.2	28.8	28.5	28.6	29.1
G160.0	27.7	28.0	28.2	28.2	28.6	28.4	28.5	28.8	28.9	29.5
G161.0	28.5	28.3	28.3	28.4	28.6	29.1	29.2	29.5	29.6	29.7
G162.0	28.8	28.6	28.6	28.8	29.2	28.9	29.4	29.6	29.7	29.5
G163.0	28.6	28.8	28.8	28.9	29.4	29.6	29.7	29.8	29.9	29.6
G164.0	29.2	29.1	29.1	29.1	29.2	29.4	29.9	29.9	29.7	30.3
G165.0	29.0	29.1	29.2	29.6	29.5	29.6	29.7	30.2	29.9	30.4
G166.0	29.8	29.5	29.5	29.8	29.6	29.8	29.9	30.3	30.4	30.5
G167.0	29.5	29.6	29.7	30.0	30.3	30.4	30.0	30.5	30.6	30.7
G168.0	29.7	29.8	30.0	30.3	30.2	30.2	30.2	30.4	30.7	30.4
G169.0	30.4	30.3	30.0	30.2	30.3	30.7	30.7	30.5	30.9	30.4
G170.0	30.6	30.4	30.3	30.5	30.9	30.4	30.4	30.6	30.5	31.0
G171.0	30.4	30.6	30.4	30.5	31.0	30.5	30.5	30.7	30.6	31.1
G172.0	31.2	30.7	30.6	30.6	31.0	31.0	30.6	31.0	30.7	31.1
G173.0	31.3	30.5	30.6	31.0	30.6	30.6	30.7	30.9	30.7	31.2
G174.0	31.0	30.7	30.9	31.0	30.7	31.2	31.2	31.1	30.9	31.3
G175.0	31.7	31.2	30.9	31.1	31.2	31.3	31.3	31.1	31.3	31.4
G176.0	31.9	31.3	31.0	30.9	30.9	30.9	30.9	31.2	31.3	31.3
G177.0	31.5	31.4	31.1	31.2	31.3	31.0	31.0	31.2	31.0	31.4
G178.0	32.0	31.7	31.2	31.1	31.1	31.4	31.4	31.2	31.0	31.3
G179.0	32.1	31.8	31.3	31.2	31.4	31.4	31.3	31.1	31.5	31.4
G180.0	31.8	31.9	31.4	31.5	31.5	31.2	31.1	31.1	31.0	31.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	4426.2	4426.6	4424.2	4425.4	4424.2	4423.0	4423.5	4419.6	4420.0	4419.3
G1.0	4426.5	4424.1	4423.6	4422.5	4422.8	4420.7	4421.4	4418.5	4419.0	4418.1
G2.0	4421.4	4421.0	4420.0	4421.2	4420.3	4417.5	4419.0	4416.8	4416.4	4416.8
G3.0	4417.0	4418.0	4416.4	4416.0	4416.1	4416.1	4415.5	4413.3	4413.2	4414.8
G4.0	4412.1	4411.8	4412.6	4412.1	4411.5	4409.3	4411.5	4409.7	4409.7	4410.1
G5.0	4405.4	4405.1	4405.9	4404.3	4406.5	4404.0	4405.1	4403.0	4403.6	4405.4
G6.0	4400.1	4398.5	4397.3	4399.0	4398.7	4395.7	4398.3	4397.1	4398.0	4398.1
G7.0	4387.4	4388.0	4388.5	4389.4	4390.5	4388.7	4389.8	4389.0	4389.5	4390.3
G8.0	4376.3	4377.6	4377.2	4377.9	4380.1	4378.2	4380.9	4378.9	4380.8	4381.4
G9.0	4363.9	4364.7	4365.0	4366.4	4366.7	4368.1	4369.0	4369.1	4370.3	4371.2
G10.0	4349.4	4351.7	4351.1	4353.7	4355.6	4353.3	4355.6	4356.0	4358.1	4359.7
G11.0	4336.4	4337.1	4338.0	4337.2	4339.4	4339.0	4341.9	4343.7	4345.2	4346.4
G12.0	4316.8	4320.2	4321.3	4322.5	4324.6	4324.5	4326.3	4327.6	4330.1	4332.1
G13.0	4298.6	4303.6	4303.7	4304.6	4307.5	4306.6	4310.0	4311.0	4313.8	4317.0
G14.0	4279.1	4283.5	4285.6	4287.1	4289.2	4289.9	4291.5	4292.7	4296.0	4298.4
G15.0	4258.3	4264.0	4264.1	4267.7	4269.5	4270.9	4273.1	4273.6	4277.6	4279.1
G16.0	4235.7	4240.8	4244.3	4243.8	4248.6	4248.9	4252.0	4253.7	4258.4	4261.1
G17.0	4210.9	4217.0	4219.4	4224.3	4226.7	4228.0	4231.5	4232.3	4236.6	4239.1
G18.0	4186.4	4190.7	4196.9	4201.0	4203.9	4203.9	4206.9	4209.4	4212.0	4216.8
G19.0	4159.5	4164.4	4171.9	4175.3	4179.6	4182.0	4183.9	4186.8	4190.5	4193.7
G20.0	4130.7	4137.6	4144.0	4148.6	4155.9	4155.7	4158.7	4161.5	4164.5	4168.2
G21.0	4102.6	4109.1	4115.1	4123.4	4127.8	4128.6	4132.0	4134.5	4139.9	4143.4
G22.0	4072.1	4077.3	4085.7	4092.0	4099.2	4101.1	4104.7	4108.1	4112.5	4115.9
G23.0	4041.9	4047.6	4054.7	4060.4	4069.4	4072.0	4075.2	4078.5	4085.3	4088.4
G24.0	4008.8	4015.8	4022.7	4026.6	4038.3	4041.2	4045.1	4050.0	4055.8	4059.4
G25.0	3975.4	3981.7	3989.0	3994.4	4005.8	4008.9	4014.5	4019.3	4025.9	4029.3
G26.0	3941.6	3946.6	3953.4	3958.9	3969.3	3974.7	3980.0	3986.2	3993.0	3998.0
G27.0	3903.2	3908.7	3916.7	3921.6	3933.1	3938.9	3946.5	3951.9	3958.7	3964.1
G28.0	3864.0	3872.2	3879.7	3884.0	3896.5	3902.7	3910.1	3916.7	3923.4	3928.6
G29.0	3826.6	3833.9	3839.6	3846.5	3856.1	3867.6	3872.9	3881.1	3888.6	3893.5
G30.0	3787.0	3791.4	3799.6	3804.4	3817.1	3826.2	3835.4	3840.8	3848.7	3855.2
G31.0	3746.9	3751.6	3759.3	3763.7	3777.6	3786.9	3796.1	3802.8	3811.3	3817.6
G32.0	3701.2	3706.5	3717.2	3721.7	3732.9	3744.7	3752.6	3762.2	3771.0	3776.4
G33.0	3656.3	3661.8	3672.4	3677.6	3689.2	3703.5	3711.8	3719.6	3728.8	3734.2
G34.0	3609.1	3618.8	3626.2	3632.8	3645.0	3658.6	3668.0	3675.8	3685.3	3690.0
G35.0	3560.9	3570.7	3578.7	3586.0	3598.6	3611.5	3623.6	3630.9	3640.9	3646.8
G36.0	3511.4	3523.0	3529.7	3536.9	3548.6	3564.2	3578.6	3585.5	3595.1	3600.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	3462.6	3469.1	3479.5	3487.5	3498.9	3514.5	3529.1	3538.4	3548.7	3557.8
G38.0	3411.7	3418.6	3426.7	3435.9	3449.0	3463.8	3478.6	3490.7	3499.9	3507.9
G39.0	3354.7	3364.6	3377.1	3384.4	3396.2	3411.2	3429.3	3440.5	3453.3	3459.8
G40.0	3299.2	3312.1	3320.2	3328.2	3342.5	3358.9	3376.5	3388.9	3401.9	3409.8
G41.0	3241.1	3256.1	3266.4	3274.1	3287.4	3301.9	3322.2	3335.6	3351.4	3359.4
G42.0	3185.2	3195.8	3207.6	3215.4	3229.5	3244.1	3264.1	3278.9	3293.9	3303.3
G43.0	3127.0	3136.1	3147.1	3154.4	3168.8	3182.5	3201.7	3219.8	3237.6	3246.2
G44.0	3061.8	3073.8	3085.9	3093.0	3106.4	3119.3	3140.9	3157.9	3174.5	3184.8
G45.0	3000.6	3011.3	3022.2	3027.9	3041.9	3054.0	3078.4	3097.7	3114.9	3124.9
G46.0	2933.8	2949.1	2955.6	2962.7	2977.3	2992.1	3015.0	3034.2	3049.2	3060.6
G47.0	2871.6	2880.8	2890.2	2898.7	2912.5	2928.9	2952.0	2972.2	2986.7	2997.3
G48.0	2803.9	2812.4	2820.7	2831.7	2845.5	2862.4	2884.4	2908.1	2922.6	2931.7
G49.0	2735.0	2741.0	2753.2	2761.8	2779.2	2792.5	2819.6	2841.2	2855.6	2867.5
G50.0	2663.5	2670.7	2683.4	2693.8	2712.6	2725.5	2748.3	2775.2	2793.3	2802.7
G51.0	2592.4	2600.5	2614.1	2622.6	2641.7	2653.6	2677.4	2706.2	2725.4	2737.1
G52.0	2519.0	2528.0	2541.8	2550.3	2567.3	2582.9	2606.6	2640.1	2658.3	2670.1
G53.0	2445.1	2456.9	2470.0	2474.4	2493.8	2509.0	2534.3	2567.5	2587.3	2600.3
G54.0	2373.2	2382.6	2392.1	2400.6	2419.3	2437.3	2463.3	2499.7	2516.9	2530.1
G55.0	2299.9	2307.6	2318.8	2324.4	2345.0	2362.4	2385.5	2424.1	2444.3	2457.3
G56.0	2225.7	2231.3	2242.1	2248.9	2268.4	2286.9	2308.8	2351.5	2369.7	2383.7
G57.0	2149.9	2152.4	2164.3	2171.9	2190.6	2207.3	2228.9	2273.5	2292.4	2308.0
G58.0	2072.5	2075.6	2082.0	2092.2	2110.2	2124.6	2148.7	2191.2	2213.0	2229.0
G59.0	1993.3	1994.8	2001.3	2011.3	2029.9	2043.0	2062.9	2109.4	2129.8	2147.0
G60.0	1909.9	1914.6	1923.7	1929.8	1947.3	1962.5	1982.0	2025.4	2048.3	2062.3
G61.0	1830.6	1834.9	1845.3	1847.7	1865.0	1879.2	1898.1	1942.1	1963.4	1976.4
G62.0	1752.1	1754.5	1760.6	1765.3	1781.3	1797.7	1813.1	1856.8	1878.9	1893.3
G63.0	1675.4	1674.3	1676.9	1684.0	1698.0	1711.2	1727.7	1771.8	1793.1	1810.0
G64.0	1600.5	1589.9	1595.5	1600.1	1614.4	1623.7	1642.0	1686.8	1708.1	1722.9
G65.0	1522.3	1509.5	1515.1	1512.2	1527.6	1535.2	1553.6	1596.7	1623.0	1636.4
G66.0	1443.7	1432.7	1430.7	1434.9	1438.8	1450.7	1467.1	1510.8	1536.1	1547.9
G67.0	1363.9	1358.3	1352.1	1347.5	1357.7	1364.2	1378.4	1415.7	1444.6	1451.7
G68.0	1280.3	1281.4	1270.8	1265.8	1267.1	1276.5	1292.3	1327.8	1349.8	1359.0
G69.0	1204.1	1204.7	1193.2	1176.3	1185.2	1190.1	1202.0	1234.2	1260.0	1264.3
G70.0	1125.4	1123.0	1113.5	1095.6	1096.8	1104.2	1112.7	1142.7	1171.3	1176.4
G71.0	1040.0	1040.9	1033.8	1013.7	1017.1	1017.0	1026.7	1048.7	1083.2	1082.8
G72.0	964.4	960.6	958.3	936.5	934.2	931.6	938.7	962.9	988.3	992.5
G73.0	886.5	879.5	878.1	864.8	850.5	847.0	854.6	869.5	897.6	902.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	811.7	800.3	804.0	790.0	771.9	764.9	769.7	780.7	812.9	812.4
G75.0	736.4	727.0	721.0	717.1	696.1	688.8	685.8	696.8	728.5	729.0
G76.0	670.8	658.2	647.8	638.4	627.5	612.1	608.7	616.7	643.8	651.5
G77.0	602.4	590.1	579.2	567.3	559.3	533.8	533.7	536.9	564.3	567.1
G78.0	537.1	525.3	511.5	496.8	488.8	468.1	462.5	463.8	486.6	493.2
G79.0	477.5	462.7	448.2	431.8	424.1	404.5	391.4	394.4	415.3	420.6
G80.0	416.2	403.1	389.8	371.7	360.0	348.6	331.2	329.3	346.9	353.5
G81.0	353.7	344.4	333.0	314.4	302.0	290.1	274.5	267.1	283.7	294.2
G82.0	294.2	289.0	280.6	263.3	248.5	237.3	221.6	214.1	229.8	235.8
G83.0	243.9	232.6	228.9	214.8	201.0	189.0	173.1	165.8	178.5	187.3
G84.0	193.4	187.0	177.1	171.4	160.3	147.6	136.2	127.5	135.7	142.8
G85.0	145.7	142.1	136.4	126.4	122.8	110.1	103.4	90.3	98.7	105.9
G86.0	101.8	101.5	97.6	91.9	88.5	80.5	73.6	62.6	67.3	75.8
G87.0	33.9	58.8	64.2	60.2	59.5	55.1	47.7	40.6	42.2	51.2
G88.0	21.7	20.9	24.1	35.4	35.6	34.8	31.1	24.8	24.2	33.2
G89.0	18.3	17.0	15.5	14.4	15.4	18.8	17.8	15.0	13.3	21.8
G90.0	15.4	14.9	13.9	12.1	11.0	9.9	10.3	9.1	8.6	12.5
G91.0	13.3	13.0	12.2	11.3	9.7	8.8	8.1	6.5	6.2	7.7
G92.0	12.1	11.7	11.3	10.2	8.9	8.1	7.3	6.3	5.7	6.2
G93.0	10.8	10.6	9.7	8.9	8.2	7.2	6.6	6.0	5.7	5.4
G94.0	10.0	9.7	8.9	8.2	7.8	7.1	6.0	6.4	6.3	5.9
G95.0	9.2	9.1	8.4	8.1	7.5	7.0	7.0	6.7	6.6	6.7
G96.0	9.4	8.6	8.1	8.1	7.4	7.1	6.7	6.6	7.1	7.1
G97.0	9.1	8.5	8.0	7.9	7.3	7.4	7.7	7.0	7.4	6.8
G98.0	8.7	8.7	7.9	8.0	7.7	7.8	7.4	7.4	7.4	7.3
G99.0	9.1	8.5	8.2	8.1	8.2	8.2	7.8	8.2	8.1	7.7
G100.0	8.8	8.8	8.4	8.5	8.4	8.5	8.2	8.7	8.1	8.6
G101.0	9.5	9.2	9.2	8.8	8.9	8.9	8.6	9.1	8.8	8.4
G102.0	9.6	9.6	9.5	9.2	9.2	9.3	9.5	9.1	9.3	8.8
G103.0	10.1	9.6	9.5	9.6	9.7	9.7	9.4	9.4	9.7	9.7
G104.0	10.0	10.4	10.3	10.0	9.9	10.1	9.9	10.2	10.1	9.6
G105.0	10.8	10.8	10.3	10.3	10.6	10.4	10.3	10.2	10.1	10.0
G106.0	10.8	10.7	11.1	11.0	10.7	10.8	11.1	11.0	10.4	10.4
G107.0	11.3	11.6	11.6	11.1	11.0	11.1	11.0	11.0	11.5	10.8
G108.0	12.1	11.9	11.9	11.8	11.8	11.6	11.5	11.5	11.3	11.3
G109.0	11.9	12.4	12.3	11.9	12.2	12.1	12.4	12.2	11.7	12.2
G110.0	12.8	12.3	12.6	12.3	12.5	12.5	12.3	12.3	12.6	12.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	13.2	12.8	13.1	12.8	12.8	12.9	13.2	12.8	13.1	12.5
G112.0	13.6	13.1	13.5	13.1	13.3	13.2	13.1	13.5	13.5	13.3
G113.0	14.0	13.5	13.9	13.9	13.8	13.6	13.5	13.9	13.9	13.2
G114.0	13.9	14.5	13.9	14.0	14.3	14.1	14.0	14.3	13.7	13.7
G115.0	14.9	14.4	14.5	14.7	14.3	14.4	14.4	14.4	14.1	14.0
G116.0	15.2	14.7	14.9	14.7	15.1	15.0	14.7	14.9	15.2	14.5
G117.0	15.7	15.1	15.5	15.2	15.4	15.3	15.2	15.3	15.1	14.9
G118.0	16.1	16.1	15.8	15.9	15.5	15.7	15.9	15.7	16.0	15.9
G119.0	16.5	16.5	16.2	16.2	16.2	16.0	16.0	16.4	15.9	16.2
G120.0	16.4	16.2	16.5	16.4	16.6	16.6	16.5	16.6	16.2	16.2
G121.0	17.3	16.7	16.8	16.7	16.9	17.0	17.0	17.2	17.2	16.6
G122.0	17.2	17.6	17.3	17.4	17.4	17.3	17.3	17.5	17.0	16.9
G123.0	17.6	18.0	17.8	17.4	17.8	17.8	17.6	17.9	17.4	17.3
G124.0	18.3	17.8	18.0	17.9	17.9	18.0	18.3	18.3	17.9	18.3
G125.0	18.3	18.7	18.4	18.1	18.6	18.6	18.4	18.7	18.2	18.2
G126.0	18.8	18.6	18.8	18.4	18.9	18.8	19.1	19.0	18.7	19.1
G127.0	19.5	19.0	19.1	18.8	19.3	19.1	19.5	19.3	19.0	19.5
G128.0	19.6	19.4	19.5	19.3	19.4	19.5	19.8	19.8	20.0	20.0
G129.0	20.4	19.8	19.8	20.1	20.1	20.1	20.3	20.1	20.3	20.3
G130.0	20.6	20.2	20.3	20.0	20.4	20.3	20.3	20.3	20.2	20.1
G131.0	20.5	21.0	20.8	20.3	20.4	20.8	21.0	20.8	20.6	20.5
G132.0	21.3	20.9	21.1	21.2	21.2	21.0	21.2	21.2	21.0	21.5
G133.0	21.3	21.7	21.2	21.1	21.6	21.5	21.6	21.7	21.3	21.8
G134.0	21.7	21.6	21.6	21.6	21.6	21.9	22.0	21.9	21.7	22.2
G135.0	22.0	22.0	21.8	22.3	21.9	22.3	22.4	22.3	22.2	21.9
G136.0	22.7	22.4	22.6	22.6	22.7	22.6	22.7	22.7	22.5	22.9
G137.0	23.0	23.0	22.5	23.1	22.6	23.1	23.0	23.0	22.9	23.2
G138.0	23.1	23.1	23.0	23.3	23.3	23.2	23.4	23.4	23.3	23.1
G139.0	23.3	23.4	23.7	23.8	23.7	23.8	23.8	23.8	24.0	23.4
G140.0	23.8	23.9	23.5	23.7	23.8	24.1	24.0	24.0	24.2	24.4
G141.0	24.4	24.2	23.9	24.5	24.0	24.2	24.5	24.2	24.6	24.1
G142.0	24.2	24.6	24.8	24.4	24.7	24.6	24.7	24.6	24.9	24.5
G143.0	24.9	24.9	25.1	24.7	25.1	25.1	25.1	24.9	25.2	25.3
G144.0	25.3	25.2	24.9	25.1	25.4	25.3	25.3	25.4	25.4	25.6
G145.0	25.2	25.4	25.8	25.3	25.6	25.4	25.5	25.6	25.8	25.9
G146.0	25.9	25.8	26.1	25.6	26.0	25.8	25.9	26.0	25.8	26.1
G147.0	26.2	26.1	26.5	26.5	26.3	26.1	26.0	26.0	26.0	25.9

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	26.5	26.5	26.1	26.7	26.2	26.3	26.5	26.5	26.3	26.6
G149.0	26.8	26.7	26.5	26.6	26.6	26.7	26.6	26.7	26.7	26.9
G150.0	27.0	26.9	26.7	27.3	27.1	26.8	26.8	26.9	27.0	27.0
G151.0	26.9	27.4	27.0	27.5	27.0	27.1	27.0	27.0	27.1	26.9
G152.0	27.6	27.6	27.8	27.7	27.6	27.4	27.4	27.4	27.4	27.6
G153.0	27.5	27.6	28.2	27.7	28.0	27.7	27.5	27.6	27.6	27.7
G154.0	28.2	27.8	27.8	27.8	28.1	28.0	27.7	27.7	27.8	28.0
G155.0	28.3	28.3	28.6	28.5	28.4	28.1	28.1	27.8	28.0	28.2
G156.0	28.1	28.2	28.3	28.8	28.6	28.3	28.3	28.2	28.1	28.4
G157.0	28.4	28.5	29.1	29.0	28.5	28.5	28.5	28.3	28.4	28.5
G158.0	28.9	29.1	28.6	28.8	29.0	28.8	28.6	28.6	28.5	28.3
G159.0	29.2	29.4	29.5	28.9	28.9	29.0	28.9	28.6	28.8	28.9
G160.0	29.0	29.1	29.0	29.1	29.1	29.2	29.1	29.0	28.9	28.6
G161.0	29.4	29.2	29.2	29.4	29.6	29.2	29.2	29.0	28.9	28.9
G162.0	29.5	29.5	29.5	29.6	29.5	29.5	29.5	29.4	29.4	29.0
G163.0	29.7	30.0	30.2	30.0	29.7	29.7	29.6	29.6	29.2	29.2
G164.0	30.2	30.2	29.7	29.8	30.0	29.9	29.8	29.7	29.6	29.6
G165.0	29.9	29.8	29.9	29.9	30.3	30.0	29.9	29.7	29.7	29.7
G166.0	30.0	30.4	30.5	30.5	30.4	30.2	30.0	29.8	29.6	29.6
G167.0	30.5	30.6	30.6	30.6	30.5	30.4	30.3	29.9	29.7	29.9
G168.0	30.3	30.7	30.6	30.7	30.6	30.4	30.4	30.0	30.2	30.0
G169.0	30.4	30.3	30.3	30.7	30.4	30.5	30.5	30.4	29.9	30.2
G170.0	31.0	30.9	30.9	30.7	30.5	30.7	30.6	30.3	30.0	30.3
G171.0	31.1	30.4	30.5	31.0	30.6	30.9	30.7	30.7	30.6	30.3
G172.0	30.6	30.6	31.0	30.6	30.6	30.7	30.7	30.9	30.7	30.4
G173.0	31.2	31.2	30.6	30.7	31.0	30.9	30.9	30.6	30.3	30.3
G174.0	31.2	31.2	30.7	31.1	31.1	30.7	31.1	30.7	30.9	30.4
G175.0	30.9	30.7	30.7	31.1	30.6	31.1	31.1	31.1	31.0	30.6
G176.0	31.0	31.2	31.2	30.7	31.1	31.1	31.0	31.2	31.1	30.7
G177.0	31.0	30.7	30.9	30.7	30.6	31.1	31.1	30.7	31.2	30.7
G178.0	31.3	31.3	31.2	31.1	31.1	30.7	30.9	31.2	31.2	30.7
G179.0	31.0	31.3	31.2	31.1	31.1	31.1	30.9	31.2	31.2	30.7
G180.0	31.4	31.2	31.0	30.7	30.6	30.6	30.9	31.2	31.2	30.7

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	4420.7	4422.8	4421.2	4424.6	4423.6	4424.9	4422.4	4425.8	4427.5	4428.3
G1.0	4420.1	4420.5	4422.7	4422.0	4422.8	4425.0	4425.4	4427.6	4429.0	4430.2
G2.0	4417.8	4416.2	4420.9	4420.4	4422.1	4422.8	4424.6	4424.8	4428.3	4429.7
G3.0	4414.0	4416.1	4416.5	4418.8	4419.3	4421.0	4422.5	4424.4	4425.8	4427.9
G4.0	4410.9	4411.1	4412.4	4415.0	4416.0	4418.6	4419.7	4420.0	4423.8	4425.8
G5.0	4407.6	4407.3	4408.7	4409.9	4411.9	4415.7	4416.3	4417.7	4420.6	4421.5
G6.0	4401.4	4402.3	4402.6	4404.7	4407.3	4410.5	4411.0	4412.3	4414.5	4416.8
G7.0	4394.3	4394.6	4396.4	4398.6	4401.0	4400.3	4405.3	4407.6	4411.7	4411.7
G8.0	4385.5	4385.7	4388.5	4392.5	4393.5	4395.3	4399.6	4400.0	4403.6	4405.4
G9.0	4376.2	4376.9	4378.5	4382.7	4383.3	4387.4	4389.9	4391.3	4394.9	4396.0
G10.0	4363.8	4366.4	4368.9	4371.4	4374.5	4376.8	4380.5	4381.6	4385.0	4386.0
G11.0	4354.0	4355.9	4356.2	4360.2	4361.6	4363.8	4368.3	4369.5	4373.6	4375.0
G12.0	4340.8	4341.0	4342.3	4347.8	4346.8	4350.8	4353.3	4355.6	4361.5	4362.7
G13.0	4318.4	4324.2	4328.6	4330.4	4332.5	4337.1	4337.2	4340.6	4346.0	4349.4
G14.0	4306.6	4303.1	4309.7	4314.1	4315.6	4319.1	4323.6	4325.6	4328.7	4331.9
G15.0	4285.2	4289.8	4292.0	4298.1	4297.9	4300.2	4305.7	4307.9	4312.3	4313.2
G16.0	4266.5	4270.5	4271.9	4277.4	4279.7	4283.0	4286.5	4290.3	4294.9	4293.6
G17.0	4244.6	4248.6	4251.5	4257.5	4261.2	4264.8	4266.0	4268.9	4271.2	4274.1
G18.0	4223.6	4225.9	4230.3	4235.7	4238.7	4245.2	4244.5	4246.7	4250.8	4251.4
G19.0	4198.4	4204.0	4206.7	4213.4	4215.8	4217.5	4222.6	4223.0	4227.0	4229.9
G20.0	4176.0	4178.5	4184.1	4190.1	4191.4	4193.8	4196.0	4198.0	4203.2	4206.4
G21.0	4149.6	4152.2	4158.6	4165.2	4166.6	4167.6	4171.0	4173.6	4178.5	4180.4
G22.0	4123.4	4127.0	4129.8	4137.7	4140.6	4140.7	4145.7	4145.6	4149.9	4155.5
G23.0	4096.6	4100.6	4102.9	4110.2	4111.4	4113.8	4116.9	4118.1	4125.0	4126.3
G24.0	4068.8	4072.8	4074.5	4081.0	4081.3	4083.4	4085.8	4090.4	4097.7	4099.4
G25.0	4038.9	4038.1	4043.0	4050.2	4049.9	4051.4	4056.7	4058.7	4066.2	4069.7
G26.0	4006.0	4008.9	4011.9	4016.9	4017.3	4019.1	4023.9	4027.8	4037.0	4038.9
G27.0	3969.8	3973.5	3979.2	3983.5	3983.8	3987.8	3992.7	3997.1	4003.2	4006.9
G28.0	3938.9	3941.3	3944.3	3947.6	3948.4	3951.1	3956.4	3963.6	3970.2	3972.6
G29.0	3900.6	3903.6	3907.4	3911.1	3911.6	3916.0	3922.7	3928.6	3934.3	3938.3
G30.0	3865.5	3866.2	3870.4	3873.3	3874.4	3878.4	3885.1	3890.9	3899.4	3903.0
G31.0	3825.8	3828.0	3830.9	3834.1	3835.9	3843.3	3847.9	3853.3	3862.4	3866.7
G32.0	3785.4	3788.8	3790.4	3794.0	3794.1	3801.5	3809.4	3813.9	3822.9	3827.4
G33.0	3742.9	3747.9	3747.9	3751.8	3754.6	3759.8	3769.1	3773.4	3780.9	3786.1
G34.0	3701.3	3706.2	3705.2	3709.5	3712.3	3716.7	3725.6	3731.1	3741.0	3745.5
G35.0	3655.9	3663.6	3662.1	3664.6	3667.5	3674.5	3679.8	3687.9	3698.5	3703.5
G36.0	3611.0	3615.9	3614.8	3617.9	3621.2	3627.2	3636.9	3642.0	3651.6	3656.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	3567.1	3568.2	3567.6	3572.4	3575.3	3582.5	3588.2	3596.8	3607.1	3611.1
G38.0	3518.8	3520.8	3518.4	3524.6	3525.9	3532.7	3541.4	3548.6	3557.0	3564.4
G39.0	3470.0	3470.3	3468.7	3473.9	3477.2	3486.2	3492.3	3499.3	3507.6	3513.4
G40.0	3415.4	3418.1	3417.3	3424.1	3427.5	3433.8	3440.6	3446.8	3456.8	3461.9
G41.0	3367.7	3366.1	3367.4	3371.0	3374.4	3378.8	3388.8	3395.4	3407.3	3411.9
G42.0	3312.6	3311.4	3311.1	3314.9	3322.1	3326.4	3333.9	3341.8	3351.1	3357.3
G43.0	3257.0	3252.4	3255.9	3260.5	3265.7	3273.7	3278.3	3285.9	3297.8	3302.0
G44.0	3198.6	3193.7	3198.4	3204.4	3207.5	3213.0	3221.9	3228.6	3238.8	3244.8
G45.0	3136.9	3132.4	3138.3	3147.9	3148.5	3158.4	3165.8	3170.8	3180.2	3186.7
G46.0	3072.7	3069.3	3075.7	3085.0	3089.4	3095.3	3104.2	3111.3	3122.2	3128.1
G47.0	3008.6	3004.3	3010.1	3021.4	3029.1	3036.6	3043.8	3051.9	3062.2	3068.8
G48.0	2942.2	2937.6	2943.6	2955.7	2961.2	2970.1	2980.6	2986.8	2997.6	3004.9
G49.0	2878.4	2871.5	2875.9	2888.3	2894.0	2904.1	2913.7	2921.9	2934.3	2942.1
G50.0	2810.5	2804.5	2809.8	2820.3	2824.7	2836.3	2847.7	2856.9	2868.9	2877.2
G51.0	2745.5	2735.6	2741.8	2752.0	2755.8	2767.6	2778.3	2787.4	2804.0	2810.3
G52.0	2674.2	2669.8	2672.8	2680.0	2686.4	2692.4	2707.8	2722.6	2737.1	2743.1
G53.0	2601.2	2598.7	2600.6	2612.3	2614.6	2622.6	2633.4	2649.4	2665.0	2674.0
G54.0	2529.7	2529.1	2532.3	2537.6	2541.3	2549.5	2558.1	2575.8	2594.9	2603.9
G55.0	2457.4	2455.4	2459.1	2467.7	2466.8	2474.6	2486.5	2501.6	2522.5	2531.9
G56.0	2380.7	2383.6	2386.1	2394.1	2393.1	2399.4	2412.5	2427.9	2448.5	2462.5
G57.0	2305.4	2307.9	2312.4	2319.0	2316.2	2323.4	2335.9	2352.1	2377.4	2391.9
G58.0	2225.6	2229.7	2236.4	2242.8	2240.8	2247.4	2262.3	2274.8	2299.3	2317.7
G59.0	2142.2	2148.7	2157.4	2163.2	2163.4	2169.9	2183.4	2198.2	2225.2	2241.5
G60.0	2057.6	2066.0	2077.9	2083.9	2087.0	2094.2	2106.3	2123.4	2147.3	2171.0
G61.0	1975.8	1982.3	1993.5	2003.7	2003.5	2012.4	2027.7	2045.9	2073.2	2094.1
G62.0	1890.4	1902.2	1910.6	1919.4	1923.6	1933.5	1953.6	1970.5	1993.4	2016.3
G63.0	1805.8	1816.7	1828.1	1837.5	1842.7	1850.0	1869.8	1894.8	1917.5	1939.2
G64.0	1720.2	1731.7	1742.6	1753.3	1761.4	1770.2	1790.4	1815.6	1837.6	1861.0
G65.0	1635.5	1644.4	1658.9	1671.6	1676.5	1691.5	1710.8	1734.2	1762.8	1779.7
G66.0	1550.9	1562.8	1576.1	1591.1	1596.7	1611.2	1633.8	1654.0	1683.8	1707.9
G67.0	1460.1	1474.8	1488.0	1507.8	1516.2	1534.1	1556.8	1575.5	1604.9	1626.6
G68.0	1372.3	1389.8	1402.9	1423.8	1434.4	1456.8	1476.8	1497.5	1524.8	1544.7
G69.0	1282.1	1299.3	1316.9	1337.6	1353.2	1376.8	1399.6	1419.5	1446.7	1459.5
G70.0	1192.7	1213.4	1231.1	1252.8	1276.6	1295.1	1318.3	1342.3	1363.4	1377.2
G71.0	1104.2	1125.1	1147.8	1172.9	1197.6	1220.8	1241.2	1258.4	1282.1	1299.8
G72.0	1017.2	1038.4	1065.0	1090.1	1118.5	1140.5	1162.6	1174.6	1199.6	1223.6
G73.0	933.6	950.1	978.5	1014.2	1036.0	1066.2	1080.9	1095.3	1124.4	1144.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	843.9	868.6	901.0	935.4	961.3	986.4	1000.9	1019.3	1045.9	1070.2
G75.0	761.1	786.6	817.6	857.7	884.8	901.3	921.5	944.4	970.5	992.9
G76.0	679.7	708.1	744.3	784.6	808.5	824.8	851.5	873.6	897.6	922.2
G77.0	601.0	631.3	671.1	711.2	727.6	750.4	779.7	801.2	827.1	851.8
G78.0	526.5	556.2	602.2	635.3	655.1	681.0	708.3	732.9	759.2	783.4
G79.0	451.9	486.0	530.8	561.8	587.7	613.1	640.0	665.7	691.1	712.1
G80.0	387.9	422.6	462.7	494.3	520.0	547.9	574.1	601.6	625.3	647.4
G81.0	321.9	359.0	396.1	429.4	454.8	483.1	510.1	538.3	562.0	581.2
G82.0	265.3	306.0	335.7	369.1	396.7	425.3	451.7	476.2	497.9	514.0
G83.0	219.9	253.1	282.4	311.1	341.2	368.3	393.7	411.9	434.5	454.4
G84.0	174.0	201.7	231.9	263.2	289.7	309.8	333.5	354.4	383.3	405.0
G85.0	136.2	160.8	188.4	216.9	238.9	257.3	281.9	307.2	332.2	352.5
G86.0	99.5	123.3	150.0	171.6	189.4	212.9	237.3	258.8	284.4	302.2
G87.0	73.6	91.6	112.3	130.1	150.6	170.8	190.6	212.2	232.6	249.2
G88.0	49.4	65.1	81.9	100.0	115.1	131.1	147.6	164.4	183.9	197.9
G89.0	31.5	44.1	57.7	69.6	81.6	92.2	106.5	116.9	117.4	103.1
G90.0	20.4	26.8	35.2	41.9	40.3	34.8	32.0	31.2	32.4	33.5
G91.0	9.9	10.8	11.9	13.6	15.0	16.6	17.9	19.1	20.5	21.7
G92.0	8.0	9.1	10.2	11.1	12.3	13.6	14.9	15.3	16.5	16.7
G93.0	7.2	8.1	9.5	10.4	11.0	12.1	13.0	13.1	14.0	14.0
G94.0	7.0	7.5	8.7	9.7	10.3	11.0	12.1	11.8	12.5	12.8
G95.0	6.8	7.3	7.9	8.8	9.6	10.4	11.3	11.3	11.6	11.9
G96.0	6.4	7.0	7.8	8.7	9.1	9.7	10.3	10.7	11.0	11.0
G97.0	7.3	7.1	7.3	7.9	8.9	9.5	9.7	10.2	10.8	11.1
G98.0	7.7	7.3	7.4	8.1	8.2	9.1	9.3	9.7	10.4	10.7
G99.0	8.0	7.7	7.5	8.0	8.6	8.8	9.5	9.3	9.7	10.3
G100.0	8.4	8.0	7.8	8.4	8.6	8.6	9.2	9.1	9.4	9.6
G101.0	8.8	8.4	8.2	8.1	8.2	8.6	9.2	9.4	9.3	9.4
G102.0	9.3	8.8	8.6	8.5	8.8	8.7	8.7	9.4	9.2	9.4
G103.0	9.1	9.2	9.3	9.2	8.8	8.9	8.8	8.9	9.6	9.3
G104.0	10.0	9.5	9.6	9.2	9.2	9.2	9.2	9.6	9.6	9.4
G105.0	10.4	10.1	10.1	10.0	9.9	9.7	9.9	9.9	9.5	10.0
G106.0	10.2	10.4	10.6	10.0	10.2	10.1	10.1	10.2	9.7	9.7
G107.0	11.3	10.8	10.9	10.3	10.7	10.2	10.4	10.0	10.0	10.4
G108.0	11.6	11.1	10.9	11.1	10.8	10.7	10.3	10.8	10.3	10.8
G109.0	11.5	11.5	11.6	11.1	11.4	10.9	10.8	11.1	10.7	11.0
G110.0	11.8	11.9	11.7	11.9	11.5	11.6	11.1	11.1	11.0	11.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	12.8	12.4	12.1	11.9	12.2	12.1	12.1	11.4	11.4	11.1
G112.0	13.2	12.9	12.4	12.3	12.5	12.4	12.4	12.2	11.7	12.1
G113.0	13.6	13.2	13.2	12.6	13.0	12.8	12.8	12.5	12.4	12.5
G114.0	13.5	13.6	13.6	13.6	13.0	13.1	12.8	12.6	12.8	12.3
G115.0	13.8	13.9	14.0	13.6	13.8	13.3	13.1	13.0	12.9	12.8
G116.0	14.3	14.4	14.0	14.4	13.8	14.0	13.5	13.8	13.6	13.1
G117.0	15.2	14.6	14.9	14.7	14.3	14.0	13.9	14.1	13.6	13.5
G118.0	15.5	15.2	15.2	15.1	15.0	14.7	14.3	14.1	14.0	14.3
G119.0	15.9	15.5	15.2	15.5	15.3	15.1	14.6	14.9	14.4	14.6
G120.0	16.0	15.9	15.7	15.4	15.3	15.5	15.0	15.2	15.2	14.7
G121.0	16.8	16.2	16.0	16.2	16.1	15.9	15.4	15.3	15.4	15.4
G122.0	17.2	16.8	16.7	16.6	16.2	16.4	16.2	15.8	15.5	15.8
G123.0	17.6	17.2	16.8	16.6	16.9	16.7	16.2	16.4	15.9	16.1
G124.0	17.6	17.6	17.2	16.9	17.2	17.0	16.6	16.6	16.2	16.2
G125.0	18.1	17.9	17.8	17.6	17.5	17.4	16.9	17.0	17.0	16.9
G126.0	18.7	18.3	17.9	17.6	17.9	17.4	17.8	17.4	16.9	17.3
G127.0	18.9	18.6	18.6	18.3	17.9	18.2	18.1	17.8	17.8	17.3
G128.0	19.5	19.0	18.9	18.2	18.7	18.6	18.4	18.1	17.8	17.6
G129.0	19.8	19.5	19.3	18.6	18.7	18.4	18.8	18.4	18.1	18.0
G130.0	20.1	20.0	19.7	19.6	19.4	18.8	19.1	18.7	18.9	18.8
G131.0	20.4	20.2	19.7	20.0	19.7	19.6	19.0	19.1	18.7	18.7
G132.0	20.9	20.6	20.4	19.7	20.1	19.6	19.8	19.5	19.6	19.4
G133.0	21.2	21.0	20.9	20.2	20.4	20.3	20.2	19.7	19.4	19.7
G134.0	21.7	21.3	21.0	21.1	20.5	20.3	20.0	20.2	19.8	19.8
G135.0	22.0	21.7	21.7	21.5	20.9	20.9	20.9	20.4	20.2	20.2
G136.0	22.4	22.0	21.7	21.2	21.5	21.5	21.2	20.9	20.9	20.5
G137.0	22.7	22.5	22.4	21.6	21.9	21.8	21.0	21.1	21.2	21.1
G138.0	23.1	22.9	22.7	22.5	21.8	21.7	21.3	21.6	21.0	21.1
G139.0	23.4	23.1	22.6	22.9	22.3	22.0	22.3	21.9	21.9	21.5
G140.0	23.7	23.5	23.0	22.6	22.9	22.7	22.0	22.3	21.7	21.8
G141.0	24.0	23.9	23.3	23.0	23.3	22.6	23.0	22.4	21.9	22.3
G142.0	24.4	24.2	23.7	23.8	23.7	23.0	23.3	22.6	23.0	22.5
G143.0	24.7	24.6	24.4	23.7	23.9	23.7	23.0	23.1	22.6	22.7
G144.0	24.9	24.7	24.6	23.9	24.2	23.7	23.9	23.2	23.0	23.1
G145.0	25.3	25.2	24.9	24.2	24.2	24.4	23.7	23.9	23.3	23.5
G146.0	25.5	25.3	25.3	25.2	24.5	24.2	24.5	23.9	23.5	23.7
G147.0	26.0	25.8	25.3	25.5	25.2	24.9	24.8	24.5	24.5	23.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	26.1	25.9	25.6	25.2	25.4	24.9	24.6	24.8	24.1	24.2
G149.0	26.5	26.2	26.1	25.4	25.4	25.2	25.4	24.7	24.5	24.6
G150.0	26.7	26.5	26.3	26.3	25.8	25.8	25.6	25.1	24.8	24.9
G151.0	26.9	26.8	26.6	26.6	26.3	26.0	25.4	25.3	25.2	25.2
G152.0	27.0	27.0	26.9	26.8	26.6	26.0	26.2	25.6	25.4	25.6
G153.0	27.4	27.1	26.9	27.0	26.9	26.6	26.6	26.3	25.6	25.9
G154.0	27.5	27.5	27.1	27.4	26.7	26.6	26.3	26.7	26.0	26.2
G155.0	27.8	27.8	27.4	27.6	26.9	26.8	26.6	26.9	26.3	26.5
G156.0	28.1	27.8	27.5	27.3	27.7	27.4	27.4	27.1	27.0	26.7
G157.0	28.2	28.2	27.8	28.1	27.5	27.4	27.7	27.0	26.9	27.1
G158.0	28.4	28.3	28.0	27.6	27.7	27.6	27.4	27.7	27.6	27.4
G159.0	28.6	28.5	28.2	28.0	28.3	28.0	27.6	27.5	27.8	27.6
G160.0	28.6	28.8	28.5	28.6	28.5	28.3	27.8	27.7	27.7	28.0
G161.0	29.0	28.6	28.6	28.2	28.6	28.4	28.1	28.0	28.4	28.1
G162.0	29.0	29.1	28.9	29.0	28.5	28.5	28.3	28.2	28.3	28.4
G163.0	29.1	29.0	29.1	29.1	28.6	28.9	29.0	29.0	28.9	28.6
G164.0	29.5	29.4	29.1	28.8	28.9	28.9	29.2	29.1	28.8	28.9
G165.0	29.4	29.2	29.4	29.0	29.5	29.1	29.4	28.9	28.9	29.1
G166.0	29.7	29.7	29.5	29.1	29.6	29.2	29.5	29.6	29.6	29.6
G167.0	29.6	29.5	29.6	29.4	29.8	29.5	29.2	29.4	29.7	29.7
G168.0	29.9	29.9	29.8	30.0	29.6	29.7	29.4	29.5	29.5	29.9
G169.0	29.9	29.8	29.8	29.6	30.0	29.8	29.6	30.0	29.7	29.8
G170.0	30.3	30.2	29.9	29.7	30.2	29.9	29.7	30.2	30.2	30.0
G171.0	30.0	29.9	30.0	30.3	30.3	30.2	30.3	30.3	29.9	30.3
G172.0	30.2	30.0	30.2	30.4	29.9	30.2	29.9	29.9	30.0	30.4
G173.0	30.4	30.2	30.2	29.9	30.4	30.4	30.0	30.5	30.2	30.5
G174.0	30.5	30.2	30.3	30.0	30.5	30.4	30.2	30.5	30.3	30.5
G175.0	30.4	30.3	30.4	30.6	30.6	30.5	30.6	30.2	30.6	30.7
G176.0	30.4	30.4	30.4	30.7	30.6	30.5	30.4	30.7	30.4	30.5
G177.0	30.4	30.3	30.4	30.2	30.6	30.5	30.7	30.3	30.7	30.5
G178.0	30.6	30.7	30.6	30.2	30.4	30.5	30.4	30.3	30.4	30.7
G179.0	30.6	30.4	30.6	30.3	30.4	30.7	30.5	30.4	30.9	30.6
G180.0	30.7	30.9	30.7	30.3	30.4	30.9	30.6	30.4	30.9	30.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	4430.7	4431.8	4430.9	4432.0	4430.4	4429.7	4433.8	4431.4	4429.8	4432.5
G1.0	4432.0	4432.2	4433.0	4433.6	4431.6	4431.2	4431.9	4432.5	4431.4	4432.2
G2.0	4431.9	4432.8	4433.0	4432.5	4431.2	4432.2	4432.2	4431.3	4430.6	4429.9
G3.0	4430.1	4430.8	4430.8	4431.4	4430.0	4430.6	4431.0	4430.8	4430.9	4430.1
G4.0	4427.5	4429.3	4429.0	4429.4	4429.7	4428.0	4426.8	4428.0	4426.4	4428.6
G5.0	4423.8	4425.5	4425.4	4427.2	4425.1	4426.1	4425.4	4425.0	4424.0	4425.1
G6.0	4420.9	4423.2	4423.5	4424.0	4421.8	4421.2	4421.9	4421.1	4419.9	4420.9
G7.0	4414.8	4417.0	4417.5	4419.2	4417.1	4418.2	4414.9	4415.0	4414.9	4415.4
G8.0	4408.8	4411.5	4411.6	4414.5	4411.3	4413.0	4408.9	4408.4	4408.3	4407.9
G9.0	4400.2	4402.9	4404.3	4405.6	4404.7	4405.3	4400.5	4402.5	4399.5	4400.7
G10.0	4390.9	4392.4	4395.2	4396.7	4396.7	4396.8	4390.0	4391.5	4389.6	4392.7
G11.0	4380.0	4382.8	4385.0	4386.0	4385.2	4387.4	4375.8	4378.9	4376.6	4380.0
G12.0	4366.9	4369.2	4371.2	4373.0	4372.1	4373.3	4362.0	4361.1	4362.7	4364.5
G13.0	4352.6	4353.5	4356.7	4358.0	4358.0	4358.7	4344.2	4346.8	4345.7	4347.0
G14.0	4335.5	4336.9	4340.0	4340.8	4339.5	4340.7	4327.6	4328.9	4328.2	4330.5
G15.0	4316.9	4319.9	4322.2	4322.5	4322.1	4322.8	4307.2	4310.3	4310.1	4312.5
G16.0	4297.4	4300.0	4303.0	4302.8	4301.5	4303.2	4289.3	4292.1	4290.0	4292.8
G17.0	4278.0	4281.2	4283.5	4284.0	4284.7	4284.1	4268.8	4270.3	4270.7	4273.1
G18.0	4254.9	4257.8	4264.0	4264.0	4264.0	4263.9	4247.1	4249.4	4247.9	4249.7
G19.0	4234.2	4237.3	4241.5	4242.8	4242.8	4242.1	4225.6	4226.1	4224.9	4227.1
G20.0	4210.8	4214.1	4218.2	4219.4	4218.1	4220.7	4199.2	4200.4	4202.5	4201.7
G21.0	4185.6	4189.4	4193.7	4194.8	4194.5	4195.9	4173.6	4175.3	4176.8	4179.6
G22.0	4159.8	4164.3	4168.7	4168.9	4169.4	4171.2	4146.9	4151.1	4151.1	4151.7
G23.0	4133.3	4136.6	4141.6	4143.4	4143.3	4144.4	4119.5	4122.5	4120.5	4122.8
G24.0	4105.5	4108.2	4113.4	4115.3	4115.5	4117.3	4090.0	4092.4	4092.6	4094.3
G25.0	4076.1	4079.0	4083.7	4086.8	4085.8	4087.7	4058.6	4062.1	4062.6	4063.7
G26.0	4043.6	4048.9	4054.2	4055.4	4055.6	4058.3	4025.4	4032.2	4032.0	4032.8
G27.0	4012.6	4017.4	4021.9	4025.5	4026.3	4026.9	3993.8	3998.1	3997.3	3999.3
G28.0	3979.1	3984.8	3988.3	3991.2	3991.9	3994.1	3958.1	3963.0	3961.5	3964.8
G29.0	3946.3	3949.5	3955.1	3958.0	3958.1	3960.1	3924.8	3927.8	3925.6	3929.6
G30.0	3909.6	3912.9	3918.8	3919.6	3922.3	3925.3	3886.9	3888.7	3887.1	3890.9
G31.0	3873.2	3876.9	3883.9	3885.1	3886.3	3889.6	3847.4	3850.8	3849.4	3850.0
G32.0	3834.7	3839.2	3844.3	3846.6	3848.0	3850.5	3808.0	3809.4	3809.4	3810.2
G33.0	3794.6	3798.6	3805.2	3808.2	3810.3	3812.2	3764.7	3767.4	3766.3	3767.4
G34.0	3753.6	3758.0	3764.2	3766.1	3768.3	3770.6	3720.8	3723.6	3723.4	3725.6
G35.0	3710.7	3714.6	3722.4	3724.4	3726.2	3730.1	3676.6	3680.5	3678.9	3678.1
G36.0	3665.6	3670.5	3674.1	3678.7	3681.1	3685.3	3630.2	3634.0	3631.3	3631.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	3619.9	3624.4	3632.5	3635.5	3638.1	3639.4	3581.9	3584.2	3583.8	3585.2
G38.0	3570.3	3577.1	3585.6	3587.3	3591.6	3593.3	3533.4	3536.6	3535.9	3535.3
G39.0	3524.5	3529.8	3537.0	3540.4	3541.8	3545.3	3483.4	3484.0	3482.7	3483.0
G40.0	3471.3	3478.8	3485.5	3490.9	3492.5	3494.4	3429.9	3432.4	3430.5	3427.4
G41.0	3420.7	3429.0	3436.4	3438.0	3440.6	3445.9	3377.1	3379.8	3377.6	3373.2
G42.0	3368.0	3372.4	3381.6	3385.9	3388.4	3394.7	3323.6	3324.6	3320.8	3318.7
G43.0	3311.9	3318.5	3328.1	3333.8	3337.1	3340.9	3267.9	3270.4	3266.2	3261.4
G44.0	3253.8	3260.9	3270.9	3277.8	3281.9	3286.3	3210.4	3210.9	3208.2	3204.7
G45.0	3194.6	3202.5	3215.8	3220.0	3226.4	3231.6	3151.7	3153.9	3148.1	3144.4
G46.0	3135.9	3145.2	3158.6	3164.4	3170.5	3174.3	3091.2	3094.7	3087.3	3083.7
G47.0	3078.1	3087.3	3099.9	3107.1	3113.9	3115.9	3030.4	3031.1	3024.6	3020.4
G48.0	3017.2	3026.4	3039.3	3047.1	3051.8	3055.3	2969.0	2968.4	2962.8	2956.2
G49.0	2955.0	2962.5	2980.2	2983.9	2990.6	2995.1	2905.9	2907.6	2898.6	2892.2
G50.0	2891.1	2899.9	2914.8	2922.2	2928.3	2933.8	2841.7	2841.7	2834.8	2825.8
G51.0	2822.2	2834.1	2850.5	2858.3	2865.6	2872.3	2777.3	2774.9	2766.2	2756.7
G52.0	2754.4	2768.4	2784.5	2794.4	2803.1	2809.7	2710.3	2708.5	2699.1	2691.4
G53.0	2686.4	2698.8	2719.1	2727.8	2736.1	2745.0	2643.3	2643.2	2634.3	2620.0
G54.0	2618.9	2633.4	2649.3	2661.4	2672.3	2678.7	2574.9	2573.1	2564.9	2551.8
G55.0	2548.6	2562.3	2583.8	2594.3	2606.0	2613.4	2502.5	2504.0	2494.4	2479.3
G56.0	2481.5	2495.8	2515.9	2525.7	2538.7	2547.5	2432.0	2433.4	2420.2	2407.1
G57.0	2409.8	2425.3	2446.3	2454.6	2468.6	2475.7	2361.8	2358.8	2344.6	2330.9
G58.0	2338.5	2353.6	2374.1	2382.7	2396.5	2407.1	2285.0	2286.3	2271.1	2260.4
G59.0	2263.6	2277.7	2297.4	2311.7	2324.9	2333.4	2212.6	2214.6	2196.5	2179.8
G60.0	2189.8	2202.6	2224.2	2237.7	2254.3	2262.3	2139.3	2141.9	2122.7	2106.9
G61.0	2112.5	2129.4	2153.2	2164.3	2181.6	2186.2	2060.3	2064.3	2044.5	2034.3
G62.0	2037.6	2055.4	2075.5	2090.6	2109.7	2114.5	1979.7	1982.1	1965.5	1955.3
G63.0	1959.1	1980.6	2002.1	2015.4	2033.2	2035.7	1899.3	1899.7	1882.1	1871.9
G64.0	1881.1	1905.8	1924.3	1935.8	1952.7	1958.1	1815.4	1816.3	1802.8	1789.6
G65.0	1802.3	1825.1	1845.4	1854.2	1868.8	1874.8	1740.5	1736.0	1722.1	1707.7
G66.0	1726.2	1745.1	1762.3	1772.3	1786.4	1798.0	1659.8	1657.8	1645.1	1630.1
G67.0	1646.8	1660.1	1682.6	1694.0	1706.5	1718.7	1582.0	1577.9	1564.3	1549.4
G68.0	1562.3	1578.9	1602.9	1616.4	1630.2	1642.1	1499.4	1497.9	1485.6	1471.1
G69.0	1480.1	1498.6	1523.2	1538.4	1551.8	1561.5	1422.1	1419.8	1404.8	1388.8
G70.0	1400.6	1423.8	1448.5	1458.8	1473.8	1484.9	1339.9	1341.6	1329.5	1314.5
G71.0	1324.2	1343.5	1370.1	1382.3	1395.7	1404.7	1262.8	1261.3	1249.1	1235.5
G72.0	1244.8	1266.6	1290.3	1305.6	1317.3	1325.8	1187.1	1186.1	1170.7	1161.4
G73.0	1168.5	1189.6	1214.3	1226.6	1241.0	1248.2	1106.0	1106.2	1094.8	1084.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	1091.3	1114.4	1138.6	1151.7	1162.6	1170.5	1029.3	1032.3	1021.5	1008.4
G75.0	1016.4	1038.8	1062.8	1075.7	1087.4	1094.0	956.4	955.2	945.7	935.6
G76.0	946.3	967.2	991.8	1004.1	1012.9	1020.4	884.5	883.9	874.8	864.9
G77.0	874.0	895.3	916.9	930.5	939.7	946.9	811.0	810.7	804.1	793.3
G78.0	805.8	826.5	848.4	859.7	869.0	876.6	734.2	733.8	729.4	722.3
G79.0	737.9	756.5	777.8	788.9	796.6	801.9	662.4	661.9	657.5	646.9
G80.0	672.9	688.9	707.4	714.8	721.4	728.6	602.2	602.6	597.1	587.4
G81.0	600.9	616.0	634.1	643.0	651.5	657.3	545.6	545.8	540.7	529.3
G82.0	534.2	552.5	573.2	583.5	593.0	598.8	485.1	485.6	482.1	472.7
G83.0	478.7	497.5	515.5	526.9	538.0	541.7	428.7	429.6	423.8	417.0
G84.0	427.5	443.7	461.9	472.5	479.1	483.7	366.2	367.6	363.8	357.8
G85.0	372.6	390.8	406.7	416.7	423.6	426.5	306.7	307.5	303.4	298.6
G86.0	320.9	336.9	351.3	357.4	363.3	367.7	221.7	229.3	224.7	227.9
G87.0	265.2	278.3	291.8	297.7	302.3	306.1	61.0	62.6	60.9	63.8
G88.0	210.5	222.7	234.1	235.7	235.9	231.7	32.5	32.1	31.9	31.8
G89.0	92.8	82.4	79.8	71.1	66.6	65.1	19.7	20.3	20.2	20.4
G90.0	34.1	34.7	36.0	34.2	33.9	33.9	15.5	15.2	15.5	15.8
G91.0	21.8	21.9	22.0	21.8	21.1	20.4	12.2	12.4	12.5	13.0
G92.0	17.3	17.2	17.3	16.6	16.1	15.7	11.0	10.9	10.9	11.1
G93.0	14.4	14.3	14.3	13.9	13.5	12.6	9.6	9.6	10.0	10.4
G94.0	12.4	12.4	12.2	11.9	11.3	11.1	9.7	9.7	9.7	9.9
G95.0	11.7	11.6	11.1	10.6	10.2	9.7	9.7	9.6	9.6	9.9
G96.0	11.1	11.0	10.6	10.6	10.2	9.4	9.2	9.2	9.4	9.4
G97.0	10.8	10.7	10.6	10.4	10.0	9.6	9.5	9.2	9.4	9.4
G98.0	10.4	10.3	10.3	9.7	9.5	9.4	8.9	9.4	9.3	9.5
G99.0	10.2	10.1	10.1	10.0	9.4	9.3	9.6	9.4	9.4	9.3
G100.0	9.9	10.0	9.7	9.7	9.5	8.9	9.7	9.5	9.4	9.4
G101.0	9.7	9.7	9.5	9.7	9.2	8.9	9.3	9.4	9.5	9.5
G102.0	9.6	9.6	9.6	9.7	9.2	9.3	10.0	9.5	9.7	9.7
G103.0	9.5	9.6	9.6	9.4	9.4	9.4	10.1	10.0	9.9	9.9
G104.0	9.7	9.6	9.6	9.4	9.4	9.4	10.3	10.2	10.0	10.1
G105.0	9.7	10.0	9.9	9.5	9.5	9.6	10.2	10.4	10.2	10.3
G106.0	9.9	10.0	10.0	9.7	9.7	9.6	10.3	10.4	10.7	10.6
G107.0	10.1	10.2	10.2	10.3	10.0	10.0	10.8	11.0	10.8	10.8
G108.0	10.2	10.3	10.4	10.6	10.2	10.1	11.1	11.0	11.1	11.3
G109.0	10.8	10.6	10.6	10.8	10.6	10.6	11.5	11.5	11.6	11.6
G110.0	11.0	11.1	10.9	11.1	11.0	10.8	11.8	12.1	11.9	12.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	11.3	11.5	11.3	11.5	11.1	11.0	12.2	12.5	12.3	12.4
G112.0	11.6	11.6	11.6	11.4	11.5	11.5	12.6	12.6	12.8	12.6
G113.0	12.2	11.8	11.9	11.7	11.8	11.8	13.0	13.2	13.1	13.1
G114.0	12.6	12.5	12.3	12.5	12.4	12.2	13.5	13.6	13.5	13.6
G115.0	12.8	12.9	12.6	12.9	12.5	12.6	14.4	14.1	13.9	13.8
G116.0	13.3	13.3	13.1	12.9	13.1	13.0	14.7	14.3	14.3	14.3
G117.0	13.8	13.3	13.5	13.1	13.2	13.3	14.7	14.6	14.7	14.6
G118.0	13.8	14.1	13.8	13.7	13.7	13.7	15.1	15.3	15.1	15.1
G119.0	14.3	14.5	14.1	14.4	14.0	14.1	16.0	15.5	15.4	15.4
G120.0	14.9	14.5	14.6	14.9	14.7	14.6	16.4	15.9	15.9	15.9
G121.0	15.2	15.2	15.0	14.7	15.1	14.9	16.2	16.2	16.4	16.2
G122.0	15.7	15.2	15.3	15.1	15.2	15.3	17.2	16.9	16.7	16.7
G123.0	16.0	15.5	15.7	15.4	15.7	15.7	17.5	17.3	17.0	17.0
G124.0	16.4	16.5	16.0	16.2	16.1	16.0	17.9	17.5	17.5	17.4
G125.0	16.7	16.8	16.5	16.2	16.6	16.4	18.0	18.0	17.9	17.9
G126.0	17.0	17.2	16.8	16.7	16.8	16.7	18.3	18.4	18.2	18.2
G127.0	17.4	16.9	17.2	17.0	17.0	17.0	19.0	18.7	18.7	18.6
G128.0	17.9	17.4	17.6	17.6	17.6	17.6	19.4	19.0	19.0	18.9
G129.0	18.2	18.2	18.0	18.0	18.0	17.9	19.7	19.6	19.4	19.3
G130.0	18.4	18.7	18.3	18.4	18.2	18.2	20.2	19.7	19.8	19.6
G131.0	18.6	18.4	18.7	18.7	18.6	18.6	20.5	20.3	20.2	20.0
G132.0	19.0	18.8	19.0	18.9	18.9	18.9	20.6	20.6	20.5	20.4
G133.0	19.6	19.1	19.3	19.1	19.3	19.4	21.0	21.1	20.9	20.6
G134.0	19.6	20.0	19.6	19.5	19.6	19.6	21.3	21.3	21.1	21.0
G135.0	20.2	20.3	20.1	19.8	20.0	20.0	21.7	21.6	21.6	21.3
G136.0	20.6	20.2	20.3	20.2	20.3	20.4	22.0	22.0	21.8	21.7
G137.0	20.9	21.0	20.8	20.5	20.6	20.6	22.4	22.3	22.2	22.0
G138.0	21.1	20.9	21.0	21.1	21.1	21.0	22.7	22.6	22.5	22.4
G139.0	21.6	21.2	21.3	21.1	21.3	21.3	23.1	23.1	22.7	22.6
G140.0	21.9	21.9	21.7	21.5	21.7	21.7	23.3	23.4	23.1	23.0
G141.0	21.9	21.9	22.0	21.8	22.0	21.9	23.8	23.7	23.4	23.3
G142.0	22.2	22.5	22.4	22.0	22.3	22.3	24.0	23.9	23.8	23.5
G143.0	22.5	22.5	22.6	22.4	22.5	22.6	24.2	24.1	24.0	24.0
G144.0	23.1	22.9	22.9	22.6	22.7	23.0	24.6	24.4	24.4	24.1
G145.0	23.1	23.4	23.2	23.0	23.1	23.1	24.8	24.7	24.6	24.5
G146.0	23.7	23.5	23.4	23.3	23.3	23.4	25.2	25.1	24.9	24.7
G147.0	23.9	23.7	23.7	23.8	23.7	23.5	25.4	25.2	25.2	25.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	24.2	24.1	24.0	23.9	23.9	23.9	25.6	25.5	25.3	25.3
G149.0	24.2	24.5	24.2	24.1	24.2	24.1	25.9	25.8	25.8	25.8
G150.0	24.6	24.5	24.5	24.5	24.5	24.4	26.1	25.9	26.0	25.9
G151.0	24.9	24.9	24.8	24.6	24.7	24.7	26.3	26.1	26.1	26.1
G152.0	25.2	25.2	25.2	24.9	25.1	24.8	26.6	26.5	26.5	26.5
G153.0	25.8	25.4	25.4	25.4	25.2	25.1	26.8	26.7	26.8	26.7
G154.0	25.9	25.8	25.6	25.6	25.5	25.3	27.1	27.0	27.0	26.9
G155.0	26.5	26.2	25.9	25.9	25.8	25.6	27.1	27.3	27.4	27.4
G156.0	26.8	26.5	26.3	26.0	26.1	25.9	27.7	27.6	27.6	27.5
G157.0	27.0	26.8	26.7	26.7	26.5	26.2	28.0	27.8	28.0	28.0
G158.0	27.4	27.1	26.9	26.9	26.8	26.5	28.3	28.2	28.3	28.2
G159.0	27.4	27.5	27.3	27.1	27.0	26.8	28.3	28.4	28.5	28.6
G160.0	27.6	27.7	27.6	27.5	27.6	27.1	28.9	28.8	29.0	29.0
G161.0	27.8	28.1	28.0	28.0	28.0	27.5	29.1	29.1	29.1	29.2
G162.0	28.2	28.5	28.3	28.1	28.1	27.8	29.4	29.4	29.6	29.5
G163.0	28.9	28.8	28.6	28.6	28.4	28.2	29.6	29.7	29.8	29.9
G164.0	29.2	29.0	28.9	28.8	28.6	28.4	29.6	29.9	30.2	30.2
G165.0	29.0	29.2	29.2	29.1	28.9	28.9	30.3	30.3	30.4	30.5
G166.0	29.7	29.4	29.6	29.6	29.2	29.1	30.5	30.5	30.7	30.7
G167.0	29.8	29.7	29.8	29.9	29.6	29.6	30.7	30.9	31.0	30.6
G168.0	29.7	30.0	30.0	30.2	29.8	29.7	31.1	31.1	31.1	31.1
G169.0	29.8	30.0	30.3	30.5	30.2	30.2	31.0	31.3	31.2	31.2
G170.0	29.9	30.3	30.5	30.6	30.6	30.5	31.5	31.5	31.3	31.1
G171.0	30.5	30.3	30.6	30.6	30.6	30.7	31.7	31.7	31.5	31.2
G172.0	30.3	30.4	30.7	30.9	30.7	31.1	31.9	31.8	31.5	31.5
G173.0	30.4	30.5	30.9	31.2	31.2	31.0	31.9	31.8	31.7	31.5
G174.0	30.9	30.6	30.9	31.2	31.1	31.4	32.1	31.8	31.5	31.5
G175.0	31.0	31.1	31.0	31.1	31.2	31.2	31.8	31.8	31.5	31.3
G176.0	30.9	31.0	31.0	31.1	31.2	31.5	31.9	31.8	31.7	31.5
G177.0	30.9	30.6	31.0	31.3	31.2	31.3	32.4	31.8	31.5	31.7
G178.0	31.0	30.7	31.1	31.3	31.7	31.5	31.9	31.8	31.7	31.3
G179.0	31.1	31.2	31.1	31.2	31.7	31.7	32.4	31.7	31.5	31.7
G180.0	31.1	31.2	31.0	31.3	31.7	31.7	31.9	31.7	31.3	31.7

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	4429.9	4429.9	4429.2	4426.5	4427.8	4427.9	4426.2	4426.6	4424.2	4425.4
G1.0	4429.8	4431.2	4429.9	4427.5	4428.4	4427.3	4428.0	4427.9	4427.3	4426.8
G2.0	4430.9	4430.5	4429.7	4429.0	4428.5	4429.9	4429.2	4429.1	4426.2	4427.1
G3.0	4430.2	4429.2	4429.0	4426.4	4427.9	4427.9	4427.5	4428.1	4425.7	4425.3
G4.0	4428.4	4427.1	4424.1	4426.0	4424.8	4426.5	4427.8	4424.6	4423.3	4422.5
G5.0	4424.8	4424.2	4422.4	4422.6	4423.9	4423.0	4422.9	4422.4	4421.0	4421.1
G6.0	4421.0	4420.4	4420.1	4419.1	4418.0	4419.1	4417.0	4419.1	4416.3	4415.7
G7.0	4415.5	4414.5	4414.6	4413.0	4411.8	4414.1	4414.7	4411.5	4409.6	4409.0
G8.0	4409.6	4408.5	4407.6	4405.9	4405.6	4406.2	4405.8	4405.9	4402.6	4401.7
G9.0	4400.5	4399.7	4397.9	4398.1	4395.9	4397.8	4399.0	4397.0	4394.3	4392.8
G10.0	4390.0	4389.9	4390.0	4387.7	4385.5	4387.8	4385.0	4385.4	4384.0	4382.6
G11.0	4379.4	4378.4	4377.7	4376.1	4374.3	4374.9	4374.8	4373.6	4370.5	4371.9
G12.0	4364.8	4364.1	4363.0	4362.3	4361.0	4362.7	4359.4	4359.0	4357.5	4358.0
G13.0	4349.2	4347.0	4347.9	4347.3	4347.8	4346.0	4346.3	4344.8	4341.7	4342.7
G14.0	4330.3	4330.3	4328.9	4329.4	4327.8	4330.6	4330.9	4328.3	4326.4	4325.8
G15.0	4312.0	4312.1	4312.1	4311.9	4311.9	4312.9	4314.4	4313.3	4309.5	4308.6
G16.0	4291.4	4291.9	4292.1	4292.3	4292.3	4294.4	4295.5	4293.8	4291.6	4288.4
G17.0	4272.1	4270.0	4270.6	4270.9	4270.4	4273.3	4271.0	4274.3	4270.5	4269.5
G18.0	4249.5	4248.8	4248.8	4247.8	4248.7	4250.7	4251.7	4251.4	4250.2	4248.2
G19.0	4227.5	4225.4	4226.8	4225.1	4225.6	4227.0	4228.4	4229.1	4225.6	4224.3
G20.0	4203.9	4203.8	4202.2	4201.3	4201.7	4202.4	4203.6	4205.7	4203.6	4202.5
G21.0	4177.5	4177.7	4177.2	4176.9	4176.7	4177.7	4177.1	4178.2	4177.2	4177.4
G22.0	4151.1	4152.6	4151.5	4150.1	4147.2	4151.1	4149.9	4150.2	4149.6	4150.3
G23.0	4124.9	4122.6	4124.0	4121.1	4121.3	4119.9	4121.4	4120.8	4118.9	4123.4
G24.0	4093.9	4094.4	4093.8	4092.7	4090.5	4091.9	4090.7	4089.8	4089.8	4093.5
G25.0	4062.6	4063.2	4062.5	4061.8	4062.4	4060.7	4061.8	4059.3	4058.6	4059.9
G26.0	4030.4	4031.7	4031.8	4030.0	4028.9	4027.6	4028.9	4026.7	4025.6	4028.1
G27.0	3998.8	3997.2	3997.0	3997.3	3994.4	3993.1	3993.8	3993.1	3990.5	3993.7
G28.0	3963.3	3963.3	3962.8	3960.2	3959.9	3958.2	3958.7	3956.5	3954.3	3956.4
G29.0	3926.4	3926.3	3926.0	3924.2	3921.7	3921.0	3921.8	3920.5	3914.7	3917.2
G30.0	3887.8	3888.5	3887.0	3885.5	3884.7	3886.1	3884.3	3881.0	3876.0	3875.2
G31.0	3848.9	3847.8	3847.9	3846.1	3844.3	3843.5	3843.0	3839.8	3832.9	3833.6
G32.0	3808.8	3808.5	3807.9	3804.9	3801.9	3803.8	3801.2	3796.3	3792.1	3789.9
G33.0	3769.0	3764.5	3763.4	3764.0	3762.2	3760.4	3758.9	3753.1	3745.0	3744.2
G34.0	3721.7	3720.9	3720.3	3718.1	3715.3	3715.0	3710.7	3706.7	3699.4	3692.8
G35.0	3677.2	3674.4	3674.9	3674.7	3670.5	3665.3	3662.8	3658.6	3646.1	3646.6
G36.0	3628.7	3627.2	3627.5	3624.9	3623.1	3620.1	3615.9	3607.4	3596.1	3594.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	3583.5	3580.9	3579.3	3578.9	3574.1	3569.3	3564.8	3557.6	3548.1	3543.5
G38.0	3532.0	3530.6	3528.8	3526.4	3520.2	3516.5	3512.9	3504.4	3493.3	3489.9
G39.0	3479.5	3478.4	3477.5	3474.5	3467.3	3463.4	3458.7	3448.9	3439.1	3437.3
G40.0	3427.2	3425.1	3422.9	3418.9	3414.2	3410.0	3402.9	3392.3	3384.4	3381.6
G41.0	3373.5	3368.8	3370.4	3363.6	3360.2	3352.8	3345.7	3334.6	3323.5	3325.6
G42.0	3315.3	3312.6	3308.5	3304.7	3299.6	3295.9	3287.2	3277.2	3269.5	3268.0
G43.0	3257.0	3254.6	3250.1	3244.6	3239.8	3232.8	3225.6	3215.0	3208.7	3209.2
G44.0	3200.9	3194.4	3189.3	3183.9	3177.4	3168.6	3164.9	3156.0	3151.4	3149.9
G45.0	3138.0	3133.6	3128.6	3121.2	3115.8	3108.5	3099.9	3094.7	3089.3	3086.7
G46.0	3078.6	3071.4	3064.1	3056.4	3051.2	3042.9	3037.8	3028.5	3025.4	3024.9
G47.0	3011.4	3006.6	3001.1	2992.3	2987.2	2977.3	2970.5	2965.8	2957.7	2960.5
G48.0	2947.9	2939.9	2935.6	2925.0	2918.0	2908.8	2905.6	2896.7	2892.9	2891.9
G49.0	2884.1	2873.3	2868.4	2861.2	2851.7	2840.7	2838.2	2832.0	2824.9	2823.6
G50.0	2817.8	2805.2	2800.1	2795.2	2780.2	2772.3	2770.5	2761.7	2754.8	2750.2
G51.0	2751.0	2736.7	2729.8	2722.7	2712.4	2700.3	2698.2	2689.7	2680.1	2677.4
G52.0	2679.6	2667.1	2660.6	2652.4	2638.8	2629.5	2626.3	2615.1	2606.8	2605.6
G53.0	2611.0	2596.9	2588.1	2579.0	2566.3	2557.4	2551.5	2540.1	2530.7	2530.6
G54.0	2538.5	2526.4	2517.4	2507.4	2495.4	2485.5	2477.9	2465.1	2456.8	2452.4
G55.0	2467.5	2453.8	2444.4	2434.5	2421.8	2408.6	2399.7	2390.0	2379.2	2373.5
G56.0	2395.9	2382.3	2372.8	2356.7	2345.6	2328.1	2325.4	2313.2	2294.9	2293.7
G57.0	2320.3	2306.7	2297.8	2281.6	2268.2	2255.6	2248.2	2232.8	2218.9	2207.2
G58.0	2242.3	2230.7	2222.3	2210.5	2194.5	2178.3	2169.6	2155.0	2137.1	2130.9
G59.0	2167.4	2151.4	2145.0	2131.7	2115.9	2102.3	2091.1	2071.8	2055.6	2043.7
G60.0	2093.5	2076.7	2068.0	2057.3	2041.5	2023.5	2010.0	1992.0	1970.7	1961.4
G61.0	2016.1	1996.5	1990.0	1972.2	1963.4	1948.7	1930.9	1908.3	1886.0	1872.6
G62.0	1939.7	1921.7	1913.6	1894.8	1885.8	1869.6	1850.5	1823.7	1798.0	1789.4
G63.0	1857.7	1844.8	1835.0	1818.2	1810.1	1790.4	1766.9	1741.9	1716.8	1703.5
G64.0	1776.2	1761.3	1758.8	1740.2	1732.3	1708.0	1688.4	1658.0	1632.2	1618.9
G65.0	1694.4	1681.9	1671.7	1662.0	1654.5	1628.0	1611.7	1577.3	1550.5	1531.7
G66.0	1611.5	1597.9	1592.0	1582.7	1576.1	1547.5	1530.3	1497.4	1464.2	1443.8
G67.0	1533.7	1519.6	1504.0	1500.5	1490.4	1467.9	1446.2	1415.9	1380.1	1354.4
G68.0	1457.0	1438.2	1425.6	1414.8	1406.8	1389.4	1367.3	1333.7	1293.4	1268.9
G69.0	1374.5	1359.1	1345.4	1335.3	1317.0	1307.5	1284.6	1244.7	1214.3	1182.4
G70.0	1298.3	1278.7	1268.5	1254.3	1237.5	1221.3	1205.0	1165.8	1132.5	1101.3
G71.0	1219.8	1201.1	1190.9	1174.3	1158.5	1137.4	1120.8	1087.3	1050.1	1015.6
G72.0	1141.8	1124.1	1112.8	1097.5	1081.4	1054.9	1032.7	1007.1	972.7	936.1
G73.0	1068.6	1049.4	1035.0	1019.5	1001.3	978.7	949.8	921.5	893.7	854.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	991.7	974.5	961.4	942.6	925.8	896.6	875.2	840.8	810.5	777.7
G75.0	919.5	902.3	888.0	872.5	853.4	824.7	797.0	763.0	729.9	701.9
G76.0	849.8	830.0	818.3	800.7	780.3	750.4	729.3	691.0	650.1	627.9
G77.0	778.1	762.1	746.4	728.7	708.1	681.6	657.2	617.8	581.6	551.5
G78.0	708.5	694.2	680.3	662.3	639.5	613.4	590.9	550.2	512.8	479.4
G79.0	634.3	621.0	606.9	594.9	573.8	549.2	523.0	488.8	449.7	415.4
G80.0	571.7	555.8	541.8	526.9	509.1	485.2	460.6	425.5	388.3	354.6
G81.0	517.7	500.8	484.9	463.7	442.3	422.0	401.8	365.3	331.8	299.8
G82.0	462.4	444.4	432.7	412.5	390.6	361.2	337.7	310.1	277.4	247.8
G83.0	404.5	390.1	379.0	358.7	339.0	313.8	286.5	255.0	227.9	200.7
G84.0	347.8	333.7	322.8	305.3	287.8	264.1	239.2	211.2	179.8	158.1
G85.0	288.1	277.5	265.4	251.8	234.9	214.1	196.4	169.0	141.8	118.3
G86.0	227.7	214.4	211.0	197.8	183.1	165.3	150.1	129.5	107.5	88.3
G87.0	65.4	68.8	73.9	79.6	91.9	103.1	104.6	88.5	73.0	59.7
G88.0	31.3	31.1	30.0	28.6	27.3	25.9	25.1	22.9	21.2	22.4
G89.0	19.8	20.0	19.8	19.3	18.1	17.2	16.1	14.4	12.6	11.5
G90.0	15.8	15.4	15.3	15.4	14.9	13.8	13.0	11.9	11.3	10.0
G91.0	12.8	12.8	12.8	12.6	12.2	11.9	11.8	10.7	10.4	9.3
G92.0	11.0	11.5	11.1	11.7	11.5	11.4	10.6	10.1	9.9	8.6
G93.0	10.7	10.6	10.7	10.7	10.9	10.8	10.4	9.5	8.7	8.2
G94.0	10.1	10.6	10.2	10.3	10.6	10.3	9.6	9.1	8.2	8.0
G95.0	9.9	9.9	10.0	10.0	9.7	9.7	9.2	8.9	8.5	7.9
G96.0	9.6	10.0	10.1	9.6	9.5	9.5	9.3	8.5	7.9	7.7
G97.0	9.5	9.5	9.5	9.4	9.6	9.1	9.1	8.4	8.5	7.8
G98.0	9.4	9.9	9.6	9.3	9.1	9.2	8.9	8.4	8.5	8.0
G99.0	9.4	9.7	9.2	9.5	9.4	9.1	8.9	8.5	8.7	8.4
G100.0	9.6	9.7	9.6	9.2	9.3	8.9	9.1	8.7	8.5	8.7
G101.0	9.5	9.3	9.3	9.6	9.1	9.2	9.3	8.9	9.4	9.1
G102.0	9.9	9.4	9.9	9.4	9.3	9.4	9.5	9.6	9.7	9.5
G103.0	9.7	10.0	9.5	9.6	9.9	9.9	9.6	9.9	9.5	10.1
G104.0	10.2	10.2	10.1	9.7	9.9	10.1	10.2	10.1	10.6	10.1
G105.0	10.2	10.6	10.1	10.1	10.1	10.3	10.2	10.6	10.4	10.8
G106.0	10.7	10.8	10.3	10.4	10.8	10.7	10.7	10.9	11.3	11.3
G107.0	10.7	11.1	10.7	10.8	11.1	11.1	11.3	11.4	11.1	11.4
G108.0	11.4	11.5	11.0	11.6	11.5	11.4	11.5	11.7	12.1	12.1
G109.0	11.7	11.4	11.4	11.9	11.8	11.8	12.1	12.1	11.9	12.4
G110.0	12.1	12.2	11.8	12.3	11.9	12.3	12.3	12.4	12.9	12.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	12.5	12.1	12.2	12.2	12.6	12.6	12.6	12.9	12.6	13.1
G112.0	12.9	12.5	13.0	13.0	12.8	13.0	13.2	13.2	13.1	13.6
G113.0	13.0	13.3	12.9	13.5	13.1	13.3	13.6	13.6	13.9	13.7
G114.0	13.5	13.3	13.7	13.5	13.5	13.8	13.8	14.0	13.9	14.4
G115.0	13.9	14.1	13.7	14.3	14.3	14.1	14.3	14.5	14.3	14.5
G116.0	14.1	14.0	14.5	14.6	14.6	14.5	14.7	14.9	15.2	15.2
G117.0	14.6	15.0	14.4	14.6	14.7	15.1	15.1	15.2	15.5	15.5
G118.0	15.2	15.3	14.9	15.3	15.4	15.4	15.3	15.7	15.9	15.5
G119.0	15.3	15.7	15.2	15.3	15.8	15.8	15.8	15.8	16.2	16.2
G120.0	15.7	15.7	16.0	15.8	15.8	16.2	16.1	16.5	16.1	16.6
G121.0	16.1	16.5	16.4	16.6	16.1	16.7	16.6	16.8	16.9	17.0
G122.0	16.8	16.8	16.4	16.9	16.9	16.9	16.9	17.3	17.4	17.0
G123.0	17.0	16.7	16.7	17.4	16.9	17.2	17.3	17.2	17.3	17.8
G124.0	17.5	17.6	17.6	17.6	17.3	17.8	17.6	17.6	17.6	18.2
G125.0	17.6	18.0	18.0	18.0	18.0	17.8	18.1	18.0	18.0	18.6
G126.0	18.3	17.9	17.9	18.4	18.3	18.4	18.3	18.7	18.9	18.9
G127.0	18.7	18.2	18.3	18.8	18.8	18.6	18.8	19.0	18.8	19.3
G128.0	18.8	19.0	18.7	19.0	19.1	19.1	19.1	19.0	19.1	19.3
G129.0	19.3	19.5	19.5	19.5	19.1	19.3	19.5	19.4	19.5	19.6
G130.0	19.5	19.8	19.3	19.8	19.4	20.0	19.8	20.1	19.8	20.3
G131.0	20.2	19.7	19.6	19.7	19.7	20.3	20.3	20.5	20.6	20.6
G132.0	20.4	20.1	20.0	20.5	20.5	20.6	20.5	20.4	20.9	20.6
G133.0	20.8	20.4	20.3	20.5	20.9	21.0	20.9	21.2	21.2	21.0
G134.0	21.1	20.8	20.6	21.2	21.2	21.3	21.2	21.1	21.2	21.7
G135.0	21.3	21.6	21.0	21.6	21.5	21.7	21.6	21.5	21.9	21.7
G136.0	21.8	21.9	21.3	21.3	21.9	21.6	21.9	22.2	21.9	22.5
G137.0	22.3	21.7	22.3	21.8	21.9	22.4	22.3	22.0	22.3	22.3
G138.0	22.5	22.6	22.5	22.2	22.3	22.3	22.6	22.9	22.6	23.1
G139.0	22.6	22.3	22.3	22.5	22.5	22.6	23.0	23.2	23.1	23.4
G140.0	23.0	22.7	23.2	23.2	22.9	23.0	23.2	23.1	23.3	23.4
G141.0	23.4	23.5	23.0	23.5	23.2	23.8	23.5	23.9	23.9	23.7
G142.0	23.5	23.9	23.8	23.9	23.9	24.1	23.9	24.1	24.1	24.4
G143.0	24.0	24.1	24.1	23.8	23.9	24.4	24.1	24.0	24.5	24.7
G144.0	24.1	24.5	23.9	24.5	24.5	24.7	24.5	24.4	24.8	25.1
G145.0	24.6	24.7	24.7	24.7	24.8	24.9	24.8	24.7	25.1	24.9
G146.0	24.8	24.5	24.6	25.1	25.2	24.7	25.1	24.9	25.3	25.6
G147.0	24.9	24.8	25.3	25.1	25.1	25.1	25.4	25.8	25.6	25.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	25.3	25.1	25.2	25.3	25.4	25.3	25.8	25.5	25.8	25.6
G149.0	25.8	26.0	25.9	26.1	25.6	25.6	26.0	26.3	26.1	26.0
G150.0	26.0	26.2	26.1	26.2	26.2	26.6	26.2	26.1	26.5	26.8
G151.0	26.1	26.6	26.1	26.6	26.2	26.2	26.5	26.9	26.6	26.6
G152.0	26.6	26.8	26.5	26.9	26.6	27.1	26.7	26.7	26.8	27.3
G153.0	26.8	27.1	27.0	27.1	26.8	26.8	27.0	27.4	27.3	27.0
G154.0	27.1	26.9	27.4	27.0	27.0	27.6	27.3	27.6	27.5	27.3
G155.0	27.5	27.7	27.4	27.7	27.3	27.8	27.5	27.8	27.7	27.5
G156.0	27.7	28.1	28.0	28.1	27.5	28.1	27.8	28.2	28.0	27.6
G157.0	28.0	27.8	28.0	27.8	27.7	27.7	28.1	28.0	28.2	28.3
G158.0	28.4	28.2	28.3	28.4	28.4	28.1	28.3	28.2	28.3	28.4
G159.0	28.6	28.4	28.6	28.4	28.6	28.3	28.5	28.4	28.5	28.4
G160.0	29.0	28.6	28.9	29.0	28.5	29.2	28.8	29.0	28.6	28.9
G161.0	29.4	29.5	29.1	29.2	28.8	29.4	29.1	29.2	28.9	28.6
G162.0	29.5	29.2	29.4	29.4	29.5	29.0	29.2	29.5	29.1	28.9
G163.0	29.8	29.5	29.5	29.6	29.6	29.8	29.5	29.1	29.4	29.0
G164.0	29.9	30.3	29.8	29.8	29.5	29.4	29.6	29.8	29.5	29.6
G165.0	30.3	30.4	29.9	29.8	30.0	30.2	29.8	29.9	29.6	29.4
G166.0	30.5	30.6	30.2	29.9	29.7	30.3	30.0	30.0	29.7	29.6
G167.0	30.7	30.7	30.4	30.4	29.9	29.9	30.0	29.7	29.9	30.0
G168.0	30.9	30.4	30.5	30.5	30.5	30.0	30.3	29.9	30.0	30.2
G169.0	31.0	31.0	30.6	30.6	30.3	30.3	30.3	30.0	30.2	30.3
G170.0	31.1	31.1	30.7	30.6	30.4	30.9	30.5	30.2	30.3	30.0
G171.0	31.2	30.7	30.9	30.6	30.5	30.4	30.6	30.3	30.4	30.2
G172.0	31.2	30.9	31.1	31.0	30.6	30.5	30.7	30.9	30.6	30.3
G173.0	31.3	31.3	31.1	31.0	31.1	30.6	30.7	30.5	30.6	30.4
G174.0	31.3	31.0	31.1	31.1	30.9	31.3	30.7	31.1	30.7	30.7
G175.0	31.3	31.1	31.1	31.2	30.9	31.3	31.0	31.1	30.7	30.6
G176.0	31.3	31.4	31.2	31.2	30.9	31.4	31.0	30.6	30.9	30.7
G177.0	31.4	31.2	31.2	31.2	31.4	31.4	31.0	31.2	30.9	31.0
G178.0	31.4	31.2	31.2	31.3	31.1	31.0	31.1	30.7	31.0	31.0
G179.0	31.4	31.2	31.3	31.2	31.3	31.5	31.1	30.9	31.0	31.0
G180.0	31.3	31.2	31.3	31.4	31.1	31.1	31.3	31.3	31.2	31.0

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	4424.2	4423.0	4423.5	4419.6	4420.0	4419.3	4420.7	4422.8	4421.2	4424.6
G1.0	4426.1	4424.6	4423.4	4420.7	4420.1	4419.6	4420.0	4422.1	4421.2	4423.5
G2.0	4424.9	4424.2	4423.8	4419.9	4419.9	4419.3	4418.3	4420.9	4419.0	4420.4
G3.0	4424.8	4421.3	4421.7	4419.6	4419.2	4416.1	4419.0	4417.4	4418.3	4418.8
G4.0	4422.1	4419.2	4419.8	4416.8	4414.8	4413.8	4415.0	4413.9	4414.1	4413.9
G5.0	4418.2	4416.7	4416.1	4412.7	4411.6	4409.8	4410.8	4407.5	4408.2	4408.0
G6.0	4414.5	4411.0	4410.8	4407.5	4405.9	4404.8	4404.3	4402.4	4402.3	4400.9
G7.0	4406.7	4405.1	4404.3	4399.6	4398.8	4396.5	4395.0	4395.3	4394.2	4393.1
G8.0	4400.3	4397.2	4395.2	4392.4	4390.5	4387.4	4388.1	4385.6	4384.0	4383.5
G9.0	4390.1	4387.3	4386.3	4383.4	4379.3	4378.4	4375.5	4374.5	4373.0	4371.0
G10.0	4379.8	4377.8	4374.3	4371.3	4368.9	4366.9	4364.7	4363.1	4360.3	4357.7
G11.0	4367.0	4363.4	4362.4	4358.2	4356.0	4353.9	4351.2	4346.1	4347.6	4345.4
G12.0	4354.4	4350.9	4348.7	4345.6	4342.0	4339.1	4337.0	4336.3	4331.5	4329.8
G13.0	4339.9	4336.6	4334.7	4329.7	4326.2	4323.2	4321.8	4319.8	4314.9	4313.0
G14.0	4322.8	4318.9	4317.1	4312.9	4310.5	4306.2	4304.3	4301.1	4298.5	4296.5
G15.0	4304.5	4302.1	4299.9	4293.8	4290.8	4287.6	4284.5	4281.8	4277.9	4275.1
G16.0	4286.6	4283.1	4279.4	4275.0	4271.5	4267.1	4264.6	4261.9	4258.4	4255.5
G17.0	4264.5	4261.2	4259.1	4253.9	4251.5	4246.1	4242.4	4239.5	4238.1	4231.2
G18.0	4244.1	4240.9	4237.0	4231.8	4227.7	4222.4	4218.4	4217.6	4214.6	4208.1
G19.0	4221.1	4217.5	4214.3	4209.5	4204.6	4201.1	4197.8	4192.3	4188.6	4181.8
G20.0	4197.2	4192.9	4190.8	4185.4	4181.1	4174.5	4172.1	4166.6	4161.6	4154.7
G21.0	4172.8	4169.5	4165.0	4160.5	4155.2	4149.2	4145.5	4140.5	4134.1	4125.9
G22.0	4147.2	4142.6	4139.9	4135.4	4129.1	4122.4	4116.8	4111.6	4104.3	4097.4
G23.0	4118.7	4115.9	4113.8	4108.0	4101.3	4094.2	4088.0	4082.9	4076.8	4064.1
G24.0	4087.5	4085.3	4084.4	4079.9	4071.8	4064.7	4057.2	4049.4	4043.5	4032.1
G25.0	4057.6	4055.0	4055.3	4047.9	4041.2	4033.8	4024.0	4018.1	4009.0	3997.8
G26.0	4025.5	4023.3	4021.7	4015.1	4007.8	4001.3	3991.8	3985.4	3975.3	3965.5
G27.0	3989.9	3989.0	3987.5	3980.9	3973.2	3965.2	3957.2	3948.3	3939.6	3927.9
G28.0	3954.1	3951.6	3950.6	3941.4	3935.4	3928.1	3917.2	3910.6	3899.3	3890.3
G29.0	3915.2	3913.0	3910.4	3902.8	3893.9	3885.7	3877.6	3868.6	3858.8	3848.5
G30.0	3873.8	3870.8	3868.0	3857.7	3850.9	3843.6	3835.0	3826.1	3814.9	3806.1
G31.0	3829.8	3827.1	3822.2	3814.1	3806.7	3798.6	3788.4	3779.8	3768.7	3759.9
G32.0	3783.5	3780.9	3774.8	3766.6	3759.1	3751.5	3743.2	3731.8	3722.2	3712.2
G33.0	3737.2	3735.2	3729.8	3720.2	3710.3	3705.2	3693.1	3682.8	3671.2	3664.5
G34.0	3688.1	3686.6	3680.8	3672.9	3663.6	3655.0	3645.9	3631.6	3621.4	3613.2
G35.0	3638.6	3639.1	3633.0	3624.9	3616.4	3605.8	3592.9	3582.0	3568.2	3560.1
G36.0	3588.2	3587.9	3585.4	3576.9	3568.8	3560.6	3548.2	3529.4	3516.0	3507.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	3535.4	3540.7	3536.9	3531.8	3523.1	3511.0	3499.2	3478.6	3465.8	3453.3
G38.0	3484.9	3488.1	3486.4	3481.9	3473.5	3460.1	3447.2	3423.1	3413.1	3397.5
G39.0	3430.2	3436.3	3435.5	3431.4	3423.1	3409.2	3392.9	3375.0	3357.3	3338.9
G40.0	3376.9	3381.5	3383.4	3379.4	3370.7	3357.0	3339.2	3319.1	3301.8	3289.6
G41.0	3321.4	3325.7	3328.0	3325.0	3314.5	3301.9	3282.2	3262.0	3243.9	3230.2
G42.0	3264.0	3266.7	3272.5	3267.7	3258.9	3246.2	3224.4	3200.9	3185.9	3170.7
G43.0	3204.6	3207.8	3214.3	3209.0	3200.3	3189.5	3165.1	3142.4	3124.5	3107.6
G44.0	3144.2	3146.7	3154.1	3148.6	3141.0	3128.5	3099.7	3082.2	3063.5	3045.3
G45.0	3080.4	3083.3	3092.0	3087.1	3077.2	3067.0	3041.1	3017.7	3000.6	2982.3
G46.0	3017.2	3018.1	3028.9	3024.1	3012.4	3004.7	2974.6	2954.6	2934.5	2915.3
G47.0	2954.6	2953.5	2964.9	2959.1	2949.5	2938.0	2905.7	2887.2	2865.7	2846.6
G48.0	2885.3	2885.6	2894.8	2891.2	2880.7	2872.0	2837.6	2817.4	2798.0	2777.9
G49.0	2814.4	2815.4	2827.6	2823.7	2810.1	2801.6	2766.9	2748.2	2725.9	2704.9
G50.0	2746.0	2744.6	2755.1	2751.0	2737.5	2725.7	2692.8	2674.8	2654.5	2631.3
G51.0	2671.2	2668.8	2674.0	2675.4	2661.9	2649.1	2611.4	2594.5	2577.6	2555.2
G52.0	2595.1	2591.6	2599.1	2598.9	2583.9	2573.6	2534.1	2519.1	2501.2	2477.7
G53.0	2520.0	2514.6	2521.4	2521.4	2511.4	2496.3	2458.0	2440.1	2421.4	2399.5
G54.0	2441.4	2435.7	2438.7	2446.6	2436.5	2419.9	2380.3	2360.6	2342.8	2317.7
G55.0	2361.5	2354.1	2358.7	2365.8	2354.7	2340.4	2300.1	2280.1	2259.0	2238.5
G56.0	2280.5	2275.6	2280.7	2289.6	2273.3	2261.6	2217.6	2198.2	2179.6	2156.1
G57.0	2197.0	2192.2	2196.1	2206.6	2196.5	2179.2	2138.4	2118.7	2096.4	2074.6
G58.0	2114.5	2112.8	2112.8	2126.1	2115.2	2097.9	2053.6	2037.5	2014.2	1990.9
G59.0	2033.2	2026.4	2024.6	2041.1	2034.4	2010.7	1969.7	1950.1	1928.9	1906.7
G60.0	1945.2	1941.9	1939.9	1957.8	1947.0	1923.8	1883.3	1865.6	1843.3	1819.6
G61.0	1864.2	1856.3	1850.2	1865.3	1851.5	1830.8	1794.4	1779.1	1757.0	1735.4
G62.0	1777.2	1768.4	1764.4	1775.2	1758.3	1737.1	1702.2	1689.6	1672.5	1649.2
G63.0	1689.9	1678.1	1670.6	1684.1	1668.6	1641.6	1612.3	1599.4	1583.1	1566.8
G64.0	1599.4	1592.1	1580.1	1596.0	1579.7	1550.8	1520.8	1513.6	1498.5	1481.7
G65.0	1514.5	1502.6	1487.8	1504.6	1487.4	1457.2	1435.6	1420.0	1407.7	1393.5
G66.0	1423.3	1409.3	1397.7	1412.2	1395.6	1364.8	1342.6	1331.0	1319.3	1305.0
G67.0	1334.6	1319.4	1305.1	1318.1	1301.8	1268.6	1250.6	1240.1	1229.6	1223.2
G68.0	1242.2	1227.7	1215.5	1224.3	1206.3	1175.1	1156.1	1152.9	1147.2	1139.4
G69.0	1153.8	1138.9	1119.7	1123.0	1113.6	1077.0	1067.6	1062.2	1056.4	1058.6
G70.0	1066.3	1046.3	1028.7	1029.3	1022.4	987.3	973.3	974.9	971.5	979.1
G71.0	981.6	958.0	939.2	933.9	929.3	898.4	888.0	886.3	888.8	901.9
G72.0	896.3	871.6	854.6	842.1	836.8	810.0	797.4	802.3	810.7	822.9
G73.0	813.9	785.5	761.8	748.7	748.0	714.1	714.0	717.5	732.5	745.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	735.2	703.7	679.9	661.0	660.9	633.6	627.9	639.8	658.8	665.5
G75.0	659.5	623.2	595.3	579.2	577.1	551.8	551.6	559.6	586.4	590.0
G76.0	584.2	546.6	521.8	494.3	498.2	475.8	474.9	489.9	515.8	515.5
G77.0	519.2	474.0	447.0	424.5	424.1	402.4	403.7	427.7	440.9	448.6
G78.0	450.5	410.3	375.0	351.8	352.9	333.0	337.6	366.7	372.5	386.8
G79.0	382.3	348.2	313.5	288.7	283.2	268.1	280.4	300.8	314.8	327.4
G80.0	318.7	290.8	253.5	230.5	229.2	212.8	223.6	247.4	260.0	269.1
G81.0	266.8	235.5	203.6	181.5	177.9	164.8	181.1	196.5	210.3	221.6
G82.0	215.3	187.7	159.4	135.7	131.6	122.2	138.5	152.1	167.2	171.9
G83.0	172.4	146.5	122.7	97.7	92.2	88.5	100.6	114.7	124.7	126.0
G84.0	132.0	110.3	88.6	66.8	62.3	59.3	70.1	81.8	85.7	88.5
G85.0	97.7	79.5	64.5	44.5	37.0	38.9	46.6	53.5	57.2	57.4
G86.0	69.6	53.9	40.6	26.9	20.1	23.4	27.4	33.1	32.1	21.7
G87.0	47.2	35.3	25.5	16.1	10.7	13.6	15.4	14.6	11.8	12.4
G88.0	23.8	19.7	14.9	9.4	7.1	7.9	7.8	8.6	10.0	11.4
G89.0	10.3	8.8	7.8	6.7	5.3	6.5	7.3	8.4	9.2	10.4
G90.0	8.5	7.8	7.0	5.9	5.6	5.6	6.3	7.2	8.2	9.4
G91.0	8.0	7.2	6.5	6.0	5.9	5.8	5.8	7.1	7.7	8.1
G92.0	7.4	7.0	6.3	6.4	6.3	6.2	6.6	6.5	7.3	8.2
G93.0	7.2	6.8	6.6	6.4	6.6	6.7	6.4	7.0	7.1	7.9
G94.0	7.5	6.8	6.7	6.7	7.0	6.8	7.3	6.8	7.2	7.8
G95.0	7.5	7.2	7.1	7.4	7.2	7.2	7.7	7.5	7.4	7.9
G96.0	7.3	7.5	7.7	7.5	7.7	7.5	8.0	7.5	7.8	7.5
G97.0	7.4	7.9	7.9	7.8	8.0	8.0	7.8	8.0	8.1	7.9
G98.0	7.8	8.2	8.2	8.5	8.5	8.5	8.8	8.4	8.5	8.2
G99.0	8.2	8.6	8.6	8.5	8.7	8.8	9.2	8.7	8.7	9.2
G100.0	9.2	8.9	9.2	9.3	9.3	9.3	9.5	9.3	9.2	8.9
G101.0	8.9	9.4	9.5	9.3	9.5	9.5	9.3	9.5	9.7	9.4
G102.0	9.9	9.7	10.0	10.1	9.9	10.1	10.3	10.0	9.9	9.7
G103.0	10.3	10.1	10.3	10.6	10.2	10.4	10.7	10.3	10.3	10.1
G104.0	10.7	10.6	10.7	10.9	10.7	10.7	10.4	10.7	10.7	11.0
G105.0	10.6	10.9	11.0	10.9	11.1	11.1	11.5	11.0	11.1	11.5
G106.0	11.4	11.3	11.5	11.6	11.6	11.6	11.8	11.6	11.5	11.3
G107.0	11.8	11.6	11.9	11.9	11.8	11.8	11.6	11.9	11.7	12.2
G108.0	12.2	12.1	12.1	12.1	12.2	12.4	12.6	12.1	12.4	12.5
G109.0	12.1	12.4	12.5	12.9	12.5	12.8	12.4	12.8	12.6	12.4
G110.0	12.4	12.9	12.9	12.9	12.9	13.1	13.3	12.9	12.9	12.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	12.8	13.2	13.2	13.6	13.2	13.6	13.2	13.1	13.6	13.1
G112.0	13.2	13.7	13.9	13.7	14.0	13.8	14.0	13.9	13.7	13.6
G113.0	13.6	14.0	14.0	14.0	14.4	14.4	14.0	14.4	14.0	13.9
G114.0	14.0	14.4	14.5	14.9	14.5	14.7	15.0	14.7	14.6	14.4
G115.0	14.9	14.7	14.9	14.9	14.9	15.1	14.9	15.2	15.0	14.7
G116.0	14.7	15.2	15.4	15.7	15.3	15.4	15.2	15.1	15.1	15.5
G117.0	15.7	15.5	15.8	16.0	15.9	15.9	16.0	15.4	15.5	15.5
G118.0	16.1	15.9	16.0	16.0	16.4	16.2	16.5	15.8	15.9	15.9
G119.0	15.9	16.2	16.6	16.4	16.7	16.6	16.8	16.7	16.5	16.7
G120.0	16.2	16.7	16.8	17.2	16.8	17.0	16.7	17.0	16.6	17.0
G121.0	17.2	17.0	17.2	17.2	17.5	17.4	17.6	16.9	17.0	16.9
G122.0	17.6	17.4	17.5	17.9	17.9	17.9	18.1	17.3	17.5	17.3
G123.0	17.3	18.0	18.0	17.8	18.0	18.2	17.9	18.2	18.0	18.1
G124.0	17.8	18.3	18.6	18.2	18.7	18.6	18.8	18.0	18.1	18.4
G125.0	18.7	18.7	19.0	19.1	19.0	18.9	19.1	18.4	18.4	18.9
G126.0	19.0	19.0	19.0	19.0	19.0	19.3	19.5	19.3	19.1	19.1
G127.0	19.4	19.4	19.5	19.4	19.4	19.6	19.4	19.3	19.5	19.1
G128.0	19.7	19.8	19.8	20.2	20.0	20.0	20.2	19.6	19.6	19.8
G129.0	20.2	20.2	20.4	20.6	20.4	20.3	20.2	20.0	20.0	20.2
G130.0	20.5	20.4	20.5	20.4	20.5	20.6	20.4	20.8	20.4	20.5
G131.0	20.9	20.9	20.9	21.2	21.1	21.0	21.2	20.6	20.9	20.5
G132.0	21.2	21.2	21.2	21.1	21.2	21.3	21.6	21.6	21.2	21.0
G133.0	21.6	21.5	21.9	21.5	21.9	21.7	21.5	21.8	21.7	21.3
G134.0	21.9	21.9	22.2	22.4	22.3	22.2	21.8	22.2	22.0	21.9
G135.0	22.3	22.3	22.3	22.2	22.6	22.5	22.6	22.2	22.4	22.0
G136.0	22.6	22.7	22.6	22.5	23.0	22.7	22.9	22.7	22.4	22.4
G137.0	22.5	23.1	23.2	22.9	23.0	23.1	22.9	22.9	22.7	23.0
G138.0	22.9	23.3	23.2	23.8	23.5	23.4	23.5	23.2	23.1	23.3
G139.0	23.2	23.7	23.5	24.0	23.5	23.8	23.4	23.8	23.4	23.7
G140.0	23.5	24.1	23.9	24.4	23.8	24.0	23.8	23.9	24.0	24.0
G141.0	24.4	24.4	24.1	24.6	24.6	24.4	24.0	24.2	24.5	24.1
G142.0	24.1	24.5	24.8	24.9	24.4	24.6	24.8	24.6	24.5	24.6
G143.0	24.9	24.9	25.2	24.7	24.7	24.8	24.7	24.8	25.1	24.8
G144.0	25.2	25.2	24.9	25.6	24.9	25.3	25.3	25.2	25.4	25.3
G145.0	25.1	25.4	25.3	25.8	25.6	25.5	25.2	25.4	25.8	25.5
G146.0	25.8	25.6	26.0	25.5	25.6	25.8	25.5	25.6	26.0	25.8
G147.0	25.5	25.9	25.9	26.3	25.8	26.1	25.8	26.1	26.3	26.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	25.9	26.0	26.1	26.6	26.3	26.1	26.0	26.2	26.2	26.5
G149.0	26.6	26.6	26.3	26.2	26.3	26.5	26.7	26.7	26.5	26.6
G150.0	26.3	26.7	26.6	26.5	26.9	26.7	26.9	26.9	27.0	26.9
G151.0	26.6	26.8	26.8	27.3	27.0	27.0	27.1	27.1	26.9	27.3
G152.0	26.8	27.0	27.4	27.5	27.4	27.3	27.0	27.5	27.5	27.5
G153.0	27.5	27.4	27.1	27.6	27.1	27.5	27.6	27.7	27.4	27.6
G154.0	27.7	27.6	27.4	27.3	27.4	27.5	27.5	27.8	27.6	27.8
G155.0	28.0	27.8	27.6	27.5	27.5	27.7	27.7	28.1	28.1	28.0
G156.0	28.2	28.1	27.7	28.2	27.7	28.1	28.0	28.3	28.4	28.3
G157.0	27.8	28.0	28.4	28.4	28.4	28.1	28.4	28.2	28.1	28.4
G158.0	28.1	28.5	28.2	28.1	28.5	28.5	28.6	28.3	28.3	28.6
G159.0	28.3	28.3	28.8	28.8	28.6	28.8	28.9	28.5	28.4	28.9
G160.0	28.4	28.5	28.9	28.4	28.9	28.5	29.0	28.6	28.6	28.9
G161.0	29.0	29.0	28.6	29.0	28.6	29.1	29.1	29.2	29.2	28.9
G162.0	29.2	29.2	28.8	29.4	29.4	29.0	29.4	29.5	29.4	29.0
G163.0	29.0	29.0	29.4	29.5	29.4	29.5	29.6	29.1	29.6	29.2
G164.0	29.6	29.1	29.6	29.5	29.6	29.6	29.5	29.2	29.7	29.5
G165.0	29.7	29.2	29.2	29.1	29.4	29.5	29.8	29.9	29.9	29.5
G166.0	29.5	29.5	29.5	29.8	29.8	29.9	29.8	29.5	29.7	29.9
G167.0	29.6	29.8	29.6	30.0	29.6	30.2	29.8	29.7	30.0	30.2
G168.0	29.7	30.0	29.7	29.6	29.7	29.9	30.2	29.8	29.8	29.9
G169.0	30.2	30.2	29.8	30.3	29.8	30.2	30.2	29.8	29.9	29.9
G170.0	30.0	29.9	29.9	30.4	29.9	30.6	30.4	30.5	30.0	30.4
G171.0	30.0	30.0	30.0	30.5	30.6	30.7	30.4	30.2	30.2	30.5
G172.0	30.5	30.6	30.5	30.6	30.3	30.9	30.6	30.7	30.2	30.6
G173.0	30.3	30.6	30.3	30.7	30.3	30.5	30.6	30.2	30.3	30.2
G174.0	30.4	30.6	30.4	30.7	31.0	30.9	30.6	30.4	30.3	30.7
G175.0	30.7	30.4	30.4	30.5	30.4	31.0	30.6	30.4	30.3	30.4
G176.0	30.5	30.4	30.9	31.0	31.1	31.1	30.6	30.9	30.4	30.4
G177.0	30.9	30.6	31.0	30.5	30.6	31.1	30.7	30.5	30.4	30.4
G178.0	31.0	30.6	30.7	31.1	30.7	30.6	30.7	30.5	30.5	30.9
G179.0	31.0	30.6	31.1	30.7	31.3	30.6	30.7	30.6	30.9	30.9
G180.0	31.0	30.6	31.0	30.9	30.7	30.6	30.7	30.7	30.4	30.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	4423.6	4424.9	4422.4	4425.8	4427.5	4428.3	4430.7	4431.8	4430.9	4432.0
G1.0	4423.5	4424.1	4426.8	4425.6	4426.6	4426.8	4430.0	4429.8	4428.6	4430.6
G2.0	4420.7	4422.1	4424.4	4423.9	4424.6	4424.7	4426.2	4426.6	4425.8	4426.3
G3.0	4418.4	4419.3	4418.9	4419.3	4421.2	4421.0	4423.0	4422.8	4421.5	4422.9
G4.0	4413.3	4415.3	4414.6	4414.1	4414.9	4416.5	4417.1	4417.5	4415.4	4415.9
G5.0	4408.1	4407.4	4408.2	4407.0	4409.0	4409.7	4410.1	4410.8	4408.8	4407.5
G6.0	4400.0	4397.9	4400.4	4400.5	4401.0	4401.4	4401.0	4401.1	4399.5	4398.3
G7.0	4391.4	4394.6	4392.1	4390.2	4390.9	4391.5	4391.0	4390.5	4388.3	4387.1
G8.0	4380.9	4383.3	4380.8	4380.4	4380.0	4379.3	4379.0	4377.8	4374.7	4374.6
G9.0	4369.9	4368.9	4367.3	4368.1	4367.5	4365.6	4364.6	4363.8	4359.7	4358.8
G10.0	4357.9	4356.9	4355.5	4352.9	4351.5	4350.9	4339.6	4346.0	4344.2	4342.1
G11.0	4342.7	4342.1	4339.5	4337.2	4334.3	4333.6	4331.6	4328.6	4324.6	4323.3
G12.0	4326.4	4324.8	4322.6	4319.7	4319.0	4312.7	4311.8	4309.5	4304.3	4303.5
G13.0	4310.6	4308.9	4304.3	4300.3	4296.0	4294.3	4291.4	4289.3	4284.3	4283.6
G14.0	4290.8	4286.6	4283.6	4279.0	4273.4	4272.1	4271.3	4267.6	4263.8	4262.3
G15.0	4269.8	4267.0	4262.9	4259.4	4253.9	4251.7	4248.9	4246.6	4242.9	4240.1
G16.0	4249.4	4245.6	4239.4	4234.8	4231.1	4228.8	4227.6	4223.6	4219.2	4217.3
G17.0	4226.7	4222.3	4216.2	4211.6	4206.4	4205.4	4202.9	4199.6	4195.5	4192.8
G18.0	4201.5	4195.2	4190.6	4186.4	4181.9	4178.0	4176.8	4173.6	4168.9	4165.9
G19.0	4176.1	4167.1	4166.0	4161.1	4158.9	4152.5	4150.9	4147.5	4140.7	4139.3
G20.0	4146.9	4143.3	4137.5	4134.3	4128.8	4123.1	4122.4	4119.1	4113.7	4111.2
G21.0	4120.0	4116.1	4109.7	4104.5	4099.3	4095.7	4093.6	4090.1	4083.6	4081.9
G22.0	4088.6	4084.4	4078.1	4074.1	4069.0	4065.4	4062.4	4058.8	4052.6	4049.8
G23.0	4059.5	4051.5	4048.1	4043.1	4037.9	4033.1	4030.3	4026.3	4019.1	4016.9
G24.0	4024.9	4018.1	4015.4	4008.2	4003.9	4000.6	3996.7	3991.4	3987.1	3982.7
G25.0	3992.3	3987.5	3980.0	3974.6	3969.3	3965.6	3962.8	3957.4	3948.8	3946.7
G26.0	3957.3	3950.3	3942.2	3938.9	3933.1	3929.0	3924.4	3922.4	3913.7	3910.9
G27.0	3920.5	3915.0	3907.9	3902.1	3894.2	3891.4	3887.6	3882.3	3874.8	3872.7
G28.0	3881.7	3874.7	3869.1	3861.9	3854.4	3851.3	3846.8	3841.8	3833.9	3830.3
G29.0	3841.6	3835.4	3828.9	3821.2	3814.0	3810.1	3805.0	3801.1	3792.8	3789.9
G30.0	3800.0	3794.4	3785.5	3778.4	3772.7	3767.2	3763.5	3758.0	3750.2	3746.1
G31.0	3757.0	3751.2	3743.5	3736.6	3727.6	3723.4	3720.2	3714.0	3705.6	3702.7
G32.0	3708.5	3701.6	3693.7	3691.5	3683.8	3678.6	3672.8	3667.2	3660.0	3657.4
G33.0	3663.1	3658.8	3650.7	3643.6	3636.0	3632.3	3624.9	3620.9	3611.4	3609.8
G34.0	3610.7	3607.6	3602.6	3595.3	3587.6	3581.4	3578.3	3570.8	3563.7	3560.7
G35.0	3556.9	3553.3	3550.8	3544.4	3536.3	3531.0	3525.1	3522.5	3513.4	3513.0
G36.0	3503.0	3500.0	3496.7	3492.5	3483.9	3479.1	3472.9	3469.3	3462.1	3459.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	3448.4	3442.8	3442.7	3438.0	3430.4	3427.4	3422.4	3418.5	3409.8	3407.7
G38.0	3390.4	3386.9	3383.6	3381.1	3376.3	3373.0	3366.4	3364.1	3355.6	3351.9
G39.0	3335.4	3327.6	3323.6	3323.9	3316.3	3314.6	3310.6	3306.8	3296.7	3296.3
G40.0	3274.4	3267.2	3264.5	3261.4	3258.5	3257.9	3251.5	3247.6	3240.8	3239.5
G41.0	3216.7	3204.0	3204.0	3199.0	3197.0	3198.5	3193.4	3186.7	3179.0	3181.3
G42.0	3156.2	3143.7	3138.4	3135.4	3134.4	3134.1	3127.9	3126.6	3118.9	3121.9
G43.0	3091.1	3080.8	3069.4	3070.2	3067.1	3069.8	3065.2	3062.8	3056.5	3057.5
G44.0	3031.1	3016.5	3007.7	3003.4	3003.3	3002.3	3000.4	2999.2	2993.3	2995.4
G45.0	2966.8	2950.5	2940.0	2937.5	2933.5	2935.9	2935.0	2932.8	2927.7	2930.6
G46.0	2899.6	2882.7	2873.6	2866.9	2863.6	2865.8	2868.9	2867.3	2861.9	2864.3
G47.0	2829.8	2815.0	2804.9	2795.2	2793.8	2799.4	2795.8	2796.4	2790.8	2795.6
G48.0	2762.6	2745.9	2735.4	2724.9	2723.4	2727.9	2727.1	2727.9	2724.7	2728.6
G49.0	2690.1	2674.9	2663.2	2654.7	2649.8	2653.8	2655.6	2657.7	2653.6	2659.2
G50.0	2615.5	2602.6	2590.1	2580.6	2573.4	2580.8	2583.6	2584.2	2583.8	2590.6
G51.0	2538.8	2526.6	2514.7	2508.3	2500.2	2502.2	2508.6	2512.4	2511.2	2520.7
G52.0	2463.2	2447.9	2437.8	2432.1	2425.7	2428.4	2434.9	2440.6	2441.9	2451.8
G53.0	2386.3	2368.6	2361.3	2354.6	2349.6	2349.4	2358.6	2368.5	2371.1	2380.6
G54.0	2306.1	2291.2	2284.0	2276.8	2274.2	2277.1	2286.8	2297.4	2298.5	2305.5
G55.0	2227.0	2211.2	2201.7	2194.9	2194.9	2201.0	2209.3	2221.9	2221.4	2227.8
G56.0	2142.3	2132.9	2121.9	2116.6	2115.3	2126.7	2131.0	2146.4	2147.9	2151.0
G57.0	2060.3	2051.6	2041.4	2037.0	2038.9	2050.5	2053.0	2062.6	2066.0	2073.7
G58.0	1977.0	1965.5	1960.0	1956.7	1957.5	1969.8	1973.4	1984.3	1989.2	1995.5
G59.0	1891.9	1882.6	1877.2	1881.1	1880.2	1891.9	1891.7	1902.9	1905.3	1911.4
G60.0	1807.3	1799.9	1793.7	1805.0	1800.8	1810.2	1816.4	1820.3	1819.6	1830.9
G61.0	1720.0	1715.1	1713.6	1726.6	1723.6	1726.9	1731.2	1733.7	1737.5	1747.7
G62.0	1637.8	1631.5	1633.9	1644.2	1640.8	1645.6	1646.5	1654.7	1654.7	1667.9
G63.0	1556.2	1549.2	1554.2	1560.1	1563.7	1557.7	1562.0	1570.1	1570.8	1582.7
G64.0	1474.7	1471.9	1476.4	1473.7	1475.0	1477.2	1481.8	1487.3	1491.8	1504.3
G65.0	1390.5	1395.2	1395.9	1394.8	1394.3	1397.1	1398.9	1409.2	1414.5	1424.0
G66.0	1308.5	1315.1	1316.3	1311.8	1306.5	1317.0	1321.6	1326.8	1334.1	1348.5
G67.0	1227.9	1234.3	1229.9	1225.1	1226.6	1235.4	1239.8	1247.9	1256.7	1267.1
G68.0	1151.3	1151.7	1142.0	1146.3	1143.6	1156.3	1164.2	1173.0	1175.9	1188.7
G69.0	1071.5	1069.2	1057.6	1062.6	1068.0	1076.5	1086.9	1093.7	1101.2	1109.9
G70.0	990.3	983.9	981.6	986.0	990.9	1002.1	1011.8	1018.5	1023.1	1035.3
G71.0	908.2	901.3	901.1	908.9	917.3	928.5	934.8	942.0	948.8	959.1
G72.0	824.2	826.4	826.8	834.1	844.6	854.4	863.5	872.0	875.1	885.5
G73.0	743.2	749.6	753.5	761.2	770.7	783.1	792.1	799.4	803.7	811.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	668.3	675.0	684.8	692.1	701.5	716.1	720.7	729.1	727.7	735.1
G75.0	596.8	606.8	614.7	624.4	634.4	644.2	649.7	648.9	649.2	654.8
G76.0	527.5	540.1	550.2	560.4	566.7	574.9	572.9	575.7	580.1	593.2
G77.0	462.3	474.8	485.9	493.9	492.0	500.1	505.2	516.2	524.0	531.2
G78.0	398.9	414.2	420.9	423.5	424.6	440.1	449.4	455.8	456.9	467.4
G79.0	340.7	352.2	353.2	359.0	371.0	382.3	389.5	393.5	391.9	399.2
G80.0	285.4	287.2	296.1	306.9	313.0	322.7	328.9	330.8	328.6	334.8
G81.0	227.3	231.8	243.7	250.0	254.7	261.2	267.0	267.3	264.5	266.9
G82.0	177.0	183.1	190.2	195.1	197.7	202.5	199.2	184.6	142.4	128.9
G83.0	131.1	135.9	140.0	143.0	132.8	103.2	75.5	61.4	55.7	54.1
G84.0	91.8	93.5	87.7	57.8	42.3	41.0	37.8	35.2	32.1	32.0
G85.0	56.4	36.9	28.4	26.8	27.0	26.6	25.9	24.5	23.4	23.1
G86.0	17.6	18.6	19.6	20.4	20.9	20.4	19.7	18.9	17.4	17.3
G87.0	14.3	15.4	16.0	16.4	16.8	16.1	15.7	15.2	13.9	13.9
G88.0	12.1	13.0	13.8	14.0	14.0	13.3	13.0	12.9	12.3	11.5
G89.0	11.3	11.8	11.9	12.2	12.6	12.3	11.8	11.7	10.8	10.6
G90.0	9.9	10.3	10.8	11.6	11.5	11.0	10.9	10.9	10.1	10.6
G91.0	9.3	9.9	10.2	10.2	10.8	10.4	10.4	10.4	9.9	9.7
G92.0	8.2	9.2	9.6	9.9	9.6	10.2	10.0	9.6	9.9	9.3
G93.0	8.2	8.7	9.1	8.9	9.3	9.5	9.6	9.4	9.3	9.6
G94.0	7.8	8.1	8.5	9.2	8.9	9.5	9.3	9.7	9.5	9.1
G95.0	8.1	8.1	8.4	8.9	9.3	9.3	9.3	9.5	9.5	8.9
G96.0	7.9	8.1	8.4	8.6	8.7	9.3	9.2	9.1	9.5	9.1
G97.0	8.5	8.2	8.5	8.7	8.8	9.3	9.3	9.1	9.2	9.6
G98.0	8.7	8.5	8.7	9.2	8.9	9.2	9.4	9.2	9.3	9.2
G99.0	8.7	8.7	8.9	9.4	9.1	9.6	9.5	9.3	9.5	9.4
G100.0	9.2	9.6	9.6	9.7	9.4	9.9	9.7	9.6	9.7	9.6
G101.0	9.6	9.9	9.5	10.0	9.6	9.7	10.0	9.9	10.3	10.4
G102.0	10.2	10.3	10.0	10.0	10.0	10.1	10.3	10.1	10.2	10.2
G103.0	10.6	10.6	10.2	10.3	10.8	10.8	10.7	10.4	10.6	10.4
G104.0	10.7	11.0	10.6	11.1	10.8	10.9	11.0	10.8	10.9	11.4
G105.0	11.4	10.9	11.5	11.5	11.5	11.3	11.4	11.1	11.6	11.7
G106.0	11.5	11.4	11.5	11.7	11.9	11.9	11.7	11.5	11.6	12.1
G107.0	12.1	11.7	11.8	12.2	11.9	11.9	12.1	11.8	12.3	11.9
G108.0	12.3	12.5	12.2	12.6	12.3	12.3	12.5	12.9	12.8	12.9
G109.0	12.9	12.9	12.5	12.6	13.1	12.8	12.9	12.6	13.1	13.2
G110.0	13.2	12.9	13.5	13.1	13.1	13.5	13.3	13.7	13.5	13.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	13.7	13.2	13.8	13.8	13.8	13.6	13.7	13.5	13.7	14.1
G112.0	13.8	14.1	13.7	14.0	13.9	13.9	14.0	14.4	14.0	13.9
G113.0	14.1	13.9	14.1	14.5	14.6	14.3	14.5	14.3	14.7	14.9
G114.0	14.7	14.5	15.0	14.7	15.0	14.6	14.9	14.6	15.1	15.2
G115.0	15.1	14.9	15.3	15.1	15.3	15.4	15.2	15.7	15.2	15.7
G116.0	15.4	15.2	15.8	15.4	15.8	15.4	15.7	16.0	15.8	15.4
G117.0	15.9	15.5	16.1	15.9	15.9	16.2	16.0	15.8	16.1	15.9
G118.0	16.1	16.5	16.0	16.4	16.4	16.6	16.4	16.1	16.7	16.8
G119.0	16.5	16.8	16.5	16.7	16.8	17.0	16.8	17.2	16.8	16.7
G120.0	16.8	16.6	17.3	17.0	17.0	17.4	17.0	16.9	17.5	17.6
G121.0	17.4	17.0	17.6	17.4	17.5	17.4	17.5	17.3	17.9	17.5
G122.0	17.5	18.0	17.5	18.0	17.9	17.6	17.9	17.8	18.0	18.3
G123.0	18.1	17.8	18.3	18.1	18.3	18.6	18.3	18.1	18.4	18.7
G124.0	18.4	18.7	18.7	18.7	18.7	18.3	18.7	18.4	18.8	18.7
G125.0	18.8	18.4	19.0	19.0	19.0	18.8	19.0	19.5	19.3	19.0
G126.0	19.0	19.4	19.0	19.3	19.4	19.6	19.4	19.8	19.5	19.8
G127.0	19.5	19.3	19.4	19.6	19.7	20.0	19.8	20.1	19.8	19.7
G128.0	19.7	19.5	19.7	20.1	20.1	20.0	20.2	20.0	20.2	20.5
G129.0	20.2	20.0	20.5	20.4	20.5	20.6	20.5	20.8	20.6	20.5
G130.0	20.5	20.3	20.9	20.6	20.8	21.1	20.8	21.1	21.0	20.9
G131.0	20.9	21.1	21.1	21.1	21.1	21.3	21.2	21.5	21.2	21.2
G132.0	21.1	20.9	21.1	21.5	21.3	21.2	21.5	21.3	21.6	21.8
G133.0	21.5	21.2	21.8	21.8	21.7	21.6	21.8	21.7	22.0	22.3
G134.0	21.8	21.6	22.2	22.0	22.2	21.8	22.2	21.9	22.3	22.5
G135.0	22.2	22.4	22.2	22.4	22.5	22.7	22.4	22.7	22.5	22.6
G136.0	22.5	22.7	22.4	22.7	22.7	22.5	22.7	23.1	22.9	23.1
G137.0	22.9	22.6	23.1	23.0	22.9	22.7	23.1	23.1	23.2	23.4
G138.0	23.2	23.4	23.3	23.2	23.2	23.1	23.3	23.5	23.4	23.7
G139.0	23.5	23.2	23.7	23.7	23.5	23.9	23.7	23.5	23.8	23.8
G140.0	23.8	24.0	24.0	23.9	23.8	24.2	23.9	24.1	24.0	24.0
G141.0	24.1	23.8	24.0	24.2	24.0	24.4	24.2	24.5	24.4	24.6
G142.0	24.5	24.1	24.2	24.5	24.5	24.4	24.5	24.7	24.6	24.8
G143.0	24.8	24.5	24.6	24.8	24.7	24.5	24.7	24.9	24.8	24.9
G144.0	25.2	25.4	25.2	24.9	25.2	24.7	25.1	25.3	25.2	25.3
G145.0	25.5	25.6	25.5	25.2	25.4	25.4	25.3	25.4	25.4	25.5
G146.0	25.6	25.4	25.5	25.6	25.3	25.3	25.4	25.6	25.6	25.6
G147.0	26.1	25.8	25.8	26.0	25.5	25.5	25.6	25.6	25.9	26.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	26.3	26.5	26.3	26.2	25.9	25.8	26.0	26.1	26.1	26.1
G149.0	26.5	26.2	26.3	26.6	26.1	26.3	26.1	26.1	26.3	26.3
G150.0	26.8	27.0	26.7	26.8	26.5	26.3	26.5	26.3	26.6	26.6
G151.0	27.3	26.8	26.9	26.7	26.9	26.9	26.6	26.5	26.8	26.8
G152.0	27.5	27.0	27.3	27.4	26.9	26.8	26.8	26.8	26.9	26.9
G153.0	27.5	27.4	27.5	27.6	27.5	27.5	27.1	27.0	27.3	27.1
G154.0	27.7	27.6	27.7	27.8	27.4	27.7	27.5	27.3	27.5	27.5
G155.0	28.0	28.3	28.1	28.1	27.6	27.5	27.6	27.8	27.7	27.7
G156.0	28.4	28.0	28.2	28.3	28.2	27.8	28.0	28.1	28.0	27.8
G157.0	28.5	28.8	28.5	28.5	28.4	28.3	28.1	28.3	28.2	28.1
G158.0	28.5	29.0	28.8	28.8	28.3	28.6	28.4	28.4	28.3	28.4
G159.0	29.0	28.5	28.9	29.0	28.9	28.9	28.6	28.4	28.6	28.6
G160.0	29.1	28.6	29.1	29.2	29.1	28.6	28.9	29.0	28.8	28.6
G161.0	29.2	28.9	29.4	29.6	29.0	29.2	29.0	28.9	29.0	29.1
G162.0	29.0	29.1	29.5	29.6	29.6	29.1	29.4	29.5	29.4	29.1
G163.0	29.2	29.7	29.6	29.8	29.4	29.4	29.6	29.7	29.6	29.5
G164.0	29.5	29.9	29.7	29.9	29.5	29.6	29.7	29.6	29.7	29.7
G165.0	29.9	29.5	29.8	30.0	30.0	30.0	29.9	29.8	29.9	29.7
G166.0	29.6	29.7	29.9	29.7	29.7	30.0	30.0	30.3	30.2	29.9
G167.0	29.7	30.3	30.0	30.3	30.3	30.3	30.0	30.4	30.3	30.2
G168.0	30.3	30.5	30.2	29.8	30.4	30.4	30.2	30.5	30.3	30.3
G169.0	29.9	29.9	30.4	30.6	30.5	30.2	30.3	30.6	30.4	30.5
G170.0	30.0	30.6	30.4	30.6	30.2	30.3	30.5	30.3	30.6	30.6
G171.0	30.2	30.2	30.5	30.2	30.6	30.4	30.6	30.4	30.6	30.5
G172.0	30.6	30.2	30.6	30.3	30.7	30.4	30.7	30.9	30.6	30.6
G173.0	30.7	30.3	30.6	30.3	30.4	30.7	30.7	30.9	30.7	30.7
G174.0	30.7	30.3	30.6	30.3	30.9	30.9	30.6	30.9	30.7	31.1
G175.0	30.7	30.5	30.6	30.9	30.9	30.9	30.5	31.0	30.7	31.1
G176.0	30.9	31.0	30.7	30.3	30.5	30.6	30.9	30.5	31.0	31.0
G177.0	30.4	30.5	30.7	31.0	30.5	30.6	30.6	30.7	31.0	31.3
G178.0	31.0	31.0	30.7	30.5	30.5	30.7	31.0	31.1	31.2	31.1
G179.0	30.4	30.5	30.6	30.5	30.5	30.9	30.7	31.2	31.0	31.2
G180.0	30.4	30.5	30.6	30.6	31.0	30.6	31.0	31.2	31.0	31.1

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G0.0	4430.4	4429.7	4433.8						
G1.0	4429.1	4425.4	4430.0						
G2.0	4424.1	4423.3	4428.7						
G3.0	4419.1	4418.8	4424.4						
G4.0	4413.6	4413.2	4418.4						
G5.0	4404.5	4404.7	4413.0						
G6.0	4396.6	4395.6	4404.7						
G7.0	4384.1	4383.6	4393.4						
G8.0	4371.3	4368.5	4382.5						
G9.0	4356.6	4354.0	4368.8						
G10.0	4337.0	4336.7	4352.9						
G11.0	4319.7	4316.4	4337.0						
G12.0	4298.2	4297.6	4315.6						
G13.0	4278.7	4277.6	4298.5						
G14.0	4257.6	4255.0	4275.4						
G15.0	4237.0	4234.5	4255.2						
G16.0	4212.2	4210.9	4232.8						
G17.0	4188.6	4186.8	4209.4						
G18.0	4161.2	4159.3	4185.9						
G19.0	4134.8	4132.4	4159.0						
G20.0	4106.5	4101.8	4132.1						
G21.0	4075.6	4073.0	4102.9						
G22.0	4044.8	4040.9	4073.5						
G23.0	4013.3	4009.7	4042.2						
G24.0	3978.1	3973.3	4008.6						
G25.0	3941.6	3938.3	3976.1						
G26.0	3905.4	3901.5	3940.5						
G27.0	3867.3	3863.1	3904.5						
G28.0	3826.0	3822.0	3866.2						
G29.0	3782.8	3779.0	3826.0						
G30.0	3742.0	3736.9	3786.2						
G31.0	3696.1	3694.8	3743.6						
G32.0	3651.3	3649.2	3700.8						
G33.0	3607.1	3603.1	3655.6						
G34.0	3558.0	3552.3	3609.5						
G35.0	3506.9	3502.9	3561.6						
G36.0	3454.8	3452.0	3512.2						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	3404.2	3399.3	3464.8						
G38.0	3348.3	3345.3	3411.2						
G39.0	3293.0	3289.0	3358.6						
G40.0	3234.1	3232.2	3302.1						
G41.0	3176.0	3173.8	3247.3						
G42.0	3117.7	3114.3	3190.8						
G43.0	3054.1	3052.0	3133.2						
G44.0	2992.2	2991.0	3070.8						
G45.0	2927.4	2924.5	3011.2						
G46.0	2862.2	2862.1	2949.8						
G47.0	2795.5	2793.8	2887.1						
G48.0	2728.4	2725.5	2821.9						
G49.0	2661.9	2659.6	2755.5						
G50.0	2594.3	2591.5	2689.1						
G51.0	2527.1	2522.4	2623.7						
G52.0	2458.6	2455.6	2559.0						
G53.0	2385.4	2383.9	2491.5						
G54.0	2312.7	2311.7	2418.5						
G55.0	2235.3	2235.9	2348.0						
G56.0	2158.6	2161.1	2272.9						
G57.0	2081.1	2080.7	2197.8						
G58.0	2000.8	1999.1	2121.4						
G59.0	1913.5	1913.6	2045.0						
G60.0	1834.9	1833.8	1962.8						
G61.0	1752.3	1752.6	1885.3						
G62.0	1671.9	1669.8	1802.9						
G63.0	1589.6	1589.7	1725.2						
G64.0	1509.2	1510.1	1642.7						
G65.0	1430.8	1431.1	1565.4						
G66.0	1353.4	1354.2	1485.2						
G67.0	1271.0	1272.3	1409.1						
G68.0	1196.1	1196.7	1331.1						
G69.0	1114.0	1114.7	1253.5						
G70.0	1036.5	1038.1	1174.4						
G71.0	964.3	961.7	1098.0						
G72.0	888.6	889.0	1022.8						
G73.0	814.9	814.6	949.4						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	733.8	730.8	874.8						
G75.0	655.1	655.9	802.3						
G76.0	594.7	598.0	721.4						
G77.0	534.7	534.8	651.2						
G78.0	472.0	470.2	592.9						
G79.0	403.9	402.8	530.7						
G80.0	335.3	335.4	463.4						
G81.0	262.0	260.2	397.4						
G82.0	118.1	110.7	332.7						
G83.0	52.4	49.4	255.2						
G84.0	31.0	30.4	101.5						
G85.0	22.0	21.3	49.7						
G86.0	16.7	16.5	29.5						
G87.0	13.3	12.9	20.9						
G88.0	11.5	11.0	16.0						
G89.0	10.6	10.2	12.8						
G90.0	10.1	9.7	10.9						
G91.0	9.7	9.9	10.1						
G92.0	9.5	9.2	9.6						
G93.0	9.4	9.1	9.3						
G94.0	9.2	8.9	8.9						
G95.0	9.3	9.3	8.8						
G96.0	9.2	9.1	8.7						
G97.0	9.3	9.2	8.7						
G98.0	9.6	9.6	8.8						
G99.0	9.6	10.0	8.8						
G100.0	9.9	9.9	8.9						
G101.0	10.2	10.6	9.3						
G102.0	10.7	10.8	9.5						
G103.0	10.9	10.7	9.6						
G104.0	11.4	11.4	10.1						
G105.0	11.7	11.8	10.2						
G106.0	11.8	12.2	10.6						
G107.0	12.2	12.6	10.8						
G108.0	12.5	13.1	11.3						
G109.0	13.0	13.5	11.5						
G110.0	13.8	13.3	11.9						

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	14.1	13.8	12.3							
G112.0	14.1	14.6	13.0							
G113.0	14.5	15.1	13.1							
G114.0	15.0	15.0	13.7							
G115.0	15.7	15.8	13.9							
G116.0	16.1	16.2	14.3							
G117.0	16.6	16.1	14.9							
G118.0	16.5	17.0	15.1							
G119.0	16.8	17.3	15.8							
G120.0	17.8	17.4	15.8							
G121.0	18.0	18.1	16.1							
G122.0	18.4	18.1	16.5							
G123.0	18.9	18.4	16.8							
G124.0	19.3	19.3	17.6							
G125.0	19.5	19.6	17.6							
G126.0	19.5	19.6	18.3							
G127.0	20.3	20.0	18.7							
G128.0	20.3	20.8	18.8							
G129.0	20.6	20.8	19.5							
G130.0	21.0	21.1	19.8							
G131.0	21.7	21.7	20.3							
G132.0	21.7	22.2	20.6							
G133.0	22.3	22.0	20.5							
G134.0	22.4	22.3	20.9							
G135.0	22.6	23.2	21.2							
G136.0	23.1	23.0	21.9							
G137.0	23.4	23.7	21.8							
G138.0	23.7	24.0	22.0							
G139.0	24.1	23.9	22.7							
G140.0	24.4	24.1	22.6							
G141.0	24.6	24.4	23.0							
G142.0	24.8	24.7	23.7							
G143.0	25.1	24.9	23.8							
G144.0	25.3	25.6	23.8							
G145.0	25.6	25.4	24.4							
G146.0	25.9	25.5	24.7							
G147.0	26.1	26.3	24.9							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.000 m

Humidity: 40

Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	26.3	26.1	25.2							
G149.0	26.5	26.8	25.4							
G150.0	26.7	26.9	25.2							
G151.0	26.8	27.0	26.0							
G152.0	27.0	26.8	26.1							
G153.0	27.1	27.0	26.3							
G154.0	27.5	27.7	26.1							
G155.0	27.7	28.1	26.7							
G156.0	27.8	27.6	27.0							
G157.0	28.3	28.0	26.8							
G158.0	28.3	28.6	27.7							
G159.0	28.5	29.0	27.8							
G160.0	28.9	29.1	27.7							
G161.0	28.9	29.5	28.5							
G162.0	29.4	29.0	28.8							
G163.0	29.2	29.8	28.6							
G164.0	29.8	30.0	29.2							
G165.0	30.0	30.3	29.0							
G166.0	30.3	30.4	29.8							
G167.0	30.4	30.6	29.5							
G168.0	30.2	30.2	29.7							
G169.0	30.7	30.9	30.4							
G170.0	30.4	31.0	30.6							
G171.0	30.9	31.1	30.4							
G172.0	30.5	31.2	31.2							
G173.0	30.6	31.3	31.3							
G174.0	30.7	31.4	31.0							
G175.0	30.9	31.1	31.7							
G176.0	30.9	31.7	31.9							
G177.0	31.7	31.2	31.5							
G178.0	31.2	31.9	32.0							
G179.0	31.8	31.2	32.1							
G180.0	31.3	31.8	31.8							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.000 m
 Humidity: 40
 Inspector: