

Report No.:

Test Time: 2020-07-15 16:57

Luminaire Property

Luminaire Manufacturer: SVETOLUB

Luminaire Description: SLIM PROM 500-40

Luminous Width (mm): 525

Voltage: 226.1 V

Power: 35.15 W

Luminous Length (mm): 140

Luminous Height (mm): 55

Current: 0.172 A

Power Factor: 0.898

Photometric Results

CIE Class: Direct

Measurement Flux: 5349 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(50%): H112.5

Vertical Diffuse Angle(50%): V109

Luminaire Efficacy Rating (LER): 152

Max. Intensity: 1909.57 cd

Total Rated Lamp Lumens: 5349.0 lm


Efficiency: 100%

Upward Ratio: 1%


Central Intensity: 1908.9 cd

Pos of Max. Intensity: H345 V3

Picture Of Luminaire



Luminous Intensity Distribution Curve

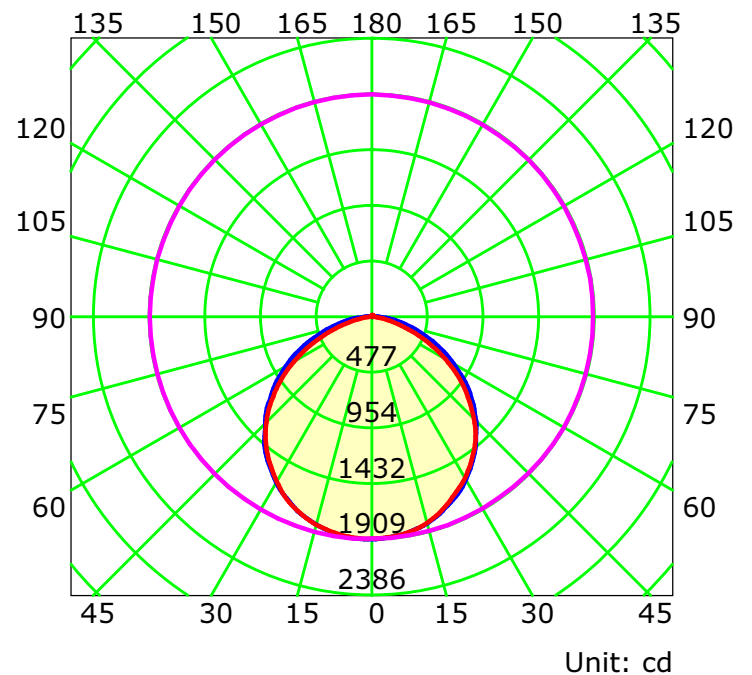

— C0-C180 — C90-C270 — G3

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Luminous Intensity Distribution Curve

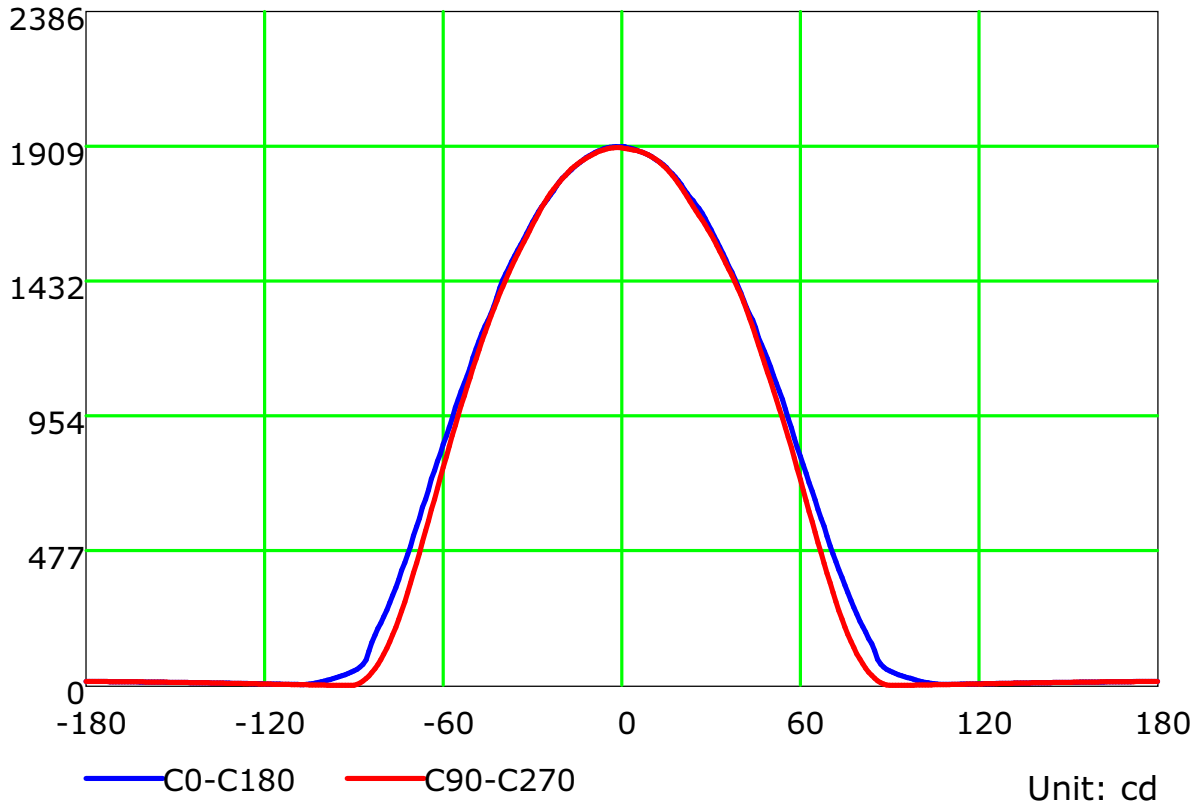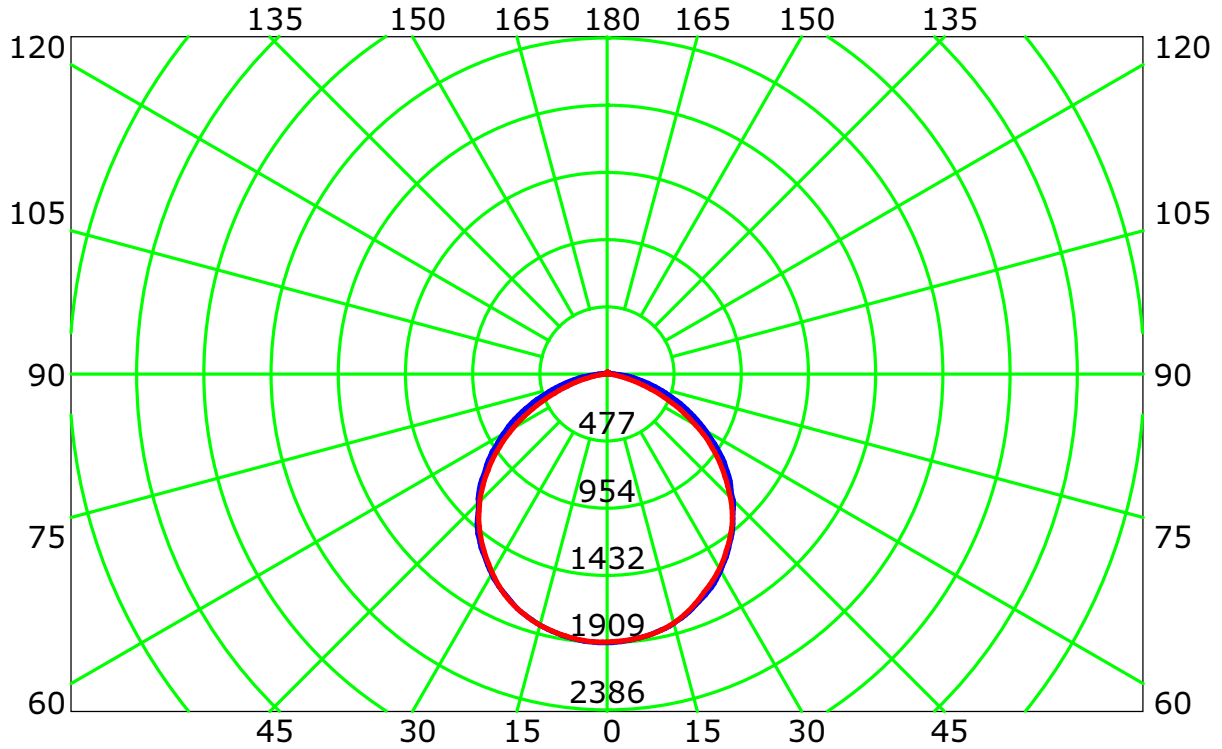

Unit: cd

C Plane (°): 0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°): 0.0-180.0: 1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Luminous Intensity Distribution Curve(cd/klm)

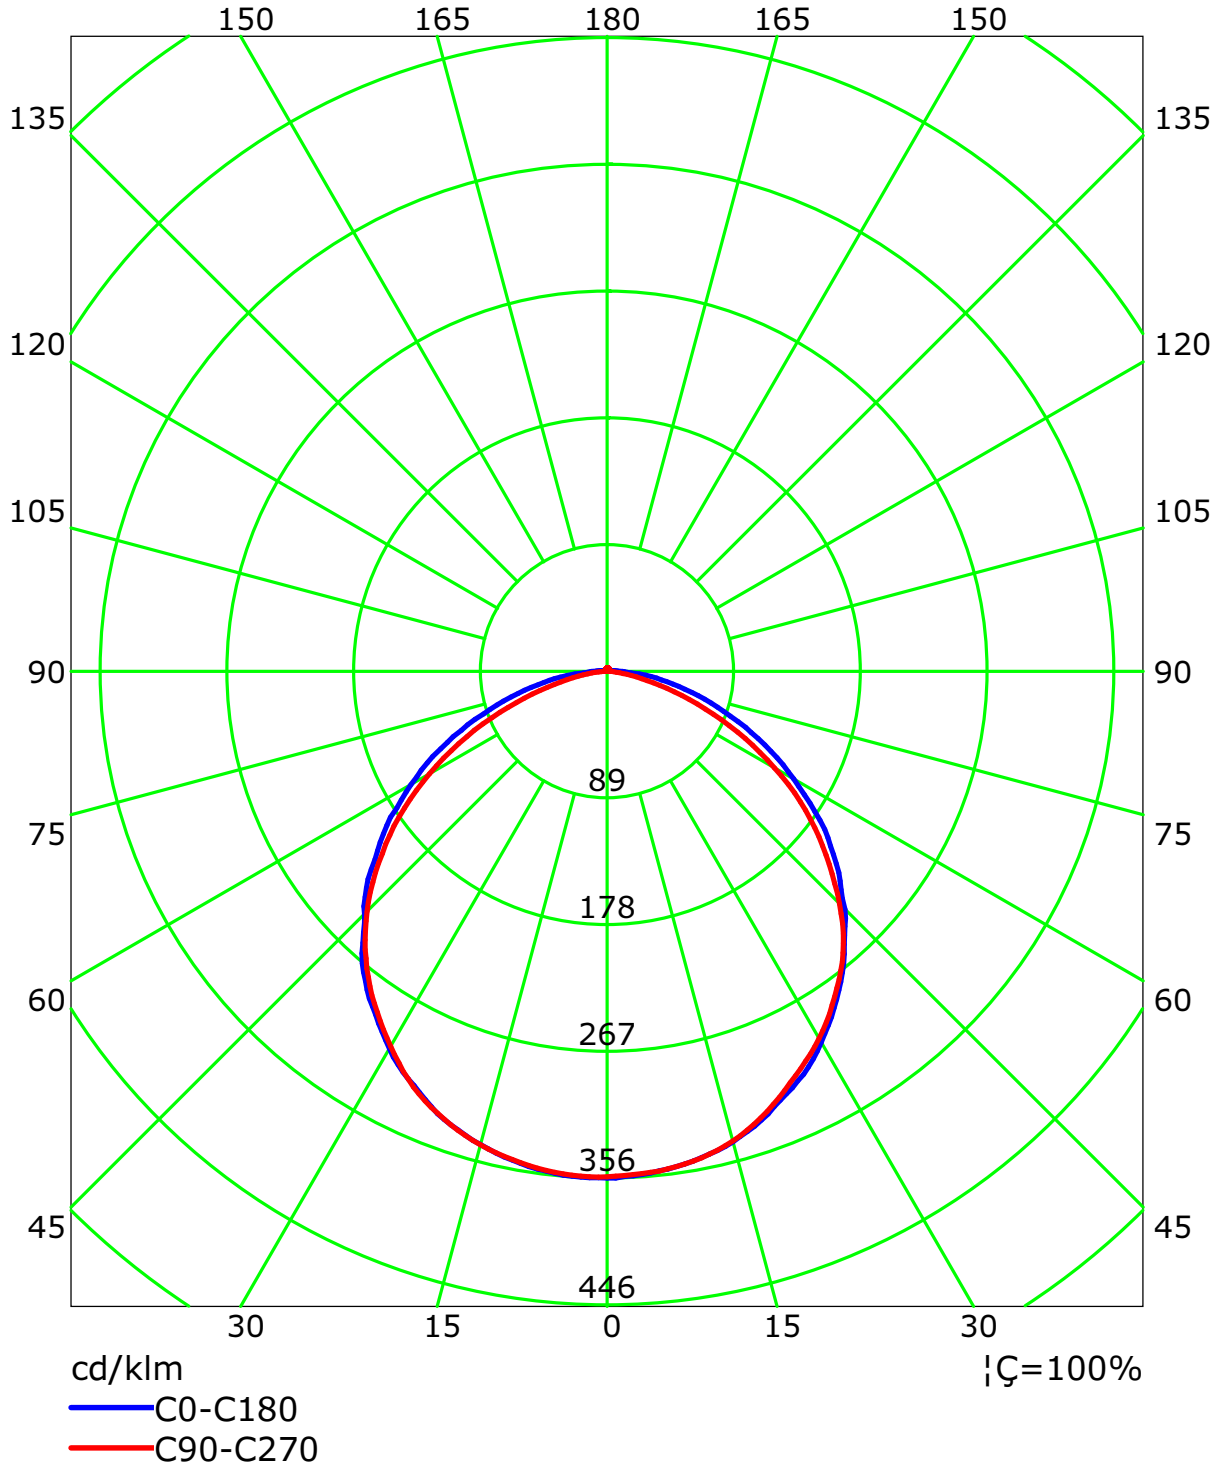

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40


Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	89	87	85	83
2	99	91	84	79	96	89	83	77	85	80	76	82	77	74	79	75	72	70
3	90	80	72	65	88	78	71	65	75	69	64	72	67	62	70	65	61	59
4	83	71	62	56	80	70	61	55	67	60	54	64	58	53	62	57	53	50
5	76	63	54	48	74	62	54	48	60	53	47	58	51	46	56	50	46	44
6	70	57	48	42	68	56	48	42	54	47	41	52	46	41	51	45	40	38
7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	46	40	36	34
8	61	47	39	33	59	47	38	33	45	38	33	44	37	32	43	37	32	30
9	57	43	35	30	55	43	35	30	42	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	27	38	31	27	37	31	26	36	31	26	25

Spacing Criteria (0-180): 1.26
 Spacing Criteria (90-270): 1.26
 Spacing Criteria (Diagonal): 1.37


Curves of Luminaires vs Lighting Area

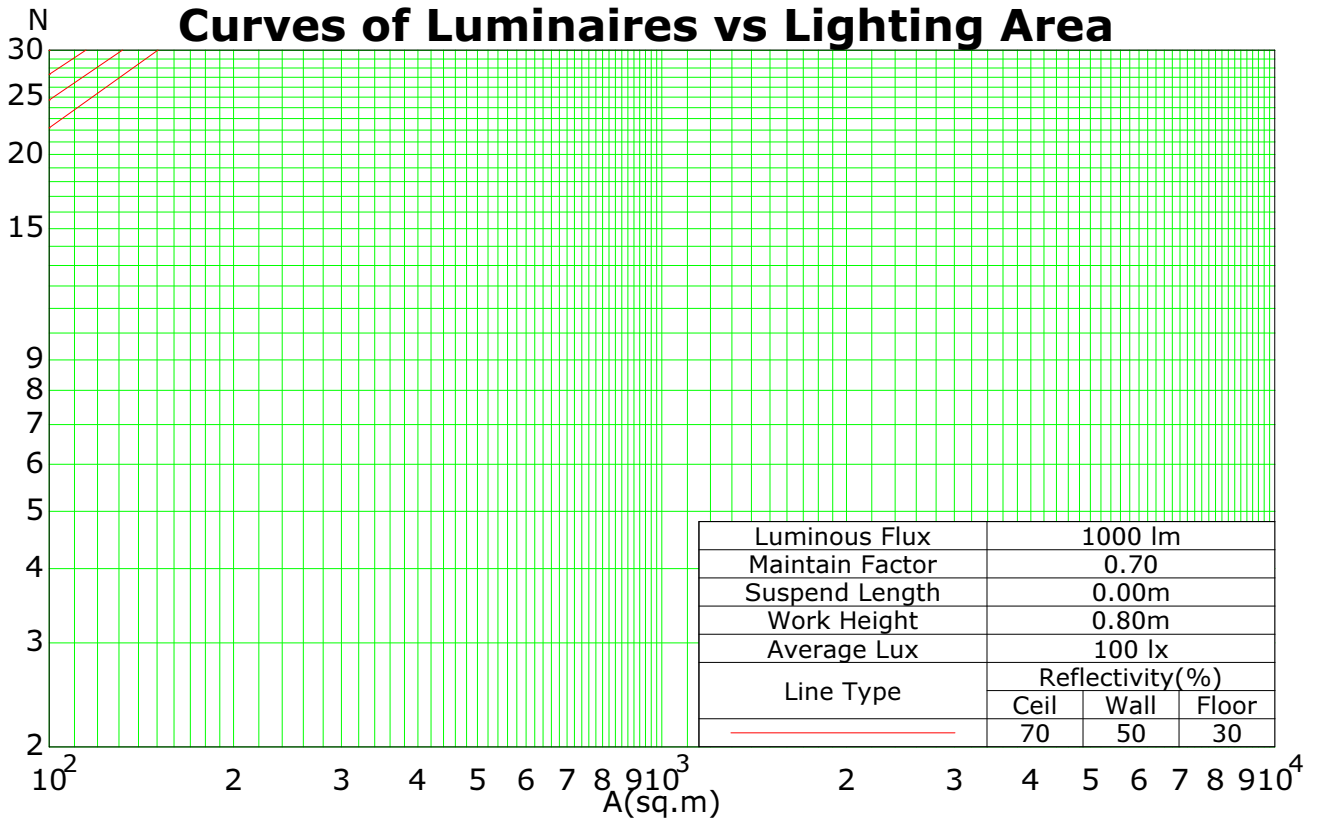

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Isocandela (rectangle)

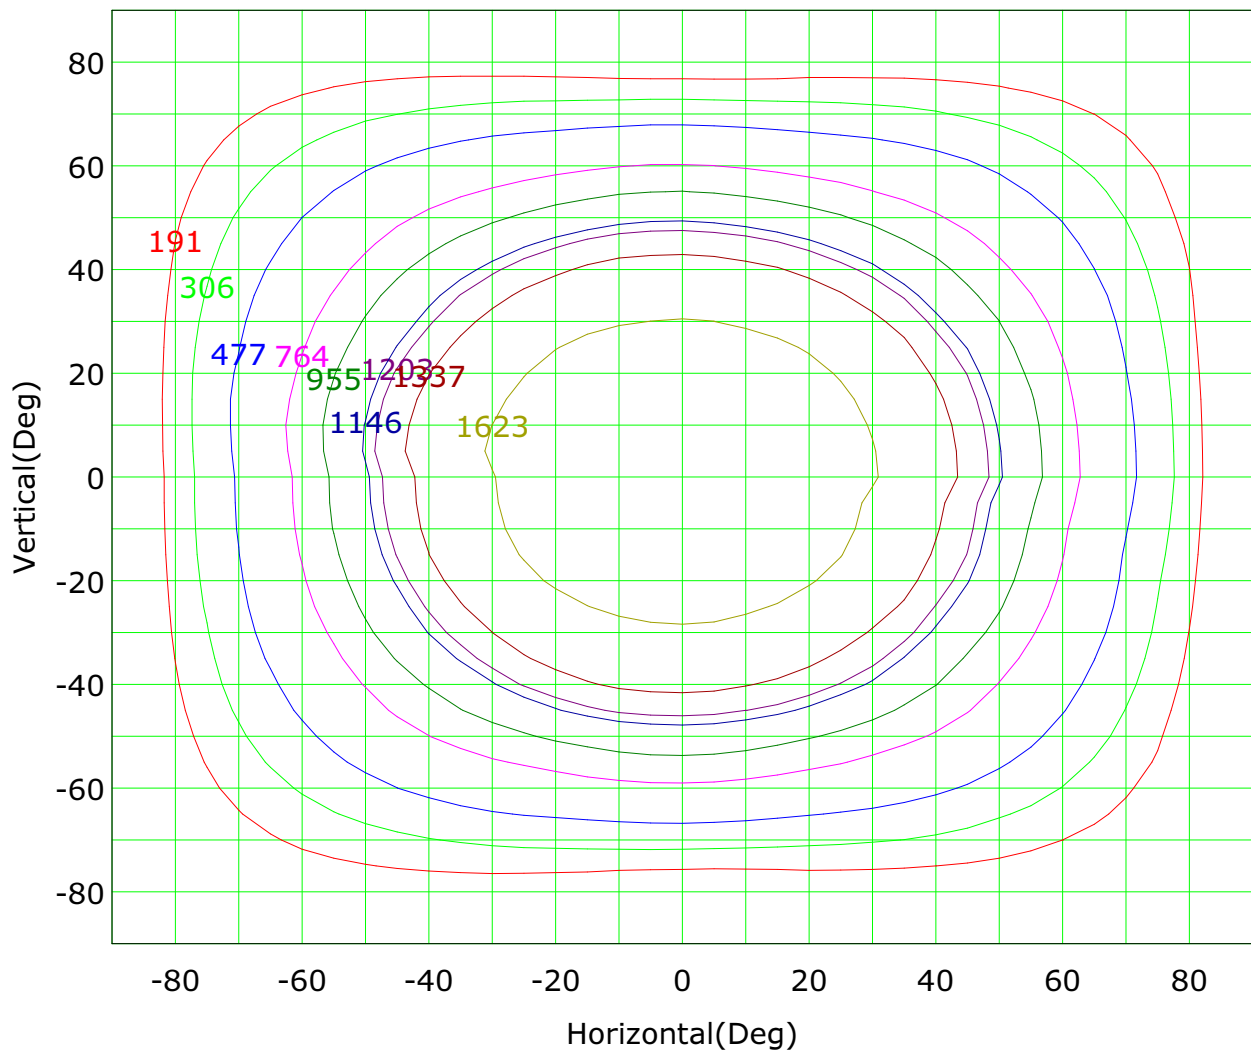

Imax (100%): 1910 cd

— (10%): 191 cd	— (16%): 306 cd
— (25%): 477 cd	— (40%): 764 cd
— (63%): 1203 cd	— (100%): 1910 cd
— (50%): 955 cd	— (60%): 1146 cd
— (70%): 1337 cd	— (85%): 1623 cd

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Isocandela (sphere)

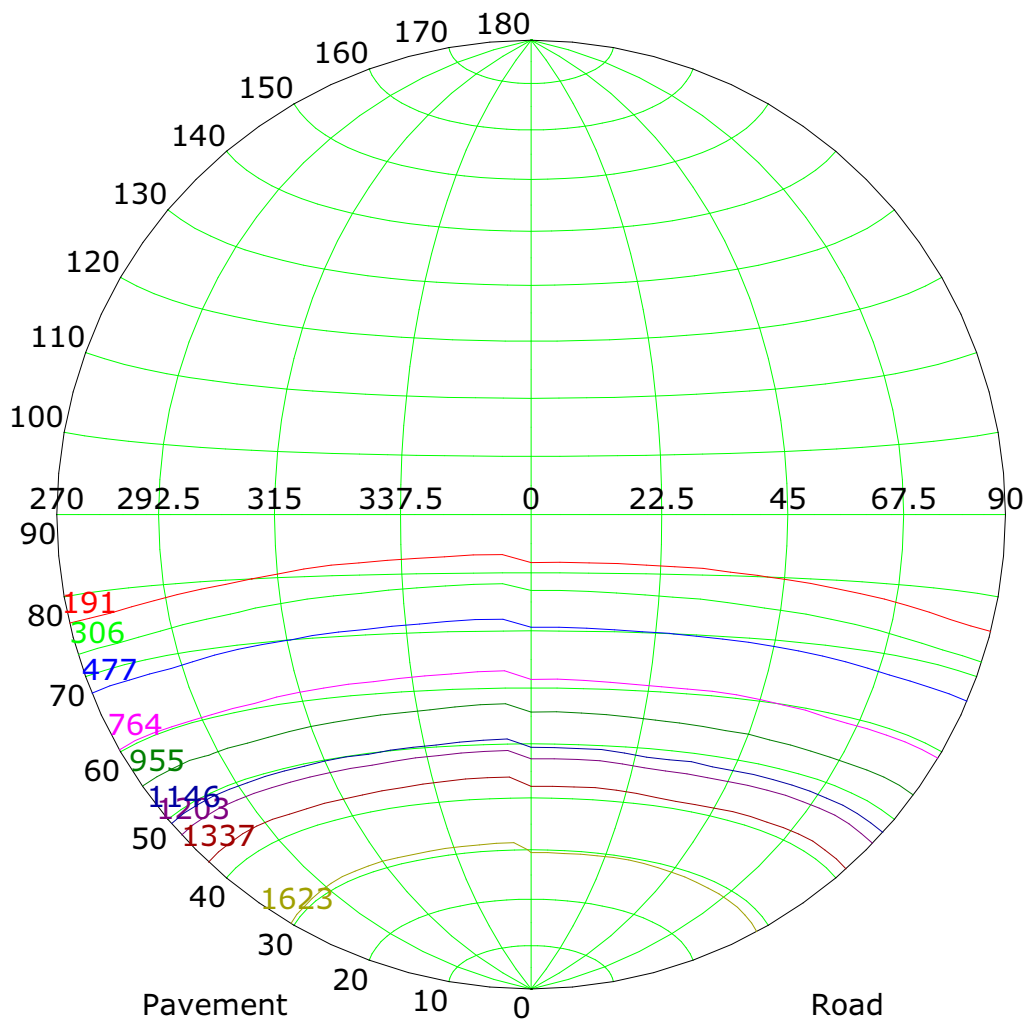


Imax (100%): 1910 cd

— (10%): 191 cd	— (16%): 306 cd
— (25%): 477 cd	— (40%): 764 cd
— (63%): 1203 cd	— (100%): 1910 cd
— (50%): 955 cd	— (60%): 1146 cd
— (70%): 1337 cd	— (85%): 1623 cd

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

IsoLux Plot

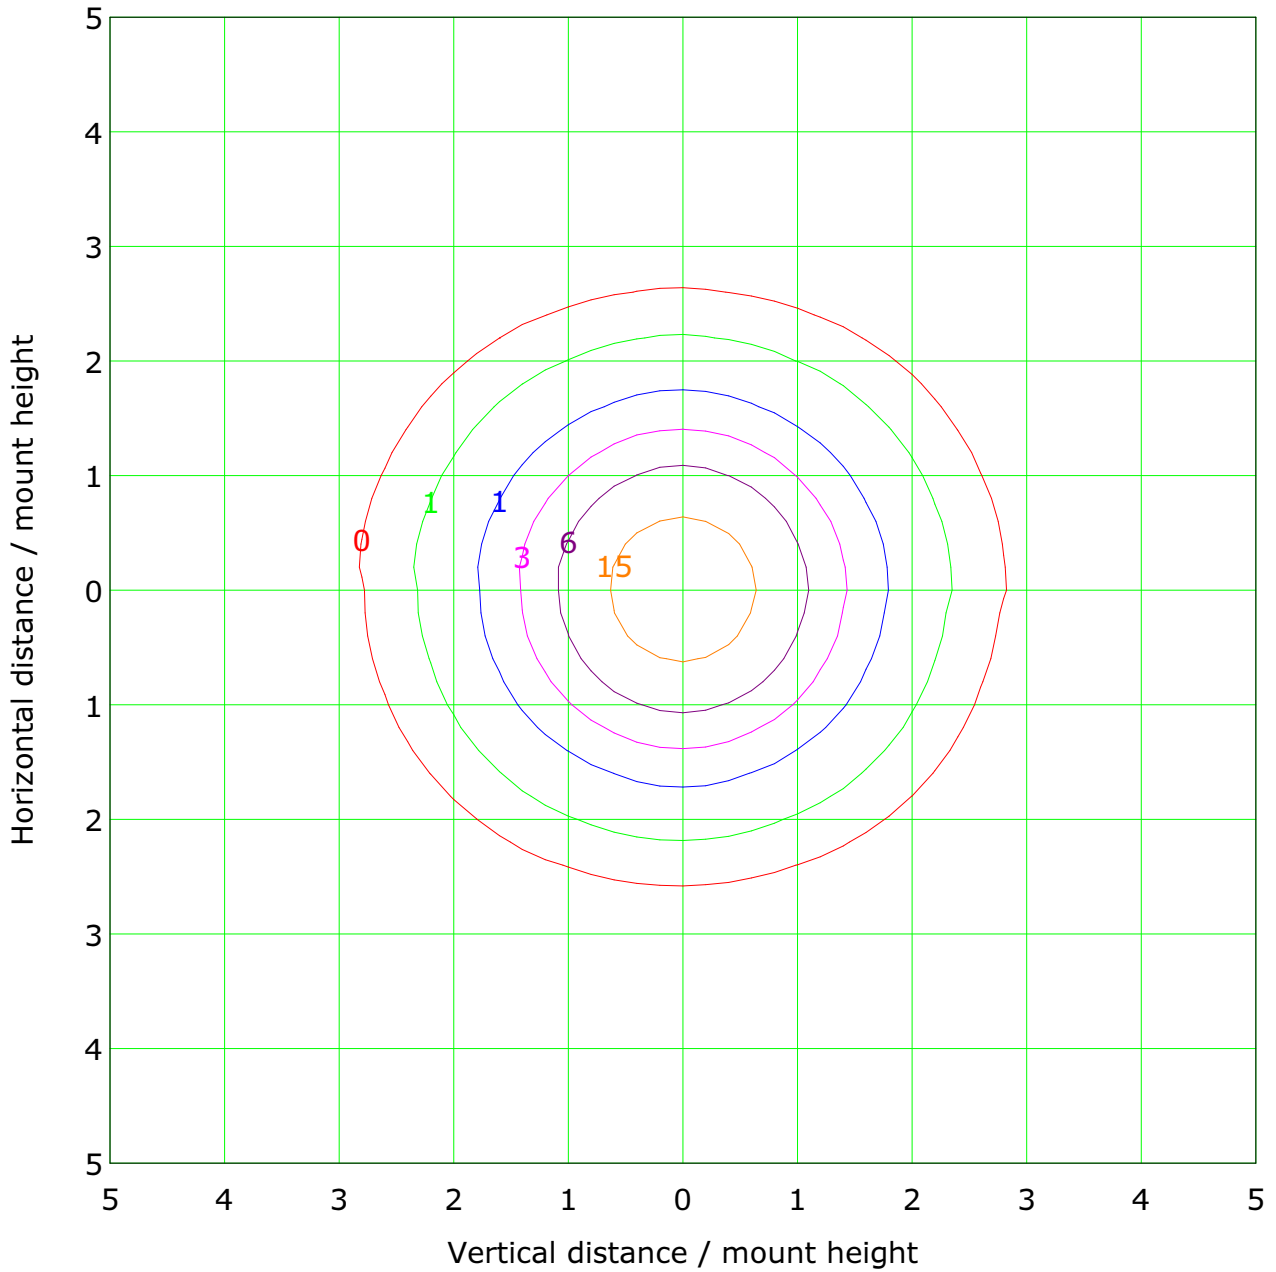

Mounting Height: 8.0m		Max Lux(100%): 29.8 lx	
—	(1%): 0.3 lx	—	(2%): 0.6 lx
—	(5%): 1.5 lx	—	(10%): 3.0 lx
—	(20%): 6.0 lx	—	(50%): 14.9 lx
—	(100%): 29.8 lx	—	(200%): 59.7 lx
—	(300%): 89.5 lx	—	(500%): 149.1 lx

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B


Distance: 8.100 m

Humidity: 40

Inspector:

Roadway CU Curve

Efficiency(%)

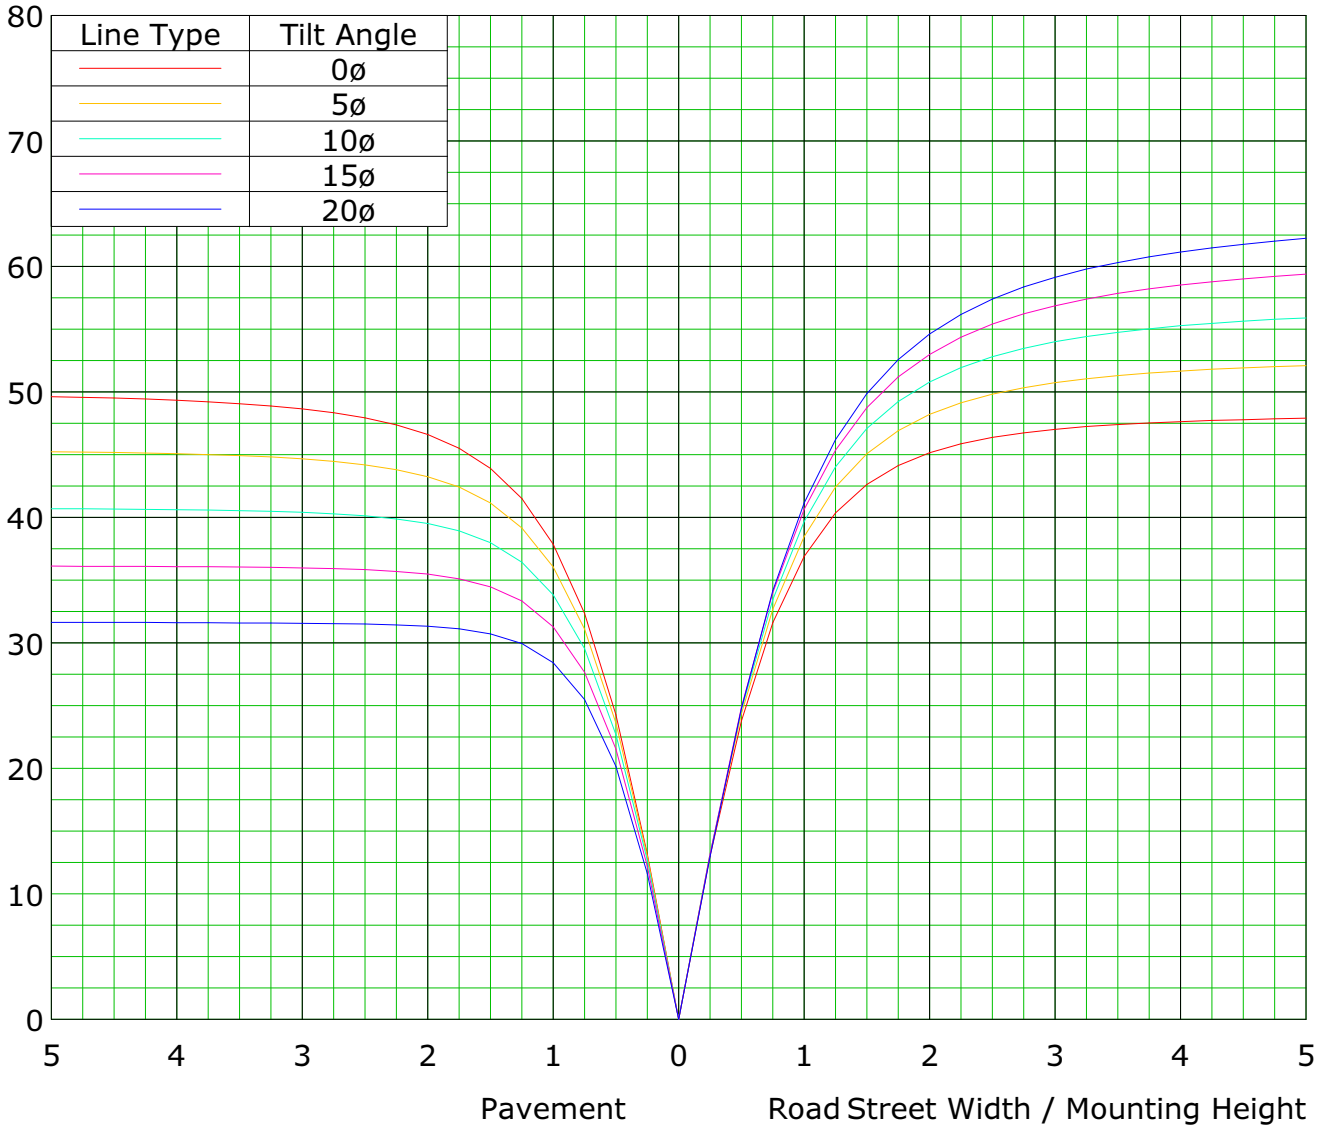

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m



Humidity: 40

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

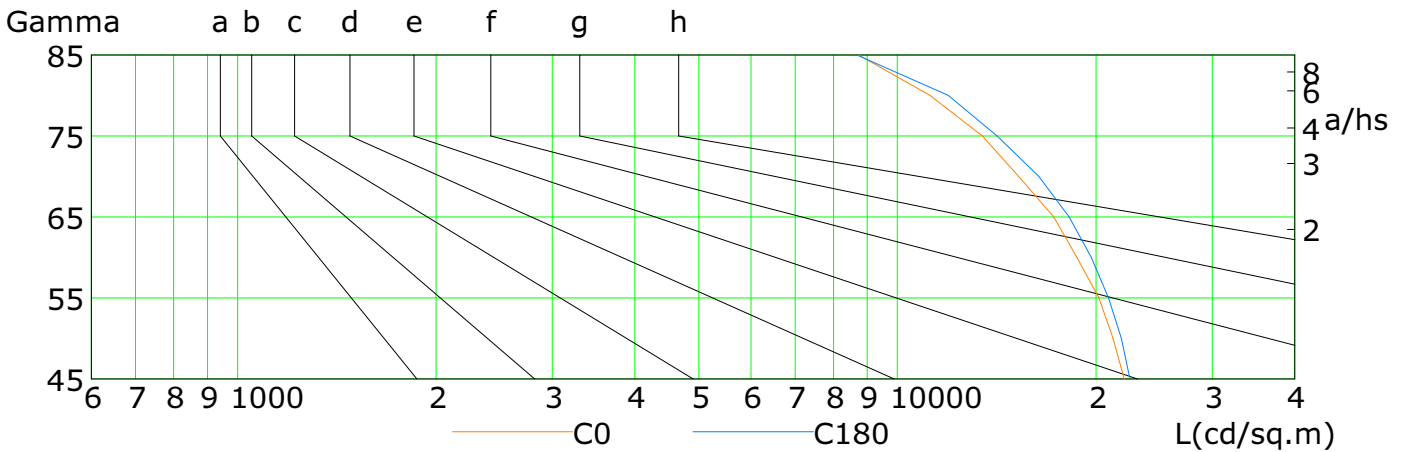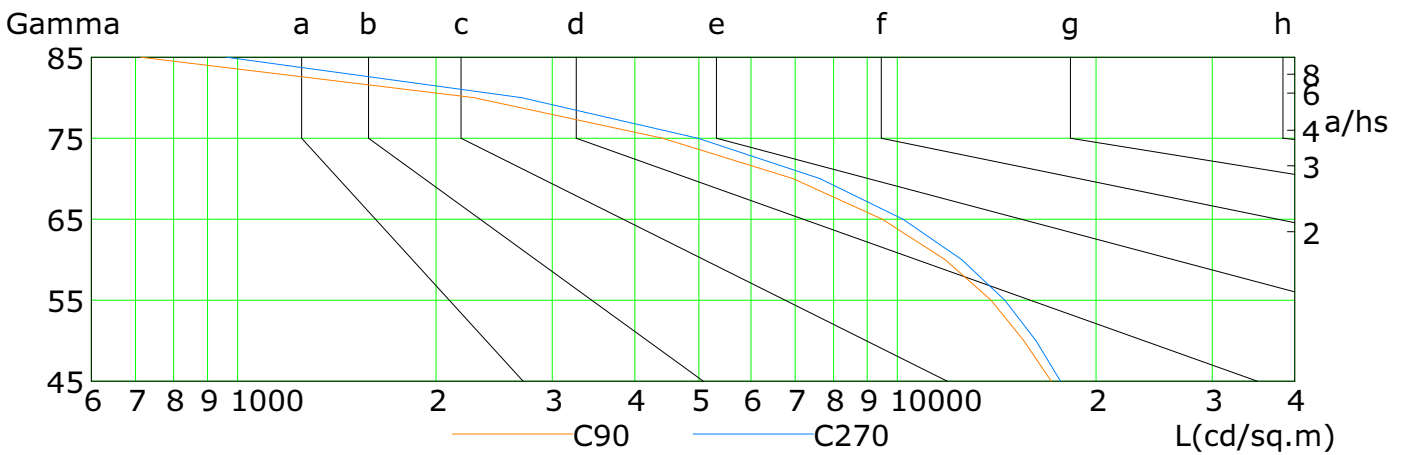

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	22067	21222	20202	18698	17267	15269	13451	11202	8731
C90	17111	15533	13873	11810	9485	6945	4410	2278	714
C180	22526	21852	20898	19671	18207	16377	14160	11944	8687
C270	17677	16217	14546	12511	10200	7632	4983	2690	963

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Illuminance at a Distance

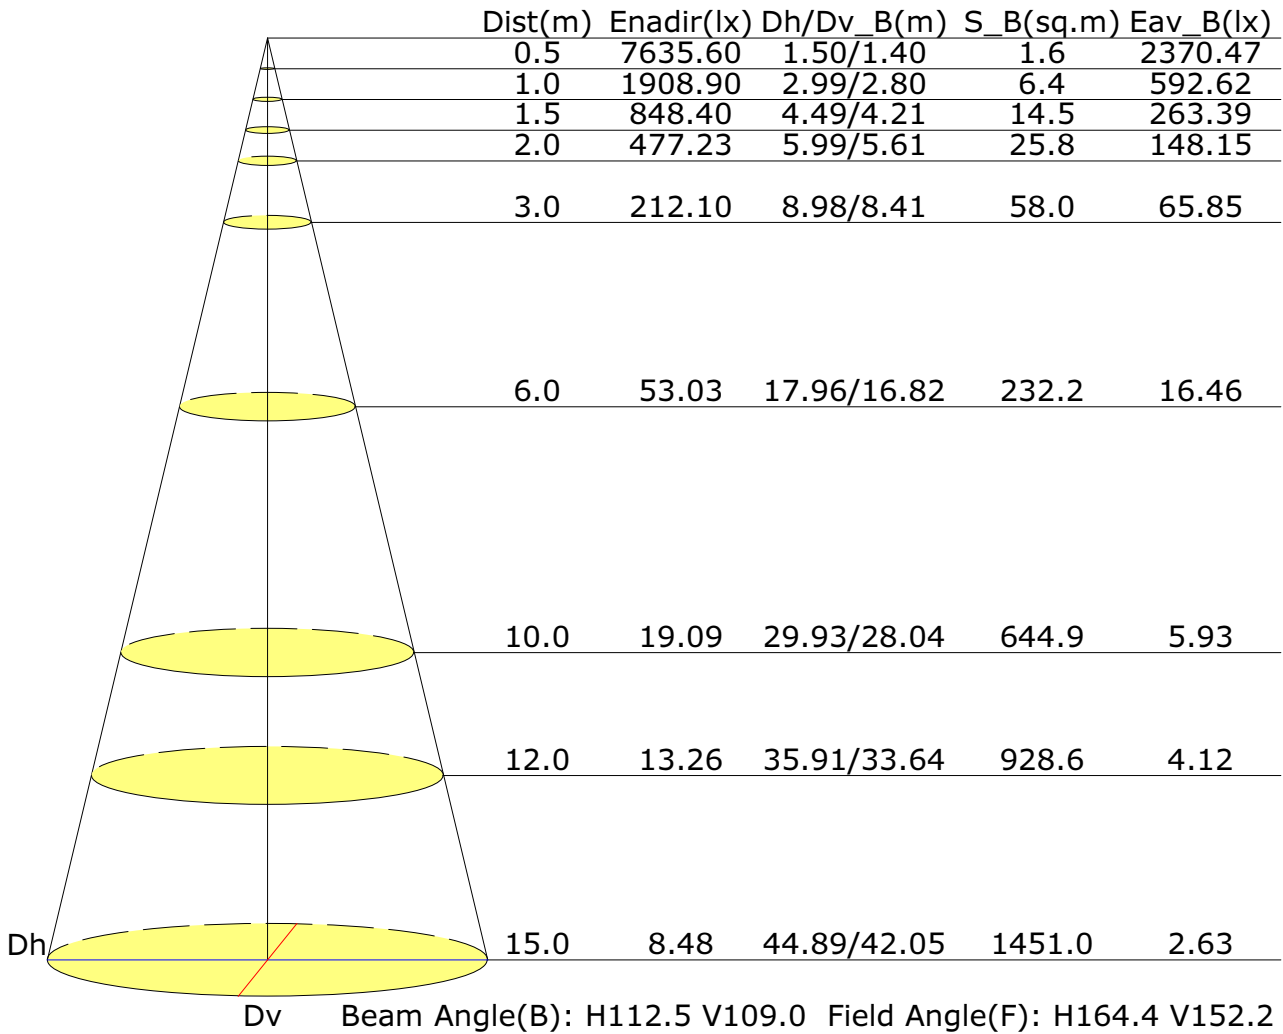

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Vertical IsoLux Plot

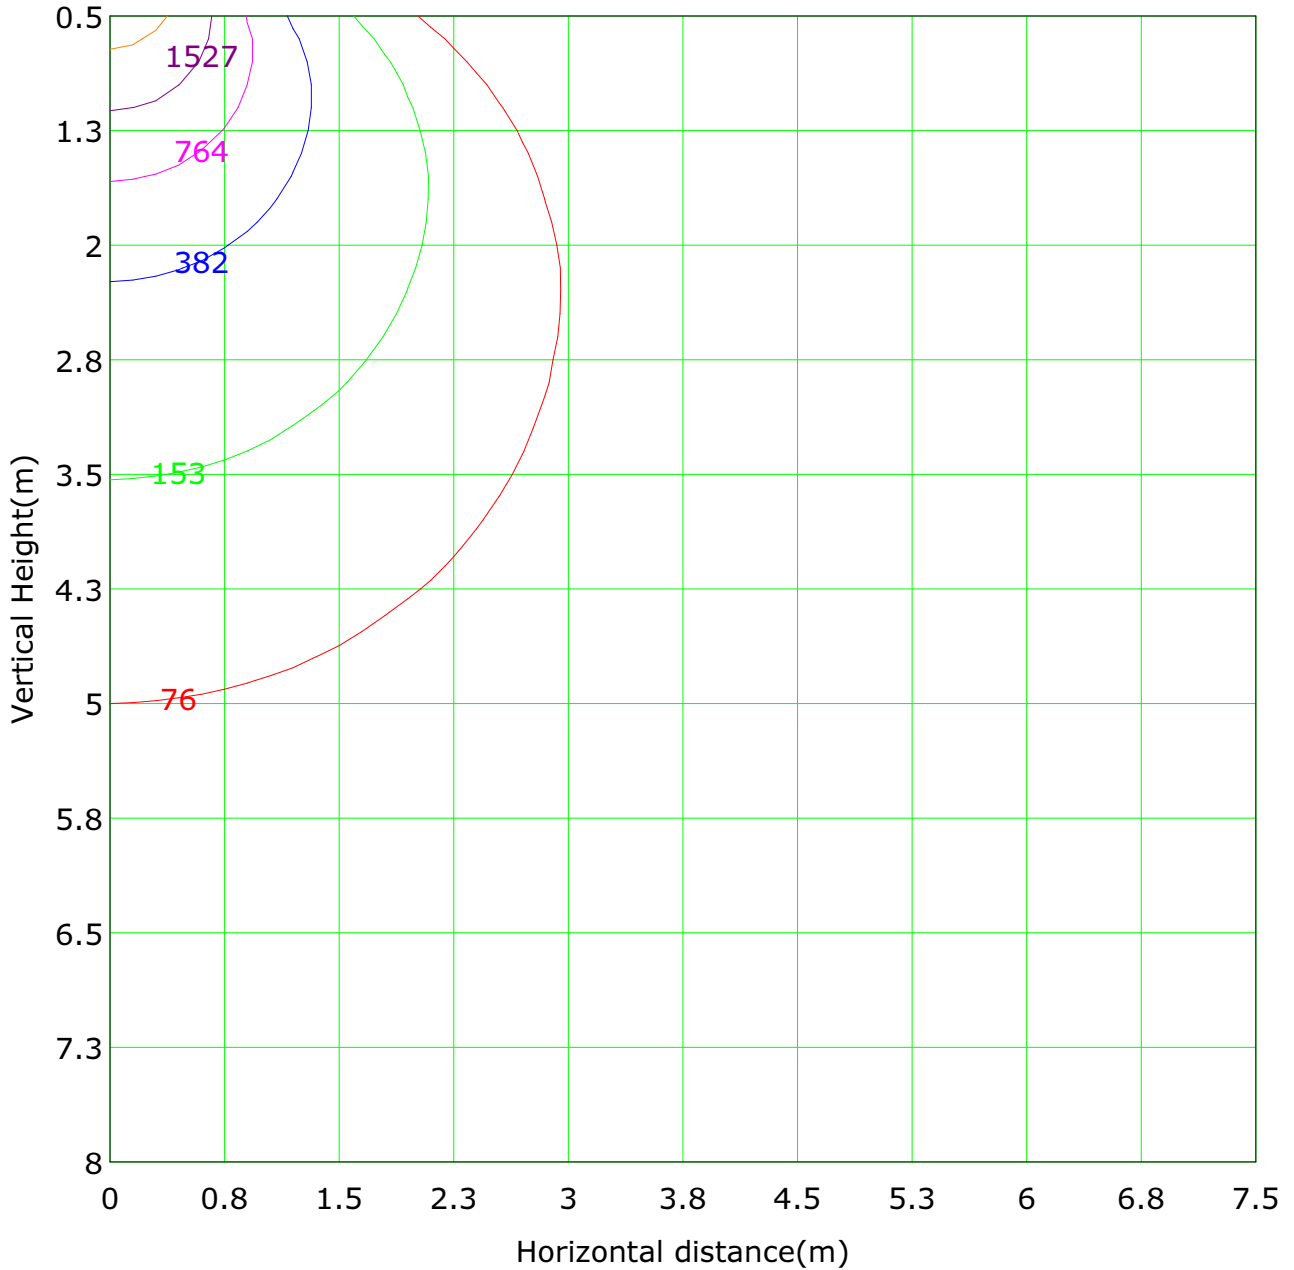


Lowest(m): 0.5m	Highest(m): 8.0m	Max Lux: 7635.6 lx
— (1%): 76.4 lx	— (2%): 152.7 lx	
— (5%): 381.8 lx	— (10%): 763.6 lx	
— (20%): 1527.1 lx	— (50%): 3817.8 lx	
— (100%): 7635.6 lx	— (200%): 15271.2 lx	
— (300%): 22906.8 lx	— (500%): 38178.0 lx	

C Plane (°): 0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

The Average Illuminance Effective Figure

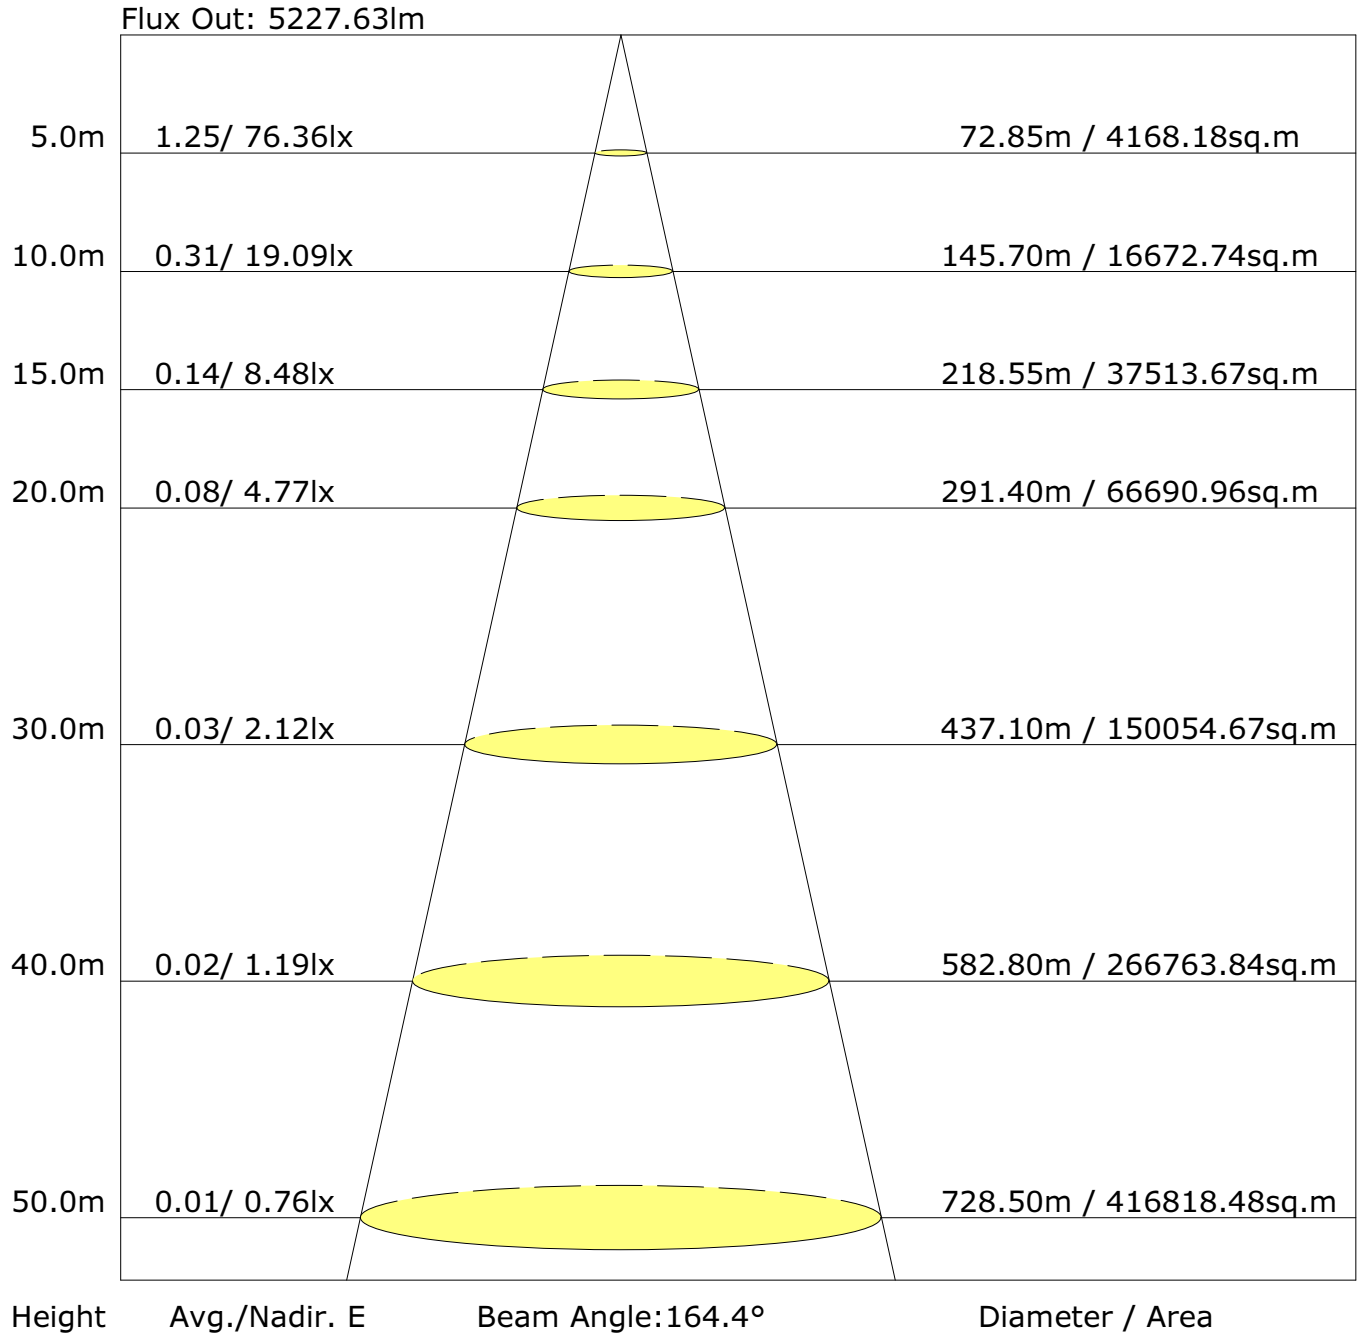

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	15.6	17.2	16.0	17.5	17.9	15.5	17.1	15.9	17.4	17.8
3H	17.1	18.5	17.5	18.9	19.3	16.7	18.1	17.1	18.5	18.9
4H	17.6	19.0	18.0	19.3	19.7	17.0	18.4	17.4	18.7	19.1
6H	18.0	19.2	18.4	19.6	20.0	17.1	18.4	17.5	18.8	19.2
8H	18.1	19.3	18.5	19.7	20.1	17.1	18.3	17.6	18.7	19.2
12H	18.1	19.3	18.6	19.7	20.1	17.1	18.3	17.6	18.7	19.1
X=4H Y=2H	16.1	17.5	16.5	17.8	18.2	16.0	17.3	16.4	17.7	18.1
3H	17.8	18.9	18.2	19.3	19.7	17.3	18.5	17.8	18.9	19.3
4H	18.4	19.4	18.8	19.8	20.3	17.7	18.7	18.2	19.2	19.6
6H	18.8	19.7	19.3	20.2	20.7	17.9	18.8	18.4	19.3	19.7
8H	19.0	19.8	19.5	20.3	20.8	17.9	18.8	18.4	19.2	19.7
12H	19.1	19.9	19.6	20.4	20.8	17.9	18.7	18.4	19.2	19.7
X=8H Y=4H	18.6	19.4	19.0	19.8	20.3	17.9	18.7	18.4	19.2	19.7
6H	19.1	19.8	19.6	20.3	20.8	18.1	18.9	18.7	19.4	19.9
8H	19.3	19.9	19.8	20.5	21.0	18.2	18.8	18.7	19.3	19.9
12H	19.5	20.0	20.0	20.6	21.1	18.2	18.8	18.7	19.3	19.9
X=12H Y=4H	18.6	19.3	19.0	19.8	20.3	17.9	18.7	18.4	19.2	19.7
6H	19.1	19.8	19.7	20.2	20.8	18.2	18.8	18.7	19.3	19.9
8H	19.4	19.9	19.9	20.4	21.0	18.3	18.8	18.8	19.3	19.9

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

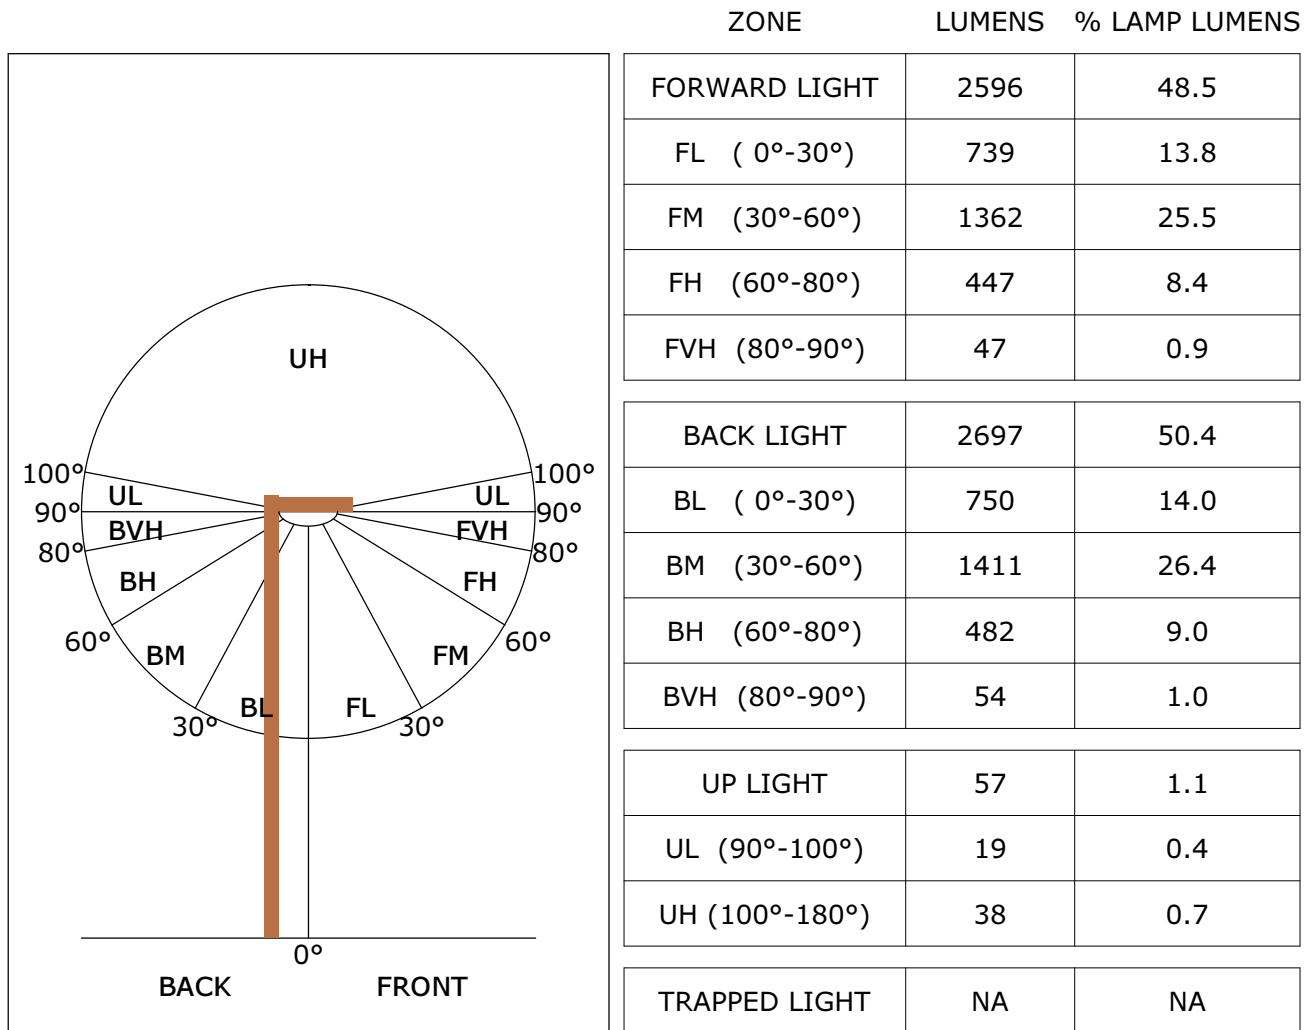


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U2 G1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature: 20
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.100 m
Humidity: 40
Inspector:

LCS Graph

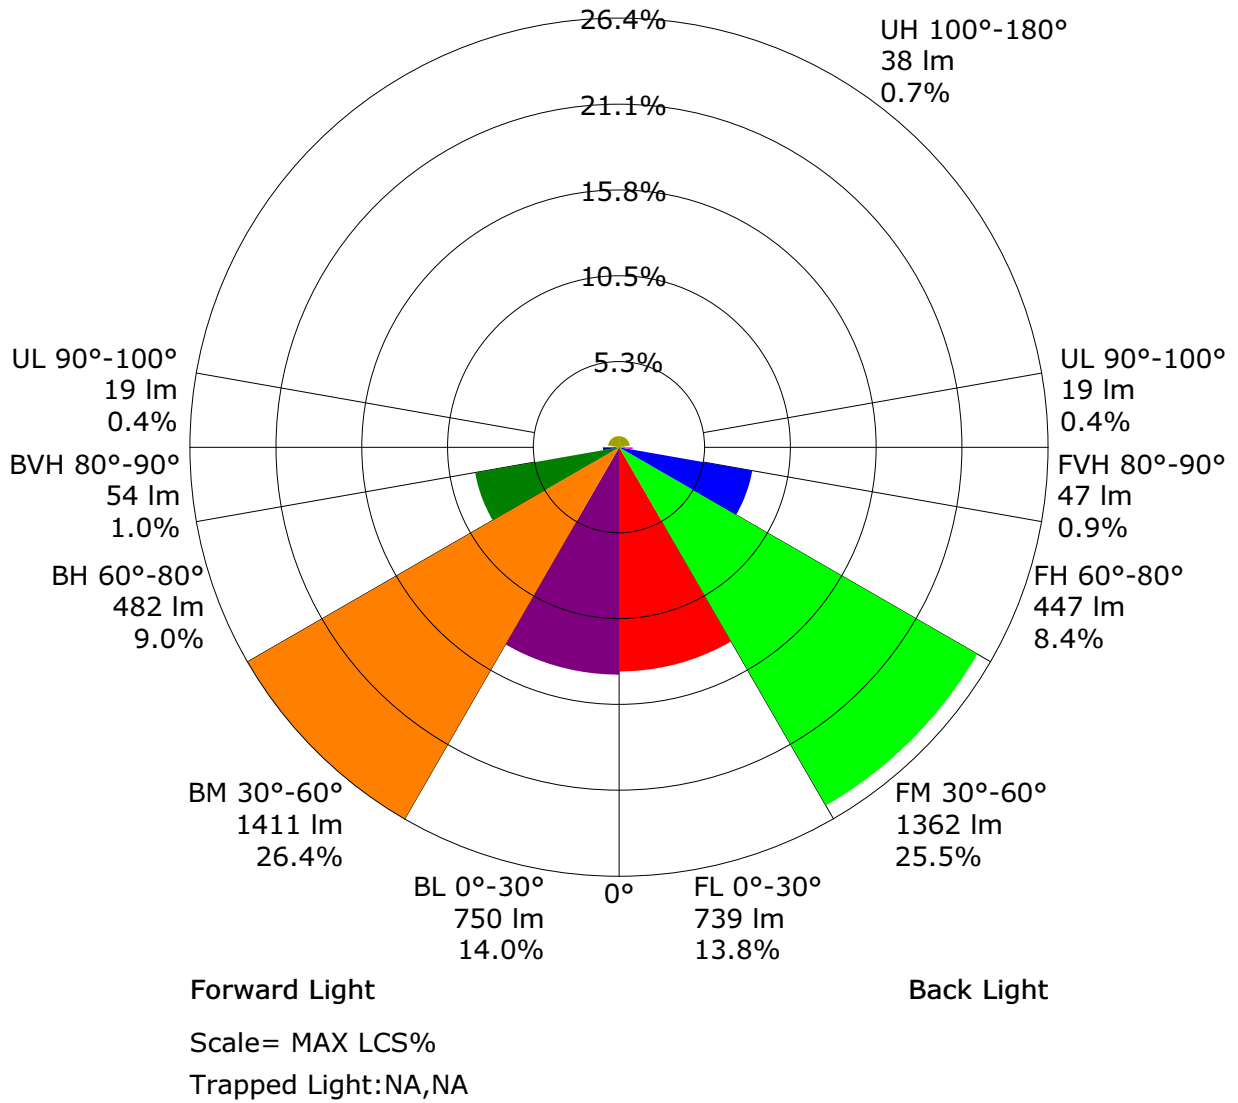

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1906.4	1.8	1.8	0.03	0.03
1.0-2.0	1905.8	5.5	7.3	0.10	0.14
2.0-3.0	1904.7	9.1	16.4	0.17	0.31
3.0-4.0	1903.1	12.7	29.1	0.24	0.54
4.0-5.0	1900.9	16.4	45.5	0.31	0.85
5.0-6.0	1898.0	19.9	65.5	0.37	1.22
6.0-7.0	1894.6	23.5	89.0	0.44	1.66
7.0-8.0	1890.5	27.1	116.0	0.51	2.17
8.0-9.0	1885.7	30.6	146.6	0.57	2.74
9.0-10.0	1880.3	34.0	180.6	0.64	3.38
10.0-11.0	1874.2	37.5	218.1	0.70	4.08
11.0-12.0	1867.4	40.8	258.9	0.76	4.84
12.0-13.0	1860.1	44.2	303.1	0.83	5.67
13.0-14.0	1852.2	47.4	350.5	0.89	6.55
14.0-15.0	1843.7	50.6	401.1	0.95	7.50
15.0-16.0	1834.5	53.8	454.9	1.01	8.50
16.0-17.0	1824.7	56.8	511.7	1.06	9.57
17.0-18.0	1814.2	59.8	571.5	1.12	10.68
18.0-19.0	1803.0	62.7	634.3	1.17	11.86
19.0-20.0	1791.1	65.6	699.8	1.23	13.08
20.0-21.0	1778.3	68.3	768.1	1.28	14.36
21.0-22.0	1764.6	70.9	839.0	1.33	15.69
22.0-23.0	1750.2	73.4	912.5	1.37	17.06
23.0-24.0	1735.1	75.9	988.3	1.42	18.48
24.0-25.0	1719.4	78.2	1066.5	1.46	19.94
25.0-26.0	1703.1	80.4	1146.9	1.50	21.44
26.0-27.0	1686.2	82.5	1229.5	1.54	22.98
27.0-28.0	1668.6	84.5	1313.9	1.58	24.56
28.0-29.0	1650.3	86.4	1400.3	1.61	26.18
29.0-30.0	1631.2	88.1	1488.4	1.65	27.83
30.0-31.0	1611.4	89.7	1578.1	1.68	29.50
31.0-32.0	1591.1	91.2	1669.2	1.70	31.21
32.0-33.0	1570.4	92.5	1761.8	1.73	32.94
33.0-34.0	1549.2	93.8	1855.5	1.75	34.69
34.0-35.0	1527.6	94.9	1950.4	1.77	36.46
35.0-36.0	1505.5	95.9	2046.3	1.79	38.25

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1482.9	96.7	2143.0	1.81	40.06
37.0-38.0	1459.7	97.4	2240.4	1.82	41.89
38.0-39.0	1435.9	98.0	2338.5	1.83	43.72
39.0-40.0	1411.6	98.5	2436.9	1.84	45.56
40.0-41.0	1386.3	98.7	2535.7	1.85	47.40
41.0-42.0	1360.0	98.8	2634.5	1.85	49.25
42.0-43.0	1332.8	98.7	2733.2	1.85	51.10
43.0-44.0	1305.3	98.5	2831.8	1.84	52.94
44.0-45.0	1277.2	98.2	2929.9	1.84	54.77
45.0-46.0	1248.9	97.7	3027.6	1.83	56.60
46.0-47.0	1219.9	97.0	3124.6	1.81	58.42
47.0-48.0	1190.2	96.2	3220.9	1.80	60.21
48.0-49.0	1159.7	95.2	3316.1	1.78	61.99
49.0-50.0	1129.0	94.1	3410.3	1.76	63.75
50.0-51.0	1097.7	92.9	3503.1	1.74	65.49
51.0-52.0	1066.0	91.5	3594.6	1.71	67.20
52.0-53.0	1034.3	90.0	3684.6	1.68	68.88
53.0-54.0	1002.5	88.4	3773.0	1.65	70.54
54.0-55.0	970.4	86.6	3859.6	1.62	72.16
55.0-56.0	937.7	84.7	3944.4	1.58	73.74
56.0-57.0	904.5	82.7	4027.1	1.55	75.29
57.0-58.0	870.6	80.5	4107.6	1.51	76.79
58.0-59.0	836.5	78.2	4185.8	1.46	78.25
59.0-60.0	802.1	75.8	4261.6	1.42	79.67
60.0-61.0	767.4	73.2	4334.8	1.37	81.04
61.0-62.0	733.1	70.6	4405.5	1.32	82.36
62.0-63.0	699.1	68.0	4473.5	1.27	83.63
63.0-64.0	665.2	65.3	4538.8	1.22	84.85
64.0-65.0	631.3	62.5	4601.3	1.17	86.02
65.0-66.0	597.4	59.6	4660.9	1.11	87.13
66.0-67.0	563.7	56.7	4717.6	1.06	88.19
67.0-68.0	530.3	53.7	4771.3	1.00	89.20
68.0-69.0	497.3	50.7	4822.0	0.95	90.15
69.0-70.0	464.8	47.7	4869.8	0.89	91.04
70.0-71.0	432.5	44.7	4914.5	0.84	91.88
71.0-72.0	401.1	41.7	4956.2	0.78	92.66

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	370.8	38.8	4995.0	0.73	93.38
73.0-74.0	341.6	35.9	5030.9	0.67	94.05
74.0-75.0	313.2	33.1	5064.0	0.62	94.67
75.0-76.0	286.1	30.4	5094.4	0.57	95.24
76.0-77.0	260.2	27.7	5122.1	0.52	95.76
77.0-78.0	235.3	25.2	5147.3	0.47	96.23
78.0-79.0	211.7	22.7	5170.1	0.43	96.65
79.0-80.0	189.3	20.4	5190.5	0.38	97.04
80.0-81.0	168.5	18.2	5208.7	0.34	97.38
81.0-82.0	149.1	16.2	5224.9	0.30	97.68
82.0-83.0	131.0	14.2	5239.1	0.27	97.94
83.0-84.0	113.5	12.4	5251.5	0.23	98.18
84.0-85.0	96.3	10.5	5262.0	0.20	98.37
85.0-86.0	79.4	8.7	5270.7	0.16	98.53
86.0-87.0	64.2	7.0	5277.7	0.13	98.67
87.0-88.0	52.1	5.7	5283.4	0.11	98.77
88.0-89.0	43.3	4.7	5288.1	0.09	98.86
89.0-90.0	36.7	4.0	5292.2	0.08	98.94
90.0-91.0	31.6	3.5	5295.6	0.06	99.00
91.0-92.0	27.3	3.0	5298.6	0.06	99.06
92.0-93.0	23.7	2.6	5301.2	0.05	99.11
93.0-94.0	20.5	2.2	5303.5	0.04	99.15
94.0-95.0	17.8	1.9	5305.4	0.04	99.18
95.0-96.0	15.3	1.7	5307.1	0.03	99.22
96.0-97.0	13.0	1.4	5308.5	0.03	99.24
97.0-98.0	11.0	1.2	5309.7	0.02	99.26
98.0-99.0	9.2	1.0	5310.7	0.02	99.28
99.0-100.0	7.6	0.8	5311.5	0.02	99.30
100.0-101.0	6.3	0.7	5312.2	0.01	99.31
101.0-102.0	5.3	0.6	5312.8	0.01	99.32
102.0-103.0	4.5	0.5	5313.3	0.01	99.33
103.0-104.0	3.9	0.4	5313.7	0.01	99.34
104.0-105.0	3.4	0.4	5314.0	0.01	99.35
105.0-106.0	3.2	0.3	5314.4	0.01	99.35
106.0-107.0	3.1	0.3	5314.7	0.01	99.36
107.0-108.0	3.1	0.3	5315.0	0.01	99.36

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	3.2	0.3	5315.3	0.01	99.37
109.0-110.0	3.4	0.3	5315.7	0.01	99.38
110.0-111.0	3.6	0.4	5316.1	0.01	99.38
111.0-112.0	3.8	0.4	5316.4	0.01	99.39
112.0-113.0	3.9	0.4	5316.8	0.01	99.40
113.0-114.0	4.1	0.4	5317.3	0.01	99.41
114.0-115.0	4.3	0.4	5317.7	0.01	99.41
115.0-116.0	4.5	0.4	5318.1	0.01	99.42
116.0-117.0	4.7	0.5	5318.6	0.01	99.43
117.0-118.0	5.0	0.5	5319.1	0.01	99.44
118.0-119.0	5.2	0.5	5319.6	0.01	99.45
119.0-120.0	5.4	0.5	5320.1	0.01	99.46
120.0-121.0	5.6	0.5	5320.6	0.01	99.47
121.0-122.0	5.8	0.5	5321.2	0.01	99.48
122.0-123.0	6.0	0.6	5321.7	0.01	99.49
123.0-124.0	6.2	0.6	5322.3	0.01	99.50
124.0-125.0	6.4	0.6	5322.9	0.01	99.51
125.0-126.0	6.6	0.6	5323.4	0.01	99.52
126.0-127.0	6.8	0.6	5324.0	0.01	99.53
127.0-128.0	7.0	0.6	5324.7	0.01	99.54
128.0-129.0	7.2	0.6	5325.3	0.01	99.56
129.0-130.0	7.4	0.6	5325.9	0.01	99.57
130.0-131.0	7.6	0.6	5326.5	0.01	99.58
131.0-132.0	7.8	0.6	5327.2	0.01	99.59
132.0-133.0	8.0	0.6	5327.8	0.01	99.60
133.0-134.0	8.2	0.6	5328.5	0.01	99.62
134.0-135.0	8.4	0.7	5329.1	0.01	99.63
135.0-136.0	8.5	0.7	5329.8	0.01	99.64
136.0-137.0	8.7	0.7	5330.4	0.01	99.65
137.0-138.0	8.9	0.7	5331.1	0.01	99.66
138.0-139.0	9.1	0.7	5331.8	0.01	99.68
139.0-140.0	9.3	0.7	5332.4	0.01	99.69
140.0-141.0	9.4	0.7	5333.1	0.01	99.70
141.0-142.0	9.6	0.7	5333.7	0.01	99.71
142.0-143.0	9.8	0.7	5334.4	0.01	99.73
143.0-144.0	9.9	0.6	5335.0	0.01	99.74

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	10.1	0.6	5335.7	0.01	99.75
145.0-146.0	10.2	0.6	5336.3	0.01	99.76
146.0-147.0	10.4	0.6	5336.9	0.01	99.77
147.0-148.0	10.5	0.6	5337.5	0.01	99.79
148.0-149.0	10.7	0.6	5338.2	0.01	99.80
149.0-150.0	10.8	0.6	5338.8	0.01	99.81
150.0-151.0	11.0	0.6	5339.4	0.01	99.82
151.0-152.0	11.1	0.6	5339.9	0.01	99.83
152.0-153.0	11.3	0.6	5340.5	0.01	99.84
153.0-154.0	11.4	0.6	5341.1	0.01	99.85
154.0-155.0	11.5	0.5	5341.6	0.01	99.86
155.0-156.0	11.7	0.5	5342.1	0.01	99.87
156.0-157.0	11.8	0.5	5342.7	0.01	99.88
157.0-158.0	12.0	0.5	5343.2	0.01	99.89
158.0-159.0	12.1	0.5	5343.6	0.01	99.90
159.0-160.0	12.2	0.5	5344.1	0.01	99.91
160.0-161.0	12.3	0.5	5344.6	0.01	99.92
161.0-162.0	12.5	0.4	5345.0	0.01	99.92
162.0-163.0	12.6	0.4	5345.4	0.01	99.93
163.0-164.0	12.7	0.4	5345.8	0.01	99.94
164.0-165.0	12.8	0.4	5346.2	0.01	99.95
165.0-166.0	12.9	0.4	5346.5	0.01	99.95
166.0-167.0	13.0	0.3	5346.9	0.01	99.96
167.0-168.0	13.1	0.3	5347.2	0.01	99.97
168.0-169.0	13.2	0.3	5347.5	0.01	99.97
169.0-170.0	13.3	0.3	5347.7	0.00	99.98
170.0-171.0	13.4	0.2	5348.0	0.00	99.98
171.0-172.0	13.4	0.2	5348.2	0.00	99.98
172.0-173.0	13.5	0.2	5348.4	0.00	99.99
173.0-174.0	13.6	0.2	5348.6	0.00	99.99
174.0-175.0	13.6	0.1	5348.7	0.00	99.99
175.0-176.0	13.7	0.1	5348.8	0.00	100.00
176.0-177.0	13.7	0.1	5348.9	0.00	100.00
177.0-178.0	13.8	0.1	5349.0	0.00	100.00
178.0-179.0	13.8	0.0	5349.0	0.00	100.00
179.0-180.0	13.8	0.0	5349.0	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	1908.9	1908.7	1908.5	1907.3	1907.1	1907.2	1906.9	1906.8	1906.3	1905.9
G1.0	1908.8	1908.6	1908.3	1907.4	1907.3	1907.1	1906.9	1906.7	1906.3	1906.0
G2.0	1904.6	1904.7	1904.3	1903.5	1903.6	1903.9	1904.1	1904.1	1904.0	1903.7
G3.0	1903.2	1903.6	1902.8	1901.4	1901.2	1900.6	1899.8	1898.8	1899.1	1899.9
G4.0	1900.1	1900.8	1900.2	1899.6	1898.9	1898.7	1898.3	1898.2	1898.2	1897.4
G5.0	1896.3	1897.0	1896.3	1895.1	1893.8	1893.7	1894.3	1895.3	1895.9	1895.7
G6.0	1892.2	1892.7	1891.9	1890.9	1889.8	1890.3	1890.9	1890.6	1890.9	1891.5
G7.0	1888.9	1889.0	1888.1	1886.8	1886.0	1886.1	1886.3	1886.8	1887.5	1886.8
G8.0	1884.3	1884.7	1884.0	1882.9	1882.7	1882.4	1882.4	1882.2	1882.6	1883.6
G9.0	1879.1	1879.2	1878.8	1877.6	1877.4	1877.9	1878.5	1878.6	1878.5	1878.3
G10.0	1873.5	1873.4	1873.0	1872.7	1871.9	1872.2	1872.8	1873.5	1874.0	1872.8
G11.0	1865.5	1865.1	1864.6	1865.1	1865.5	1866.7	1867.1	1867.2	1867.3	1867.4
G12.0	1858.7	1858.9	1857.9	1858.3	1857.9	1858.4	1860.2	1861.1	1860.5	1860.4
G13.0	1853.2	1853.3	1852.3	1851.5	1851.4	1851.9	1852.4	1852.9	1854.3	1852.6
G14.0	1844.4	1845.1	1844.3	1844.7	1845.1	1844.9	1845.3	1845.7	1844.9	1844.4
G15.0	1835.0	1835.7	1834.3	1834.4	1834.7	1836.9	1838.2	1837.4	1836.6	1835.4
G16.0	1822.6	1823.1	1823.3	1824.6	1825.4	1825.7	1828.3	1828.7	1827.1	1825.6
G17.0	1812.6	1813.2	1812.6	1812.3	1812.6	1815.5	1817.4	1817.4	1818.0	1815.8
G18.0	1801.5	1802.7	1801.4	1802.5	1801.5	1803.0	1805.4	1805.8	1807.3	1805.1
G19.0	1788.4	1788.8	1787.5	1788.3	1790.2	1792.1	1791.6	1794.1	1795.2	1795.1
G20.0	1774.4	1774.6	1774.0	1775.7	1776.3	1779.1	1780.3	1780.3	1782.5	1782.3
G21.0	1757.4	1756.9	1759.0	1762.1	1762.8	1766.0	1767.1	1769.0	1767.4	1770.0
G22.0	1743.4	1742.9	1743.4	1745.4	1747.5	1752.3	1754.0	1754.5	1754.5	1754.3
G23.0	1729.1	1728.9	1728.9	1731.4	1732.9	1735.9	1740.2	1739.6	1741.3	1738.5
G24.0	1717.0	1716.4	1715.4	1715.6	1717.4	1720.2	1723.6	1724.8	1724.6	1722.6
G25.0	1701.9	1701.5	1701.4	1702.3	1702.2	1702.9	1706.6	1708.5	1708.8	1706.8
G26.0	1689.6	1688.9	1687.4	1686.6	1686.4	1686.8	1687.4	1689.2	1691.6	1687.3
G27.0	1672.9	1671.3	1671.4	1671.7	1670.8	1669.7	1669.1	1670.3	1670.7	1669.0
G28.0	1654.4	1653.9	1653.2	1653.1	1654.1	1653.7	1651.2	1649.8	1650.0	1648.4
G29.0	1634.8	1633.8	1633.0	1634.3	1634.9	1635.1	1633.7	1632.1	1628.3	1625.0
G30.0	1614.1	1614.5	1613.4	1614.2	1614.9	1615.3	1614.7	1611.9	1607.7	1603.3
G31.0	1592.8	1591.6	1592.3	1596.0	1596.4	1595.8	1595.0	1592.9	1586.3	1580.1
G32.0	1573.1	1572.8	1572.4	1575.8	1577.6	1576.9	1573.7	1570.6	1566.6	1558.6
G33.0	1553.0	1552.2	1552.6	1556.4	1556.5	1555.5	1552.0	1548.8	1544.9	1537.1
G34.0	1530.4	1529.6	1530.8	1535.2	1535.5	1532.0	1530.7	1525.2	1522.3	1517.2
G35.0	1509.0	1507.7	1508.5	1511.8	1512.7	1510.3	1505.9	1502.8	1498.7	1497.3
G36.0	1485.1	1484.4	1485.8	1487.6	1488.4	1485.6	1481.5	1476.4	1475.7	1473.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	1464.2	1463.4	1462.9	1465.0	1463.4	1459.8	1455.1	1450.6	1451.2	1450.8
G38.0	1440.8	1440.6	1440.9	1442.9	1439.5	1434.6	1428.3	1424.5	1425.0	1425.3
G39.0	1417.2	1417.3	1417.6	1420.4	1417.8	1411.1	1403.5	1398.1	1398.9	1401.1
G40.0	1390.7	1390.7	1392.2	1395.9	1394.0	1388.2	1378.3	1372.5	1373.0	1374.8
G41.0	1363.3	1366.2	1367.6	1371.6	1368.7	1362.9	1355.2	1348.6	1346.8	1347.8
G42.0	1337.2	1338.5	1339.1	1343.2	1341.5	1335.4	1328.6	1322.4	1320.0	1321.6
G43.0	1314.7	1315.6	1315.0	1314.7	1311.3	1307.9	1301.0	1297.0	1294.9	1295.0
G44.0	1294.1	1294.3	1291.5	1290.3	1283.1	1276.6	1272.0	1268.1	1265.3	1266.0
G45.0	1267.0	1267.4	1267.7	1267.6	1258.3	1248.1	1241.3	1239.4	1238.8	1237.5
G46.0	1232.4	1235.3	1235.5	1240.1	1235.3	1222.3	1210.5	1210.2	1211.0	1208.2
G47.0	1205.8	1204.8	1203.3	1205.9	1206.5	1199.4	1185.0	1181.0	1183.0	1179.9
G48.0	1181.7	1180.3	1177.0	1175.8	1168.3	1167.7	1163.2	1153.8	1153.1	1151.2
G49.0	1156.9	1156.5	1153.3	1151.1	1139.2	1130.4	1136.5	1129.1	1121.7	1122.6
G50.0	1127.8	1128.6	1126.1	1124.7	1113.8	1101.5	1101.0	1106.1	1093.5	1091.4
G51.0	1097.4	1099.5	1095.1	1093.5	1084.3	1074.0	1068.6	1072.4	1066.9	1060.3
G52.0	1069.3	1068.6	1062.8	1060.0	1052.5	1046.1	1040.7	1036.2	1038.8	1029.3
G53.0	1042.1	1042.8	1035.6	1029.8	1021.2	1015.7	1012.8	1004.2	1004.0	998.9
G54.0	1013.3	1014.3	1010.6	1002.4	992.0	985.2	983.5	975.8	967.7	970.7
G55.0	979.1	983.1	977.7	973.5	964.6	956.8	951.9	946.2	939.7	937.4
G56.0	945.0	947.5	943.9	940.0	933.9	928.9	921.0	914.8	911.6	902.4
G57.0	912.5	915.9	910.2	904.0	900.4	897.6	893.2	881.8	881.3	869.5
G58.0	876.4	880.7	877.6	871.7	865.9	863.8	862.0	855.3	846.8	838.3
G59.0	842.7	846.9	841.6	836.8	832.3	826.9	826.3	824.3	814.2	805.9
G60.0	811.8	813.5	809.8	803.4	797.3	792.2	790.2	790.0	784.2	772.3
G61.0	781.2	782.4	776.5	769.4	762.3	756.2	757.1	754.9	753.4	738.5
G62.0	751.5	751.6	746.1	739.2	731.5	724.3	721.8	721.7	717.0	708.3
G63.0	718.8	720.1	714.1	709.9	701.6	691.7	691.1	686.2	683.2	675.0
G64.0	687.8	689.2	685.1	677.3	669.7	661.5	657.3	651.5	648.0	640.0
G65.0	656.8	658.5	651.4	643.4	636.5	630.1	627.5	617.2	614.3	604.6
G66.0	623.6	623.7	617.8	610.5	605.6	599.2	594.4	587.4	581.8	571.0
G67.0	590.4	591.7	585.5	579.8	572.1	568.0	564.1	557.6	550.3	537.2
G68.0	563.6	564.1	557.9	548.5	541.0	536.7	532.8	526.4	518.7	506.3
G69.0	528.7	530.1	524.3	520.3	514.0	506.5	502.5	495.6	488.7	474.5
G70.0	494.3	495.3	492.2	487.7	482.0	478.8	470.2	463.7	455.5	444.1
G71.0	465.1	465.6	461.0	455.6	447.9	445.7	442.5	432.9	423.5	413.9
G72.0	438.1	438.3	433.6	426.5	419.3	412.8	409.6	404.9	394.6	384.5
G73.0	410.2	410.9	406.0	399.5	392.0	385.4	380.0	374.4	367.9	355.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	383.1	383.3	378.2	371.4	364.9	359.0	353.6	345.2	338.3	328.9
G75.0	355.9	357.0	351.8	346.4	339.4	333.0	328.2	319.0	308.9	300.3
G76.0	329.4	328.9	325.6	320.8	316.0	309.6	303.2	294.4	283.9	273.0
G77.0	301.2	302.3	298.9	296.6	289.2	283.8	280.4	270.0	260.3	249.6
G78.0	276.2	277.1	273.6	269.5	263.6	259.8	255.4	246.4	238.0	227.8
G79.0	253.5	254.6	251.6	247.8	241.2	235.9	232.5	224.2	215.8	205.6
G80.0	227.9	229.0	226.4	223.6	218.5	215.5	211.2	201.4	194.3	185.1
G81.0	208.3	208.6	206.1	202.4	196.4	192.7	188.5	181.7	174.3	165.6
G82.0	188.9	189.9	186.6	184.1	179.1	174.8	168.9	161.6	155.2	147.4
G83.0	166.7	167.6	165.6	164.0	159.7	156.4	151.5	144.8	137.4	129.2
G84.0	147.8	148.8	147.7	144.6	140.6	137.3	133.4	127.8	122.2	113.7
G85.0	122.9	125.2	124.6	124.4	122.4	120.3	116.8	111.4	105.6	98.9
G86.0	92.3	93.5	93.1	94.7	94.7	95.5	95.6	93.4	90.9	85.3
G87.0	75.2	75.8	76.1	75.9	75.2	74.7	74.8	72.9	71.2	68.4
G88.0	65.3	65.8	65.7	65.8	64.8	64.2	63.1	61.2	59.0	55.9
G89.0	57.7	58.2	58.1	57.7	56.8	56.1	54.9	52.8	50.8	47.5
G90.0	51.7	52.1	52.0	51.7	50.8	49.8	48.5	46.5	44.1	41.0
G91.0	46.6	46.7	46.6	46.4	45.5	44.3	42.8	40.7	38.5	35.2
G92.0	42.0	42.2	42.1	41.9	40.9	39.7	38.2	36.0	33.6	30.6
G93.0	38.0	38.3	38.1	37.8	36.8	35.5	34.0	31.8	29.4	26.2
G94.0	34.5	34.7	34.5	34.3	33.2	31.9	30.5	28.1	25.7	22.6
G95.0	31.3	31.5	31.3	30.9	29.9	28.5	26.8	24.6	22.2	19.0
G96.0	28.1	28.3	28.1	27.7	26.6	25.3	23.6	21.2	18.6	15.3
G97.0	25.1	25.2	25.0	24.6	23.3	21.9	20.0	17.6	15.0	11.9
G98.0	21.9	22.0	21.6	21.3	19.9	18.4	16.6	14.1	11.8	8.9
G99.0	18.8	18.8	18.5	18.1	16.8	15.2	13.4	11.2	9.1	7.1
G100.0	15.8	15.9	15.6	15.0	13.8	12.4	10.9	9.1	7.4	5.6
G101.0	13.2	13.2	12.9	12.3	11.4	10.3	9.0	7.4	5.8	4.3
G102.0	11.1	11.1	10.8	10.4	9.5	8.6	7.4	6.0	4.6	3.2
G103.0	9.4	9.4	9.1	8.7	7.9	7.0	6.0	4.7	3.5	2.6
G104.0	7.9	7.9	7.7	7.3	6.5	5.7	4.8	3.7	2.9	2.5
G105.0	6.6	6.6	6.3	5.9	5.3	4.6	3.8	3.1	2.7	2.6
G106.0	5.3	5.3	5.2	4.8	4.2	3.6	3.2	3.0	2.8	2.8
G107.0	4.4	4.3	4.2	3.9	3.6	3.3	3.1	3.0	3.0	3.0
G108.0	3.8	3.8	3.7	3.6	3.4	3.4	3.3	3.2	3.1	3.1
G109.0	3.7	3.7	3.7	3.6	3.6	3.5	3.5	3.4	3.3	3.3
G110.0	3.8	3.8	3.8	3.8	3.8	3.7	3.7	3.6	3.5	3.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	4.0	4.0	4.0	4.0	3.9	3.9	3.8	3.8	3.8	3.7
G112.0	4.3	4.2	4.2	4.2	4.1	4.1	4.0	4.0	3.9	3.9
G113.0	4.5	4.4	4.4	4.4	4.3	4.3	4.2	4.2	4.1	4.1
G114.0	4.7	4.6	4.6	4.6	4.5	4.5	4.4	4.4	4.3	4.3
G115.0	4.8	4.8	4.8	4.7	4.7	4.7	4.7	4.6	4.5	4.5
G116.0	5.0	5.0	5.0	4.9	4.9	4.9	4.8	4.8	4.7	4.7
G117.0	5.2	5.2	5.2	5.2	5.1	5.1	5.0	5.0	4.9	4.9
G118.0	5.4	5.4	5.4	5.3	5.3	5.3	5.2	5.2	5.1	5.1
G119.0	5.6	5.6	5.6	5.5	5.5	5.4	5.4	5.3	5.3	5.3
G120.0	5.8	5.8	5.8	5.7	5.7	5.7	5.6	5.6	5.5	5.5
G121.0	6.0	6.0	6.0	6.0	5.9	5.9	5.8	5.8	5.7	5.7
G122.0	6.2	6.2	6.2	6.2	6.1	6.1	6.0	6.0	5.9	5.9
G123.0	6.4	6.4	6.4	6.3	6.3	6.3	6.2	6.2	6.2	6.1
G124.0	6.6	6.6	6.6	6.5	6.5	6.5	6.4	6.4	6.3	6.3
G125.0	6.8	6.8	6.8	6.8	6.7	6.7	6.6	6.6	6.5	6.5
G126.0	7.0	7.0	7.0	6.9	6.9	6.8	6.8	6.8	6.7	6.7
G127.0	7.2	7.2	7.2	7.1	7.1	7.0	7.0	7.0	6.9	6.9
G128.0	7.4	7.4	7.4	7.3	7.3	7.3	7.2	7.2	7.1	7.1
G129.0	7.6	7.6	7.6	7.6	7.5	7.5	7.4	7.4	7.3	7.3
G130.0	7.8	7.7	7.7	7.7	7.7	7.7	7.6	7.6	7.5	7.5
G131.0	7.9	7.9	7.9	7.9	7.8	7.8	7.8	7.7	7.7	7.7
G132.0	8.1	8.1	8.1	8.1	8.0	8.0	8.0	7.9	7.9	7.9
G133.0	8.3	8.3	8.3	8.3	8.2	8.2	8.2	8.1	8.1	8.1
G134.0	8.5	8.5	8.4	8.4	8.4	8.4	8.4	8.3	8.3	8.2
G135.0	8.7	8.6	8.6	8.6	8.6	8.5	8.5	8.5	8.4	8.4
G136.0	8.8	8.8	8.8	8.8	8.8	8.7	8.7	8.7	8.6	8.6
G137.0	9.0	9.0	9.0	9.0	8.9	8.9	8.9	8.8	8.8	8.8
G138.0	9.1	9.1	9.1	9.1	9.1	9.1	9.1	9.0	9.0	9.0
G139.0	9.3	9.3	9.3	9.3	9.2	9.2	9.2	9.2	9.1	9.1
G140.0	9.5	9.5	9.5	9.5	9.4	9.4	9.4	9.3	9.3	9.3
G141.0	9.7	9.6	9.6	9.6	9.6	9.6	9.5	9.5	9.5	9.5
G142.0	9.8	9.8	9.8	9.8	9.7	9.7	9.7	9.7	9.7	9.6
G143.0	9.9	9.9	9.9	9.9	9.9	9.9	9.8	9.8	9.8	9.8
G144.0	10.1	10.1	10.1	10.0	10.0	10.0	10.0	10.0	9.9	9.9
G145.0	10.2	10.2	10.2	10.2	10.2	10.2	10.1	10.1	10.1	10.1
G146.0	10.4	10.4	10.4	10.3	10.3	10.3	10.3	10.3	10.2	10.3
G147.0	10.5	10.5	10.5	10.5	10.5	10.5	10.4	10.4	10.4	10.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6
G149.0	10.8	10.8	10.8	10.8	10.8	10.8	10.7	10.7	10.7	10.8
G150.0	10.9	10.9	10.9	10.9	10.9	10.8	10.8	10.8	10.8	10.9
G151.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
G152.0	11.1	11.2	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2
G153.0	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3
G154.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4
G155.0	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.6
G156.0	11.6	11.6	11.6	11.7	11.7	11.7	11.7	11.7	11.7	11.7
G157.0	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.9
G158.0	11.9	11.9	11.9	12.0	12.0	12.0	12.0	12.0	12.0	12.0
G159.0	12.0	12.0	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1
G160.0	12.1	12.1	12.1	12.2	12.3	12.2	12.2	12.2	12.2	12.3
G161.0	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.4
G162.0	12.4	12.4	12.4	12.4	12.5	12.4	12.4	12.4	12.5	12.5
G163.0	12.5	12.5	12.5	12.6	12.6	12.6	12.6	12.6	12.6	12.6
G164.0	12.6	12.6	12.6	12.7	12.7	12.7	12.7	12.7	12.7	12.7
G165.0	12.8	12.7	12.8	12.8	12.9	12.8	12.8	12.8	12.8	12.8
G166.0	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
G167.0	13.0	12.9	13.0	13.1	13.1	13.1	13.0	13.0	13.0	13.1
G168.0	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1
G169.0	13.3	13.1	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2
G170.0	13.4	13.2	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.3
G171.0	13.5	13.3	13.3	13.3	13.4	13.4	13.4	13.4	13.4	13.4
G172.0	13.6	13.4	13.4	13.4	13.5	13.4	13.4	13.4	13.4	13.5
G173.0	13.7	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.6
G174.0	13.8	13.6	13.6	13.5	13.6	13.6	13.5	13.6	13.6	13.6
G175.0	13.8	13.7	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.7
G176.0	13.9	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7
G177.0	14.0	13.8	13.8	13.7	13.8	13.7	13.7	13.7	13.7	13.7
G178.0	14.0	13.8	13.8	13.8	13.8	13.8	13.7	13.7	13.7	13.8
G179.0	14.1	13.9	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8
G180.0	14.1	13.9	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	1906.2	1905.7	1905.3	1904.7	1905.2	1905.1	1904.5	1904.5	1904.0	1904.7
G1.0	1905.5	1904.3	1903.8	1903.0	1903.3	1903.4	1902.8	1902.8	1902.2	1903.1
G2.0	1903.6	1903.1	1902.9	1901.5	1901.7	1901.7	1901.2	1901.3	1900.6	1902.0
G3.0	1901.4	1901.3	1901.4	1900.3	1900.4	1899.8	1899.1	1899.1	1898.6	1900.1
G4.0	1897.4	1897.7	1899.2	1898.7	1898.7	1898.3	1897.2	1897.2	1896.7	1898.1
G5.0	1895.4	1894.4	1895.0	1896.0	1896.8	1896.8	1895.5	1895.4	1894.9	1896.3
G6.0	1892.7	1892.3	1892.3	1892.6	1894.7	1895.1	1893.5	1893.0	1892.5	1893.9
G7.0	1888.1	1889.8	1890.0	1888.9	1890.8	1892.2	1890.7	1889.7	1888.6	1890.5
G8.0	1884.2	1884.6	1886.1	1885.2	1884.9	1887.7	1887.0	1885.3	1884.5	1886.2
G9.0	1879.4	1878.9	1880.2	1880.9	1880.1	1882.0	1881.9	1880.1	1879.2	1880.5
G10.0	1872.7	1873.1	1873.4	1875.1	1874.5	1875.3	1875.8	1874.6	1873.2	1874.6
G11.0	1867.2	1865.8	1866.6	1867.1	1868.9	1868.0	1870.1	1869.0	1867.2	1868.3
G12.0	1860.6	1858.1	1858.7	1859.2	1862.2	1861.6	1862.7	1861.7	1859.7	1860.8
G13.0	1852.2	1851.1	1850.5	1851.3	1854.1	1854.1	1853.9	1853.2	1851.0	1852.1
G14.0	1843.3	1843.2	1842.5	1841.9	1842.6	1845.5	1844.6	1844.6	1841.5	1842.8
G15.0	1835.2	1833.4	1833.0	1831.0	1832.8	1835.5	1834.1	1834.3	1831.3	1832.1
G16.0	1826.0	1823.8	1823.7	1821.5	1821.9	1824.2	1820.9	1822.4	1820.0	1821.0
G17.0	1814.8	1814.9	1813.3	1810.1	1809.7	1811.0	1808.5	1810.0	1807.3	1808.7
G18.0	1804.7	1804.8	1802.1	1799.8	1796.2	1797.0	1794.8	1796.9	1793.9	1795.0
G19.0	1794.0	1791.2	1790.8	1787.4	1783.1	1782.2	1780.9	1782.7	1779.4	1781.2
G20.0	1781.7	1778.6	1778.2	1773.1	1769.3	1767.6	1765.6	1766.7	1764.1	1765.7
G21.0	1768.9	1764.1	1763.4	1758.9	1754.1	1750.6	1749.2	1750.3	1747.7	1749.6
G22.0	1753.3	1748.9	1747.1	1743.3	1738.5	1735.0	1732.7	1733.5	1731.7	1732.9
G23.0	1737.6	1734.5	1730.3	1727.7	1723.1	1718.5	1716.5	1717.0	1714.6	1716.9
G24.0	1720.0	1716.3	1712.3	1710.9	1704.6	1700.9	1699.3	1699.4	1696.8	1699.2
G25.0	1702.2	1697.4	1694.7	1691.2	1686.6	1684.0	1682.2	1683.4	1680.6	1682.8
G26.0	1683.6	1679.4	1676.3	1672.1	1669.3	1667.0	1665.3	1667.1	1664.8	1666.5
G27.0	1664.8	1658.9	1655.7	1653.0	1652.6	1650.3	1648.4	1651.1	1648.9	1650.9
G28.0	1643.9	1637.7	1636.6	1634.2	1636.0	1633.7	1631.4	1633.8	1633.0	1634.5
G29.0	1624.5	1619.3	1618.5	1615.7	1617.5	1616.7	1614.7	1616.0	1615.7	1616.5
G30.0	1602.4	1599.1	1598.3	1598.6	1597.7	1598.8	1597.3	1596.7	1596.8	1597.4
G31.0	1579.2	1578.0	1577.8	1579.8	1578.7	1580.6	1578.8	1578.2	1578.8	1578.8
G32.0	1555.8	1556.7	1558.3	1560.0	1559.0	1560.8	1558.9	1558.8	1558.3	1558.6
G33.0	1534.8	1535.4	1538.8	1541.3	1539.6	1540.0	1538.9	1538.7	1538.4	1538.9
G34.0	1511.5	1513.8	1517.7	1520.6	1519.5	1520.9	1518.5	1518.1	1516.2	1517.5
G35.0	1490.2	1489.9	1496.2	1497.6	1499.9	1500.5	1497.3	1497.8	1495.4	1497.5
G36.0	1469.6	1468.1	1473.7	1475.9	1479.7	1478.7	1476.1	1476.1	1474.1	1475.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	1450.3	1446.2	1451.3	1454.5	1458.2	1456.3	1454.2	1454.9	1452.8	1454.3
G38.0	1428.3	1424.5	1425.0	1431.3	1433.2	1433.3	1431.8	1432.3	1430.7	1431.9
G39.0	1404.4	1402.2	1400.9	1406.9	1409.4	1410.4	1408.8	1410.2	1408.0	1409.0
G40.0	1379.5	1378.8	1377.0	1381.8	1385.0	1386.2	1383.7	1385.6	1383.9	1383.2
G41.0	1352.3	1354.3	1352.5	1356.4	1358.2	1361.1	1358.2	1360.5	1357.4	1357.7
G42.0	1324.5	1326.8	1327.7	1330.8	1331.3	1334.0	1330.7	1332.4	1330.2	1330.0
G43.0	1297.3	1300.6	1301.3	1302.0	1304.7	1307.8	1302.4	1302.8	1301.2	1300.4
G44.0	1268.5	1273.4	1272.6	1272.8	1274.7	1278.4	1273.3	1270.5	1270.1	1270.3
G45.0	1241.3	1243.6	1245.0	1242.5	1244.8	1247.0	1242.6	1238.7	1238.7	1239.7
G46.0	1210.9	1214.2	1213.6	1211.2	1213.9	1214.1	1211.2	1206.9	1206.7	1206.9
G47.0	1179.1	1182.0	1183.3	1180.9	1181.6	1179.3	1178.7	1172.6	1173.0	1174.8
G48.0	1147.7	1149.9	1150.5	1147.0	1147.9	1146.4	1144.4	1139.8	1141.0	1141.7
G49.0	1117.9	1118.3	1117.7	1116.4	1112.5	1112.1	1110.9	1107.7	1109.2	1109.7
G50.0	1090.3	1084.7	1084.4	1082.9	1075.8	1078.1	1078.0	1076.8	1077.4	1077.9
G51.0	1059.7	1051.3	1049.5	1049.0	1041.0	1044.2	1044.0	1045.1	1045.0	1044.8
G52.0	1027.9	1020.3	1015.3	1015.1	1006.7	1012.2	1012.5	1013.8	1013.3	1011.5
G53.0	993.8	987.9	981.2	980.1	974.1	977.8	978.8	980.1	980.0	978.0
G54.0	959.0	954.5	946.0	943.9	941.4	943.7	949.0	947.7	947.7	945.6
G55.0	925.1	920.5	913.3	909.1	908.1	911.3	915.0	914.7	913.0	910.2
G56.0	896.0	885.6	879.0	874.3	873.7	877.1	880.5	881.1	879.6	877.9
G57.0	866.8	849.3	844.0	838.0	838.5	841.5	845.9	845.4	843.0	840.1
G58.0	829.2	816.5	806.9	801.2	803.2	804.1	809.1	808.8	805.3	804.0
G59.0	793.7	785.5	771.5	765.4	768.0	766.8	769.2	769.1	767.4	765.6
G60.0	761.6	753.0	737.1	731.5	730.8	729.6	730.4	730.4	729.3	727.7
G61.0	728.2	714.8	702.2	696.6	693.0	693.6	691.3	692.0	690.6	689.1
G62.0	694.4	679.6	670.2	662.6	657.4	658.1	655.2	654.8	653.6	651.9
G63.0	661.2	647.4	640.8	628.6	621.3	622.0	616.6	618.5	615.9	614.1
G64.0	630.5	616.1	604.5	594.3	585.7	583.6	579.9	579.9	579.8	576.9
G65.0	599.3	583.3	570.2	559.3	549.5	545.8	542.2	544.0	542.9	539.4
G66.0	565.6	551.0	538.8	527.2	514.1	510.9	507.1	508.2	505.0	502.3
G67.0	530.0	520.4	507.5	494.7	479.7	475.6	471.1	471.1	468.6	465.7
G68.0	496.1	488.1	475.8	460.1	446.2	440.0	434.9	434.8	432.6	429.5
G69.0	463.5	455.3	444.8	428.1	412.8	407.3	400.8	398.8	397.1	394.3
G70.0	431.8	423.4	412.3	396.2	383.3	374.5	367.9	365.5	363.0	359.4
G71.0	403.2	391.0	381.5	366.3	352.5	343.4	334.6	330.9	328.9	326.0
G72.0	373.7	361.2	350.2	337.6	323.2	312.6	302.9	299.3	296.5	294.0
G73.0	344.9	332.5	319.8	309.7	294.1	282.3	272.8	267.3	264.8	262.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	318.0	304.7	291.5	280.8	266.1	253.3	243.8	238.1	235.3	233.8
G75.0	290.7	277.2	265.1	253.6	240.8	228.1	216.1	209.7	206.9	205.5
G76.0	265.3	251.7	240.3	227.6	215.3	202.5	190.4	183.6	180.8	179.9
G77.0	239.7	228.7	216.7	203.4	190.9	178.9	166.4	158.8	155.9	155.7
G78.0	216.0	204.8	193.8	179.8	167.3	156.1	144.1	136.2	133.9	133.6
G79.0	194.6	181.6	171.9	159.0	146.1	135.5	123.2	115.3	112.2	112.2
G80.0	174.4	162.6	150.9	139.4	126.3	115.6	104.7	96.6	93.8	94.1
G81.0	155.9	144.2	132.5	121.0	108.1	97.4	87.3	79.2	76.4	76.9
G82.0	137.2	126.8	115.7	103.9	92.1	81.5	71.8	64.0	61.1	61.4
G83.0	120.5	111.0	100.1	88.9	77.5	66.9	57.2	50.1	47.0	47.7
G84.0	104.9	97.0	86.4	75.9	64.5	54.5	45.0	38.5	35.5	36.0
G85.0	91.4	83.0	73.7	64.1	53.5	43.6	34.5	28.1	25.1	25.9
G86.0	78.5	70.8	62.5	53.5	43.8	34.3	25.7	19.7	16.7	17.7
G87.0	64.5	59.0	51.8	44.3	35.0	26.6	18.4	12.6	9.8	10.9
G88.0	52.1	47.6	42.2	35.4	27.6	20.0	12.9	7.3	4.9	5.9
G89.0	43.8	39.1	34.1	27.9	21.2	14.6	8.2	3.6	1.4	2.6
G90.0	37.1	32.8	28.1	22.4	16.2	10.3	5.0	1.5	0.1	1.1
G91.0	31.4	27.1	22.9	17.7	12.1	6.9	2.8	0.7	0.2	0.3
G92.0	26.6	22.7	18.6	13.8	8.8	4.4	1.5	0.3	0.3	0.3
G93.0	22.6	18.6	14.7	10.3	5.6	2.2	0.5	0.4	0.4	0.5
G94.0	18.9	15.1	11.3	7.1	3.2	1.0	0.6	0.6	0.6	0.6
G95.0	15.3	11.4	7.7	4.6	2.0	0.8	0.7	0.7	0.7	0.7
G96.0	11.8	8.2	5.3	3.1	1.2	0.8	0.8	0.8	0.8	0.8
G97.0	8.7	6.1	3.7	2.0	1.1	1.0	1.0	1.0	1.0	1.0
G98.0	6.7	4.5	2.5	1.4	1.2	1.2	1.1	1.1	1.1	1.2
G99.0	5.2	3.3	1.7	1.4	1.4	1.3	1.3	1.3	1.3	1.3
G100.0	3.8	2.3	1.6	1.5	1.5	1.5	1.5	1.5	1.5	1.5
G101.0	2.9	2.0	1.7	1.7	1.6	1.6	1.6	1.6	1.6	1.6
G102.0	2.3	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8
G103.0	2.3	2.1	2.1	2.0	2.0	2.0	2.0	2.0	2.0	2.0
G104.0	2.3	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2
G105.0	2.5	2.5	2.4	2.4	2.3	2.3	2.3	2.3	2.3	2.3
G106.0	2.7	2.7	2.6	2.5	2.5	2.5	2.5	2.5	2.5	2.5
G107.0	2.9	2.8	2.8	2.8	2.7	2.7	2.7	2.7	2.7	2.7
G108.0	3.0	3.0	3.0	2.9	2.9	2.9	2.9	2.9	2.9	3.0
G109.0	3.2	3.2	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
G110.0	3.4	3.4	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	3.7	3.6	3.6	3.5	3.5	3.5	3.5	3.5	3.5	3.6
G112.0	3.8	3.8	3.8	3.7	3.7	3.7	3.7	3.7	3.7	3.7
G113.0	4.0	4.0	4.0	3.9	3.9	3.8	3.9	3.9	3.9	3.9
G114.0	4.2	4.2	4.1	4.1	4.1	4.0	4.1	4.1	4.1	4.1
G115.0	4.4	4.4	4.4	4.3	4.3	4.3	4.3	4.3	4.3	4.4
G116.0	4.6	4.6	4.6	4.5	4.5	4.5	4.5	4.5	4.6	4.6
G117.0	4.8	4.8	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.8
G118.0	5.0	5.0	4.9	4.9	4.9	4.8	4.9	4.9	5.0	5.0
G119.0	5.3	5.2	5.2	5.1	5.1	5.1	5.1	5.2	5.2	5.2
G120.0	5.4	5.4	5.3	5.3	5.3	5.3	5.3	5.3	5.4	5.4
G121.0	5.6	5.6	5.6	5.5	5.5	5.5	5.5	5.6	5.6	5.6
G122.0	5.9	5.8	5.8	5.7	5.7	5.7	5.8	5.8	5.8	5.9
G123.0	6.1	6.0	6.0	6.0	5.9	5.9	6.0	6.0	6.1	6.1
G124.0	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.3
G125.0	6.5	6.4	6.4	6.4	6.3	6.3	6.4	6.5	6.5	6.5
G126.0	6.7	6.6	6.6	6.6	6.6	6.6	6.6	6.7	6.7	6.7
G127.0	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.9	6.9	6.9
G128.0	7.0	7.0	7.0	7.0	7.0	7.0	7.1	7.1	7.1	7.1
G129.0	7.3	7.2	7.2	7.2	7.2	7.2	7.3	7.3	7.3	7.4
G130.0	7.5	7.4	7.4	7.4	7.4	7.4	7.5	7.5	7.6	7.6
G131.0	7.7	7.6	7.6	7.6	7.6	7.7	7.7	7.7	7.7	7.8
G132.0	7.8	7.8	7.8	7.8	7.8	7.8	7.9	7.9	8.0	8.0
G133.0	8.0	8.0	8.0	8.0	8.0	8.1	8.1	8.1	8.2	8.2
G134.0	8.2	8.2	8.2	8.2	8.2	8.3	8.3	8.4	8.4	8.4
G135.0	8.4	8.4	8.4	8.4	8.4	8.4	8.5	8.5	8.5	8.6
G136.0	8.6	8.5	8.5	8.5	8.6	8.7	8.7	8.7	8.8	8.8
G137.0	8.8	8.7	8.7	8.7	8.8	8.8	8.9	8.9	8.9	9.0
G138.0	8.9	8.9	8.9	9.0	9.0	9.0	9.1	9.1	9.1	9.1
G139.0	9.1	9.1	9.1	9.1	9.1	9.2	9.2	9.3	9.3	9.3
G140.0	9.3	9.3	9.3	9.3	9.3	9.4	9.4	9.5	9.5	9.5
G141.0	9.5	9.5	9.5	9.5	9.5	9.6	9.6	9.7	9.7	9.7
G142.0	9.6	9.6	9.6	9.7	9.7	9.7	9.8	9.8	9.9	9.9
G143.0	9.8	9.8	9.8	9.8	9.9	9.9	9.9	10.0	10.0	10.0
G144.0	9.9	10.0	10.0	10.0	10.0	10.1	10.1	10.2	10.2	10.2
G145.0	10.1	10.1	10.1	10.2	10.2	10.2	10.3	10.3	10.4	10.4
G146.0	10.3	10.3	10.3	10.4	10.4	10.4	10.5	10.5	10.5	10.5
G147.0	10.5	10.5	10.5	10.5	10.6	10.6	10.6	10.6	10.7	10.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	10.6	10.6	10.7	10.7	10.7	10.7	10.8	10.8	10.8	10.8
G149.0	10.8	10.8	10.8	10.8	10.9	10.9	10.9	11.0	11.0	11.0
G150.0	10.9	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.1	11.1
G151.0	11.1	11.1	11.1	11.2	11.2	11.2	11.2	11.3	11.3	11.3
G152.0	11.2	11.3	11.3	11.3	11.3	11.3	11.4	11.4	11.4	11.4
G153.0	11.4	11.4	11.4	11.4	11.4	11.4	11.5	11.5	11.5	11.6
G154.0	11.5	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.7	11.7
G155.0	11.6	11.7	11.7	11.7	11.7	11.7	11.8	11.8	11.8	11.8
G156.0	11.8	11.8	11.9	11.9	11.9	11.9	11.9	11.9	11.9	12.0
G157.0	11.9	12.0	12.0	12.0	12.0	12.0	12.1	12.1	12.1	12.1
G158.0	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.2	12.2
G159.0	12.2	12.2	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3
G160.0	12.3	12.3	12.3	12.4	12.4	12.4	12.4	12.4	12.4	12.4
G161.0	12.4	12.4	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
G162.0	12.5	12.5	12.6	12.6	12.6	12.6	12.7	12.6	12.6	12.6
G163.0	12.6	12.6	12.7	12.7	12.8	12.8	12.8	12.7	12.7	12.7
G164.0	12.7	12.7	12.8	12.8	12.9	12.9	12.9	12.9	12.8	12.8
G165.0	12.8	12.8	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
G166.0	12.9	12.9	12.9	13.0	13.1	13.1	13.1	13.1	13.0	13.0
G167.0	13.0	13.0	13.1	13.1	13.1	13.1	13.2	13.1	13.1	13.1
G168.0	13.1	13.1	13.1	13.2	13.2	13.2	13.3	13.2	13.2	13.1
G169.0	13.2	13.2	13.2	13.3	13.3	13.3	13.4	13.3	13.3	13.2
G170.0	13.3	13.3	13.3	13.3	13.4	13.4	13.4	13.4	13.4	13.3
G171.0	13.4	13.4	13.4	13.4	13.4	13.5	13.5	13.5	13.4	13.4
G172.0	13.5	13.5	13.5	13.5	13.5	13.6	13.6	13.6	13.5	13.5
G173.0	13.6	13.5	13.5	13.6	13.6	13.6	13.7	13.7	13.6	13.5
G174.0	13.6	13.6	13.6	13.6	13.6	13.7	13.7	13.7	13.7	13.6
G175.0	13.7	13.6	13.7	13.7	13.7	13.7	13.8	13.8	13.7	13.7
G176.0	13.7	13.7	13.7	13.7	13.7	13.7	13.8	13.8	13.8	13.7
G177.0	13.7	13.7	13.7	13.8	13.8	13.8	13.8	13.8	13.8	13.8
G178.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8
G179.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.9	13.8
G180.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.9	13.9	13.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	1905.1	1905.2	1905.6	1906.4	1906.9	1907.0	1906.7	1907.3	1907.1	1907.4
G1.0	1903.5	1903.4	1903.7	1904.8	1905.3	1905.2	1904.8	1905.6	1905.2	1905.7
G2.0	1902.2	1901.7	1902.3	1902.7	1903.0	1903.0	1902.7	1903.8	1903.9	1904.6
G3.0	1900.3	1899.8	1899.9	1900.4	1901.2	1901.7	1901.8	1902.3	1901.9	1902.3
G4.0	1898.4	1897.7	1897.6	1898.7	1899.9	1900.0	1899.6	1900.0	1899.6	1899.1
G5.0	1896.8	1895.4	1895.7	1897.0	1897.4	1897.7	1896.8	1896.2	1895.9	1895.4
G6.0	1893.8	1892.7	1894.0	1894.7	1895.2	1894.5	1892.2	1892.2	1891.3	1890.2
G7.0	1890.1	1889.8	1891.1	1891.6	1891.4	1890.3	1887.6	1886.7	1886.5	1887.0
G8.0	1885.6	1885.7	1886.6	1886.8	1885.8	1885.1	1882.2	1883.5	1882.3	1881.4
G9.0	1879.9	1880.6	1881.3	1880.6	1879.7	1877.7	1877.6	1878.0	1876.9	1875.6
G10.0	1873.9	1874.8	1875.0	1873.4	1871.8	1871.7	1870.8	1871.3	1869.7	1867.5
G11.0	1868.1	1868.2	1867.7	1865.5	1863.6	1864.3	1863.6	1863.4	1861.4	1859.9
G12.0	1861.6	1861.2	1859.6	1856.8	1856.2	1856.1	1854.9	1854.3	1852.4	1852.6
G13.0	1853.0	1852.1	1849.8	1847.6	1847.7	1847.4	1845.4	1844.6	1843.8	1842.5
G14.0	1844.2	1842.6	1839.6	1838.4	1838.0	1837.8	1835.2	1835.9	1833.8	1833.7
G15.0	1834.2	1832.5	1829.5	1828.8	1828.2	1826.9	1825.9	1824.0	1824.1	1824.4
G16.0	1823.0	1821.0	1818.7	1818.6	1817.5	1816.0	1814.3	1814.4	1813.3	1815.9
G17.0	1811.0	1808.4	1807.3	1807.5	1806.8	1805.7	1802.6	1803.4	1804.0	1806.0
G18.0	1798.4	1795.4	1796.3	1795.8	1794.3	1794.5	1791.8	1792.9	1795.0	1793.9
G19.0	1784.7	1781.4	1782.4	1783.1	1781.6	1780.9	1780.3	1782.9	1783.2	1782.3
G20.0	1769.0	1764.6	1767.3	1767.4	1768.7	1768.4	1768.6	1772.4	1769.7	1770.2
G21.0	1751.6	1748.5	1751.7	1751.4	1751.7	1754.8	1756.6	1758.4	1757.6	1757.0
G22.0	1735.5	1732.4	1735.9	1735.1	1734.9	1739.7	1743.9	1744.7	1744.6	1742.8
G23.0	1718.1	1715.9	1719.2	1717.4	1719.2	1724.3	1727.3	1731.1	1729.8	1728.5
G24.0	1700.8	1698.1	1701.3	1699.2	1701.6	1708.4	1710.6	1715.7	1715.1	1711.9
G25.0	1682.9	1681.5	1682.1	1681.2	1684.2	1690.1	1694.1	1698.5	1698.0	1695.2
G26.0	1666.7	1664.7	1664.5	1662.3	1667.3	1671.4	1676.3	1680.9	1679.1	1677.3
G27.0	1649.6	1647.4	1646.6	1644.1	1649.2	1651.9	1656.9	1659.6	1657.4	1659.3
G28.0	1632.7	1630.2	1628.5	1625.4	1629.0	1633.9	1637.7	1638.8	1638.2	1641.2
G29.0	1614.9	1613.6	1609.8	1607.1	1609.0	1614.5	1615.6	1616.0	1617.7	1625.1
G30.0	1595.8	1594.7	1591.5	1589.2	1588.9	1595.5	1592.5	1595.0	1598.1	1605.4
G31.0	1575.6	1574.3	1571.4	1570.9	1571.8	1575.1	1571.6	1572.4	1579.3	1583.9
G32.0	1556.5	1553.6	1552.0	1552.1	1552.0	1553.3	1549.3	1551.0	1557.4	1561.5
G33.0	1536.4	1532.7	1531.7	1531.0	1531.9	1531.1	1527.1	1530.2	1534.0	1537.3
G34.0	1516.3	1511.6	1511.0	1509.5	1511.1	1508.4	1504.4	1509.5	1510.3	1513.4
G35.0	1494.6	1491.1	1489.6	1487.3	1489.1	1483.9	1481.7	1486.6	1485.9	1488.1
G36.0	1474.1	1469.3	1468.2	1466.1	1464.3	1460.0	1459.4	1463.3	1460.3	1461.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	1452.1	1445.7	1446.1	1444.0	1441.6	1435.8	1437.3	1438.5	1435.3	1435.8
G38.0	1428.4	1421.7	1422.4	1420.2	1415.6	1409.7	1412.7	1412.1	1409.3	1411.1
G39.0	1404.1	1397.7	1398.0	1397.2	1390.6	1386.3	1387.8	1385.7	1383.3	1389.2
G40.0	1379.5	1372.3	1373.2	1372.3	1364.9	1363.2	1359.7	1358.2	1358.2	1364.8
G41.0	1352.8	1346.6	1347.1	1345.7	1339.3	1337.8	1333.0	1331.8	1334.0	1337.4
G42.0	1324.8	1318.8	1320.0	1317.7	1314.3	1312.6	1305.9	1304.1	1309.3	1312.4
G43.0	1296.3	1290.7	1293.6	1290.1	1288.4	1285.5	1280.0	1279.9	1282.5	1288.9
G44.0	1265.2	1261.2	1264.1	1259.4	1260.6	1256.8	1251.6	1255.7	1254.6	1260.4
G45.0	1233.6	1231.0	1233.5	1229.8	1232.7	1228.4	1224.9	1228.9	1230.4	1230.6
G46.0	1202.7	1199.6	1203.1	1198.8	1202.4	1198.7	1198.5	1200.4	1201.9	1197.7
G47.0	1169.3	1167.3	1170.0	1167.6	1171.1	1167.5	1172.9	1176.4	1171.9	1163.0
G48.0	1137.3	1134.6	1136.4	1136.4	1137.6	1135.5	1142.5	1147.8	1138.0	1131.3
G49.0	1105.3	1100.3	1102.3	1104.4	1102.4	1105.4	1112.0	1116.9	1103.2	1102.6
G50.0	1072.1	1067.8	1067.9	1070.1	1069.5	1075.5	1082.7	1082.7	1072.2	1078.7
G51.0	1040.2	1036.1	1033.6	1035.0	1032.1	1043.9	1050.8	1046.1	1043.5	1052.2
G52.0	1005.6	1002.9	998.0	1001.0	996.8	1009.8	1017.8	1010.2	1018.0	1023.5
G53.0	972.0	967.3	963.4	964.2	963.3	977.7	981.7	977.9	990.2	993.7
G54.0	938.3	933.8	929.5	929.9	933.0	945.8	943.8	949.8	960.3	962.6
G55.0	905.0	899.2	897.1	893.0	899.5	911.9	906.5	921.5	930.8	925.3
G56.0	871.1	864.2	862.3	857.1	865.6	875.0	874.3	889.4	897.4	895.9
G57.0	834.6	828.6	827.8	821.9	832.5	837.8	843.4	858.6	862.4	868.6
G58.0	798.1	792.7	791.9	788.6	799.1	798.5	811.1	823.8	829.8	837.5
G59.0	760.5	755.2	756.2	755.9	762.7	763.6	778.2	788.8	800.1	807.0
G60.0	723.1	718.7	717.7	721.6	725.6	732.3	745.5	754.9	766.4	773.4
G61.0	684.3	680.9	681.6	686.5	687.2	701.1	707.3	723.5	734.4	734.0
G62.0	647.2	644.7	643.1	652.6	652.7	669.2	673.9	689.4	697.6	701.6
G63.0	610.8	607.3	608.0	618.2	619.1	637.5	643.9	659.8	661.3	668.9
G64.0	572.5	571.5	573.0	581.4	587.7	600.0	612.6	621.9	626.9	638.5
G65.0	538.0	535.9	539.0	542.5	555.6	567.2	583.0	586.9	596.2	606.9
G66.0	501.6	499.8	505.5	507.0	523.9	536.3	547.4	555.5	566.0	574.9
G67.0	466.0	463.6	472.9	475.4	489.2	505.0	510.6	526.1	535.1	546.7
G68.0	429.7	428.5	439.8	444.7	457.5	473.0	478.8	493.3	507.7	510.2
G69.0	394.2	395.0	404.2	413.3	427.2	439.1	447.8	462.1	474.4	480.4
G70.0	361.8	364.6	370.3	381.9	397.3	406.5	419.3	433.3	440.6	451.3
G71.0	330.4	332.5	339.7	351.1	365.2	377.8	390.8	399.0	411.7	418.3
G72.0	298.4	303.6	310.2	323.3	333.2	347.0	361.3	370.3	380.5	390.0
G73.0	267.3	273.5	283.1	295.3	305.3	321.1	330.5	341.6	350.9	355.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	238.2	244.3	255.5	266.9	278.1	293.2	303.5	313.8	319.3	328.0
G75.0	210.5	216.8	230.0	238.8	252.7	265.1	275.5	286.0	291.9	302.8
G76.0	185.0	192.2	205.8	215.3	227.1	241.1	249.8	258.1	267.9	277.3
G77.0	161.0	169.1	180.9	192.0	202.8	215.9	222.2	235.4	243.7	251.3
G78.0	139.3	146.8	158.0	169.7	180.9	190.8	201.3	212.5	220.6	227.6
G79.0	118.7	126.7	137.8	147.7	159.3	169.3	179.6	190.3	198.8	206.7
G80.0	99.2	107.9	118.2	128.6	138.0	149.8	159.3	170.1	178.7	184.3
G81.0	81.9	90.1	100.2	110.3	120.5	131.4	140.8	149.2	157.7	164.6
G82.0	66.6	74.2	84.4	93.5	104.4	115.0	122.6	131.1	139.2	147.1
G83.0	53.2	60.5	69.8	79.5	89.4	98.9	106.5	115.1	124.3	130.0
G84.0	41.2	48.3	57.3	67.1	76.0	84.7	93.5	100.8	105.9	110.4
G85.0	30.8	37.9	46.8	55.3	64.1	72.2	78.8	84.5	88.2	89.9
G86.0	22.4	29.1	37.5	45.5	53.1	59.9	64.4	67.8	69.0	70.4
G87.0	15.5	21.8	29.5	36.4	42.4	47.7	51.3	54.8	57.1	59.3
G88.0	10.1	15.8	22.4	28.6	34.0	39.1	43.1	46.7	49.4	51.5
G89.0	6.1	11.0	16.8	22.3	27.6	32.6	36.6	40.3	43.0	45.3
G90.0	3.5	7.4	12.3	17.4	22.4	27.3	31.3	34.9	37.8	40.1
G91.0	1.8	4.7	8.8	13.5	18.0	22.6	26.4	30.0	32.9	35.3
G92.0	0.8	2.8	6.0	10.0	14.1	18.3	22.1	25.7	28.6	31.1
G93.0	0.5	1.4	3.8	7.1	10.7	14.6	18.3	21.6	24.6	27.1
G94.0	0.6	0.8	2.3	4.8	8.0	11.5	14.7	18.1	20.8	23.4
G95.0	0.8	0.8	1.2	3.0	5.6	8.7	11.7	14.8	17.5	20.1
G96.0	0.9	0.9	1.0	1.6	3.7	6.3	9.0	11.8	14.4	16.8
G97.0	1.0	1.0	1.1	1.3	2.2	4.3	6.7	9.2	11.6	13.9
G98.0	1.2	1.2	1.3	1.4	1.5	2.7	4.6	6.9	9.1	11.1
G99.0	1.3	1.4	1.4	1.5	1.6	1.8	3.0	4.9	6.9	8.8
G100.0	1.5	1.5	1.5	1.6	1.7	1.8	2.1	3.3	4.9	6.7
G101.0	1.6	1.7	1.7	1.8	1.8	1.9	2.1	2.3	3.4	4.8
G102.0	1.8	1.9	1.9	2.0	2.0	2.1	2.2	2.3	2.5	3.4
G103.0	2.0	2.1	2.1	2.1	2.2	2.3	2.3	2.4	2.5	2.7
G104.0	2.2	2.2	2.3	2.3	2.3	2.4	2.5	2.5	2.6	2.7
G105.0	2.3	2.4	2.4	2.5	2.5	2.6	2.6	2.7	2.8	2.9
G106.0	2.5	2.6	2.6	2.7	2.7	2.8	2.8	2.9	3.0	3.0
G107.0	2.8	2.8	2.8	2.9	2.9	3.0	3.0	3.0	3.1	3.2
G108.0	3.0	3.0	3.0	3.0	3.1	3.1	3.2	3.2	3.3	3.4
G109.0	3.1	3.1	3.2	3.2	3.3	3.3	3.4	3.4	3.5	3.6
G110.0	3.3	3.4	3.4	3.4	3.5	3.5	3.6	3.6	3.7	3.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	3.5	3.6	3.6	3.6	3.7	3.7	3.8	3.8	3.9	3.9
G112.0	3.7	3.8	3.8	3.8	3.9	3.9	4.0	4.0	4.1	4.1
G113.0	3.9	3.9	4.0	4.0	4.1	4.1	4.2	4.2	4.3	4.3
G114.0	4.1	4.1	4.2	4.2	4.2	4.3	4.4	4.4	4.5	4.5
G115.0	4.3	4.4	4.4	4.4	4.5	4.5	4.6	4.6	4.7	4.7
G116.0	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.8	4.9	4.9
G117.0	4.8	4.8	4.8	4.8	4.9	4.9	5.0	5.0	5.1	5.1
G118.0	5.0	5.0	5.0	5.1	5.1	5.1	5.2	5.2	5.3	5.3
G119.0	5.2	5.2	5.2	5.3	5.3	5.3	5.4	5.4	5.5	5.5
G120.0	5.4	5.4	5.4	5.4	5.5	5.5	5.6	5.6	5.7	5.7
G121.0	5.6	5.6	5.6	5.7	5.7	5.7	5.8	5.8	5.9	6.0
G122.0	5.8	5.8	5.9	5.9	5.9	6.0	6.0	6.1	6.1	6.2
G123.0	6.1	6.1	6.1	6.1	6.2	6.2	6.2	6.2	6.3	6.3
G124.0	6.3	6.3	6.3	6.3	6.3	6.4	6.4	6.5	6.5	6.5
G125.0	6.5	6.5	6.5	6.5	6.6	6.6	6.6	6.7	6.7	6.8
G126.0	6.7	6.7	6.7	6.8	6.8	6.8	6.8	6.8	6.9	6.9
G127.0	6.9	6.9	6.9	6.9	6.9	7.0	7.0	7.0	7.1	7.1
G128.0	7.1	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.3	7.4
G129.0	7.4	7.3	7.3	7.4	7.4	7.4	7.4	7.5	7.5	7.6
G130.0	7.6	7.6	7.5	7.6	7.6	7.6	7.7	7.7	7.7	7.7
G131.0	7.8	7.7	7.7	7.7	7.8	7.8	7.8	7.8	7.9	7.9
G132.0	8.0	7.9	7.9	7.9	8.0	8.0	8.0	8.0	8.1	8.1
G133.0	8.2	8.2	8.1	8.1	8.2	8.2	8.2	8.3	8.3	8.3
G134.0	8.4	8.4	8.3	8.3	8.4	8.4	8.4	8.4	8.4	8.4
G135.0	8.6	8.5	8.5	8.5	8.5	8.5	8.5	8.6	8.6	8.6
G136.0	8.8	8.7	8.7	8.7	8.7	8.7	8.7	8.8	8.8	8.8
G137.0	8.9	8.9	8.9	8.9	8.9	8.9	8.9	9.0	9.0	9.0
G138.0	9.1	9.1	9.1	9.1	9.1	9.1	9.1	9.1	9.1	9.2
G139.0	9.3	9.3	9.2	9.2	9.2	9.2	9.2	9.3	9.3	9.3
G140.0	9.5	9.5	9.4	9.4	9.4	9.4	9.4	9.4	9.5	9.5
G141.0	9.7	9.7	9.6	9.6	9.6	9.6	9.6	9.6	9.7	9.7
G142.0	9.9	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8
G143.0	10.0	10.0	9.9	9.9	9.9	9.9	9.9	9.9	9.9	10.0
G144.0	10.2	10.2	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1
G145.0	10.3	10.3	10.3	10.3	10.3	10.2	10.2	10.2	10.3	10.3
G146.0	10.5	10.5	10.5	10.4	10.4	10.4	10.4	10.4	10.4	10.4
G147.0	10.7	10.6	10.6	10.6	10.6	10.6	10.6	10.5	10.6	10.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	10.8	10.8	10.8	10.8	10.8	10.7	10.6	10.7	10.7	10.7
G149.0	11.0	11.0	10.9	10.9	10.9	10.8	10.8	10.8	10.8	10.8
G150.0	11.1	11.1	11.1	11.1	11.0	11.0	11.0	11.0	11.0	11.0
G151.0	11.3	11.3	11.3	11.2	11.2	11.1	11.1	11.1	11.1	11.1
G152.0	11.4	11.4	11.4	11.4	11.4	11.3	11.3	11.3	11.3	11.3
G153.0	11.6	11.5	11.5	11.5	11.5	11.4	11.4	11.4	11.4	11.4
G154.0	11.7	11.7	11.7	11.7	11.6	11.6	11.5	11.5	11.6	11.5
G155.0	11.9	11.8	11.8	11.8	11.8	11.7	11.7	11.7	11.7	11.7
G156.0	12.0	12.0	12.0	12.0	11.9	11.9	11.9	11.8	11.8	11.8
G157.0	12.1	12.1	12.1	12.1	12.1	12.0	12.0	12.0	12.0	12.0
G158.0	12.2	12.2	12.2	12.2	12.2	12.1	12.1	12.1	12.1	12.1
G159.0	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3
G160.0	12.4	12.4	12.4	12.4	12.4	12.4	12.4	12.3	12.4	12.4
G161.0	12.5	12.6	12.6	12.5	12.5	12.5	12.5	12.5	12.5	12.5
G162.0	12.6	12.7	12.7	12.6	12.6	12.6	12.6	12.6	12.6	12.6
G163.0	12.7	12.8	12.8	12.7	12.7	12.7	12.7	12.7	12.7	12.7
G164.0	12.8	12.9	12.9	12.8	12.8	12.8	12.8	12.9	12.9	12.9
G165.0	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
G166.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.1	13.1	13.1
G167.0	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1
G168.0	13.2	13.2	13.2	13.2	13.1	13.1	13.2	13.2	13.2	13.2
G169.0	13.2	13.3	13.2	13.2	13.2	13.2	13.2	13.3	13.3	13.3
G170.0	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.4	13.4	13.4
G171.0	13.4	13.4	13.4	13.4	13.4	13.4	13.4	13.4	13.5	13.5
G172.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.6
G173.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.6	13.6	13.6
G174.0	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.7
G175.0	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.7	13.7
G176.0	13.7	13.7	13.7	13.7	13.6	13.6	13.7	13.7	13.7	13.7
G177.0	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.8
G178.0	13.8	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.8	13.8
G179.0	13.8	13.8	13.7	13.8	13.8	13.7	13.7	13.8	13.8	13.8
G180.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	1907.7	1907.9	1908.4	1908.9	1908.3	1908.5	1908.9	1908.7	1908.5	1907.3
G1.0	1906.2	1906.2	1906.7	1906.9	1906.7	1906.4	1908.3	1908.3	1908.2	1907.3
G2.0	1905.4	1905.4	1905.9	1906.3	1905.9	1905.7	1908.9	1909.2	1909.1	1908.2
G3.0	1903.0	1902.8	1903.4	1904.1	1903.7	1903.6	1907.4	1907.8	1907.8	1906.8
G4.0	1899.6	1899.2	1899.6	1900.5	1900.1	1900.3	1906.8	1907.2	1907.0	1906.2
G5.0	1895.3	1894.5	1894.3	1895.3	1894.6	1895.0	1904.9	1905.1	1905.0	1904.2
G6.0	1891.0	1890.8	1890.9	1891.6	1890.7	1891.5	1901.7	1901.5	1901.5	1900.8
G7.0	1886.7	1885.7	1886.1	1886.3	1885.8	1886.8	1896.3	1896.4	1895.9	1895.6
G8.0	1881.4	1880.5	1880.3	1880.0	1878.9	1879.9	1893.1	1893.1	1892.7	1892.6
G9.0	1874.4	1872.8	1872.8	1872.8	1872.5	1873.8	1888.4	1888.3	1888.1	1888.0
G10.0	1866.4	1865.7	1867.5	1868.1	1866.8	1867.8	1882.2	1882.3	1882.3	1882.1
G11.0	1860.2	1859.4	1860.0	1860.3	1859.5	1860.0	1875.7	1875.4	1875.7	1875.1
G12.0	1852.3	1851.3	1852.1	1852.8	1850.7	1851.1	1870.1	1870.3	1869.9	1869.3
G13.0	1844.2	1843.5	1842.6	1843.5	1842.2	1843.7	1862.3	1861.7	1861.7	1860.3
G14.0	1834.8	1834.7	1835.0	1836.3	1834.5	1835.4	1853.7	1853.5	1853.6	1852.4
G15.0	1826.0	1827.2	1826.8	1825.9	1823.7	1824.1	1845.4	1845.2	1845.2	1843.1
G16.0	1818.2	1816.4	1814.9	1814.8	1814.4	1814.9	1837.7	1837.7	1837.6	1835.9
G17.0	1806.4	1804.8	1805.1	1806.3	1805.3	1805.0	1826.7	1826.5	1826.7	1826.1
G18.0	1793.9	1794.9	1795.2	1795.3	1794.5	1794.8	1816.7	1816.5	1815.8	1814.7
G19.0	1783.2	1783.8	1784.2	1784.7	1783.4	1782.5	1807.5	1807.4	1807.6	1806.6
G20.0	1770.5	1771.3	1772.1	1771.4	1769.0	1767.4	1796.5	1796.8	1797.0	1796.4
G21.0	1758.2	1757.6	1758.4	1757.5	1754.0	1751.9	1784.7	1783.7	1784.7	1784.6
G22.0	1743.7	1742.4	1742.0	1740.5	1737.6	1736.4	1769.4	1769.0	1768.9	1769.6
G23.0	1728.4	1726.1	1726.0	1725.3	1721.4	1721.0	1752.8	1752.2	1753.6	1754.5
G24.0	1710.3	1709.1	1708.8	1709.5	1707.2	1706.8	1737.8	1737.3	1738.3	1739.2
G25.0	1694.5	1693.1	1694.4	1695.6	1693.4	1692.7	1722.5	1721.7	1722.7	1723.0
G26.0	1677.7	1677.2	1679.4	1679.4	1676.3	1676.1	1709.1	1708.0	1708.0	1706.9
G27.0	1660.9	1662.4	1661.0	1661.1	1659.5	1658.7	1694.9	1694.6	1695.5	1692.0
G28.0	1646.2	1643.2	1642.4	1643.6	1638.8	1640.3	1678.6	1678.2	1679.3	1677.5
G29.0	1627.0	1624.8	1622.8	1622.7	1620.2	1620.4	1661.1	1660.6	1662.6	1659.9
G30.0	1607.7	1603.7	1602.2	1602.5	1600.1	1599.8	1641.3	1641.6	1641.1	1640.1
G31.0	1586.2	1583.9	1582.0	1583.6	1581.6	1580.1	1621.3	1621.4	1621.6	1618.5
G32.0	1565.0	1562.7	1562.0	1562.9	1560.5	1560.4	1601.5	1602.1	1601.7	1599.2
G33.0	1542.2	1541.1	1540.8	1541.9	1542.1	1541.9	1581.4	1581.5	1581.8	1578.6
G34.0	1518.4	1517.8	1519.6	1524.4	1524.4	1524.5	1560.8	1562.0	1560.6	1556.8
G35.0	1492.3	1495.9	1501.4	1506.0	1504.8	1503.7	1542.2	1542.3	1540.9	1536.2
G36.0	1467.2	1475.7	1480.8	1483.5	1481.1	1480.1	1524.0	1523.8	1521.4	1517.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	1445.2	1454.8	1458.2	1460.9	1460.8	1460.1	1502.4	1501.2	1500.2	1497.7
G38.0	1422.2	1429.9	1435.5	1439.5	1437.0	1436.3	1479.8	1479.5	1477.3	1475.1
G39.0	1397.6	1405.6	1414.6	1414.4	1411.9	1411.1	1459.7	1459.2	1457.6	1451.9
G40.0	1371.1	1384.0	1389.1	1387.8	1382.1	1381.2	1435.8	1435.6	1432.5	1431.4
G41.0	1348.3	1357.3	1362.1	1356.6	1349.6	1349.9	1408.6	1407.0	1406.0	1405.3
G42.0	1322.7	1328.6	1328.8	1324.4	1318.3	1321.0	1376.4	1374.9	1375.3	1376.8
G43.0	1295.0	1295.1	1295.4	1294.6	1292.3	1296.9	1345.2	1342.8	1342.8	1343.4
G44.0	1262.5	1261.7	1265.5	1269.4	1271.4	1275.9	1316.4	1315.3	1313.7	1312.6
G45.0	1227.9	1230.9	1239.9	1249.4	1251.6	1253.0	1293.4	1291.4	1288.7	1284.9
G46.0	1195.7	1202.0	1217.9	1226.0	1225.0	1225.7	1273.8	1272.5	1269.4	1261.9
G47.0	1168.1	1179.4	1191.5	1197.1	1199.5	1200.5	1247.6	1248.1	1245.8	1240.9
G48.0	1141.8	1153.5	1161.7	1171.0	1173.1	1172.3	1220.8	1219.9	1219.1	1213.6
G49.0	1116.4	1123.8	1132.6	1139.8	1138.7	1137.7	1193.3	1191.7	1191.1	1184.8
G50.0	1086.3	1094.1	1100.7	1104.9	1108.4	1106.3	1161.3	1160.4	1161.4	1157.6
G51.0	1057.3	1061.7	1065.8	1074.9	1078.3	1079.9	1125.3	1126.8	1125.3	1122.3
G52.0	1026.1	1025.3	1035.4	1047.1	1055.0	1055.2	1097.0	1097.5	1094.8	1089.9
G53.0	990.7	994.1	1008.5	1020.7	1024.0	1023.6	1071.3	1073.3	1069.6	1059.8
G54.0	957.0	966.7	980.0	988.3	997.4	997.7	1042.5	1043.2	1042.8	1034.3
G55.0	928.8	936.2	948.5	963.4	965.4	963.5	1012.8	1013.0	1009.5	1001.0
G56.0	900.4	906.1	920.0	924.6	926.3	928.3	984.9	985.1	984.2	974.3
G57.0	868.2	877.9	881.6	887.7	895.9	899.4	945.4	945.5	944.6	942.3
G58.0	842.2	840.7	847.8	855.7	864.0	869.3	915.0	914.3	910.6	902.7
G59.0	805.9	808.1	815.2	825.4	835.2	839.7	883.7	883.6	879.5	873.2
G60.0	771.2	776.4	786.2	793.9	803.7	807.4	854.1	854.5	849.9	841.5
G61.0	740.6	745.1	752.9	764.9	772.8	776.2	820.1	822.0	816.3	811.6
G62.0	711.9	713.5	724.8	731.3	742.6	750.6	793.8	794.0	789.0	778.4
G63.0	679.5	683.5	691.0	705.9	712.7	717.5	761.0	758.7	752.2	747.0
G64.0	650.1	653.3	663.3	669.9	672.8	675.3	732.1	729.2	725.5	720.1
G65.0	618.6	623.4	623.6	632.3	642.2	648.5	692.6	689.8	690.0	688.2
G66.0	587.8	585.0	591.4	606.4	613.3	617.3	659.5	656.8	651.9	646.5
G67.0	550.0	555.8	563.5	571.8	574.4	579.3	630.7	629.8	625.0	619.9
G68.0	519.1	525.9	528.1	537.6	546.9	552.0	592.8	590.1	589.4	587.3
G69.0	490.0	491.7	499.3	508.0	511.3	516.0	563.5	562.3	556.6	550.0
G70.0	455.4	464.3	466.7	471.0	476.4	481.0	530.2	528.3	525.5	520.9
G71.0	426.9	429.0	430.4	440.5	449.4	453.6	492.9	491.9	487.1	484.6
G72.0	392.4	398.1	404.5	412.9	421.4	427.3	464.3	462.3	457.4	449.3
G73.0	364.4	370.7	378.2	386.3	392.3	397.2	434.8	432.2	429.0	423.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	339.0	346.1	350.7	355.4	362.9	366.1	407.2	403.9	402.3	396.5
G75.0	312.9	317.6	321.2	327.4	333.9	338.6	374.7	373.6	371.3	365.5
G76.0	287.0	291.2	296.4	301.3	308.9	314.2	346.2	344.4	341.4	336.7
G77.0	262.0	267.1	272.5	277.3	282.4	287.3	319.5	318.7	315.5	310.0
G78.0	238.4	245.2	246.7	250.9	256.6	261.3	293.3	291.6	289.3	285.3
G79.0	213.9	219.8	223.5	229.5	234.4	239.2	266.5	264.6	262.6	258.9
G80.0	191.9	199.3	203.3	206.9	212.4	216.9	243.0	241.8	239.7	235.4
G81.0	171.5	179.0	184.4	189.3	194.1	197.8	220.1	218.8	216.8	212.9
G82.0	155.4	161.3	164.3	168.8	170.6	173.8	202.1	200.3	199.1	194.7
G83.0	135.5	139.2	141.9	144.5	145.5	147.9	178.4	178.4	176.2	173.1
G84.0	114.4	115.8	117.0	117.7	115.1	115.3	152.6	151.7	150.8	148.5
G85.0	90.2	88.7	88.0	88.2	87.1	87.2	122.3	120.5	120.2	121.2
G86.0	71.5	71.8	72.1	72.8	73.3	73.3	90.3	89.2	90.2	89.1
G87.0	61.0	61.9	62.7	63.6	63.8	64.1	74.5	74.2	74.3	73.3
G88.0	53.5	54.7	55.7	56.5	56.9	57.1	64.8	64.2	64.5	63.9
G89.0	47.4	48.8	49.7	50.7	51.0	51.3	57.6	57.3	57.5	56.7
G90.0	42.2	43.6	44.7	45.6	46.1	46.4	51.6	51.5	51.5	50.8
G91.0	37.5	39.0	40.2	41.2	41.7	41.9	46.5	46.5	46.4	45.9
G92.0	33.3	35.0	36.1	37.3	37.7	37.9	42.0	42.0	41.8	41.5
G93.0	29.3	31.0	32.3	33.4	33.8	34.2	38.1	38.0	37.9	37.3
G94.0	25.7	27.3	28.7	29.9	30.3	30.6	34.2	34.2	34.2	33.5
G95.0	22.2	23.8	25.3	26.5	26.9	27.3	30.7	30.7	30.6	29.9
G96.0	19.0	20.6	22.0	23.2	23.7	24.2	27.3	27.2	27.2	26.4
G97.0	15.9	17.6	19.0	20.1	20.7	21.1	24.1	24.1	23.8	23.2
G98.0	13.2	14.7	16.0	17.3	17.8	18.2	21.0	21.0	20.7	20.1
G99.0	10.6	12.1	13.4	14.5	15.1	15.5	18.2	18.1	17.9	17.1
G100.0	8.4	9.8	10.9	12.1	12.6	13.1	15.5	15.3	15.1	14.4
G101.0	6.3	7.7	8.8	9.8	10.4	10.8	13.0	12.8	12.6	11.9
G102.0	4.7	5.7	6.8	7.7	8.2	8.6	10.6	10.5	10.2	9.6
G103.0	3.3	4.2	5.1	5.9	6.4	6.8	8.6	8.4	8.2	7.5
G104.0	2.8	3.1	3.8	4.4	4.8	5.1	6.6	6.5	6.2	5.7
G105.0	2.9	3.0	3.1	3.3	3.6	3.8	5.0	4.9	4.7	4.2
G106.0	3.0	3.1	3.2	3.2	3.2	3.2	3.8	3.6	3.5	3.2
G107.0	3.2	3.3	3.3	3.4	3.4	3.4	3.1	3.1	3.1	3.1
G108.0	3.4	3.5	3.5	3.5	3.6	3.6	3.3	3.3	3.3	3.3
G109.0	3.6	3.7	3.7	3.7	3.8	3.8	3.5	3.5	3.5	3.4
G110.0	3.8	3.8	3.8	3.9	3.9	3.9	3.7	3.7	3.7	3.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	4.0	4.0	4.0	4.1	4.1	4.1	3.8	3.8	3.8	3.8
G112.0	4.2	4.2	4.3	4.3	4.3	4.3	4.1	4.0	4.0	4.0
G113.0	4.4	4.4	4.5	4.5	4.5	4.5	4.3	4.2	4.2	4.2
G114.0	4.6	4.6	4.7	4.7	4.7	4.7	4.5	4.4	4.4	4.4
G115.0	4.8	4.8	4.8	4.9	4.9	4.9	4.7	4.7	4.6	4.6
G116.0	5.0	5.0	5.0	5.1	5.1	5.1	4.8	4.8	4.8	4.8
G117.0	5.2	5.2	5.3	5.3	5.3	5.3	5.1	5.0	5.0	5.0
G118.0	5.4	5.4	5.4	5.4	5.5	5.5	5.3	5.3	5.2	5.2
G119.0	5.6	5.6	5.6	5.7	5.7	5.7	5.4	5.4	5.4	5.4
G120.0	5.8	5.8	5.8	5.9	5.9	5.9	5.6	5.6	5.6	5.6
G121.0	6.0	6.0	6.0	6.1	6.1	6.2	5.9	5.8	5.8	5.8
G122.0	6.2	6.2	6.2	6.2	6.3	6.3	6.1	6.1	6.0	6.0
G123.0	6.4	6.4	6.4	6.5	6.5	6.5	6.2	6.2	6.2	6.2
G124.0	6.6	6.6	6.6	6.7	6.7	6.7	6.5	6.4	6.4	6.4
G125.0	6.8	6.8	6.8	6.8	6.8	6.9	6.7	6.7	6.6	6.6
G126.0	7.0	7.0	7.0	7.0	7.1	7.1	6.8	6.8	6.8	6.8
G127.0	7.2	7.2	7.2	7.2	7.3	7.3	7.0	7.0	7.0	7.0
G128.0	7.4	7.4	7.4	7.4	7.5	7.5	7.2	7.2	7.2	7.2
G129.0	7.6	7.6	7.6	7.6	7.7	7.7	7.4	7.4	7.4	7.4
G130.0	7.7	7.8	7.8	7.8	7.8	7.8	7.7	7.6	7.6	7.6
G131.0	7.9	8.0	7.9	8.0	8.0	8.0	7.8	7.8	7.7	7.7
G132.0	8.1	8.2	8.2	8.2	8.2	8.2	8.0	8.0	7.9	7.9
G133.0	8.3	8.4	8.4	8.3	8.4	8.4	8.2	8.2	8.1	8.1
G134.0	8.5	8.5	8.5	8.5	8.5	8.6	8.4	8.4	8.3	8.3
G135.0	8.7	8.7	8.7	8.7	8.7	8.7	8.5	8.5	8.5	8.4
G136.0	8.9	8.9	8.9	8.9	8.9	8.9	8.7	8.7	8.7	8.6
G137.0	9.0	9.1	9.1	9.0	9.0	9.1	8.9	8.9	8.8	8.8
G138.0	9.2	9.2	9.2	9.2	9.2	9.2	9.1	9.1	9.0	9.0
G139.0	9.3	9.4	9.4	9.4	9.4	9.4	9.2	9.2	9.2	9.1
G140.0	9.5	9.6	9.6	9.5	9.5	9.6	9.4	9.4	9.3	9.3
G141.0	9.7	9.7	9.7	9.7	9.7	9.7	9.6	9.5	9.5	9.5
G142.0	9.9	9.9	9.9	9.9	9.8	9.9	9.7	9.7	9.7	9.6
G143.0	10.0	10.0	10.0	10.0	10.0	10.0	9.9	9.9	9.8	9.8
G144.0	10.1	10.2	10.2	10.2	10.1	10.2	10.0	10.0	10.0	9.9
G145.0	10.3	10.3	10.3	10.3	10.3	10.3	10.2	10.1	10.1	10.1
G146.0	10.5	10.5	10.5	10.5	10.4	10.5	10.3	10.3	10.3	10.3
G147.0	10.6	10.6	10.6	10.6	10.6	10.6	10.5	10.4	10.4	10.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	10.7	10.8	10.8	10.8	10.7	10.7	10.6	10.6	10.6	10.6
G149.0	10.8	10.9	10.9	10.9	10.8	10.8	10.8	10.7	10.7	10.7
G150.0	11.0	11.0	11.1	11.1	11.0	11.0	10.9	10.8	10.8	10.8
G151.0	11.1	11.2	11.2	11.2	11.1	11.1	11.0	11.0	11.0	11.0
G152.0	11.3	11.3	11.3	11.3	11.3	11.2	11.1	11.1	11.1	11.1
G153.0	11.4	11.4	11.4	11.4	11.4	11.4	11.3	11.2	11.3	11.3
G154.0	11.5	11.5	11.6	11.6	11.6	11.4	11.4	11.4	11.4	11.4
G155.0	11.7	11.7	11.7	11.7	11.7	11.6	11.5	11.5	11.5	11.5
G156.0	11.8	11.8	11.8	11.9	11.9	11.7	11.6	11.6	11.7	11.7
G157.0	12.0	12.0	12.0	12.0	12.0	11.9	11.7	11.7	11.8	11.8
G158.0	12.1	12.1	12.1	12.1	12.1	12.0	11.9	11.9	12.0	12.0
G159.0	12.3	12.3	12.3	12.3	12.3	12.1	12.0	12.1	12.1	12.1
G160.0	12.4	12.4	12.4	12.4	12.4	12.3	12.1	12.2	12.3	12.3
G161.0	12.5	12.5	12.5	12.5	12.6	12.4	12.3	12.3	12.4	12.3
G162.0	12.6	12.6	12.6	12.6	12.7	12.6	12.4	12.4	12.5	12.5
G163.0	12.7	12.7	12.8	12.8	12.8	12.7	12.5	12.6	12.6	12.6
G164.0	12.9	12.9	12.9	12.9	12.9	12.9	12.6	12.7	12.8	12.7
G165.0	12.9	12.9	13.0	12.9	13.0	13.0	12.8	12.9	12.9	12.8
G166.0	13.1	13.1	13.1	13.1	13.1	13.1	12.9	13.0	13.0	12.9
G167.0	13.2	13.2	13.2	13.2	13.2	13.2	13.0	13.1	13.1	13.0
G168.0	13.3	13.3	13.3	13.3	13.3	13.3	13.1	13.2	13.2	13.1
G169.0	13.3	13.4	13.4	13.4	13.4	13.5	13.2	13.3	13.3	13.2
G170.0	13.4	13.5	13.5	13.5	13.5	13.6	13.4	13.5	13.4	13.3
G171.0	13.5	13.5	13.6	13.6	13.6	13.6	13.5	13.6	13.5	13.4
G172.0	13.6	13.6	13.6	13.7	13.7	13.7	13.6	13.7	13.6	13.5
G173.0	13.7	13.7	13.7	13.7	13.7	13.8	13.7	13.7	13.6	13.5
G174.0	13.7	13.7	13.8	13.8	13.8	13.8	13.8	13.8	13.7	13.6
G175.0	13.7	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.7	13.7
G176.0	13.8	13.8	13.8	13.8	13.8	13.9	13.9	13.8	13.8	13.7
G177.0	13.8	13.8	13.8	13.9	13.9	13.9	14.0	13.9	13.8	13.8
G178.0	13.8	13.8	13.9	13.9	13.9	13.9	14.0	13.9	13.8	13.8
G179.0	13.8	13.8	13.9	13.9	13.9	13.9	14.1	13.9	13.8	13.8
G180.0	13.8	13.8	13.9	13.9	13.9	13.9	14.1	13.9	13.8	13.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	1907.1	1907.2	1906.9	1906.8	1906.3	1905.9	1906.2	1905.7	1905.3	1904.7
G1.0	1907.2	1907.3	1907.3	1907.1	1906.9	1906.4	1906.7	1906.0	1906.2	1905.4
G2.0	1908.2	1908.0	1908.2	1908.2	1907.9	1907.5	1907.8	1907.1	1907.3	1906.2
G3.0	1907.0	1906.8	1906.7	1906.7	1906.7	1906.3	1906.6	1906.0	1906.0	1905.2
G4.0	1906.1	1906.0	1906.1	1905.8	1905.4	1904.5	1904.8	1904.2	1904.2	1903.7
G5.0	1904.3	1904.5	1904.3	1904.3	1904.3	1903.7	1904.0	1903.2	1902.8	1902.1
G6.0	1901.0	1901.4	1901.6	1901.6	1902.1	1901.6	1901.6	1900.9	1900.7	1899.1
G7.0	1896.4	1897.3	1897.6	1897.6	1898.0	1897.9	1898.3	1898.0	1897.8	1897.2
G8.0	1892.3	1892.3	1891.9	1891.5	1892.7	1892.9	1894.3	1893.9	1894.4	1893.6
G9.0	1888.5	1888.5	1888.2	1887.8	1887.2	1886.9	1888.8	1889.1	1889.6	1889.6
G10.0	1883.7	1883.1	1883.0	1882.8	1882.5	1882.3	1881.6	1882.4	1883.3	1883.5
G11.0	1875.8	1875.5	1876.3	1876.7	1876.9	1876.2	1876.4	1874.6	1875.4	1876.8
G12.0	1868.7	1867.9	1867.5	1868.4	1869.9	1870.1	1869.5	1868.7	1867.8	1869.3
G13.0	1860.0	1861.0	1860.6	1860.2	1860.6	1862.2	1862.6	1861.7	1860.3	1861.0
G14.0	1852.0	1851.2	1851.4	1852.8	1851.7	1852.0	1854.8	1854.4	1854.2	1852.4
G15.0	1843.1	1842.8	1842.1	1842.0	1842.9	1843.0	1844.4	1846.3	1845.7	1844.2
G16.0	1835.0	1833.6	1833.4	1832.9	1832.2	1833.8	1835.0	1835.8	1837.7	1837.1
G17.0	1826.3	1825.7	1825.6	1823.7	1823.4	1822.9	1825.3	1825.3	1827.6	1827.4
G18.0	1814.7	1816.2	1816.5	1815.9	1814.7	1813.6	1813.7	1814.8	1816.4	1817.4
G19.0	1805.7	1805.0	1805.0	1806.6	1806.0	1804.4	1803.7	1804.7	1804.2	1805.8
G20.0	1796.6	1796.8	1794.4	1794.8	1796.2	1794.7	1793.6	1791.6	1792.0	1793.1
G21.0	1785.2	1785.6	1784.9	1783.1	1783.7	1784.0	1781.7	1779.4	1779.1	1779.0
G22.0	1771.6	1772.6	1772.9	1772.5	1771.3	1771.7	1769.6	1766.2	1765.3	1765.9
G23.0	1756.0	1756.3	1759.8	1759.0	1759.4	1758.3	1756.8	1752.6	1750.9	1751.3
G24.0	1739.9	1741.9	1743.3	1745.5	1745.7	1743.0	1742.6	1738.9	1737.0	1737.4
G25.0	1724.3	1725.1	1727.2	1728.7	1729.9	1728.8	1726.8	1725.6	1722.1	1721.9
G26.0	1707.1	1708.7	1709.2	1711.3	1712.8	1711.5	1711.1	1710.5	1706.1	1704.3
G27.0	1691.3	1692.0	1692.2	1692.8	1693.4	1695.4	1695.5	1692.9	1689.8	1686.5
G28.0	1676.9	1676.3	1674.2	1674.1	1674.8	1676.5	1677.7	1674.2	1673.2	1668.6
G29.0	1660.0	1660.9	1657.2	1655.5	1654.9	1656.9	1659.1	1656.6	1654.4	1650.2
G30.0	1642.0	1641.8	1640.5	1636.9	1637.0	1638.7	1639.8	1637.3	1633.1	1629.6
G31.0	1621.1	1622.4	1619.7	1620.1	1617.6	1617.1	1618.5	1617.3	1611.5	1607.9
G32.0	1600.5	1600.3	1599.8	1598.7	1598.5	1596.6	1597.9	1596.4	1589.7	1587.3
G33.0	1579.4	1579.2	1577.6	1578.4	1578.7	1575.9	1574.3	1573.9	1568.4	1564.3
G34.0	1558.3	1557.5	1556.8	1557.0	1556.1	1554.4	1551.4	1550.0	1545.5	1541.7
G35.0	1536.2	1534.9	1532.8	1534.8	1534.7	1533.6	1527.3	1525.9	1523.0	1518.7
G36.0	1515.0	1511.5	1510.8	1510.6	1511.5	1510.2	1503.8	1499.3	1502.1	1497.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	1495.9	1490.4	1485.8	1486.0	1487.2	1486.4	1480.9	1475.3	1477.3	1475.7
G38.0	1474.8	1471.1	1465.3	1461.2	1460.6	1459.9	1458.2	1450.5	1452.5	1453.9
G39.0	1449.9	1448.0	1444.2	1436.8	1434.5	1433.9	1432.5	1427.9	1427.9	1430.3
G40.0	1428.1	1421.2	1420.7	1413.9	1406.7	1405.5	1407.8	1404.0	1402.0	1407.1
G41.0	1404.7	1400.1	1393.7	1391.9	1381.1	1378.8	1379.6	1380.6	1376.2	1381.8
G42.0	1377.4	1375.4	1368.8	1365.6	1357.0	1351.1	1351.0	1353.0	1349.7	1354.9
G43.0	1346.7	1347.3	1344.1	1336.8	1330.7	1323.8	1323.0	1325.3	1323.5	1327.8
G44.0	1313.3	1315.9	1317.0	1312.3	1302.9	1297.7	1295.4	1296.3	1297.0	1297.6
G45.0	1282.1	1280.5	1283.5	1283.3	1273.1	1271.5	1266.5	1267.3	1269.1	1268.0
G46.0	1254.1	1248.8	1249.7	1253.6	1249.2	1244.0	1237.1	1237.2	1239.9	1237.7
G47.0	1230.7	1220.9	1216.5	1219.8	1218.7	1213.3	1209.1	1206.5	1210.9	1206.9
G48.0	1207.5	1195.3	1185.3	1183.9	1188.2	1187.2	1182.2	1177.0	1179.5	1177.0
G49.0	1178.5	1171.7	1157.7	1148.2	1152.2	1157.7	1154.0	1146.5	1146.6	1146.7
G50.0	1151.3	1142.2	1133.9	1118.6	1116.5	1127.8	1123.1	1117.3	1113.7	1114.9
G51.0	1119.7	1114.4	1104.9	1091.3	1082.3	1092.4	1094.2	1086.2	1079.5	1082.2
G52.0	1084.8	1083.3	1072.7	1066.3	1052.1	1056.3	1063.3	1055.5	1045.5	1049.2
G53.0	1053.2	1047.1	1041.6	1035.8	1027.8	1020.2	1027.2	1020.8	1012.7	1014.6
G54.0	1025.6	1015.1	1007.6	1006.9	1000.1	988.6	990.7	989.5	979.8	978.8
G55.0	998.1	984.3	973.8	974.3	969.7	959.9	951.6	954.9	945.9	942.1
G56.0	966.3	956.6	943.7	939.6	939.8	932.4	915.9	918.2	910.9	905.0
G57.0	941.1	924.6	917.6	906.2	907.2	900.5	882.3	881.8	877.5	868.1
G58.0	905.2	898.5	883.6	880.2	870.4	868.6	854.3	843.5	844.3	834.1
G59.0	866.8	860.2	854.7	848.6	837.3	834.0	822.2	806.9	810.0	800.4
G60.0	836.0	825.2	817.6	817.3	807.3	795.4	791.3	774.2	772.7	764.5
G61.0	805.2	790.7	782.2	784.1	773.2	761.4	755.8	743.2	733.3	729.1
G62.0	773.1	759.5	747.8	744.0	742.9	731.6	718.8	711.2	695.7	696.3
G63.0	741.4	726.7	718.5	710.8	705.7	697.1	684.2	677.0	659.8	659.9
G64.0	707.6	697.5	686.6	679.6	669.3	667.7	656.3	643.0	628.1	621.9
G65.0	681.9	664.2	657.7	649.5	637.7	631.2	624.5	609.2	596.8	582.8
G66.0	645.0	636.3	624.5	617.2	606.3	595.8	594.2	576.3	563.8	546.9
G67.0	607.1	597.2	596.5	583.8	574.6	562.4	555.6	544.6	530.1	511.4
G68.0	579.2	565.5	555.3	555.7	542.8	532.5	519.5	512.5	494.0	480.1
G69.0	542.0	536.7	526.8	518.1	514.5	500.5	486.9	477.9	462.6	449.7
G70.0	510.8	501.0	495.4	486.9	480.1	470.0	456.8	442.5	431.7	416.5
G71.0	478.6	472.9	462.3	457.3	447.2	439.3	425.0	411.1	400.8	384.4
G72.0	443.6	440.1	433.4	424.7	418.5	404.8	396.8	382.4	367.3	354.6
G73.0	415.1	405.2	399.7	395.1	385.9	376.7	363.6	351.6	335.6	325.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	388.1	379.8	368.8	362.8	356.6	346.4	334.4	324.6	307.7	296.7
G75.0	359.2	353.6	342.5	334.3	324.2	317.9	307.8	294.7	280.5	267.3
G76.0	331.7	325.7	316.5	308.8	296.5	288.5	279.5	268.8	254.8	241.0
G77.0	303.8	295.8	289.5	283.5	272.8	261.5	252.5	242.0	227.6	216.1
G78.0	280.4	272.8	263.7	257.4	247.3	238.2	225.1	216.8	204.2	192.9
G79.0	254.1	248.6	241.3	233.7	223.7	214.8	203.0	190.8	181.0	169.4
G80.0	229.7	223.9	216.7	211.5	202.3	191.8	182.3	169.7	157.6	149.2
G81.0	208.4	202.9	195.1	188.9	181.3	171.4	161.4	150.9	137.7	129.1
G82.0	188.5	182.8	175.0	169.0	160.0	151.2	143.1	132.1	120.4	109.5
G83.0	168.8	165.2	157.9	150.4	142.2	133.1	124.5	115.3	104.6	93.6
G84.0	145.9	143.1	136.7	133.1	125.9	117.4	108.7	99.3	89.4	79.7
G85.0	120.1	118.8	116.3	112.6	107.8	102.1	94.3	85.5	76.0	67.2
G86.0	91.0	90.5	90.9	91.4	88.5	84.8	79.6	73.0	64.0	55.3
G87.0	73.5	72.4	71.3	70.5	69.0	67.4	64.5	59.8	53.1	45.9
G88.0	63.1	62.6	61.0	59.6	57.3	54.8	51.4	47.5	42.3	36.5
G89.0	56.2	55.0	53.5	52.0	49.5	46.8	43.2	39.2	34.1	28.4
G90.0	50.2	49.0	47.4	45.6	43.3	40.3	36.8	32.8	27.8	22.5
G91.0	45.0	43.8	42.1	40.4	37.9	35.0	31.4	27.4	22.6	17.7
G92.0	40.5	39.2	37.5	35.6	33.0	30.2	26.5	22.7	18.2	13.6
G93.0	36.4	35.2	33.3	31.3	28.7	25.8	22.4	18.4	14.3	10.2
G94.0	32.6	31.2	29.3	27.2	24.7	21.7	18.4	14.8	10.8	7.3
G95.0	29.0	27.5	25.7	23.6	20.9	18.2	15.0	11.7	8.2	5.0
G96.0	25.5	24.0	22.2	20.0	17.5	14.9	11.9	8.7	5.7	3.1
G97.0	22.2	20.8	18.9	16.9	14.5	11.9	9.1	6.4	3.8	1.7
G98.0	19.0	17.6	15.8	13.9	11.6	9.2	6.8	4.3	2.2	1.3
G99.0	16.1	14.8	13.1	11.3	9.1	6.9	4.7	2.7	1.5	1.3
G100.0	13.4	12.1	10.5	8.8	6.9	4.9	3.0	1.8	1.5	1.5
G101.0	11.0	9.8	8.2	6.7	4.9	3.3	2.1	1.8	1.6	1.6
G102.0	8.7	7.6	6.2	4.8	3.3	2.3	2.1	1.9	1.8	1.8
G103.0	6.7	5.7	4.5	3.4	2.5	2.3	2.1	2.0	2.0	1.9
G104.0	5.0	4.1	3.2	2.6	2.5	2.3	2.3	2.2	2.2	2.1
G105.0	3.7	3.0	2.8	2.7	2.6	2.5	2.4	2.4	2.3	2.3
G106.0	3.0	2.9	2.9	2.8	2.7	2.7	2.6	2.5	2.5	2.4
G107.0	3.1	3.0	3.0	3.0	2.9	2.8	2.8	2.7	2.7	2.6
G108.0	3.2	3.2	3.1	3.1	3.0	3.0	3.0	2.9	2.9	2.8
G109.0	3.4	3.4	3.3	3.3	3.2	3.2	3.1	3.1	3.0	3.0
G110.0	3.6	3.6	3.5	3.5	3.4	3.4	3.4	3.3	3.2	3.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	3.8	3.8	3.7	3.7	3.7	3.6	3.5	3.5	3.5	3.4
G112.0	4.0	3.9	3.9	3.9	3.8	3.8	3.8	3.7	3.7	3.6
G113.0	4.2	4.1	4.1	4.1	4.0	4.0	3.9	3.9	3.8	3.8
G114.0	4.4	4.4	4.3	4.3	4.2	4.2	4.1	4.1	4.0	4.0
G115.0	4.6	4.6	4.5	4.5	4.4	4.4	4.3	4.3	4.2	4.2
G116.0	4.7	4.7	4.7	4.7	4.7	4.6	4.6	4.5	4.5	4.4
G117.0	5.0	4.9	4.9	4.9	4.8	4.8	4.7	4.7	4.7	4.6
G118.0	5.2	5.2	5.1	5.1	5.0	5.0	5.0	4.9	4.8	4.8
G119.0	5.3	5.3	5.3	5.3	5.3	5.2	5.1	5.1	5.1	5.0
G120.0	5.6	5.5	5.5	5.5	5.4	5.4	5.3	5.3	5.3	5.2
G121.0	5.8	5.7	5.7	5.7	5.6	5.6	5.6	5.5	5.5	5.4
G122.0	6.0	6.0	5.9	5.9	5.9	5.8	5.8	5.7	5.7	5.6
G123.0	6.2	6.2	6.1	6.1	6.1	6.0	6.0	6.0	5.9	5.9
G124.0	6.4	6.3	6.3	6.3	6.2	6.2	6.2	6.2	6.1	6.1
G125.0	6.6	6.5	6.5	6.5	6.5	6.4	6.4	6.3	6.3	6.3
G126.0	6.8	6.8	6.7	6.7	6.7	6.6	6.6	6.6	6.5	6.5
G127.0	6.9	6.9	6.9	6.9	6.8	6.8	6.8	6.8	6.8	6.7
G128.0	7.1	7.1	7.1	7.1	7.0	7.0	7.0	7.0	6.9	6.9
G129.0	7.3	7.3	7.3	7.3	7.2	7.2	7.2	7.2	7.1	7.1
G130.0	7.5	7.5	7.5	7.5	7.5	7.4	7.4	7.4	7.4	7.3
G131.0	7.7	7.7	7.7	7.7	7.7	7.6	7.6	7.6	7.6	7.5
G132.0	7.9	7.9	7.9	7.9	7.8	7.8	7.8	7.8	7.7	7.7
G133.0	8.1	8.1	8.1	8.1	8.0	8.0	8.0	8.0	7.9	7.9
G134.0	8.3	8.3	8.3	8.3	8.2	8.2	8.2	8.2	8.1	8.1
G135.0	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.3	8.3
G136.0	8.6	8.6	8.6	8.6	8.6	8.5	8.5	8.5	8.5	8.5
G137.0	8.8	8.8	8.8	8.8	8.7	8.7	8.7	8.7	8.7	8.7
G138.0	9.0	9.0	9.0	8.9	8.9	8.9	8.9	8.9	8.9	8.8
G139.0	9.1	9.1	9.1	9.1	9.1	9.1	9.1	9.1	9.0	9.0
G140.0	9.3	9.3	9.3	9.3	9.3	9.2	9.2	9.2	9.2	9.2
G141.0	9.5	9.5	9.5	9.4	9.4	9.4	9.4	9.4	9.4	9.4
G142.0	9.6	9.7	9.6	9.6	9.6	9.6	9.6	9.5	9.5	9.5
G143.0	9.8	9.8	9.8	9.8	9.8	9.8	9.7	9.7	9.7	9.7
G144.0	9.9	10.0	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9
G145.0	10.1	10.1	10.1	10.1	10.0	10.0	10.0	10.0	10.0	10.0
G146.0	10.3	10.3	10.3	10.2	10.2	10.2	10.2	10.2	10.2	10.2
G147.0	10.4	10.5	10.4	10.4	10.4	10.3	10.3	10.3	10.4	10.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	10.6	10.6	10.6	10.5	10.5	10.5	10.5	10.5	10.5	10.6
G149.0	10.7	10.8	10.7	10.6	10.6	10.6	10.6	10.6	10.7	10.8
G150.0	10.9	10.9	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.9
G151.0	11.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9	11.0	11.0
G152.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2
G153.0	11.3	11.3	11.2	11.2	11.2	11.2	11.2	11.3	11.3	11.3
G154.0	11.4	11.4	11.4	11.3	11.4	11.4	11.4	11.4	11.4	11.5
G155.0	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.6	11.6
G156.0	11.7	11.7	11.6	11.6	11.6	11.6	11.6	11.7	11.7	11.8
G157.0	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.9	11.9
G158.0	12.0	11.9	11.9	11.9	11.9	11.9	11.9	12.0	12.0	12.0
G159.0	12.1	12.1	12.0	12.0	12.0	12.1	12.1	12.1	12.1	12.1
G160.0	12.2	12.2	12.1	12.1	12.2	12.2	12.2	12.3	12.3	12.3
G161.0	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.4	12.4	12.4
G162.0	12.4	12.4	12.4	12.4	12.4	12.4	12.5	12.5	12.5	12.5
G163.0	12.5	12.6	12.5	12.5	12.5	12.6	12.6	12.6	12.6	12.6
G164.0	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7
G165.0	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.8
G166.0	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
G167.0	13.0	13.0	13.0	13.1	13.0	13.0	13.0	12.9	13.0	13.0
G168.0	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1
G169.0	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.1	13.1	13.1
G170.0	13.3	13.3	13.3	13.3	13.3	13.3	13.2	13.2	13.2	13.2
G171.0	13.4	13.4	13.4	13.4	13.4	13.4	13.3	13.3	13.3	13.3
G172.0	13.5	13.5	13.5	13.5	13.5	13.4	13.4	13.4	13.4	13.4
G173.0	13.6	13.6	13.6	13.5	13.5	13.5	13.5	13.5	13.5	13.5
G174.0	13.6	13.7	13.6	13.6	13.6	13.6	13.6	13.5	13.5	13.5
G175.0	13.7	13.7	13.7	13.7	13.7	13.6	13.6	13.6	13.6	13.6
G176.0	13.8	13.8	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7
G177.0	13.8	13.8	13.8	13.7	13.7	13.7	13.7	13.7	13.7	13.7
G178.0	13.8	13.8	13.8	13.8	13.8	13.8	13.7	13.7	13.8	13.8
G179.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8
G180.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	1905.2	1905.1	1904.5	1904.5	1904.0	1904.7	1905.1	1905.2	1905.6	1906.4
G1.0	1906.0	1906.0	1905.7	1905.7	1905.2	1905.4	1905.3	1905.4	1905.6	1906.2
G2.0	1906.7	1906.6	1905.9	1905.8	1905.2	1905.2	1904.9	1905.3	1905.5	1906.4
G3.0	1905.6	1905.9	1905.5	1905.3	1904.5	1904.4	1904.3	1904.9	1905.0	1905.8
G4.0	1904.4	1904.3	1903.9	1903.8	1902.8	1903.0	1903.1	1903.7	1903.8	1905.2
G5.0	1902.6	1902.4	1902.0	1902.0	1900.7	1901.2	1901.3	1902.0	1903.0	1905.2
G6.0	1899.1	1899.1	1899.1	1899.1	1897.6	1898.4	1898.6	1899.8	1901.0	1902.0
G7.0	1895.9	1895.5	1895.4	1895.5	1894.0	1895.1	1895.4	1897.2	1897.7	1898.8
G8.0	1893.4	1892.1	1891.9	1891.7	1890.4	1890.9	1891.7	1893.8	1893.4	1893.3
G9.0	1889.3	1887.6	1886.7	1886.4	1884.8	1885.5	1886.4	1888.2	1887.8	1887.0
G10.0	1883.9	1883.2	1881.1	1880.8	1879.3	1879.8	1881.6	1882.8	1881.0	1881.5
G11.0	1878.2	1877.9	1875.7	1875.4	1873.7	1874.5	1876.0	1876.2	1873.7	1875.8
G12.0	1871.2	1871.6	1869.9	1869.6	1867.8	1867.9	1870.3	1869.4	1867.4	1869.4
G13.0	1863.8	1864.9	1864.0	1863.1	1861.2	1861.8	1863.0	1861.8	1861.5	1862.5
G14.0	1855.1	1857.5	1857.4	1855.8	1854.1	1854.9	1856.0	1853.0	1854.1	1853.3
G15.0	1846.6	1848.9	1849.8	1848.1	1846.7	1847.6	1848.2	1846.1	1846.8	1845.9
G16.0	1837.4	1840.3	1841.1	1839.4	1838.5	1839.6	1839.9	1838.6	1838.5	1838.8
G17.0	1827.7	1829.9	1831.3	1830.3	1829.1	1830.4	1830.7	1830.2	1828.4	1829.9
G18.0	1816.7	1818.0	1820.3	1819.4	1818.4	1820.2	1820.3	1820.7	1819.0	1820.2
G19.0	1805.8	1806.3	1809.1	1807.8	1807.1	1809.2	1808.8	1810.2	1808.1	1810.4
G20.0	1793.4	1793.9	1797.4	1796.2	1795.3	1798.0	1797.4	1798.7	1796.9	1798.9
G21.0	1780.8	1780.5	1784.6	1784.3	1783.1	1786.2	1784.6	1785.8	1783.8	1786.7
G22.0	1767.5	1767.3	1772.2	1772.8	1770.9	1774.4	1773.0	1772.0	1770.4	1773.9
G23.0	1754.6	1754.6	1759.2	1760.3	1757.8	1761.6	1760.6	1758.5	1757.8	1759.5
G24.0	1740.7	1740.4	1743.9	1745.5	1743.1	1746.3	1746.0	1744.1	1744.7	1746.2
G25.0	1724.4	1724.7	1727.7	1729.9	1728.0	1730.6	1729.9	1729.3	1730.3	1732.4
G26.0	1707.3	1708.2	1710.7	1712.2	1710.1	1712.6	1712.1	1711.8	1714.2	1717.4
G27.0	1689.9	1689.9	1692.2	1694.4	1692.4	1694.6	1694.2	1693.7	1696.7	1700.9
G28.0	1669.8	1671.7	1672.8	1674.5	1671.6	1673.3	1674.7	1674.8	1677.4	1681.7
G29.0	1650.5	1650.8	1651.6	1653.7	1652.3	1653.9	1653.3	1655.1	1658.1	1662.6
G30.0	1628.5	1630.0	1631.1	1632.9	1632.3	1633.0	1632.4	1635.0	1638.7	1642.7
G31.0	1607.5	1607.6	1609.9	1612.8	1611.2	1611.5	1610.1	1613.9	1617.6	1622.1
G32.0	1586.3	1586.4	1588.3	1592.0	1590.7	1592.1	1589.3	1593.5	1596.4	1601.4
G33.0	1563.8	1564.4	1569.3	1572.3	1570.8	1572.0	1569.1	1572.8	1573.4	1581.2
G34.0	1542.5	1544.3	1548.5	1550.8	1549.3	1550.9	1548.8	1552.2	1552.3	1558.5
G35.0	1519.6	1522.4	1527.2	1530.6	1528.9	1530.5	1527.6	1531.0	1531.7	1536.5
G36.0	1498.0	1501.4	1505.3	1509.1	1508.2	1508.3	1506.8	1509.2	1510.4	1515.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	1475.6	1477.6	1484.1	1486.8	1485.4	1486.0	1484.8	1487.9	1488.1	1492.7
G38.0	1453.3	1453.8	1460.3	1463.2	1461.9	1461.8	1462.0	1466.1	1466.3	1467.0
G39.0	1430.2	1429.1	1436.6	1439.6	1438.8	1438.5	1438.0	1442.9	1443.4	1443.0
G40.0	1405.3	1404.9	1411.2	1414.6	1412.9	1412.7	1415.1	1418.5	1419.6	1419.2
G41.0	1380.7	1378.9	1385.2	1388.8	1389.7	1389.3	1389.4	1394.8	1393.1	1394.6
G42.0	1355.5	1354.1	1357.6	1361.8	1362.4	1364.0	1365.2	1368.3	1368.0	1367.3
G43.0	1330.3	1327.7	1330.5	1334.4	1336.2	1337.4	1338.8	1342.8	1342.1	1341.9
G44.0	1302.9	1301.1	1302.2	1306.8	1308.0	1310.8	1311.2	1316.4	1315.3	1315.8
G45.0	1274.0	1272.9	1272.3	1277.3	1279.6	1283.5	1282.7	1287.4	1286.9	1287.0
G46.0	1244.6	1243.6	1243.8	1248.0	1251.6	1254.4	1254.4	1258.3	1258.3	1255.4
G47.0	1211.7	1213.2	1212.2	1216.0	1220.4	1224.0	1223.4	1226.7	1226.5	1224.9
G48.0	1180.6	1181.3	1181.8	1185.1	1188.9	1192.6	1191.0	1195.6	1195.2	1191.4
G49.0	1147.9	1147.7	1148.9	1153.6	1156.9	1159.4	1158.9	1161.7	1161.3	1159.4
G50.0	1115.0	1116.3	1116.0	1122.0	1124.9	1127.3	1127.7	1128.3	1127.3	1127.4
G51.0	1080.7	1082.7	1082.0	1089.0	1090.5	1094.1	1095.4	1095.2	1090.5	1094.7
G52.0	1047.7	1049.5	1048.5	1055.9	1059.1	1060.7	1062.4	1062.3	1056.1	1062.7
G53.0	1012.2	1014.1	1014.0	1021.5	1026.0	1027.4	1027.4	1028.4	1022.3	1028.7
G54.0	978.8	980.3	979.7	988.6	992.7	992.5	993.5	995.2	987.9	996.0
G55.0	944.5	943.8	944.2	953.6	957.3	957.7	958.4	960.9	953.1	959.7
G56.0	908.0	908.4	910.9	918.2	920.8	923.0	923.6	924.0	917.7	924.8
G57.0	872.6	873.2	875.2	881.8	884.9	886.2	888.0	886.8	882.8	887.8
G58.0	836.8	835.1	840.8	845.6	848.0	851.4	851.1	851.6	848.2	851.2
G59.0	800.0	798.6	804.1	807.8	810.5	813.1	814.7	814.7	812.7	813.0
G60.0	763.1	760.6	766.3	770.0	772.7	777.2	777.3	775.6	774.6	778.2
G61.0	725.7	724.1	727.0	732.0	736.0	738.7	737.7	736.2	738.2	741.4
G62.0	687.2	687.2	689.6	693.5	698.3	700.0	698.4	696.9	700.2	706.3
G63.0	650.3	650.0	650.8	654.9	659.6	663.1	659.7	658.7	662.3	669.3
G64.0	615.3	612.7	613.6	617.5	622.8	625.4	622.5	622.5	623.3	635.4
G65.0	578.5	576.0	576.9	579.2	583.8	586.9	584.9	586.3	586.6	598.5
G66.0	543.5	537.8	540.9	542.0	548.2	550.7	547.2	549.5	548.9	561.8
G67.0	509.3	502.3	503.1	504.1	508.6	512.2	510.4	513.2	513.6	525.3
G68.0	475.1	465.6	466.9	467.6	469.1	474.0	473.1	476.7	479.6	491.6
G69.0	438.9	430.3	429.9	429.6	433.6	436.5	435.7	440.2	446.3	458.8
G70.0	404.0	398.0	396.2	395.3	399.0	401.4	399.4	406.3	411.9	424.9
G71.0	371.0	364.6	361.8	359.8	362.9	364.8	364.8	372.1	379.1	392.5
G72.0	341.6	333.7	329.5	326.5	329.0	332.1	331.0	339.2	347.6	363.0
G73.0	313.3	302.4	297.1	293.8	295.5	298.4	300.4	307.2	318.0	333.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	284.3	271.2	266.5	262.5	263.9	266.8	268.2	277.6	287.2	304.3
G75.0	255.8	242.8	237.1	233.0	233.8	236.3	239.3	248.5	260.6	275.5
G76.0	230.1	216.4	209.6	206.0	205.8	208.5	211.7	221.5	233.4	247.8
G77.0	205.7	192.6	184.3	179.7	179.3	181.0	185.7	196.1	207.9	220.2
G78.0	180.4	168.5	161.3	155.4	154.5	156.8	160.9	172.1	184.2	195.3
G79.0	157.6	147.3	138.1	133.0	131.7	133.5	139.0	149.1	160.2	172.3
G80.0	137.0	126.3	117.6	111.9	110.8	112.8	117.8	129.1	138.7	151.6
G81.0	117.9	107.1	98.5	93.4	91.8	93.5	99.8	109.7	119.1	131.6
G82.0	100.3	89.6	81.7	75.9	74.6	76.4	82.0	92.2	101.4	114.0
G83.0	84.4	74.4	66.9	61.0	59.3	61.5	67.1	76.3	86.0	97.1
G84.0	69.8	60.6	53.1	47.6	45.8	47.9	53.4	61.8	71.5	82.8
G85.0	57.7	48.6	41.1	35.8	33.9	36.0	41.5	49.8	59.3	69.8
G86.0	47.3	38.0	31.1	25.8	24.1	26.1	31.2	39.2	48.0	58.3
G87.0	37.7	29.6	22.3	17.1	15.4	17.4	22.4	30.5	38.8	48.1
G88.0	29.6	22.1	15.5	10.6	8.7	10.6	15.7	23.0	30.7	39.0
G89.0	22.6	16.2	10.3	5.7	3.8	5.7	10.2	16.9	23.8	31.4
G90.0	17.0	11.3	6.4	2.6	0.6	2.4	6.3	11.9	18.1	24.7
G91.0	12.6	7.7	3.7	1.1	0.1	0.8	3.5	8.1	13.5	19.4
G92.0	9.0	4.9	2.0	0.3	0.1	0.2	1.8	5.3	9.9	15.1
G93.0	6.3	3.0	0.9	0.3	0.3	0.3	0.6	3.0	6.8	11.5
G94.0	4.0	1.5	0.4	0.4	0.4	0.4	0.4	1.2	4.0	8.3
G95.0	2.3	0.8	0.6	0.5	0.5	0.5	0.5	0.6	2.0	5.2
G96.0	1.2	0.8	0.7	0.7	0.7	0.7	0.7	0.7	1.0	3.0
G97.0	1.0	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.9	1.9
G98.0	1.1	1.0	1.0	1.0	0.9	0.9	0.9	0.9	1.0	1.3
G99.0	1.2	1.2	1.2	1.1	1.1	1.1	1.1	1.1	1.1	1.2
G100.0	1.4	1.4	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
G101.0	1.5	1.5	1.5	1.5	1.4	1.4	1.5	1.4	1.5	1.5
G102.0	1.7	1.7	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
G103.0	1.9	1.9	1.8	1.8	1.8	1.7	1.8	1.8	1.8	1.8
G104.0	2.1	2.0	2.0	2.0	1.9	1.9	1.9	1.9	2.0	2.0
G105.0	2.2	2.2	2.2	2.2	2.1	2.1	2.1	2.1	2.2	2.2
G106.0	2.4	2.4	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
G107.0	2.6	2.6	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
G108.0	2.8	2.8	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
G109.0	3.0	3.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
G110.0	3.2	3.1	3.1	3.1	3.1	3.0	3.0	3.0	3.1	3.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	3.4	3.3	3.3	3.3	3.3	3.3	3.2	3.2	3.3	3.3
G112.0	3.6	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
G113.0	3.8	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
G114.0	3.9	3.9	3.9	3.9	3.9	3.9	3.8	3.8	3.9	3.9
G115.0	4.2	4.1	4.1	4.1	4.1	4.1	4.1	4.0	4.1	4.1
G116.0	4.4	4.4	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
G117.0	4.6	4.6	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
G118.0	4.8	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7
G119.0	4.9	5.0	4.9	4.9	4.9	4.9	4.9	4.9	4.9	4.9
G120.0	5.2	5.2	5.2	5.2	5.2	5.1	5.1	5.1	5.1	5.1
G121.0	5.4	5.4	5.3	5.4	5.3	5.3	5.3	5.3	5.3	5.3
G122.0	5.6	5.6	5.6	5.6	5.5	5.5	5.5	5.5	5.5	5.5
G123.0	5.8	5.8	5.8	5.8	5.8	5.8	5.8	5.7	5.7	5.7
G124.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	5.9	5.9	6.0
G125.0	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
G126.0	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.3	6.3
G127.0	6.6	6.7	6.7	6.7	6.7	6.6	6.6	6.6	6.6	6.6
G128.0	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8
G129.0	7.1	7.1	7.1	7.1	7.1	7.0	7.0	7.0	7.0	7.0
G130.0	7.3	7.3	7.3	7.3	7.3	7.3	7.2	7.2	7.2	7.2
G131.0	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.4	7.4	7.4
G132.0	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.7	7.6	7.6
G133.0	7.9	7.9	7.9	7.9	7.9	7.9	7.8	7.8	7.8	7.8
G134.0	8.1	8.1	8.1	8.1	8.1	8.1	8.0	8.0	8.0	8.0
G135.0	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.2	8.2	8.2
G136.0	8.4	8.5	8.5	8.5	8.5	8.5	8.4	8.4	8.4	8.4
G137.0	8.7	8.7	8.7	8.7	8.7	8.7	8.6	8.6	8.6	8.6
G138.0	8.8	8.9	8.9	8.9	8.9	8.9	8.9	8.8	8.8	8.8
G139.0	9.0	9.1	9.1	9.1	9.1	9.1	9.0	9.0	9.0	9.0
G140.0	9.2	9.2	9.2	9.3	9.3	9.3	9.2	9.2	9.1	9.1
G141.0	9.4	9.4	9.4	9.4	9.5	9.5	9.4	9.4	9.3	9.3
G142.0	9.6	9.6	9.6	9.6	9.7	9.6	9.6	9.6	9.5	9.5
G143.0	9.8	9.8	9.8	9.8	9.9	9.8	9.8	9.7	9.7	9.7
G144.0	9.9	9.9	9.9	10.0	10.0	10.0	9.9	9.9	9.9	9.9
G145.0	10.1	10.1	10.1	10.1	10.2	10.1	10.1	10.1	10.1	10.0
G146.0	10.3	10.3	10.3	10.3	10.3	10.3	10.3	10.2	10.2	10.2
G147.0	10.4	10.5	10.5	10.5	10.5	10.5	10.5	10.4	10.4	10.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	10.6	10.6	10.6	10.6	10.7	10.6	10.6	10.6	10.6	10.6
G149.0	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.7
G150.0	10.9	10.9	11.0	11.0	11.0	11.0	10.9	10.9	10.9	10.9
G151.0	11.1	11.1	11.1	11.2	11.2	11.1	11.1	11.1	11.0	11.0
G152.0	11.2	11.3	11.3	11.3	11.3	11.3	11.3	11.2	11.2	11.2
G153.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.3
G154.0	11.5	11.5	11.6	11.6	11.6	11.5	11.5	11.5	11.5	11.4
G155.0	11.6	11.7	11.7	11.7	11.7	11.7	11.7	11.6	11.6	11.6
G156.0	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.7
G157.0	11.9	12.0	12.0	12.0	12.0	12.0	12.0	11.9	11.9	11.9
G158.0	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.0	12.0
G159.0	12.1	12.2	12.3	12.3	12.3	12.2	12.2	12.2	12.1	12.1
G160.0	12.3	12.3	12.4	12.4	12.3	12.3	12.3	12.3	12.3	12.3
G161.0	12.4	12.4	12.5	12.5	12.5	12.5	12.5	12.4	12.4	12.4
G162.0	12.5	12.5	12.6	12.6	12.6	12.6	12.6	12.6	12.5	12.5
G163.0	12.6	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.6	12.6
G164.0	12.7	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.8	12.7
G165.0	12.8	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.8
G166.0	12.9	12.9	12.9	13.0	13.0	13.1	13.1	13.0	12.9	12.9
G167.0	13.0	13.0	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.0
G168.0	13.1	13.1	13.1	13.1	13.2	13.2	13.2	13.2	13.1	13.1
G169.0	13.2	13.2	13.2	13.2	13.3	13.3	13.3	13.3	13.2	13.2
G170.0	13.2	13.3	13.3	13.3	13.4	13.4	13.4	13.3	13.3	13.3
G171.0	13.3	13.3	13.4	13.4	13.5	13.5	13.5	13.4	13.4	13.3
G172.0	13.4	13.4	13.5	13.5	13.6	13.6	13.6	13.5	13.4	13.4
G173.0	13.5	13.5	13.5	13.6	13.7	13.7	13.6	13.5	13.5	13.5
G174.0	13.6	13.6	13.6	13.7	13.7	13.7	13.7	13.6	13.6	13.6
G175.0	13.6	13.7	13.7	13.7	13.8	13.8	13.7	13.7	13.6	13.6
G176.0	13.7	13.7	13.7	13.8	13.8	13.8	13.7	13.7	13.7	13.7
G177.0	13.7	13.8	13.8	13.8	13.8	13.8	13.8	13.7	13.7	13.7
G178.0	13.8	13.8	13.8	13.8	13.9	13.8	13.8	13.8	13.7	13.7
G179.0	13.8	13.8	13.8	13.8	13.9	13.8	13.8	13.8	13.8	13.8
G180.0	13.8	13.8	13.8	13.8	13.9	13.8	13.8	13.8	13.8	13.8

 C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

 Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	1906.9	1907.0	1906.7	1907.3	1907.1	1907.4	1907.7	1907.9	1908.4	1908.9
G1.0	1907.0	1907.0	1906.9	1907.6	1907.3	1907.7	1908.4	1908.1	1908.5	1908.9
G2.0	1907.1	1907.0	1907.0	1907.9	1907.4	1907.7	1907.9	1907.9	1908.3	1908.9
G3.0	1906.3	1906.7	1906.8	1908.1	1908.1	1908.4	1908.6	1908.9	1909.4	1909.6
G4.0	1906.6	1907.5	1907.0	1907.4	1907.1	1907.3	1906.7	1906.3	1906.5	1906.7
G5.0	1905.8	1905.7	1904.8	1904.6	1903.5	1903.1	1902.8	1902.5	1903.1	1903.4
G6.0	1902.3	1901.6	1900.1	1899.7	1900.2	1900.8	1901.3	1901.3	1902.0	1902.2
G7.0	1898.0	1896.7	1896.2	1896.7	1897.4	1898.3	1897.9	1897.6	1897.3	1897.6
G8.0	1892.1	1893.4	1893.0	1893.6	1892.7	1892.2	1893.2	1893.8	1894.4	1894.0
G9.0	1887.9	1888.7	1888.1	1887.8	1888.2	1889.4	1888.7	1889.0	1890.1	1890.3
G10.0	1882.4	1882.6	1881.4	1883.1	1883.8	1883.9	1884.3	1884.6	1886.2	1886.3
G11.0	1876.6	1875.1	1876.8	1877.1	1877.7	1879.0	1879.2	1880.0	1880.6	1880.2
G12.0	1869.0	1869.5	1869.8	1870.7	1871.6	1873.3	1873.1	1873.3	1874.3	1875.1
G13.0	1862.1	1862.3	1863.1	1863.7	1865.3	1866.5	1867.6	1867.8	1868.4	1868.0
G14.0	1855.4	1855.5	1856.0	1857.1	1858.0	1860.3	1860.8	1860.1	1859.4	1859.6
G15.0	1846.7	1847.5	1848.7	1848.9	1851.9	1852.1	1851.3	1852.0	1851.2	1852.4
G16.0	1839.4	1839.8	1840.1	1842.6	1843.0	1842.0	1842.0	1843.1	1843.9	1845.1
G17.0	1831.2	1831.6	1832.3	1833.9	1833.1	1832.7	1832.4	1835.1	1835.6	1834.4
G18.0	1821.8	1821.9	1824.3	1823.4	1822.9	1822.6	1823.3	1823.0	1824.5	1825.1
G19.0	1812.1	1812.8	1814.1	1812.8	1812.9	1813.8	1811.5	1813.4	1813.7	1811.9
G20.0	1800.4	1802.2	1803.2	1802.5	1802.8	1801.3	1801.4	1800.4	1801.5	1802.1
G21.0	1788.4	1789.4	1791.1	1792.3	1791.1	1791.1	1788.3	1789.1	1790.5	1789.8
G22.0	1775.7	1776.9	1778.4	1779.8	1780.3	1777.2	1777.1	1777.3	1776.9	1776.6
G23.0	1763.3	1763.2	1766.6	1765.6	1766.4	1765.4	1765.2	1763.9	1764.1	1762.3
G24.0	1747.3	1748.8	1752.0	1752.5	1751.4	1753.5	1750.9	1750.1	1749.2	1744.5
G25.0	1732.5	1735.0	1736.8	1735.5	1738.5	1738.8	1736.7	1734.0	1731.2	1729.4
G26.0	1718.1	1720.3	1721.1	1720.0	1722.8	1723.2	1720.6	1716.0	1714.4	1712.8
G27.0	1701.3	1702.6	1703.4	1704.0	1706.1	1705.8	1701.1	1699.0	1696.8	1698.0
G28.0	1684.7	1686.8	1685.6	1686.4	1687.7	1685.9	1683.2	1681.4	1681.8	1683.0
G29.0	1667.2	1667.8	1669.3	1668.4	1668.6	1666.8	1664.6	1666.4	1666.5	1669.2
G30.0	1646.3	1647.2	1650.0	1650.4	1647.6	1645.3	1648.5	1649.5	1650.3	1651.8
G31.0	1626.0	1626.4	1629.7	1629.1	1627.3	1628.2	1630.0	1631.7	1631.3	1633.3
G32.0	1604.9	1605.8	1607.9	1607.4	1605.8	1608.2	1610.7	1612.0	1612.3	1613.3
G33.0	1582.3	1583.1	1586.1	1585.5	1587.4	1590.4	1589.8	1592.9	1592.4	1592.3
G34.0	1559.7	1560.9	1561.2	1562.2	1566.3	1568.9	1569.9	1571.8	1571.3	1570.3
G35.0	1537.5	1537.8	1537.7	1541.3	1547.0	1548.6	1547.3	1551.2	1549.3	1547.3
G36.0	1515.2	1513.8	1512.6	1518.4	1524.7	1524.7	1526.8	1527.5	1527.5	1524.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	1491.4	1486.8	1490.0	1496.3	1501.0	1501.6	1502.0	1505.0	1503.0	1500.8
G38.0	1467.4	1462.8	1466.3	1471.4	1475.0	1477.2	1479.1	1480.2	1479.4	1478.1
G39.0	1442.7	1437.8	1442.5	1446.0	1449.4	1452.4	1453.3	1455.1	1456.3	1454.3
G40.0	1417.5	1412.9	1419.9	1420.4	1421.4	1426.4	1427.5	1430.4	1431.8	1434.5
G41.0	1389.5	1388.7	1396.0	1393.1	1393.8	1398.7	1401.2	1405.8	1410.5	1410.8
G42.0	1362.9	1362.8	1367.4	1366.0	1367.4	1371.2	1373.3	1382.3	1385.9	1388.0
G43.0	1336.1	1340.0	1339.0	1337.5	1339.5	1343.4	1347.0	1356.2	1360.2	1363.3
G44.0	1308.2	1313.8	1313.0	1311.2	1313.3	1315.2	1320.0	1328.3	1334.7	1334.1
G45.0	1282.3	1284.5	1284.0	1282.8	1284.8	1288.4	1291.1	1299.5	1303.4	1308.0
G46.0	1255.2	1256.4	1254.8	1252.7	1257.4	1260.2	1262.1	1268.2	1277.0	1282.9
G47.0	1226.8	1225.7	1226.1	1223.3	1230.7	1232.2	1230.2	1239.5	1251.3	1261.2
G48.0	1196.0	1197.1	1195.9	1194.8	1202.0	1202.4	1199.5	1213.1	1227.4	1230.2
G49.0	1163.9	1163.6	1164.3	1168.8	1172.3	1170.8	1172.1	1187.0	1193.7	1193.6
G50.0	1131.8	1132.8	1134.5	1141.0	1143.4	1141.8	1148.9	1154.3	1156.5	1163.9
G51.0	1097.2	1099.4	1103.5	1110.8	1110.2	1115.4	1119.8	1117.2	1127.1	1136.7
G52.0	1063.6	1064.7	1073.1	1079.1	1080.4	1089.2	1084.8	1088.4	1101.5	1108.8
G53.0	1028.0	1031.8	1041.0	1044.5	1051.5	1056.2	1052.8	1061.7	1071.5	1078.0
G54.0	992.8	996.8	1007.9	1010.5	1023.3	1020.4	1026.0	1033.2	1038.9	1045.8
G55.0	957.9	963.5	972.8	979.8	984.6	989.7	996.6	1000.0	1006.3	1018.2
G56.0	922.7	929.5	935.9	949.3	949.3	960.1	963.9	968.7	978.8	989.3
G57.0	888.7	895.3	902.0	914.7	917.5	928.5	932.3	940.0	951.0	958.1
G58.0	855.3	859.8	872.9	875.6	888.4	895.5	901.8	911.7	918.4	923.2
G59.0	820.9	824.9	841.3	843.3	855.5	861.9	872.2	877.5	883.2	887.5
G60.0	787.0	790.2	804.5	812.1	822.1	831.8	836.7	841.8	848.1	852.3
G61.0	751.2	758.8	767.2	779.7	788.8	800.4	801.8	807.4	812.7	814.9
G62.0	715.0	726.7	735.3	746.0	760.2	764.4	766.1	771.9	778.0	782.2
G63.0	678.3	689.5	702.5	714.0	726.7	728.5	730.7	735.7	744.5	750.8
G64.0	645.2	653.7	669.0	682.7	692.0	695.9	696.2	703.5	712.9	720.8
G65.0	611.7	621.7	635.4	649.4	654.5	659.5	662.8	672.9	682.6	687.9
G66.0	575.1	588.0	604.3	612.0	620.8	626.4	630.6	643.0	650.4	657.1
G67.0	539.5	554.1	570.0	577.3	585.1	593.0	600.4	609.5	617.7	623.6
G68.0	507.2	521.7	535.5	540.9	553.1	562.3	568.5	577.7	585.4	589.4
G69.0	474.0	490.2	500.7	507.2	521.8	530.6	537.0	545.7	552.9	559.4
G70.0	442.1	456.5	466.0	475.7	490.2	499.7	505.0	514.4	521.7	531.8
G71.0	410.2	424.1	434.5	446.2	457.9	468.1	473.9	483.7	492.7	497.5
G72.0	378.6	388.8	403.6	413.9	426.8	436.5	446.6	453.7	459.9	464.5
G73.0	346.9	357.2	373.9	384.5	396.2	408.8	414.4	419.2	427.7	434.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	315.1	327.6	343.4	355.3	369.1	378.4	380.8	390.3	400.3	408.1
G75.0	286.6	300.0	316.0	327.4	340.8	346.5	354.0	364.4	373.2	380.3
G76.0	260.1	272.8	287.4	300.7	310.8	320.5	328.7	338.7	347.0	353.2
G77.0	233.7	246.6	263.1	271.4	284.6	295.9	303.6	312.9	320.6	326.6
G78.0	209.4	221.9	237.1	246.6	260.9	271.0	278.8	287.2	293.9	301.2
G79.0	186.2	199.1	211.0	223.9	236.8	246.5	254.4	262.9	268.6	274.6
G80.0	164.8	175.8	190.9	201.3	214.0	224.9	230.4	238.3	244.7	250.7
G81.0	143.4	156.1	169.4	181.2	192.3	201.1	208.5	217.1	221.8	226.4
G82.0	125.2	137.5	150.3	160.4	170.9	181.8	187.3	194.2	198.5	204.3
G83.0	109.4	120.6	131.8	142.3	151.9	160.0	167.1	174.5	180.1	185.4
G84.0	94.2	104.3	116.0	124.6	134.6	143.1	150.1	156.9	161.1	165.1
G85.0	80.4	89.9	100.0	109.3	118.7	126.2	132.0	137.5	141.2	145.4
G86.0	68.4	77.0	87.0	94.7	102.5	109.1	114.6	120.2	123.4	125.8
G87.0	57.4	65.3	73.9	80.8	87.2	91.8	94.5	96.4	96.7	96.2
G88.0	47.1	54.4	60.8	65.0	69.0	71.6	72.2	74.6	75.5	75.7
G89.0	38.2	43.9	49.1	53.3	56.9	59.6	61.6	63.4	64.8	65.4
G90.0	30.9	36.2	41.2	45.1	48.8	51.6	53.6	55.5	56.5	57.3
G91.0	25.1	30.0	34.9	38.8	42.3	45.1	47.2	49.0	50.3	51.2
G92.0	20.4	24.5	29.3	33.2	36.8	39.7	41.9	43.6	45.0	45.9
G93.0	16.2	20.4	24.8	28.4	32.0	35.0	37.0	39.0	40.4	41.4
G94.0	12.8	16.6	20.7	24.4	27.8	30.7	32.9	34.8	36.4	37.3
G95.0	9.2	13.1	17.2	20.8	24.1	27.0	29.2	31.2	32.7	33.8
G96.0	6.0	9.6	13.7	17.3	20.6	23.5	25.7	27.7	29.3	30.4
G97.0	3.8	6.6	10.2	13.6	17.0	19.9	22.3	24.4	26.0	27.2
G98.0	2.4	4.5	7.2	10.2	13.4	16.2	18.7	21.0	22.8	24.0
G99.0	1.6	3.2	5.3	7.5	10.3	12.9	15.4	17.6	19.4	20.6
G100.0	1.4	2.3	3.8	5.7	7.7	10.0	12.3	14.4	16.1	17.3
G101.0	1.5	1.8	2.8	4.3	6.1	8.0	9.8	11.6	13.2	14.3
G102.0	1.7	1.8	2.1	3.2	4.7	6.3	8.0	9.5	10.7	11.7
G103.0	1.9	1.9	2.1	2.4	3.6	5.1	6.4	7.8	8.9	9.8
G104.0	2.0	2.1	2.2	2.3	2.8	3.9	5.1	6.3	7.3	8.2
G105.0	2.2	2.3	2.3	2.4	2.6	3.0	4.0	5.0	6.0	6.7
G106.0	2.4	2.4	2.5	2.5	2.6	2.8	3.2	4.0	4.8	5.4
G107.0	2.6	2.6	2.7	2.7	2.8	2.9	3.0	3.3	3.8	4.3
G108.0	2.8	2.8	2.9	2.9	2.9	3.0	3.1	3.2	3.4	3.6
G109.0	3.0	3.0	3.0	3.1	3.1	3.2	3.2	3.3	3.3	3.4
G110.0	3.1	3.2	3.2	3.3	3.3	3.4	3.4	3.5	3.5	3.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	3.3	3.4	3.4	3.5	3.5	3.6	3.6	3.7	3.7	3.8
G112.0	3.5	3.6	3.6	3.7	3.7	3.8	3.8	3.8	3.9	3.9
G113.0	3.8	3.8	3.8	3.8	3.9	3.9	4.0	4.0	4.1	4.1
G114.0	3.9	4.0	4.0	4.0	4.1	4.1	4.2	4.2	4.3	4.3
G115.0	4.1	4.2	4.2	4.3	4.3	4.3	4.4	4.4	4.5	4.5
G116.0	4.3	4.4	4.4	4.5	4.5	4.6	4.7	4.6	4.7	4.7
G117.0	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.8	4.8	4.9
G118.0	4.7	4.8	4.8	4.8	4.9	5.0	5.0	5.0	5.1	5.1
G119.0	4.9	5.0	5.0	5.1	5.1	5.2	5.2	5.2	5.3	5.3
G120.0	5.2	5.2	5.2	5.3	5.3	5.3	5.4	5.4	5.5	5.5
G121.0	5.3	5.4	5.4	5.5	5.5	5.5	5.6	5.6	5.7	5.7
G122.0	5.6	5.6	5.6	5.7	5.7	5.8	5.8	5.8	5.9	5.9
G123.0	5.8	5.8	5.9	5.9	5.9	6.0	6.0	6.1	6.1	6.1
G124.0	6.0	6.0	6.1	6.1	6.2	6.2	6.2	6.2	6.3	6.3
G125.0	6.2	6.2	6.3	6.3	6.3	6.4	6.4	6.4	6.5	6.5
G126.0	6.4	6.4	6.5	6.5	6.5	6.6	6.6	6.7	6.7	6.7
G127.0	6.6	6.7	6.7	6.7	6.7	6.8	6.8	6.8	6.9	6.9
G128.0	6.8	6.8	6.9	6.9	6.9	7.0	7.0	7.0	7.1	7.1
G129.0	7.0	7.0	7.1	7.1	7.1	7.2	7.2	7.3	7.3	7.3
G130.0	7.2	7.2	7.3	7.3	7.3	7.4	7.4	7.5	7.5	7.5
G131.0	7.4	7.4	7.5	7.5	7.5	7.6	7.6	7.7	7.7	7.7
G132.0	7.6	7.7	7.7	7.7	7.7	7.7	7.8	7.8	7.8	7.9
G133.0	7.8	7.8	7.8	7.9	7.9	7.9	8.0	8.0	8.0	8.1
G134.0	8.0	8.0	8.0	8.1	8.1	8.1	8.2	8.2	8.2	8.2
G135.0	8.2	8.2	8.2	8.3	8.3	8.3	8.4	8.4	8.4	8.4
G136.0	8.4	8.4	8.4	8.4	8.5	8.5	8.5	8.5	8.5	8.6
G137.0	8.5	8.6	8.6	8.6	8.7	8.7	8.7	8.7	8.7	8.8
G138.0	8.7	8.7	8.8	8.8	8.8	8.9	8.9	8.9	8.9	8.9
G139.0	8.9	8.9	9.0	9.0	9.0	9.1	9.1	9.1	9.1	9.1
G140.0	9.1	9.1	9.1	9.1	9.2	9.2	9.2	9.2	9.2	9.2
G141.0	9.3	9.3	9.3	9.3	9.3	9.4	9.4	9.4	9.4	9.4
G142.0	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.6	9.6	9.6
G143.0	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.8
G144.0	9.9	9.8	9.8	9.9	9.9	9.9	9.9	9.9	9.9	9.9
G145.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
G146.0	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2
G147.0	10.4	10.3	10.3	10.3	10.3	10.3	10.3	10.3	10.3	10.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5
G149.0	10.7	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6
G150.0	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8
G151.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9	10.9	10.8	10.9
G152.0	11.2	11.1	11.1	11.1	11.0	11.0	11.0	11.0	11.0	11.0
G153.0	11.3	11.3	11.2	11.2	11.2	11.2	11.2	11.2	11.1	11.2
G154.0	11.4	11.4	11.4	11.4	11.3	11.3	11.3	11.3	11.3	11.3
G155.0	11.6	11.5	11.5	11.5	11.4	11.4	11.4	11.4	11.4	11.4
G156.0	11.7	11.7	11.6	11.6	11.6	11.6	11.6	11.6	11.5	11.6
G157.0	11.9	11.8	11.8	11.8	11.7	11.7	11.7	11.7	11.7	11.7
G158.0	12.0	12.0	11.9	11.9	11.9	11.9	11.9	11.9	11.8	11.9
G159.0	12.1	12.1	12.1	12.0	12.0	12.0	12.0	12.0	12.0	12.0
G160.0	12.3	12.2	12.2	12.1	12.1	12.1	12.1	12.1	12.1	12.1
G161.0	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3
G162.0	12.5	12.5	12.4	12.4	12.4	12.4	12.4	12.4	12.4	12.4
G163.0	12.6	12.6	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
G164.0	12.7	12.7	12.6	12.7	12.6	12.7	12.6	12.6	12.6	12.6
G165.0	12.8	12.8	12.7	12.8	12.8	12.8	12.8	12.7	12.7	12.7
G166.0	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
G167.0	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
G168.0	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1
G169.0	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.2	13.1
G170.0	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2
G171.0	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.3
G172.0	13.4	13.4	13.4	13.4	13.4	13.4	13.4	13.4	13.4	13.4
G173.0	13.5	13.5	13.5	13.4	13.5	13.5	13.5	13.5	13.5	13.5
G174.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.6	13.6
G175.0	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6	13.6
G176.0	13.7	13.7	13.7	13.6	13.7	13.7	13.7	13.7	13.7	13.7
G177.0	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.8	13.8
G178.0	13.7	13.7	13.7	13.7	13.7	13.7	13.8	13.8	13.8	13.8
G179.0	13.7	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8
G180.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.9	13.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G0.0	1908.3	1908.5	1908.9							
G1.0	1908.1	1908.7	1908.8							
G2.0	1908.2	1908.2	1904.6							
G3.0	1909.1	1908.9	1903.2							
G4.0	1905.7	1905.7	1900.1							
G5.0	1902.8	1903.1	1896.3							
G6.0	1901.4	1901.7	1892.2							
G7.0	1897.0	1897.1	1888.9							
G8.0	1893.4	1893.1	1884.3							
G9.0	1889.7	1889.7	1879.1							
G10.0	1886.0	1885.8	1873.5							
G11.0	1879.8	1879.9	1865.5							
G12.0	1874.2	1874.8	1858.7							
G13.0	1866.8	1866.7	1853.2							
G14.0	1860.0	1859.6	1844.4							
G15.0	1853.2	1852.9	1835.0							
G16.0	1846.2	1846.0	1822.6							
G17.0	1835.8	1836.4	1812.6							
G18.0	1825.7	1824.8	1801.5							
G19.0	1812.9	1812.9	1788.4							
G20.0	1802.8	1803.0	1774.4							
G21.0	1789.7	1789.8	1757.4							
G22.0	1776.5	1775.8	1743.4							
G23.0	1761.7	1759.1	1729.1							
G24.0	1743.0	1743.5	1717.0							
G25.0	1729.0	1729.0	1701.9							
G26.0	1713.4	1715.8	1689.6							
G27.0	1699.8	1700.6	1672.9							
G28.0	1686.6	1687.9	1654.4							
G29.0	1671.0	1671.9	1634.8							
G30.0	1653.5	1653.9	1614.1							
G31.0	1635.2	1633.6	1592.8							
G32.0	1614.3	1613.8	1573.1							
G33.0	1593.7	1591.8	1553.0							
G34.0	1570.8	1571.7	1530.4							
G35.0	1549.0	1549.5	1509.0							
G36.0	1526.4	1527.7	1485.1							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G37.0	1504.0	1505.1	1464.2						
G38.0	1481.4	1481.3	1440.8						
G39.0	1459.2	1459.5	1417.2						
G40.0	1436.8	1437.3	1390.7						
G41.0	1414.4	1413.6	1363.3						
G42.0	1389.5	1386.8	1337.2						
G43.0	1362.8	1358.6	1314.7						
G44.0	1334.8	1332.3	1294.1						
G45.0	1308.8	1309.1	1267.0						
G46.0	1288.0	1288.6	1232.4						
G47.0	1261.8	1259.0	1205.8						
G48.0	1227.2	1223.1	1181.7						
G49.0	1194.3	1195.4	1156.9						
G50.0	1168.9	1170.8	1127.8						
G51.0	1141.4	1145.0	1097.4						
G52.0	1114.7	1115.7	1069.3						
G53.0	1084.6	1086.4	1042.1						
G54.0	1054.1	1057.7	1013.3						
G55.0	1027.5	1030.8	979.1						
G56.0	1000.1	998.9	945.0						
G57.0	964.9	965.1	912.5						
G58.0	929.3	929.3	876.4						
G59.0	894.2	898.2	842.7						
G60.0	859.8	862.0	811.8						
G61.0	825.4	828.7	781.2						
G62.0	793.2	796.4	751.5						
G63.0	760.5	765.4	718.8						
G64.0	730.6	733.3	687.8						
G65.0	697.6	702.5	656.8						
G66.0	666.0	668.7	623.6						
G67.0	631.7	636.2	590.4						
G68.0	599.9	601.7	563.6						
G69.0	567.7	572.9	528.7						
G70.0	539.9	539.9	494.3						
G71.0	504.7	505.2	465.1						
G72.0	469.8	471.8	438.1						
G73.0	441.1	444.1	410.2						

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0						
G74.0	414.2	414.8	383.1						
G75.0	384.6	387.5	355.9						
G76.0	358.9	362.4	329.4						
G77.0	332.4	334.5	301.2						
G78.0	306.6	307.9	276.2						
G79.0	279.1	281.2	253.5						
G80.0	256.9	258.0	227.9						
G81.0	231.4	232.2	208.3						
G82.0	209.8	211.3	188.9						
G83.0	190.6	192.4	166.7						
G84.0	169.4	170.5	147.8						
G85.0	149.8	151.5	122.9						
G86.0	128.7	127.9	92.3						
G87.0	97.4	96.6	75.2						
G88.0	76.6	76.8	65.3						
G89.0	66.3	66.2	57.7						
G90.0	58.1	58.2	51.7						
G91.0	52.0	52.2	46.6						
G92.0	46.6	46.9	42.0						
G93.0	42.2	42.4	38.0						
G94.0	38.1	38.2	34.5						
G95.0	34.5	34.8	31.3						
G96.0	31.2	31.4	28.1						
G97.0	28.0	28.3	25.1						
G98.0	24.9	25.1	21.9						
G99.0	21.5	21.9	18.8						
G100.0	18.3	18.5	15.8						
G101.0	15.3	15.5	13.2						
G102.0	12.6	12.9	11.1						
G103.0	10.5	10.6	9.4						
G104.0	8.8	9.1	7.9						
G105.0	7.3	7.6	6.6						
G106.0	6.0	6.3	5.3						
G107.0	4.8	5.0	4.4						
G108.0	3.9	4.1	3.8						
G109.0	3.6	3.7	3.7						
G110.0	3.6	3.6	3.8						

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	3.8	3.8	4.0							
G112.0	3.9	4.0	4.3							
G113.0	4.1	4.2	4.5							
G114.0	4.3	4.4	4.7							
G115.0	4.5	4.6	4.8							
G116.0	4.7	4.7	5.0							
G117.0	4.9	5.0	5.2							
G118.0	5.2	5.2	5.4							
G119.0	5.3	5.3	5.6							
G120.0	5.5	5.6	5.8							
G121.0	5.7	5.8	6.0							
G122.0	6.0	6.0	6.2							
G123.0	6.2	6.2	6.4							
G124.0	6.3	6.4	6.6							
G125.0	6.5	6.6	6.8							
G126.0	6.8	6.8	7.0							
G127.0	6.9	7.0	7.2							
G128.0	7.1	7.2	7.4							
G129.0	7.3	7.4	7.6							
G130.0	7.5	7.6	7.8							
G131.0	7.7	7.7	7.9							
G132.0	7.9	7.9	8.1							
G133.0	8.1	8.1	8.3							
G134.0	8.3	8.3	8.5							
G135.0	8.4	8.4	8.7							
G136.0	8.6	8.6	8.8							
G137.0	8.8	8.8	9.0							
G138.0	9.0	9.0	9.1							
G139.0	9.1	9.1	9.3							
G140.0	9.3	9.3	9.5							
G141.0	9.4	9.5	9.7							
G142.0	9.6	9.6	9.8							
G143.0	9.8	9.8	9.9							
G144.0	9.9	9.9	10.1							
G145.0	10.0	10.1	10.2							
G146.0	10.2	10.2	10.4							
G147.0	10.4	10.4	10.5							

C Plane (°):0.0-360.0: 5.0

Test Lab:

Test Type: TYPE C

Temperature: 20

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: LSG-1600B

Distance: 8.100 m

Humidity: 40

Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	10.5	10.5	10.6							
G149.0	10.6	10.6	10.8							
G150.0	10.8	10.8	10.9							
G151.0	10.9	10.9	11.0							
G152.0	11.0	11.1	11.1							
G153.0	11.2	11.2	11.3							
G154.0	11.3	11.3	11.4							
G155.0	11.4	11.4	11.5							
G156.0	11.6	11.6	11.6							
G157.0	11.7	11.7	11.8							
G158.0	11.8	11.9	11.9							
G159.0	12.0	12.0	12.0							
G160.0	12.1	12.1	12.1							
G161.0	12.2	12.3	12.3							
G162.0	12.3	12.4	12.4							
G163.0	12.5	12.5	12.5							
G164.0	12.6	12.6	12.6							
G165.0	12.7	12.7	12.8							
G166.0	12.8	12.9	12.9							
G167.0	12.9	12.9	13.0							
G168.0	13.1	13.1	13.1							
G169.0	13.1	13.1	13.3							
G170.0	13.2	13.2	13.4							
G171.0	13.3	13.3	13.5							
G172.0	13.4	13.4	13.6							
G173.0	13.5	13.5	13.7							
G174.0	13.6	13.6	13.8							
G175.0	13.7	13.7	13.8							
G176.0	13.7	13.8	13.9							
G177.0	13.8	13.8	14.0							
G178.0	13.8	13.9	14.0							
G179.0	13.9	13.9	14.1							
G180.0	13.9	13.9	14.1							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature: 20
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.100 m
 Humidity: 40
 Inspector: